




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 11:50:32 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	50.98
Relative Humidity:	30%	Conductivity:	1.872
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	24.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	39.00 mm
Antenna Configuration:	Integral	Max E Field:	10.13 V/m
Test Frequency:	2412MHz	SAR 1g:	0.161 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.087 W/kg
Type of Modulation:		SAR End:	0.089 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.64 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

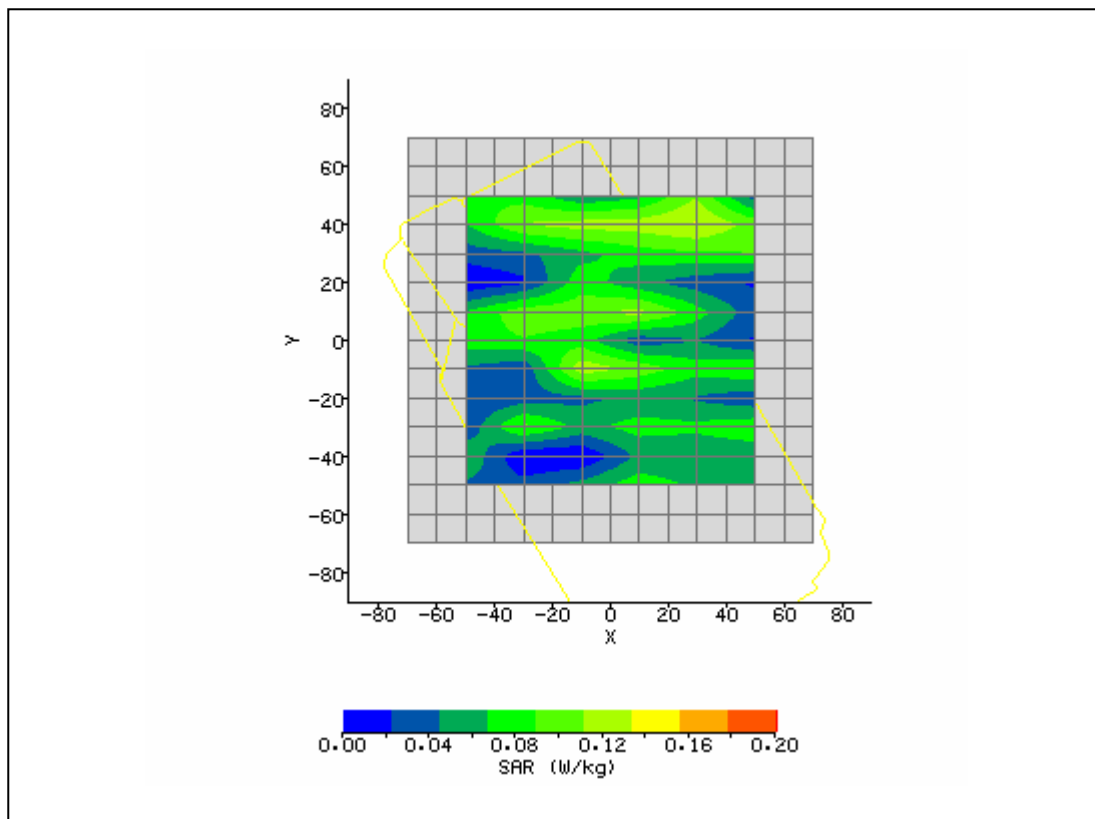


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 12:13:10 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	51.07
Relative Humidity:	30%	Conductivity:	1.913
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-2.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	15.45 mm
Antenna Configuration:	Integral	Max E Field:	9.21 V/m
Test Frequency:	2437MHz	SAR 1g:	0.185 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.055 W/kg
Type of Modulation:		SAR End:	0.058 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.37 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

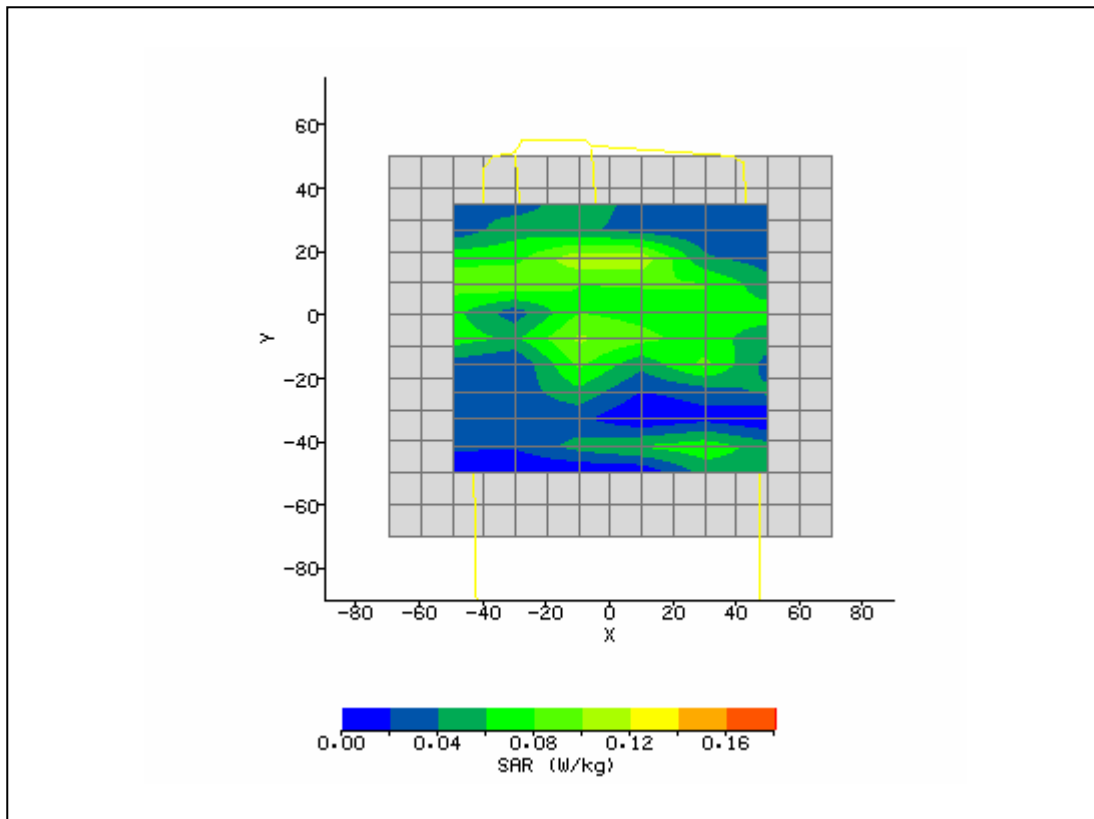


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 1:33:01 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	51.12
Relative Humidity:	30%	Conductivity:	1.941
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	20.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Integral	Max E Field:	12.39 V/m
Test Frequency:	2462MHz	SAR 1g:	0.328 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.179 W/kg
Type of Modulation:		SAR End:	0.182 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.77 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

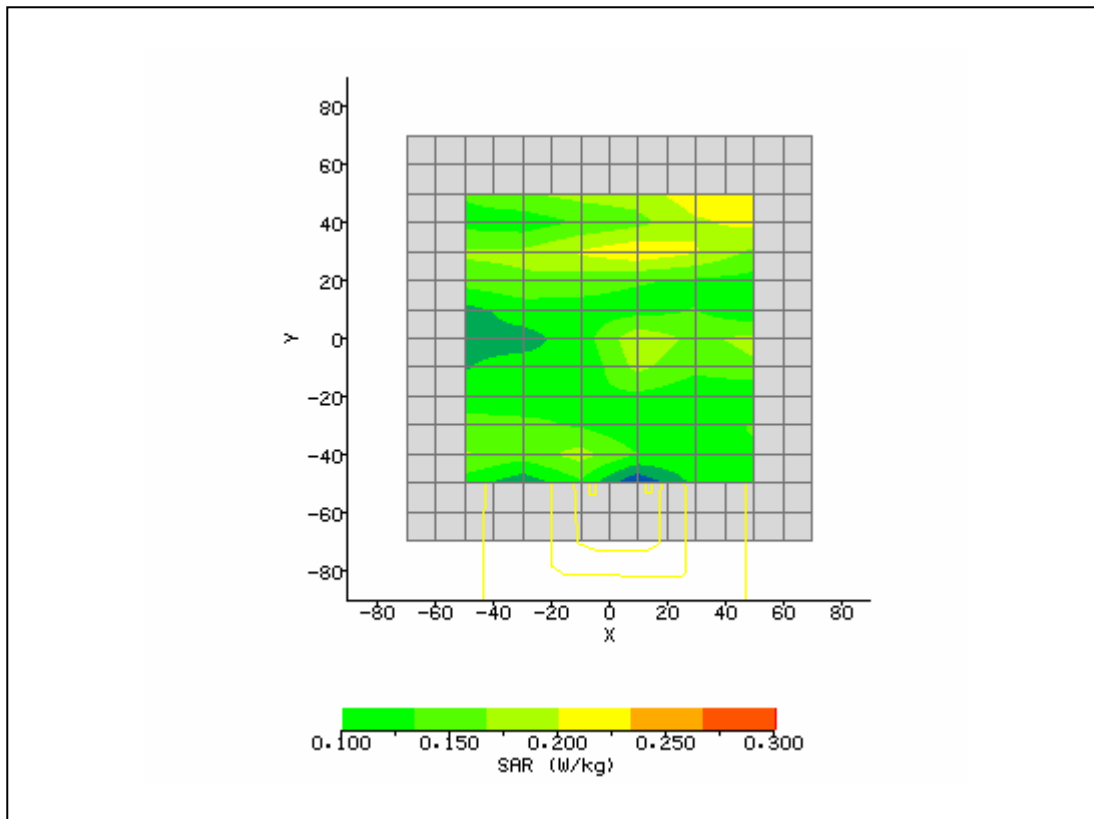


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 2:51:10 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	51.12
Relative Humidity:	30%	Conductivity:	1.941
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-5.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	9.40 mm
Antenna Configuration:	Integral - Aux	Max E Field:	9.54 V/m
Test Frequency:	2462MHz	SAR 1g:	0.203 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.070 W/kg
Type of Modulation:		SAR End:	0.073 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.29 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

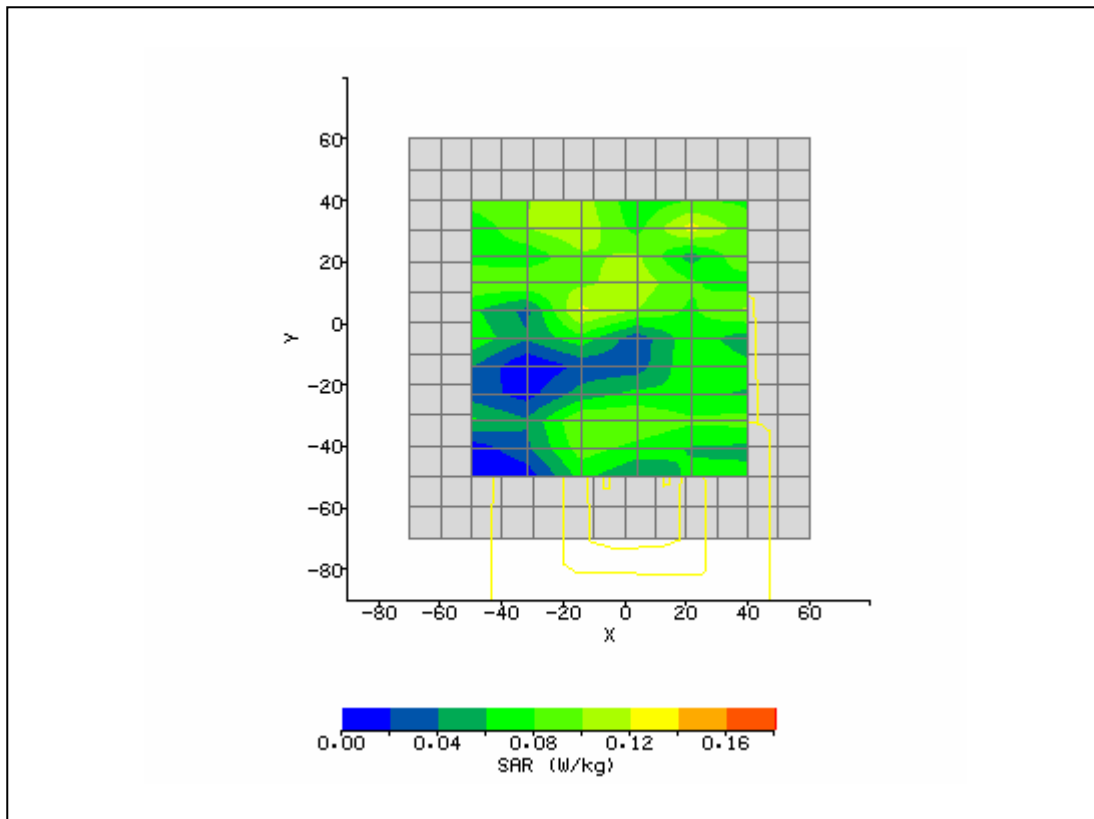


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 3:18:28 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	50.98
Relative Humidity:	30%	Conductivity:	1.872
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	10.90 mm
Antenna Configuration:	Integral - Main	Max E Field:	9.00 V/m
Test Frequency:	2412MHz	SAR 1g:	0.165 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.073 W/kg
Type of Modulation:		SAR End:	0.074 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.83 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

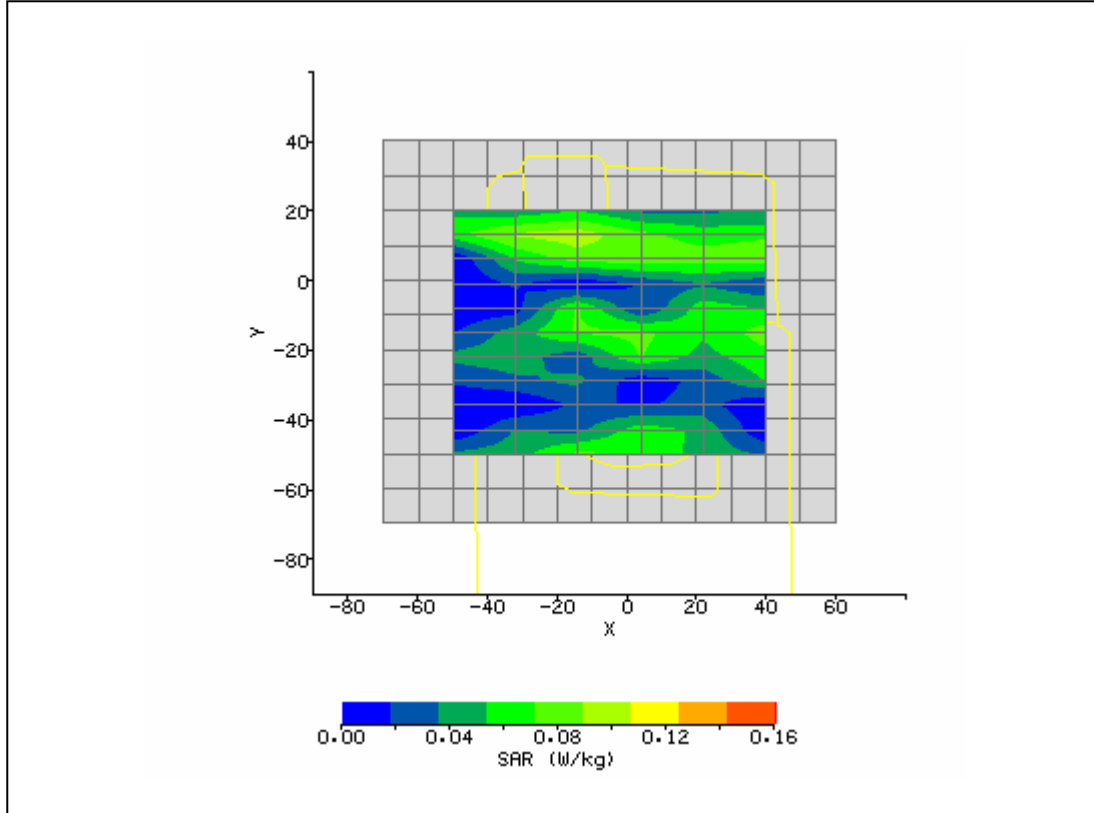


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 3:33:06 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	51.07
Relative Humidity:	30%	Conductivity:	1.913
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-15.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	-4.10 mm
Antenna Configuration:	Integral - Main	Max E Field:	9.16 V/m
Test Frequency:	2437MHz	SAR 1g:	0.214 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.075 W/kg
Type of Modulation:		SAR End:	0.078 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.55 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

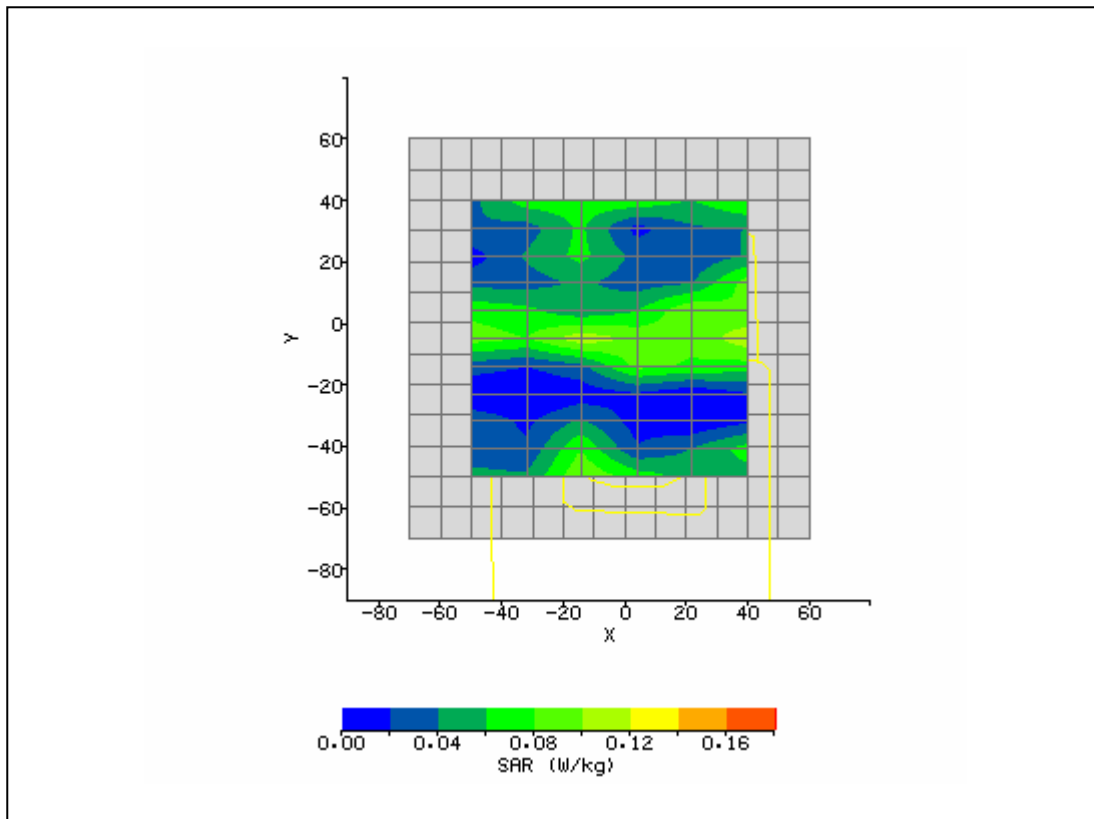


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 3:54:11 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	51.12
Relative Humidity:	30%	Conductivity:	1.941
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	5.40 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	20.00 mm
Antenna Configuration:	Integral - Main	Max E Field:	8.96 V/m
Test Frequency:	2462MHz	SAR 1g:	0.186 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.065 W/kg
Type of Modulation:		SAR End:	0.065 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.19 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

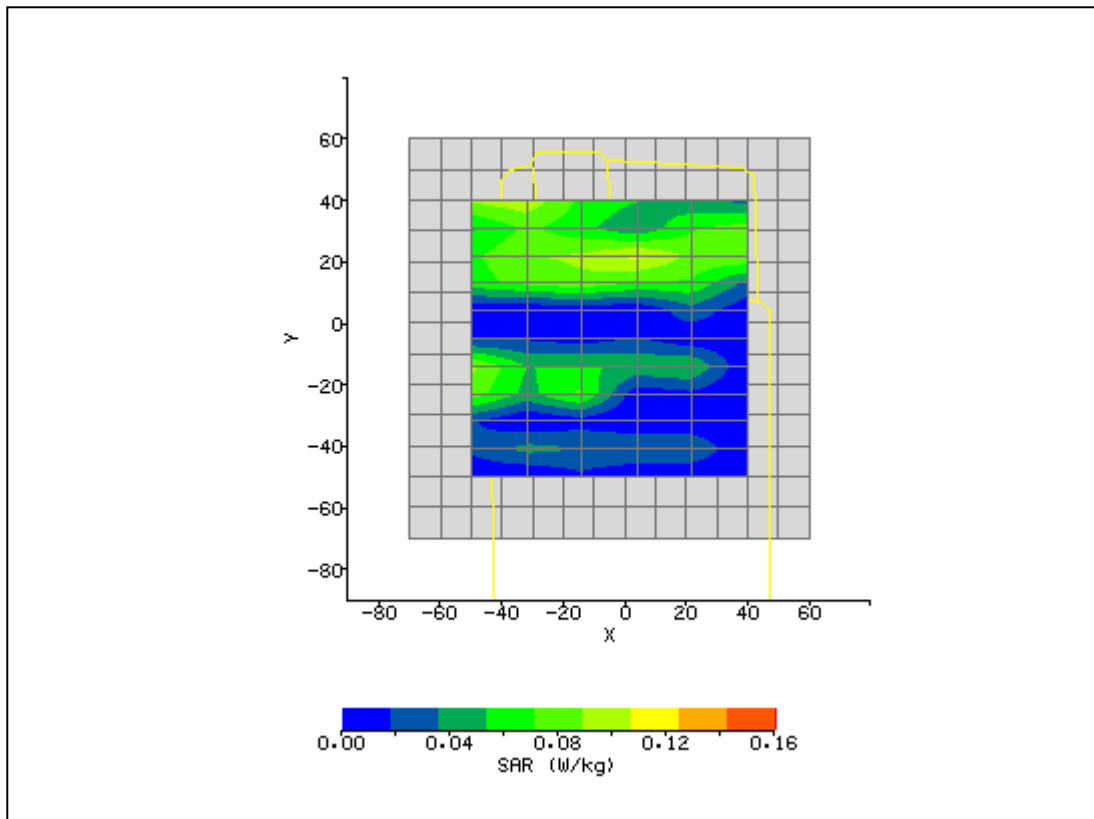


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/30/2007 9:03:54 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	51.07
Relative Humidity:	30%	Conductivity:	1.913
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	10.30 mm
Antenna Configuration:	Integral - Aux	Max E Field:	9.61 V/m
Test Frequency:	2437MHz	SAR 1g:	0.175 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.089 W/kg
Type of Modulation:		SAR End:	0.085 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.25 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

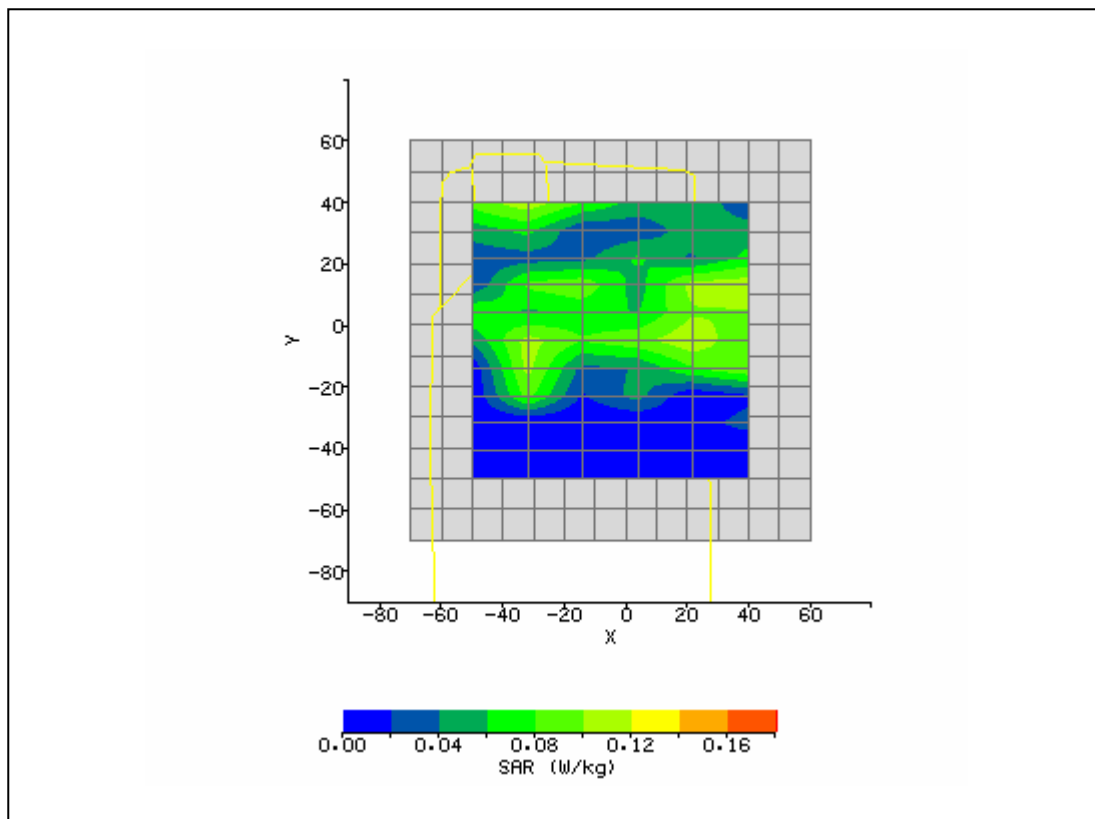

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/30/2007 9:28:43 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	37.57
Relative Humidity:	38.4%	Conductivity:	1.852
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.7°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-40.00 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-100.00 mm
Antenna Configuration:	Integral - Main	Max E Field:	1.13 V/m
Test Frequency:	2412MHz	SAR 1g:	0.000 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.000 W/kg
Conversion Factors:	.451 / .451 / .451	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/30/07
Input Power Level:	Set by SW	Extrapolation:	poly4

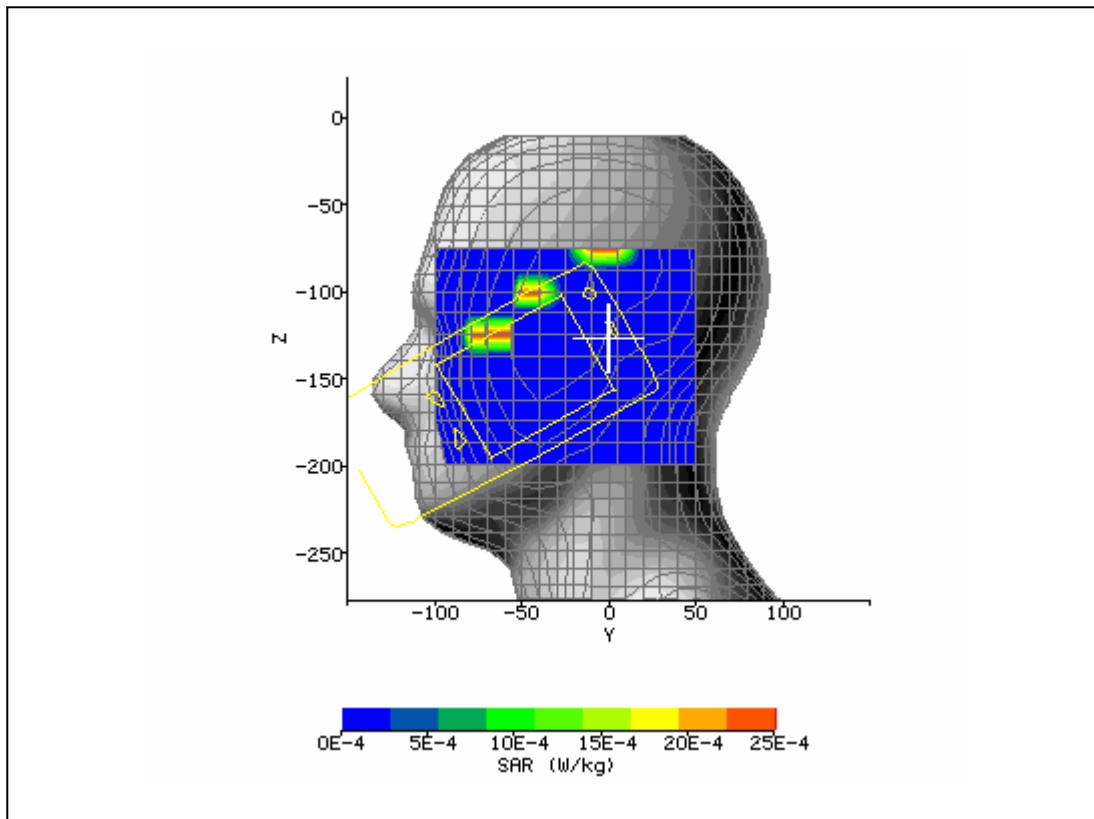

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 11:31:41 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	37.52
Relative Humidity:	38.4%	Conductivity:	1.872
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.7°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	-1.00 mm
Antenna Configuration:	Dipole	Max E Field:	138.24 V/m
Test Frequency:	2450MHz	SAR 1g:	51.618 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	23.528 W/kg
Conversion Factors:	.451 / .451 / .451	SAR Start:	2.857 W/kg
Type of Modulation:		SAR End:	2.832 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.87 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	1W	Extrapolation:	poly4

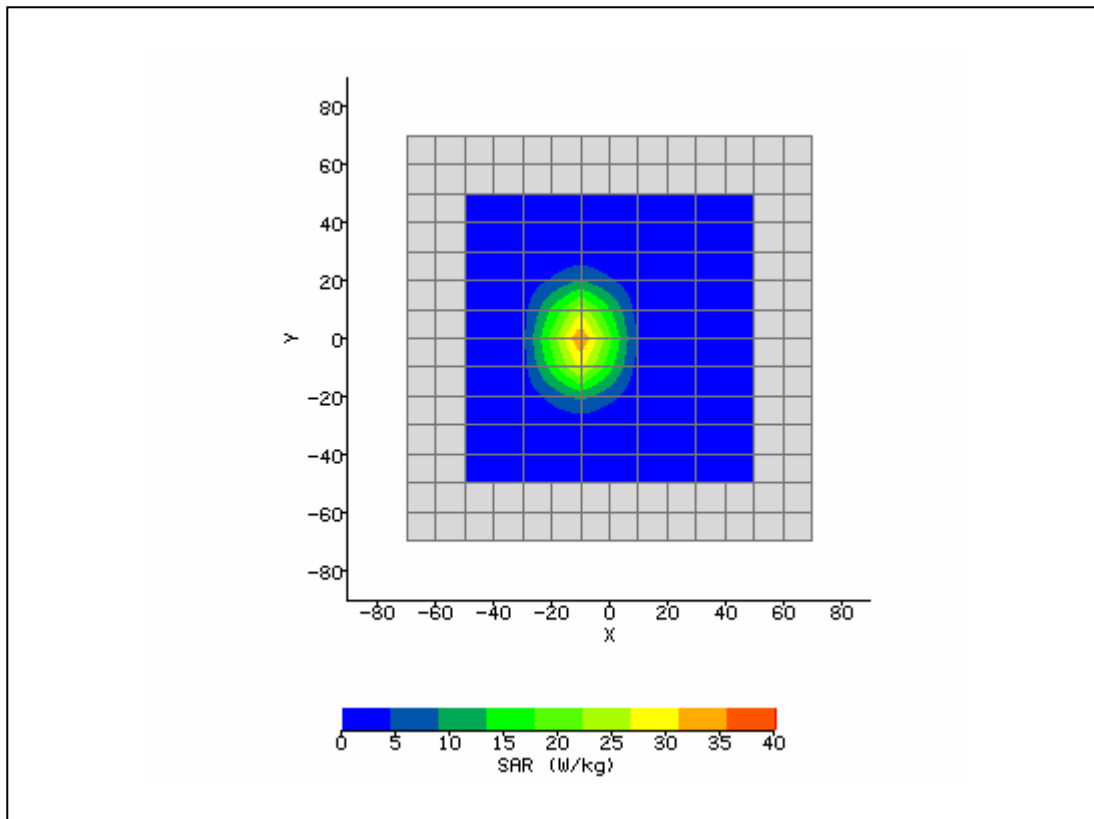

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/30/2007 9:47:58 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.4°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	37.51
Relative Humidity:	37.4%	Conductivity:	1.873
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.3°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	-9.00 mm
Antenna Configuration:	Dipole	Max E Field:	128.61 V/m
Test Frequency:	2450MHz	SAR 1g:	50.500 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	23.110 W/kg
Conversion Factors:	.451 / .451 / .451	SAR Start:	2.469 W/kg
Type of Modulation:		SAR End:	2.473 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.17 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/30/07
Input Power Level:	1 W	Extrapolation:	poly4

