



# FCC Test Report

## FCC Part 22, 24 / RSS 132,133

For the  
**Psion Teklogix Inc.**

**Handheld Computer**

**Model Number: 7505-BTSDCMHC25**

**FCC ID: GM37505BTSDCMHC25**  
**IC ID: 2739D-7505BSHC**

**TEST REPORT #: EMC\_PSION\_001\_07502\_FCC22\_24\_GM37505BTSDCMHC25**  
**DATE: 2007-12-3**



**FCC listed:**  
**A2LA accredited**  
**IC recognized #**  
**3462B**

**CETECOM Inc.**

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: +1 (408) 586 6200 • Fax: +1 (408) 586 6299 • E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM



**Table of Contents**

**1 ASSESSMENT .....4**

**2 ADMINISTRATIVE DATA.....5**

2.1 IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT.....5

2.2 IDENTIFICATION OF THE CLIENT .....5

2.3 IDENTIFICATION OF THE MANUFACTURER.....5

**3 EQUIPMENT UNDER TEST (EUT).....6**

3.1 SPECIFICATION OF THE EQUIPMENT UNDER TEST .....6

3.2 IDENTIFICATION OF THE EQUIPMENT UNDER TEST (EUT) .....6

3.3 IDENTIFICATION OF ACCESSORY EQUIPMENT .....6

**4 SUBJECT OF INVESTIGATION.....7**

**5 MEASUREMENTS.....8**

5.1 RF POWER OUTPUT .....8

5.1.1 *FCC 2.1046 Measurements required: RF power output*.....8

5.1.2 *Limits:* .....8

5.1.2.1 *FCC 22.913 (a) Effective radiated power limits.* .....8

5.1.2.2 *FCC 24.232 (b)(c) Power limits.*.....8

5.1.3 *Conducted Output Power Measurement procedure:*.....8

5.1.4 *Radiated Output Power Measurement procedure:*.....9

5.1.5 *ERP Results 850 MHz band:* .....10

5.1.6 *EIRP Results 1900 MHz band:*.....10

5.2 OCCUPIED BANDWIDTH/EMISSION BANDWIDTH .....29

5.2.1 *FCC 2.1049 Measurements required: Occupied bandwidth*.....29

5.2.2 *Occupied / emission bandwidth measurement procedure:*.....29

5.2.3 *Occupied / Emission bandwidth results 850 MHz band:* .....29

5.3 FREQUENCY STABILITY.....30

5.3.1 *Limit* .....30

5.3.2 *Test Results Frequency Stability (GSM-850)* .....31

5.3.3 *FREQUENCY STABILITY (PCS-1900)* .....32

5.4 SPURIOUS EMISSIONS CONDUCTED.....32

5.4.1 *FCC 2.1051 Measurements required: Spurious emissions at antenna terminals.* .....32

5.4.2 *Limits:* .....32

5.4.2.1 *FCC 22.917 Emission limitations for cellular equipment.* .....32

5.4.2.2 *FCC 24.238 Emission limitations for Broadband PCS equipment.* .....32

5.4.3 *Conducted out of band emissions measurement procedure:* .....33

5.4.4 *Test Results: Conducted Emission:* .....34

5.5 SPURIOUS EMISSIONS RADIATED .....34

5.5.1 *FCC 2.1053 Measurements required: Field strength of spurious radiation.*.....34

5.5.2 *Limits:* .....34

5.5.2.1 *FCC 22.917 Emission limitations for cellular equipment.* .....34

5.5.2.2 *FCC 24.238 Emission limitations for Broadband PCS equipment.* .....34

5.5.3 *Radiated out of band measurement procedure:* .....35

5.5.4 *Radiated out of band emissions results on EUT:* .....37



|         |  |     |
|---------|--|-----|
| 5.5.4.1 | Test Results Transmitter Spurious Emission GSM850:.....                      | 37  |
| 5.5.4.2 | Test Results Transmitter Spurious Emission UMTS FDD5.....                    | 46  |
| 5.5.4.3 | Test Results Transmitter Spurious Emission PCS-1900:.....                    | 55  |
| 5.5.4.4 | Test Results Transmitter Spurious Emission UMTS FDD2:.....                   | 65  |
| 5.5.4.5 | Test Results Transmitter Spurious Emission Radio Collocated GSM/WLAN/BT..... | 75  |
| 5.5.5   | <b>RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-132 &amp; 133</b> .....        | 81  |
| 5.5.5.1 | Test Results Receiver Spurious Emission GSM850.....                          | 82  |
| 5.5.5.2 | Test Results Receiver Spurious Emission UMTS FDD5.....                       | 90  |
| 5.5.5.3 | Test Results Receiver Spurious Emission GSM1900.....                         | 98  |
| 5.5.5.4 | Test Results Receiver Spurious Emission UMTS FDD2.....                       | 102 |
| 5.6     | <b>AC POWER LINE CONDUCTED EMISSIONS § 15.107/207</b> .....                  | 107 |
| 5.6.1   | <i>Limits</i> .....  | 107 |
| 5.6.2   | <i>Results, TX Transmit Line:</i> .....                                      | 108 |
| 5.6.3   | <i>TX Transmit Neutral:</i> .....  | 110 |
| 5.6.4   | <i>Results, Idle Line:</i> .....   | 112 |
| 5.6.5   | <i>TX Idle Neutral:</i> .....  | 114 |
| 6       | <b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS</b> .....                   | 116 |
| 7       | <b>REFERENCES</b> .....  | 117 |
| 8       | <b>BLOCK DIAGRAMS</b> .....  | 118 |



# 1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS132 and RSS133.

| Company             | Description       | Model #         |
|---------------------|-------------------|-----------------|
| Psion Teklogix Inc. | Handheld Computer | 7505-BTSDCMHC25 |

Technical responsibility for area of testing:

**Lothar Schmidt**  
 (Director Regulatory and  
 Antenna Services)

2007-12-3 EMC & Radio

---

| Date | Section | Name | Signature |
|------|---------|------|-----------|
|------|---------|------|-----------|

This report is prepared by:

**Peter Mu**  
 (EMC Project Engineer)

2007-12-3 EMC & Radio

---

| Date | Section | Name | Signature |
|------|---------|------|-----------|
|------|---------|------|-----------|

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID.



## **2 Administrative Data**

### **2.1 Identification of the Testing Laboratory Issuing the EMC Test Report**

|                               |   |
|-------------------------------|---|
| Company Name:                 | <b>CETECOM Inc.</b>   |
| Department:                   | <b>EMC</b>  |
| Address:                      | <b>411 Dixon Landing Road<br/>Milpitas, CA 95035<br/>U.S.A.</b> |
| Telephone:                    | <b>+1 (408) 586 6200</b>  |
| Fax:                          | <b>+1 (408) 586 6299</b>  |
| Responsible Test Lab Manager: | <b>Lothar Schmidt</b>   |
| Responsible Project Leader:   | <b>Peter Mu</b>   |
| Date of test:                 | <b>2007-11-9 to 2007-11-21</b>                                  |

### **2.2 Identification of the Client**

|                   |  |
|-------------------|--|
| Applicant's Name: | <b>Psion Teklogix Inc</b>                |
| Address Line 1:   | <b>2100 Meadowvale Boulevard</b>         |
| Address Line 2:   |  |
| City/ Zip Code    | <b>Mississauga, Ontario, L5N 7J9</b>     |
| Country:          | <b>Canada</b>                            |
| Contact Person:   | <b>Sada Dharwarkar</b>                   |
| Phone No.:        | <b>905-812-6200 ex 3358</b>              |
| Fax:              | <b>905-812-6301</b>                      |
| e-mail:           | <b>Sada.dharwarkar@psionteklogix.com</b> |

### **2.3 Identification of the Manufacturer**

**Same as above applicant**



### 3 Equipment under Test (EUT)

#### 3.1 Specification of the Equipment under Test

|  |   |
|--|---|
| Marketing Name of EUT (if not same as Model No.) | Handheld Computer   |
| Model No.  | 7505-BTSDCMHC25   |
| FCC-ID   | GM37505BTSDCMHC25   |
| IC-ID (Industry Canada)                          | 2739D-7505BSHC  |
| Frequency Range:                                 | 824.2MHz – 848.8MHz for GSM 850<br>1850.2MHz – 1909.8MHz for PCS 1900<br>826.4MHz – 846.6MHz for UMTS FDD5<br>1852.4MHz – 1907.6MHz for UMTS FDD2                                   |
| Type(s) of Modulation:                           | GMSK, 8PSK, QPSK  |
| Number of Channels:                              | 124 for GSM-850, 299 for PCS-1900   |
| Antenna Type:                                    | PIFA 0dBi   |
| Max. Output Power:                               | Conducted : Tests Conducted not by Cetecom.<br>Radiated : see section 5.1.5 and 5.1.6.<br>30.87dBm (1.22W) @ GSM 836.6MHz ERP values<br>27.70dBm (0.589W) @ PCS 1880MHz EIRP values |

#### 3.2 Identification of the Equipment Under Test (EUT)

| EUT # | TYPE | MANF.              | MODEL           | SERIAL # |
|-------|------|--------------------|-----------------|----------|
| 1     | EUT  | Psion Teklogix Inc | 7505-BTSDCMHC25 | N/A      |

#### 3.3 Identification of Accessory equipment

| AE # | TYPE          | MANF.         | MODEL     | SERIAL # |
|------|---------------|---------------|-----------|----------|
| 1    | AC/DC ADAPTER | Sino-American | SA115C-05 | N/A      |

#### **4 Subject of Investigation**

All testing was performed on the EUT listed in Section 3. The EUT was maximized in the X,Y, Z positions , all data in this report shows the worst case between horizontal and vertical polarization for above 1GHz.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS132 and RSS133.

This EUT contains an FCC approved module with the FCC ID QIPHC25. This report refers only to the radiated measurements in GSM and WCDMA technology.

## 5 Measurements

### 5.1 RF Power Output

#### 5.1.1 FCC 2.1046 Measurements required: RF power output.

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

#### 5.1.2 Limits:

##### 5.1.2.1 FCC 22.913 (a) Effective radiated power limits.

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

##### 5.1.2.2 FCC 24.232 (b)(c) Power limits.


(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).

(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

#### 5.1.3 Conducted Output Power Measurement procedure:

Based on TIA-603C 2004

##### 2.2.1 Conducted Carrier Output Power Rating




1. Connect the equipment as shown in the above diagram. A Digital Radiocommunication Tester (DRT) is used to enable the EUT to transmit and to measure the output power.
2. Adjust the settings of the DRT to set the EUT to its maximum power at the required channel.
3. Record the output power level measured by the DRT.
4. Correct the measured level for all losses in the RF path.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.



#### 5.1.4 Radiated Output Power Measurement procedure:

Based on TIA-603C 2004

#### 2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

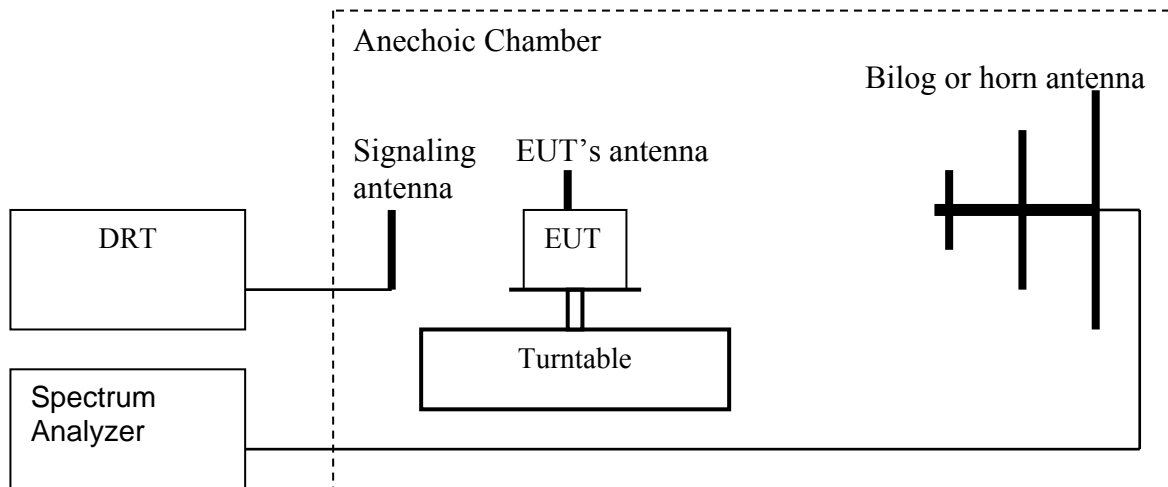

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
  2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
  3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
  4. Rotate the EUT 360°. Record the peak level in dBm (LVL).
  5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
  6. Connect the antenna to a signal generator with known output power and record the path loss in dB (LOSS).  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$ .
  7. Determine the ERP using the following equation:  
 $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
  8. Determine the EIRP using the following equation:  
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.14 \text{ (dB)}$
  9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band. **Spectrum analyzer settings = rbw=vbw=3MHz**
- (note: Steps 5 and 6 above are performed prior to testing and LOSS is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)



**5.1.5 ERP Results 850 MHz band:**

|                            |                       |
|----------------------------|-----------------------|
| <b>Power Control Level</b> | <b>Burst Peak ERP</b> |
| <b>5</b>                   | <b>≤38.45dBm (7W)</b> |

| <b>Frequency (MHz)</b> | <b>Effective Radiated Power (dBm)</b> |                      |
|------------------------|---------------------------------------|----------------------|
|                        | <b>GSM</b>                            | <b>EGPRS</b>         |
| <b>824.2</b>           | <b>29.28 (31.42)</b>                  | <b>27.39 (29.53)</b> |
| <b>836.6</b>           | <b>30.87 (33.01)</b>                  | <b>28.02 (30.16)</b> |
| <b>848.8</b>           | <b>28.44 (30.58)</b>                  | <b>25.54 (27.68)</b> |

| <b>Frequency (MHz)</b> | <b>Effective Radiated Power (dBm)</b> |
|------------------------|---------------------------------------|
|                        | <b>UMTS FDD5</b>                      |
| <b>826.4</b>           | <b>22.29 (24.43)</b>                  |
| <b>836.6</b>           | <b>22.74 (24.88)</b>                  |
| <b>846.6</b>           | <b>23.10 (25.24)</b>                  |

\*Values reported are ERP and (EIRP) in parentheses.

**5.1.6 EIRP Results 1900 MHz band:**

|                            |                        |
|----------------------------|------------------------|
| <b>Power Control Level</b> | <b>Burst Peak EIRP</b> |
| <b>0</b>                   | <b>≤33dBm (2W)</b>     |

| <b>Frequency (MHz)</b> | <b>Effective Isotropic Radiated Power (dBm)</b> |              |
|------------------------|---|--------------|
|                        | <b>GSM</b>                                      | <b>EGPRS</b> |
| <b>1850.2</b>          | <b>26.32</b>                                    | <b>24.08</b> |
| <b>1880.0</b>          | <b>27.70</b>                                    | <b>25.49</b> |
| <b>1909.8</b>          | <b>27.47</b>                                    | <b>25.72</b> |

| <b>Frequency (MHz)</b> | <b>Effective Radiated Power (dBm)</b> |
|------------------------|---------------------------------------|
|                        | <b>UMTS FDD5</b>                      |
| <b>1852.4</b>          | <b>19.73</b>                          |
| <b>1880</b>            | <b>22.16</b>                          |
| <b>1907.6</b>          | <b>20.86</b>                          |




**EIRP (GSM 850) CHANNEL 128 §22.913(a)**

EUT: 7505  
 Customer:: Psion Teklogix Inc  
 Test Mode: GSM850  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: PETER  
 Voltage: Battery  
 Comments: TT227° ANT 126CM

***SWEEP TABLE: "EIRP 850 CH 128 H"***

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 819.2 MHz       | 829.2 MHz      | MaxPeak  | Coupled    | 3 MHz     | DUMMY-DBM  |
|                 |                | MaxPeak  |            |           |            |

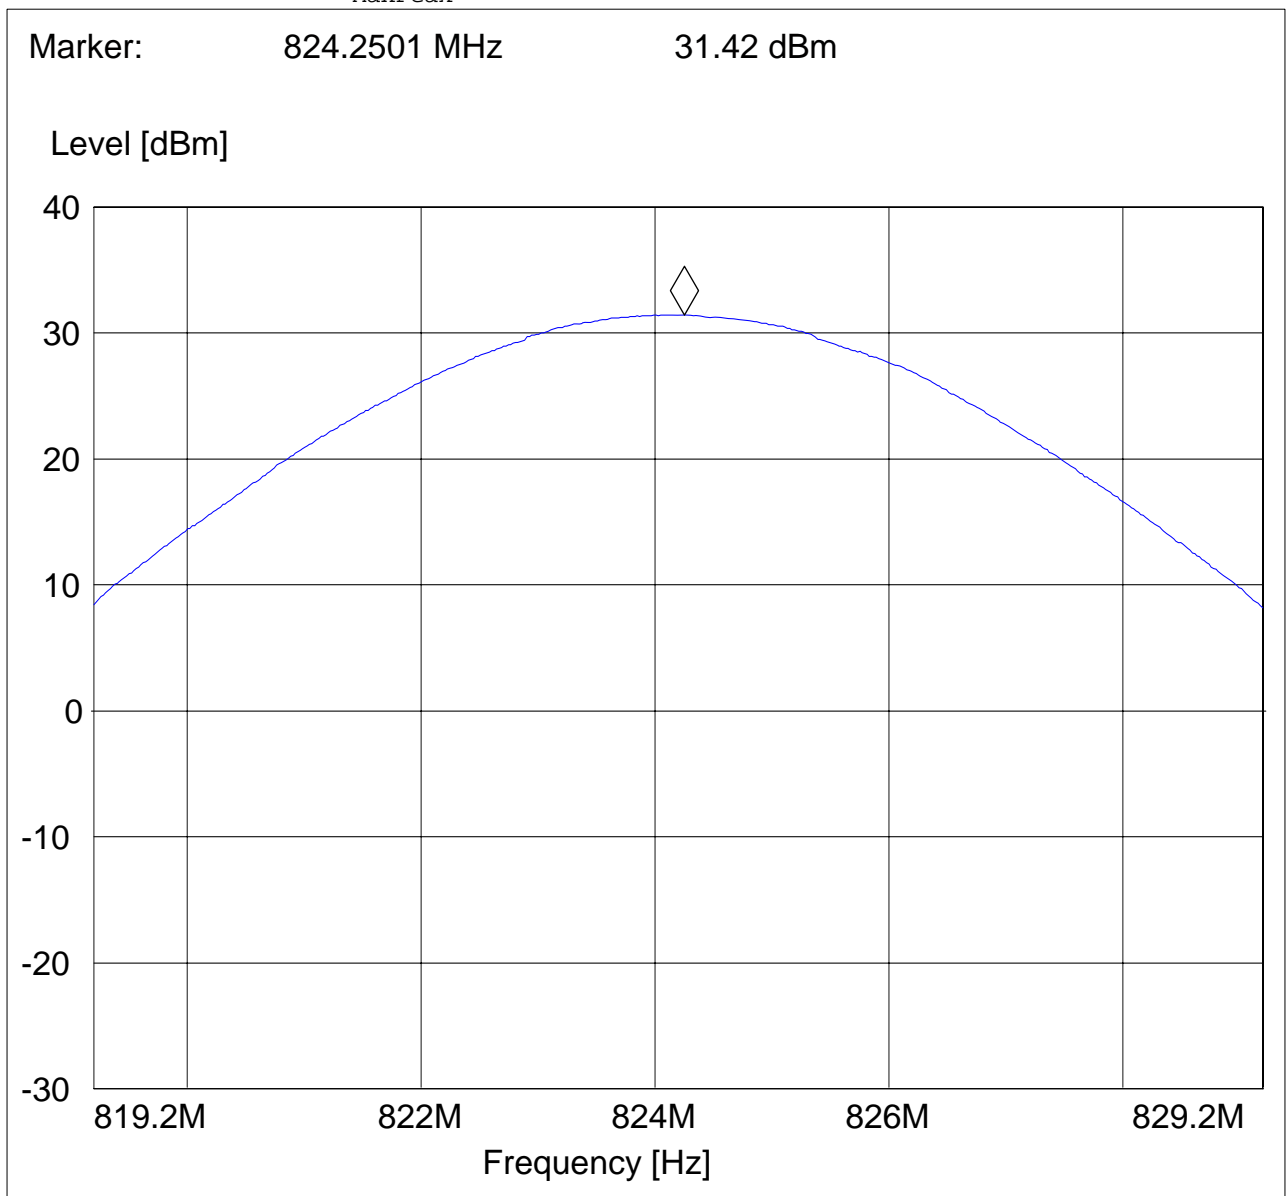




**EIRP (GSM 850) CHANNEL 190 §22.913(a)**

EUT: 7505  
 Customer:: Psion Teklogix Inc  
 Test Mode: GSM850  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: PETER  
 Voltage: Battery  
 Comments: TT227° ANT 126CM

**SWEEP TABLE: "EIRP 850 CH 190 H"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 831.6 MHz       | 841.6 MHz      | MaxPeak  | Coupled    | 3 MHz     | DUMMY-DBM  |
|                 |                | MaxPeak  |            |           |            |

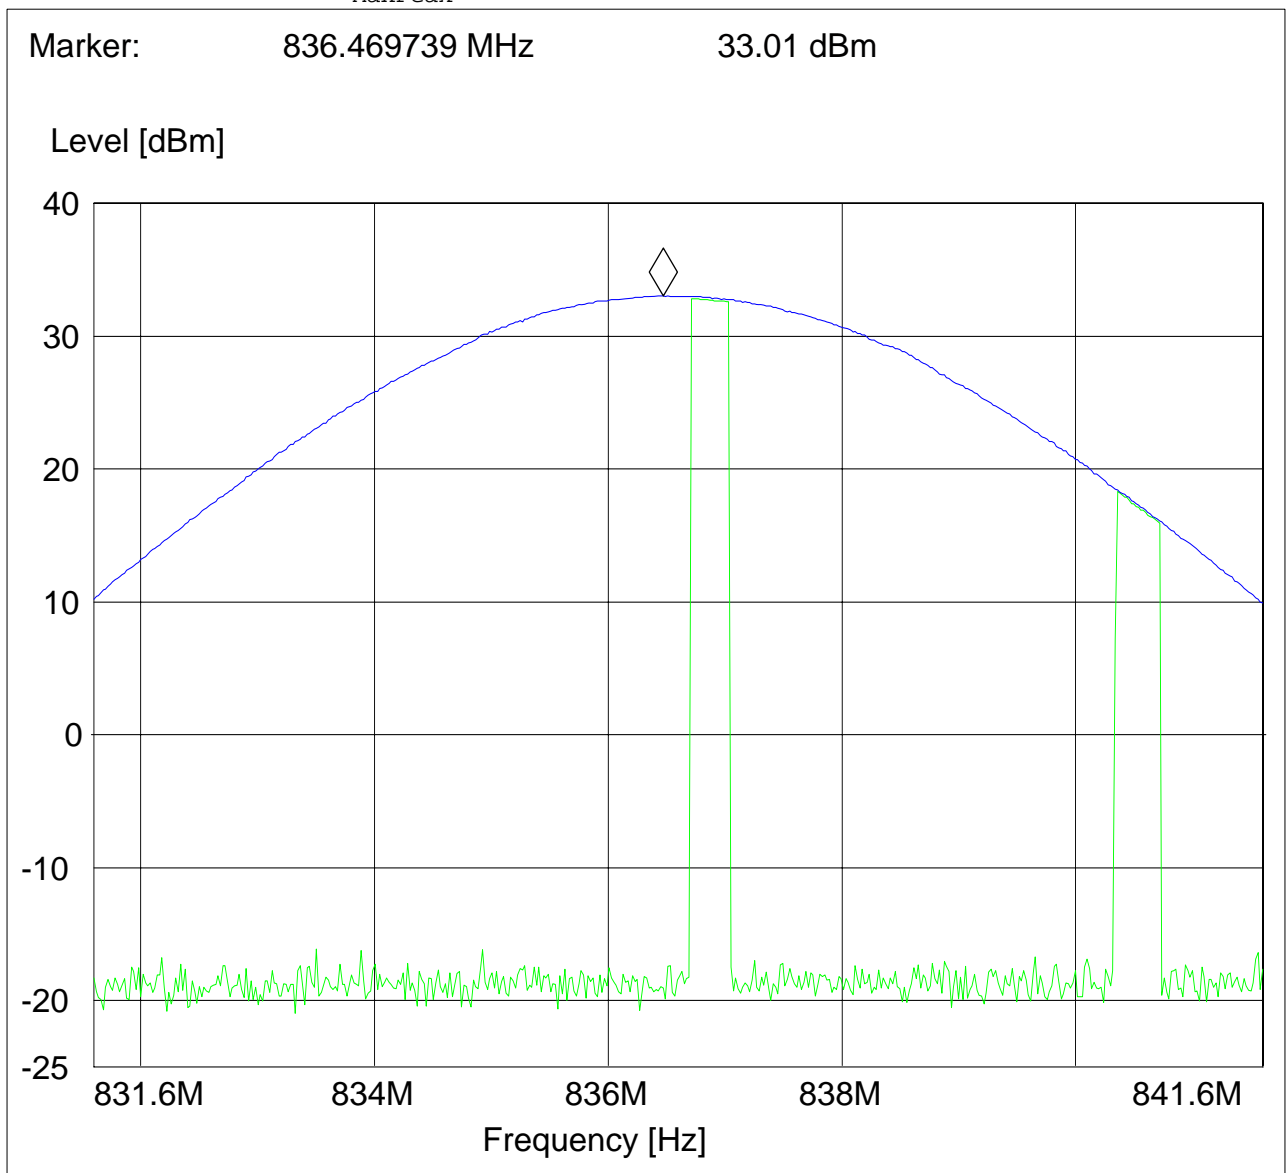




**EIRP (GSM 850) CHANNEL 251 §22.913(a)**

EUT: 7505  
 Customer:: Psion Teklogix Inc  
 Test Mode: GSM850  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: PETER  
 Voltage: Battery  
 Comments: TT227° ANT 126CM

**SWEEP TABLE: "EIRP 850 CH 251 H"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 843.8 MHz       | 853.8 MHz      | MaxPeak  | Coupled    | 3 MHz     | DUMMY-DBM  |

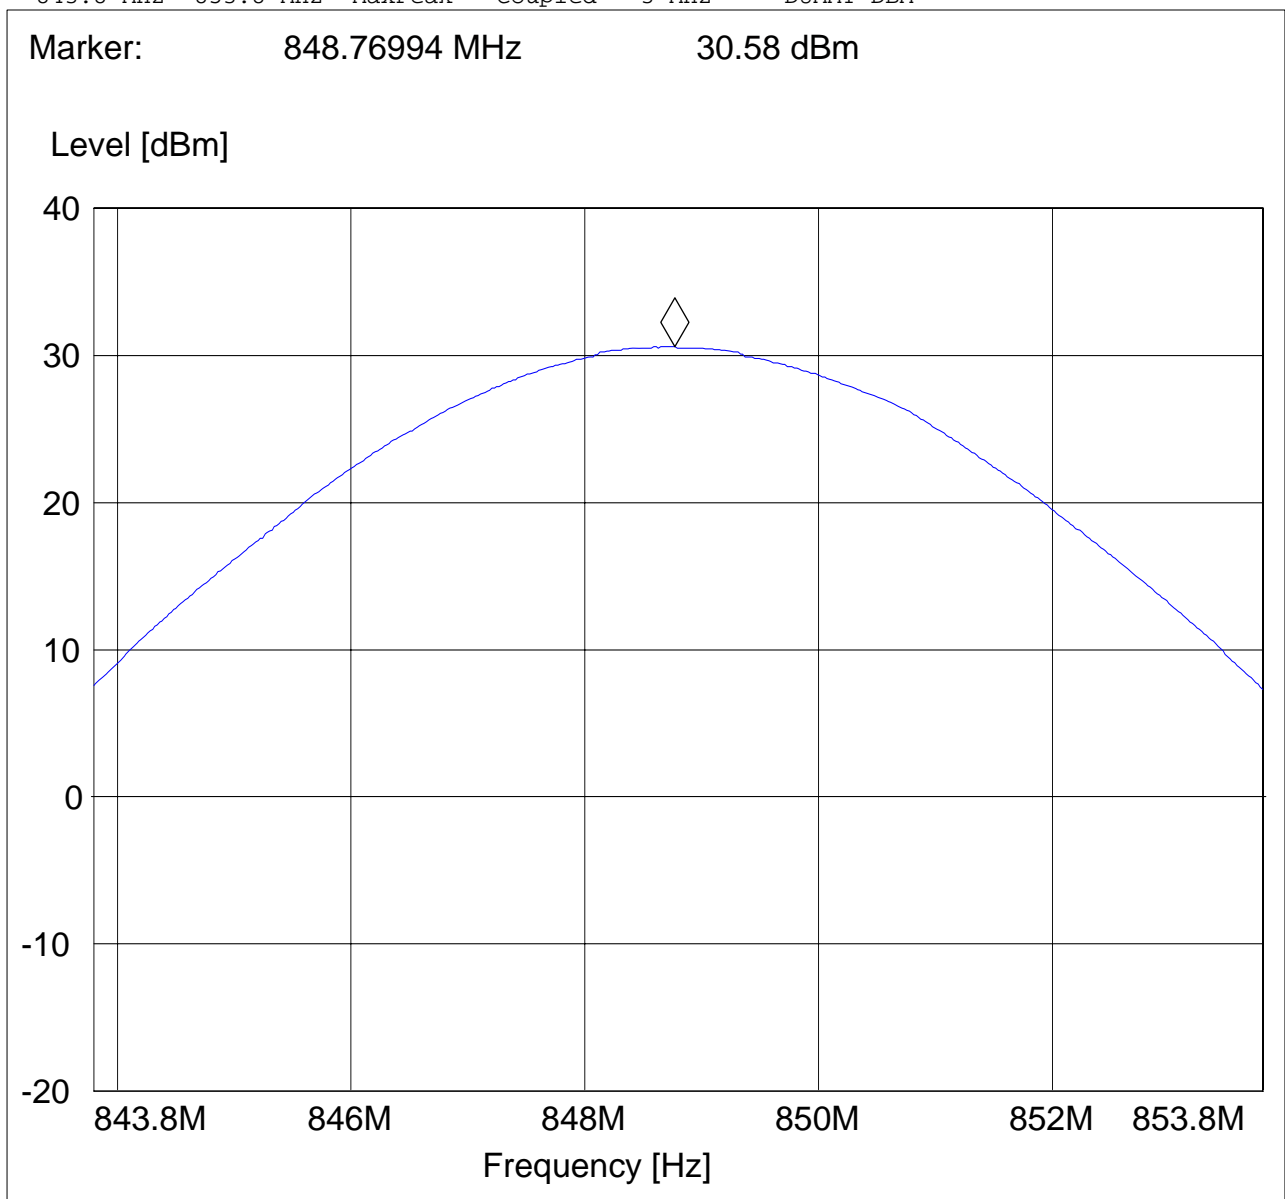




**EIRP (EGPRS 850) CHANNEL 128 §22.913(a)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: EGPRS  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: PETER  
 Voltage: AC Adaptor  
 Comments:

**SWEEP TABLE: "EIRP 850 CH 128 H"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 819.2 MHz       | 829.2 MHz      | MaxPeak  | Coupled    | 3 MHz     | DUMMY-DBM  |
|                 |                | MaxPeak  |            |           |            |

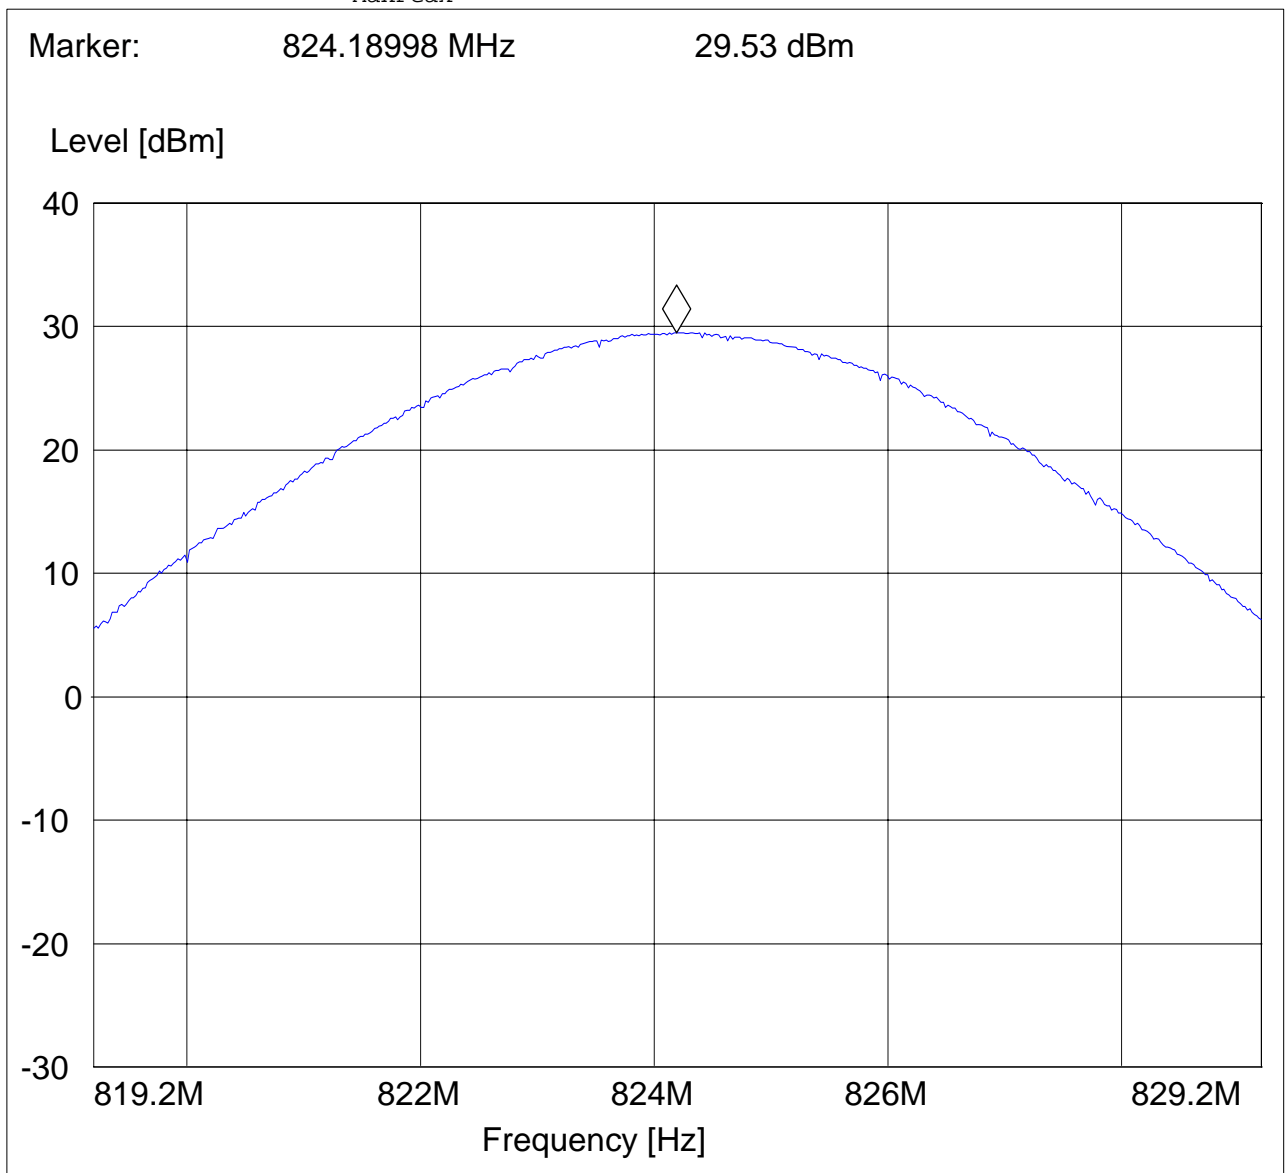




**EIRP (EGPRS 850) CHANNEL 190 §22.913(a)**

EUT: 7505  
Customer:: Psion Teklogix Inc  
Test Mode: EGPRS850  
ANT Orientation: H  
EUT Orientation: H  
Test Engineer: PETER  
Voltage: Battery  
Comments: TT227° ANT 126CM

**SWEEP TABLE: "EIRP 850 CH 190 H"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 831.6 MHz       | 841.6 MHz      | MaxPeak  | Coupled    | 3 MHz     | DUMMY-DBM  |
|                 |                | MaxPeak  |            |           |            |

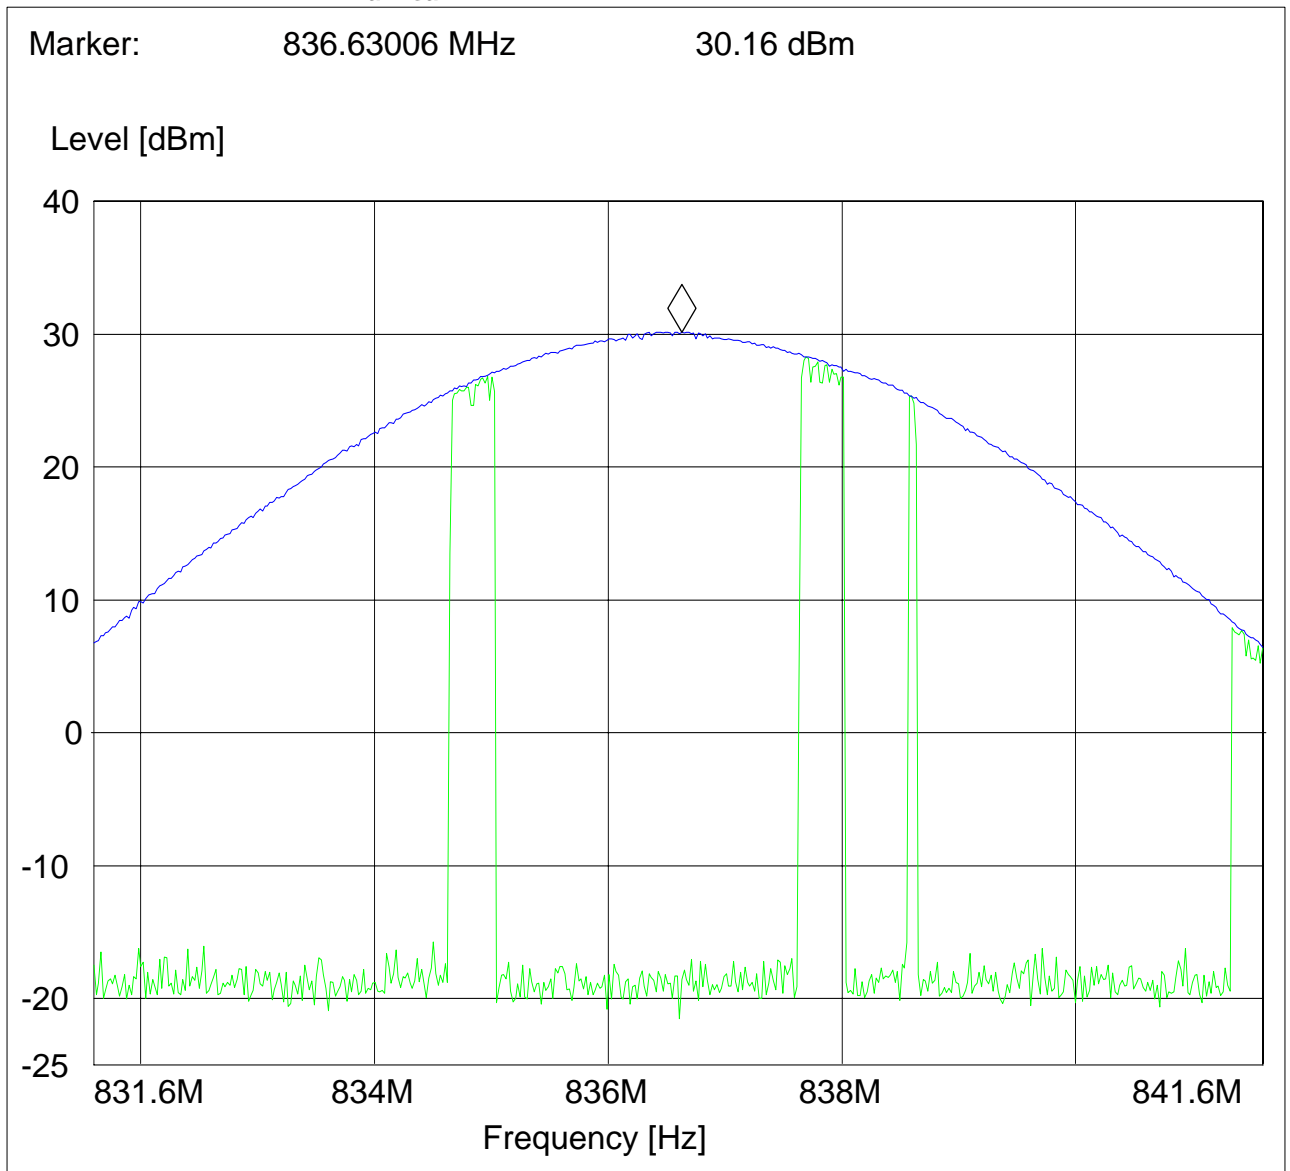




**EIRP (EGPRS 850) CHANNEL 251 §22.913(a)**

EUT: 7505  
Customer:: Psion Teklogix Inc  
Test Mode: EGPRS850  
ANT Orientation: H  
EUT Orientation: H  
Test Engineer: PETER  
Voltage: Battery  
Comments: TT227° ANT 126CM

***SWEEP TABLE: "EIRP 850 CH 251 H"***

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 843.8 MHz       | 853.8 MHz      | MaxPeak  | Coupled    | 3 MHz     | DUMMY-DBM  |

Marker: 848.83006 MHz 27.68 dBm

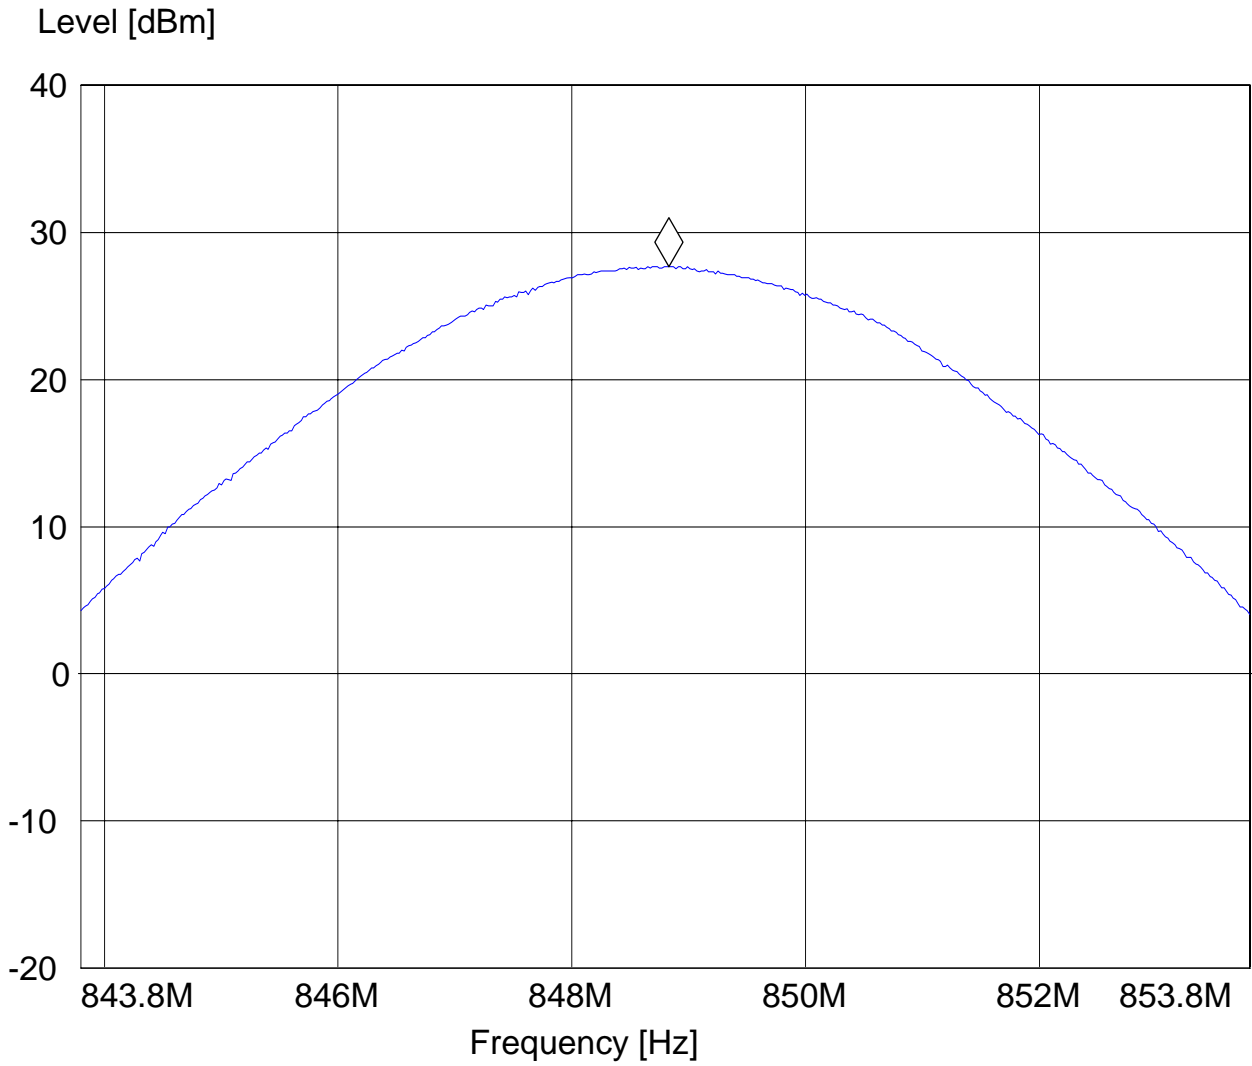






**EIRP (UMTS FDD5) CHANNEL 4132 §22.913(a)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD V  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Sam  
 Voltage: AC ADAPTER  
 Comments: TT@210° ANT@142

**SWEEP TABLE: "EIRP 850 CH 4132H"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 816.4 MHz       | 836.4 MHz      | MaxPeak  | Coupled    | 5 MHz     | DUMMY-DBM  |
|                 |                | MaxPeak  |            |           |            |

Marker: 826.660521 MHz 24.43 dBm

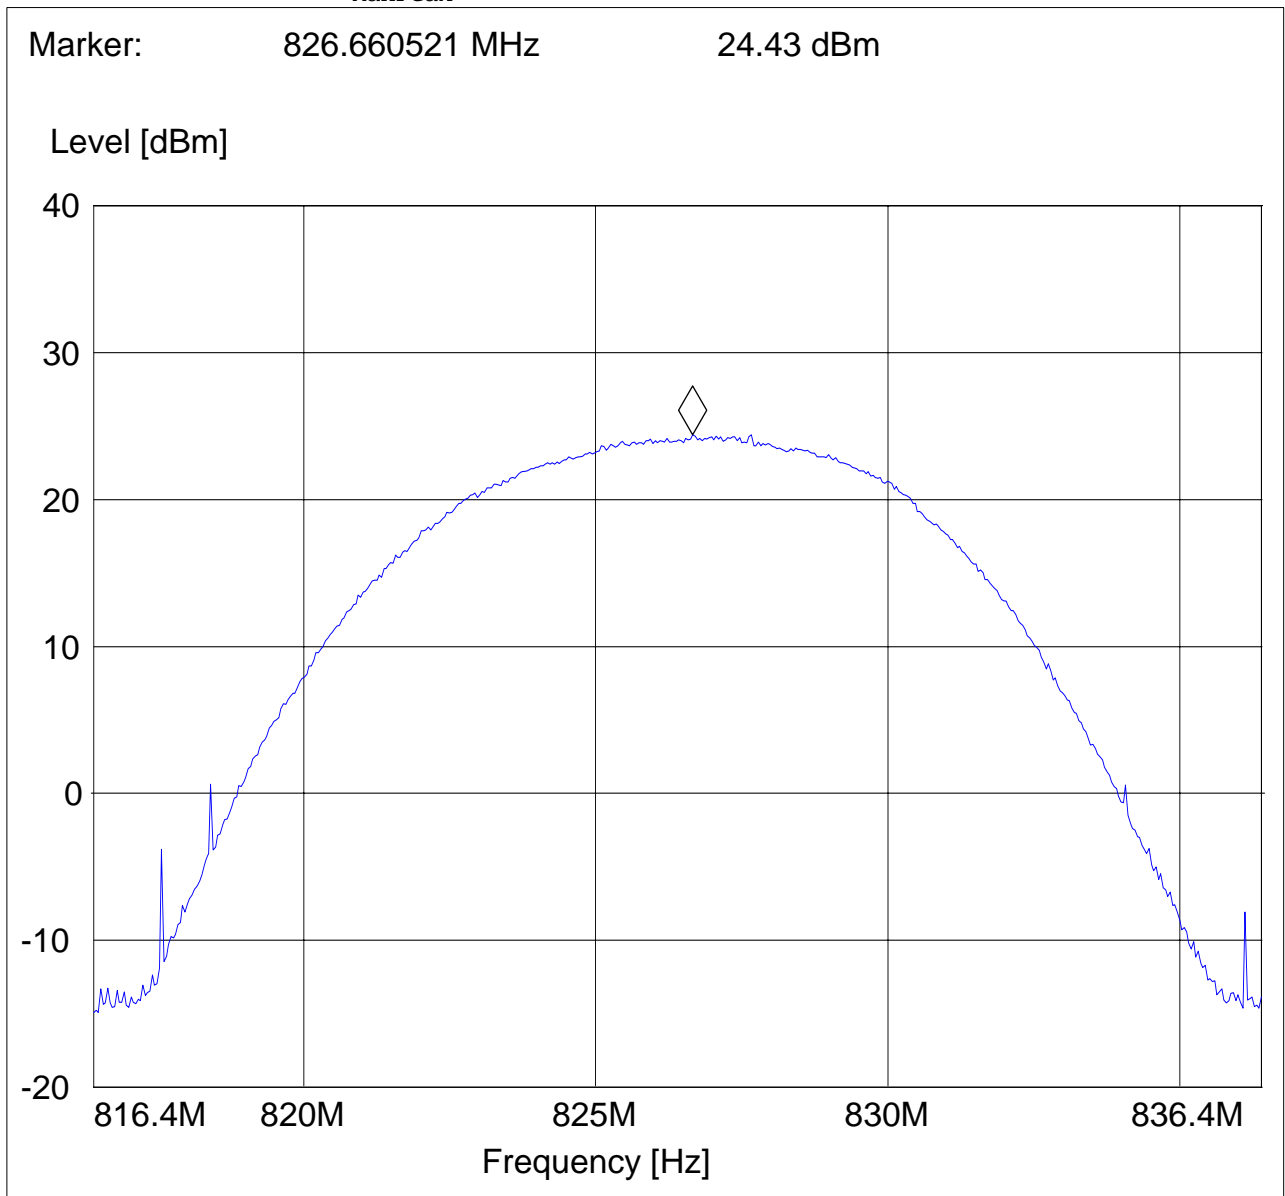




**EIRP (UMTS FDD5) CHANNEL 4183 §22.913(a)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD V  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Sam  
 Voltage: AC ADAPTER  
 Comments: TT@210° ANT@142

**SWEEP TABLE: "EIRP 850 CH 4183 H"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 826.6 MHz       | 846.6 MHz      | MaxPeak  | Coupled    | 5 MHz     | DUMMY-DBM  |
|                 |                | MaxPeak  |            |           |            |

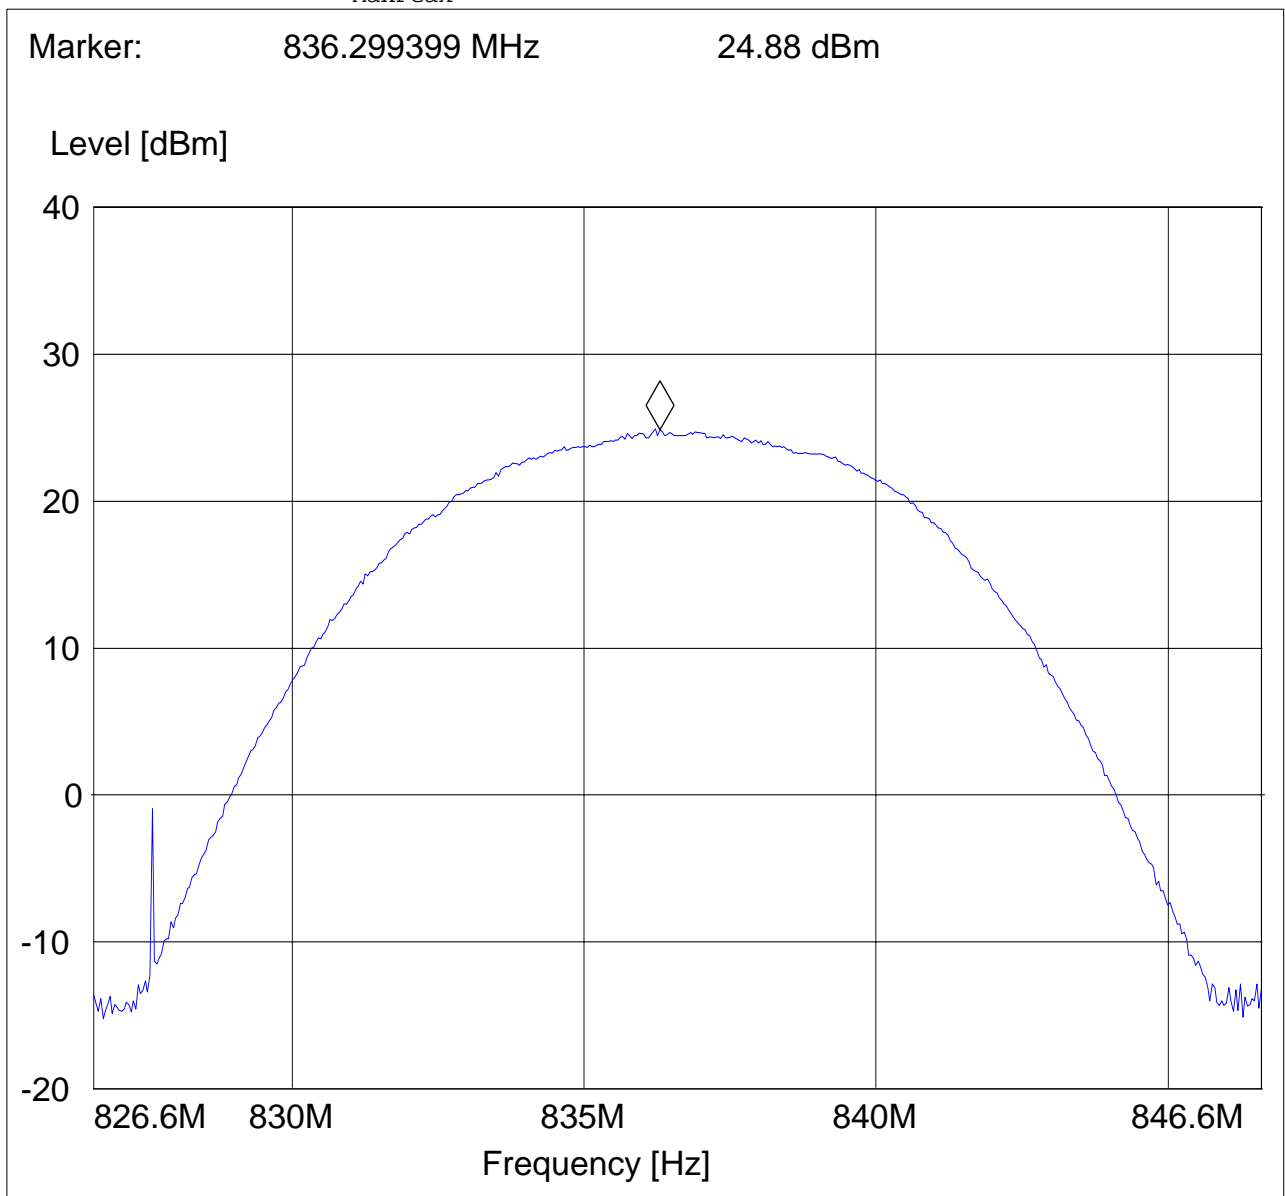




**EIRP (UMTS FDD5) CHANNEL 4233 §22.913(a)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD V  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Sam  
 Voltage: AC ADAPTER  
 Comments: TT@210° ANT@142

**SWEEP TABLE: "EIRP 850 CH 4233H"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 836.6 MHz       | 856.6 MHz      | MaxPeak  | Coupled    | 5 MHz     | DUMMY-DBM  |
|                 |                | MaxPeak  |            |           |            |

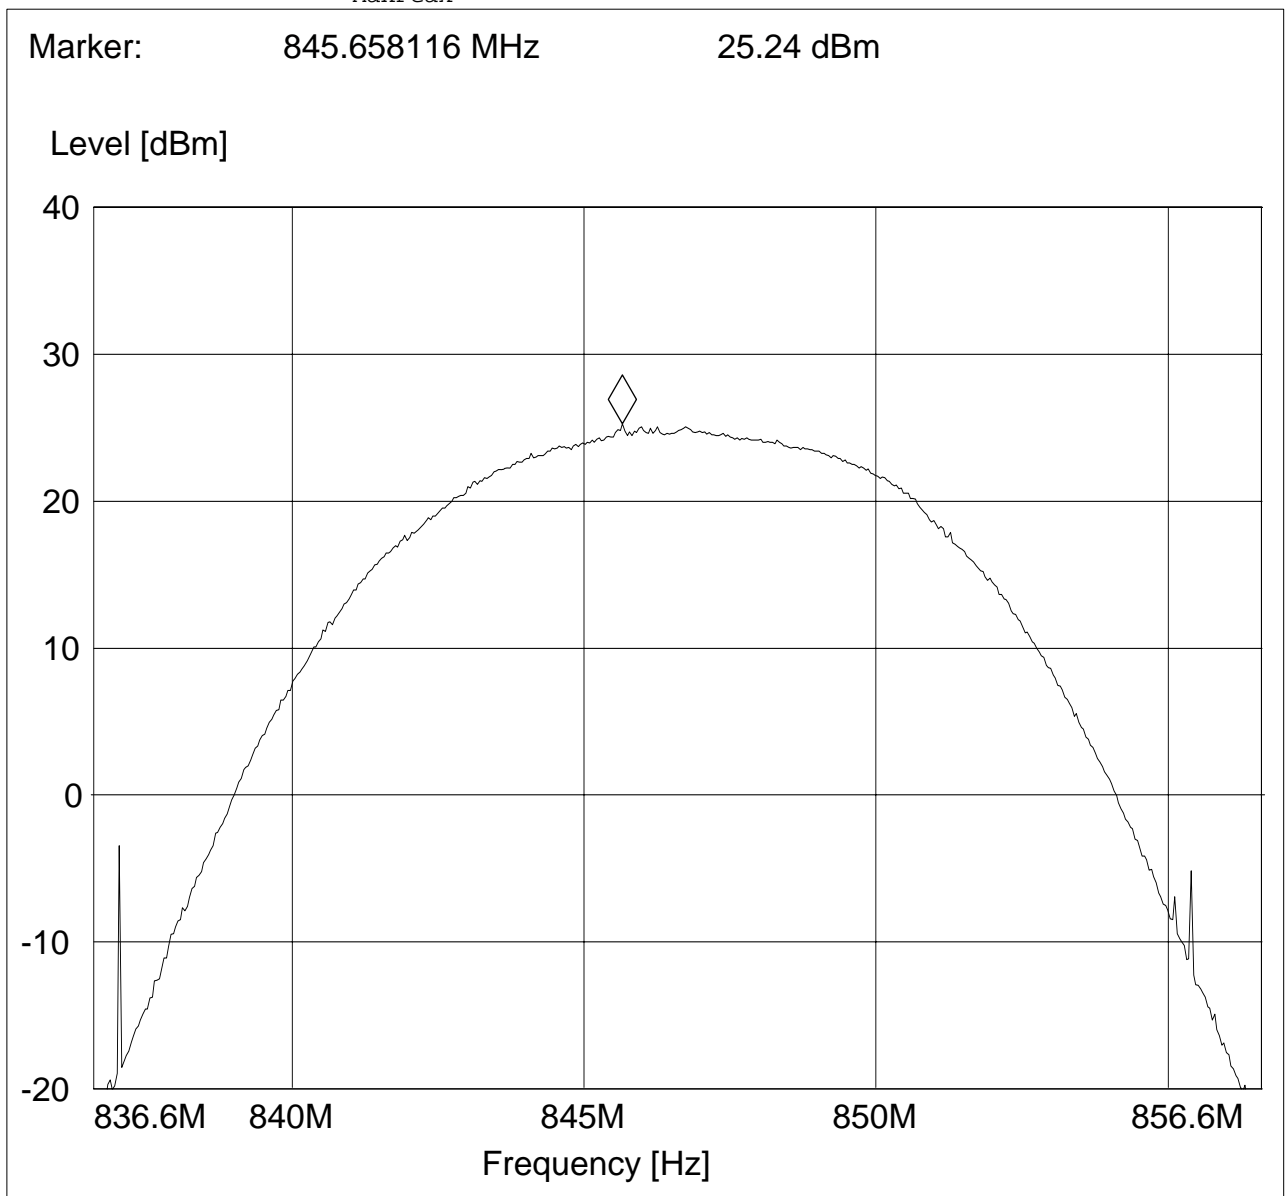




**EIRP (PCS-1900) CHANNEL 512 §24.232(b)**

EUT: 7505  
Customer:: PSION  
Test Mode: GSM 1900; CH 512  
ANT Orientation: H  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: AC Adapter  
Comments:

**SWEEP TABLE: "EIRP 1900 CH512"**

| Short Description: |         | EIRP PCS 1900 for channel-512 |            |           |            |
|--------------------|---------|-------------------------------|------------|-----------|------------|
| Start              | Stop    | Detector                      | Meas. Time | IF Bandw. | Transducer |
| 1.8 GHz            | 1.9 GHz | MaxPeak                       | Coupled    | 3 MHz     | DUMMY-DBM  |

Marker: 1.85031022 GHz 26.32 dBm

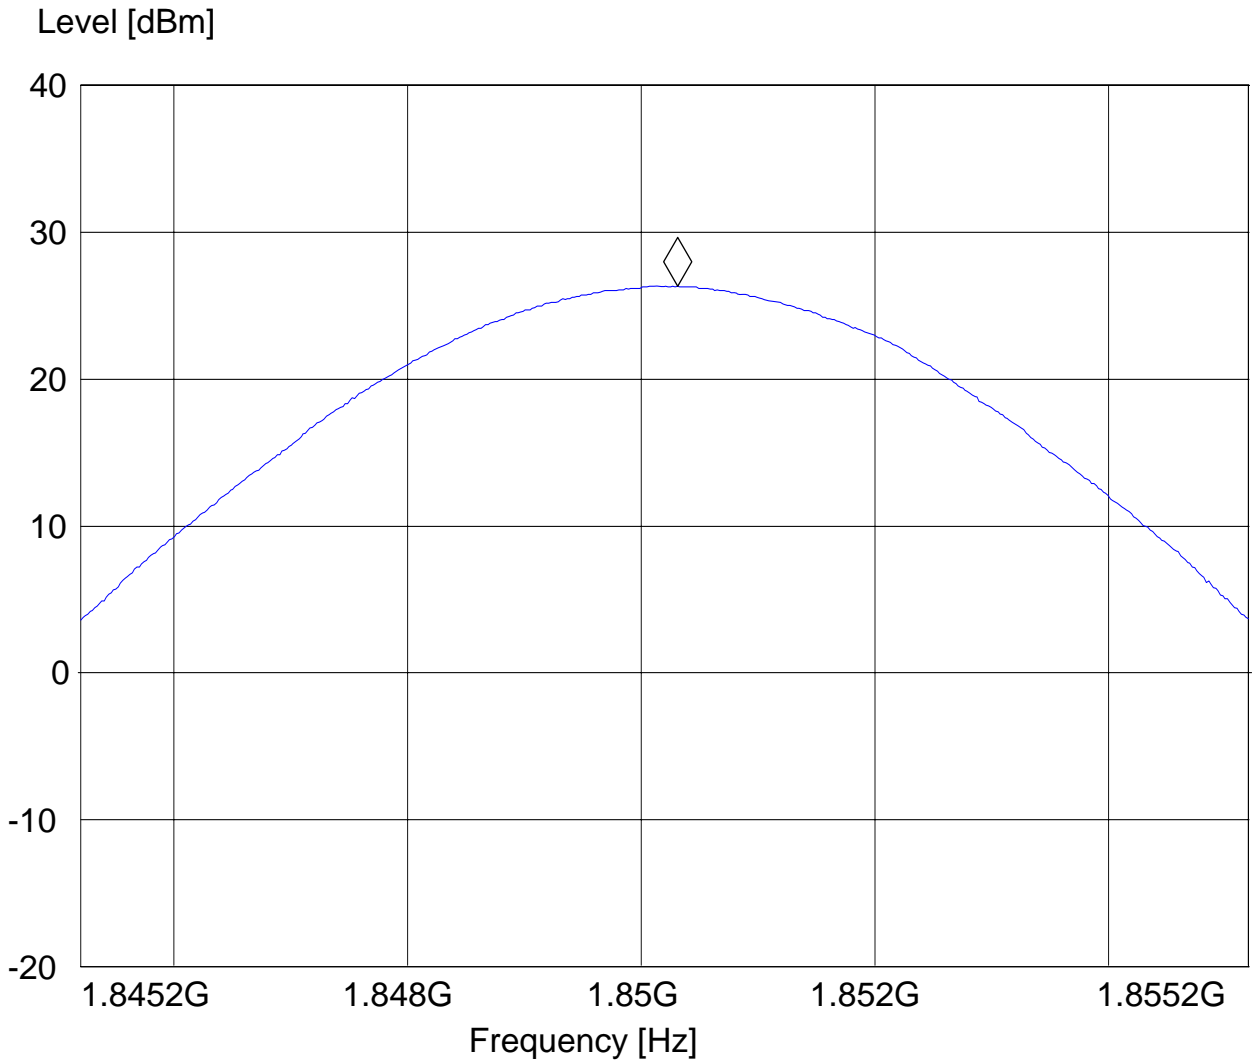




**EIRP (PCS-1900) CHANNEL 661 §24.232(b)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 1900; CH 661  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "EIRP 1900 CH661"**

| Short Description: |         | EIRP PCS 1900 for channel-661 |            |           |            |  |
|--------------------|---------|-------------------------------|------------|-----------|------------|--|
| Start              | Stop    | Detector                      | Meas. Time | IF Bandw. | Transducer |  |
| 1.9 GHz            | 1.9 GHz | MaxPeak                       | Coupled    | 3 MHz     | DUMMY-DBM  |  |
|                    |         | MaxPeak                       |            |           |            |  |

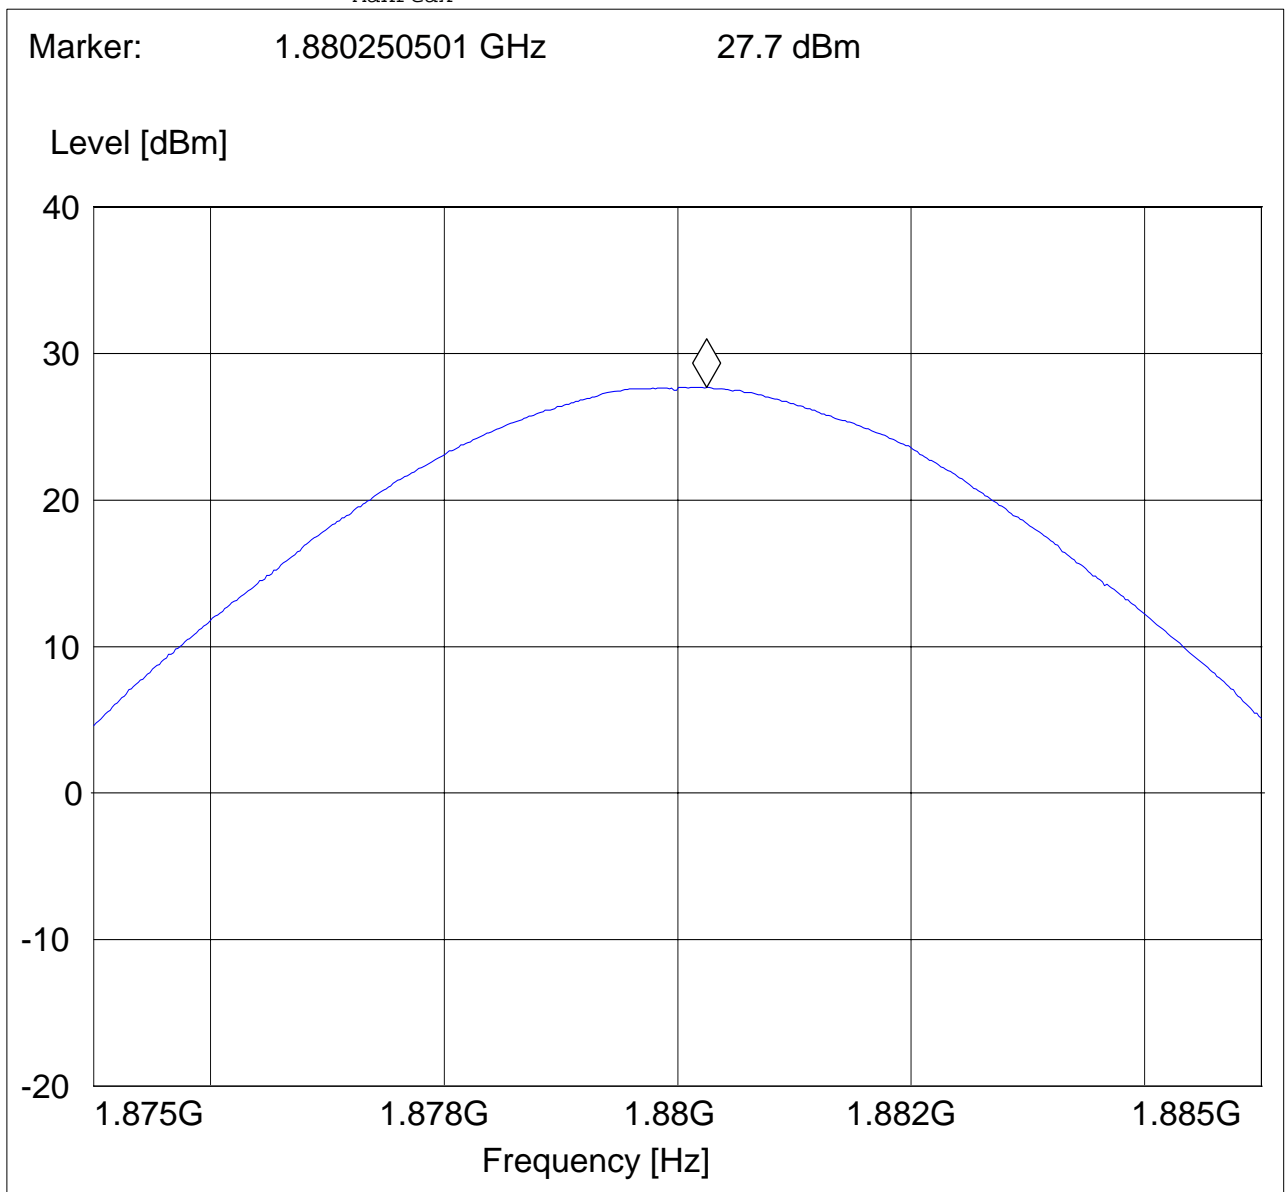




**EIRP (PCS-1900) CHANNEL 810 §24.232(b)**

EUT: 7505  
Customer:: PSION  
Test Mode: GSM 1900; CH 810  
ANT Orientation: H  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: AC Adapter  
Comments:

**SWEEP TABLE: "EIRP 1900 CH810"**

|                    |           |                               |         |        |            |
|--------------------|-----------|-------------------------------|---------|--------|------------|
| Short Description: |           | EIRP PCS 1900 for channel-810 |         |        |            |
| Start              | Stop      | Detector                      | Meas.   | IF     | Transducer |
| Frequency          | Frequency |                               | Time    | Bandw. |            |
| 1.9 GHz            | 1.9 GHz   | MaxPeak                       | Coupled | 3 MHz  | DUMMY-DBM  |

Marker: 1.909970341 GHz 27.47 dBm

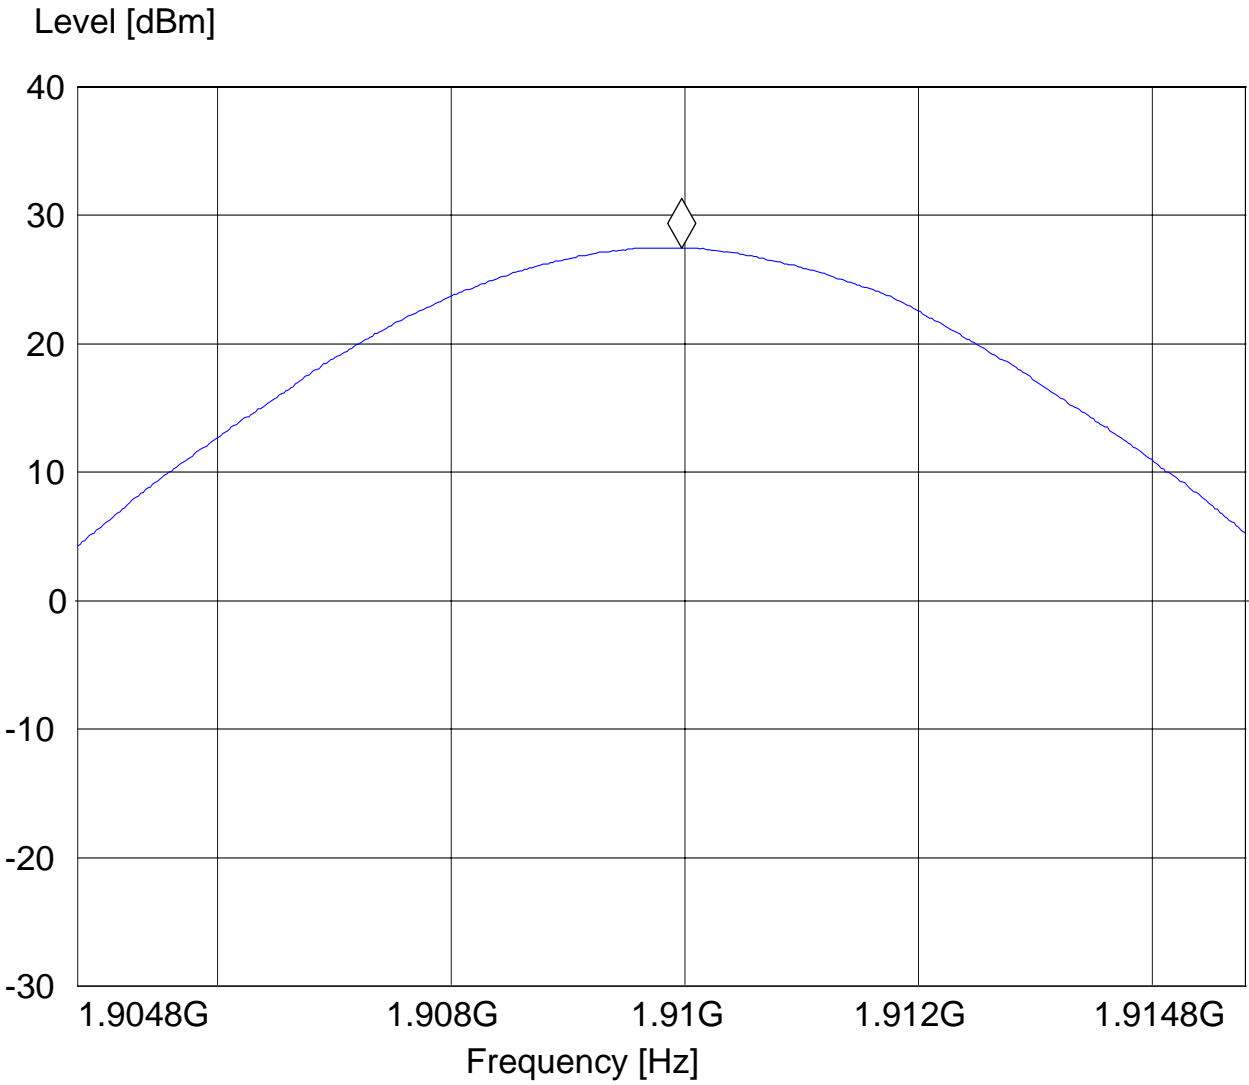




**EIRP (EGPRS 1900) CHANNEL 512 §24.232(b)**

EUT: 7505  
Customer:: Psion Teklogix Inc  
Test Mode: EGPRS1900  
ANT Orientation: H  
EUT Orientation: H  
Test Engineer: PETER  
Voltage: Battery  
Comments: TT270°

**SWEEP TABLE: "EIRP 1900 CH512"**

|                    |           |                               |         |        |            |
|--------------------|-----------|-------------------------------|---------|--------|------------|
| Short Description: |           | EIRP PCS 1900 for channel-512 |         |        |            |
| Start              | Stop      | Detector                      | Meas.   | IF     | Transducer |
| Frequency          | Frequency |                               | Time    | Bandw. |            |
| 1.8 GHz            | 1.9 GHz   | MaxPeak                       | Coupled | 3 MHz  | DUMMY-DBM  |

Marker: 1.85008978 GHz 24.08 dBm

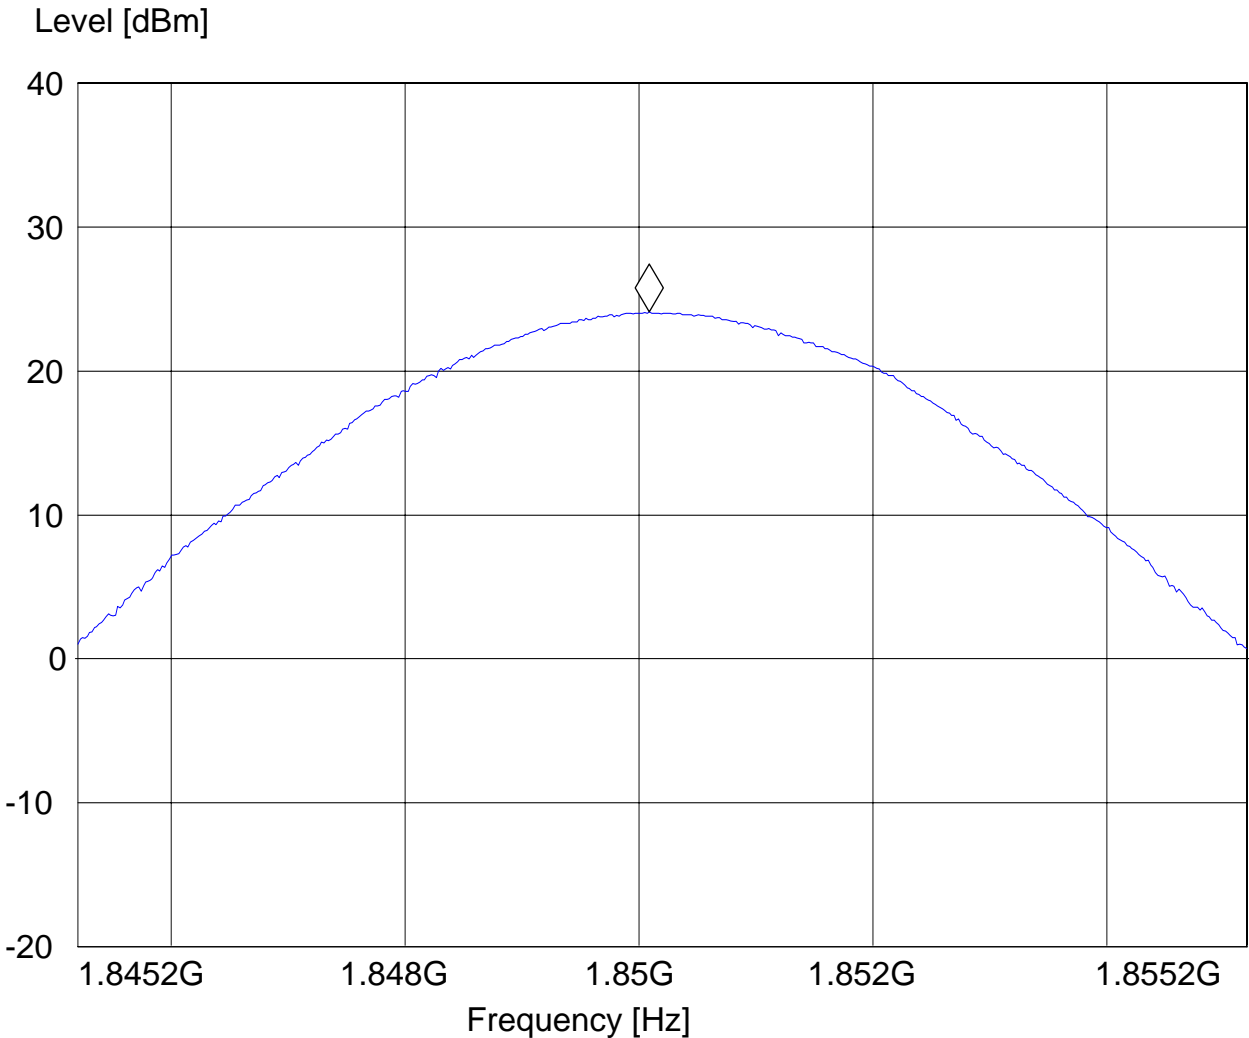




**EIRP (EGPRS 1900) CHANNEL 661 §24.232(b)**

EUT: 7505  
 Customer:: Psion Teklogix Inc  
 Test Mode: EGPRS1900  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: PETER  
 Voltage: Battery  
 Comments: TT270°

**SWEEP TABLE: "EIRP 1900 CH661"**

|                    |         |                               |            |           |            |
|--------------------|---------|-------------------------------|------------|-----------|------------|
| Short Description: |         | EIRP PCS 1900 for channel-661 |            |           |            |
| Start              | Stop    | Detector                      | Meas. Time | IF Bandw. | Transducer |
| 1.9 GHz            | 1.9 GHz | MaxPeak                       | Coupled    | 3 MHz     | DUMMY-DBM  |
|                    |         | MaxPeak                       |            |           |            |

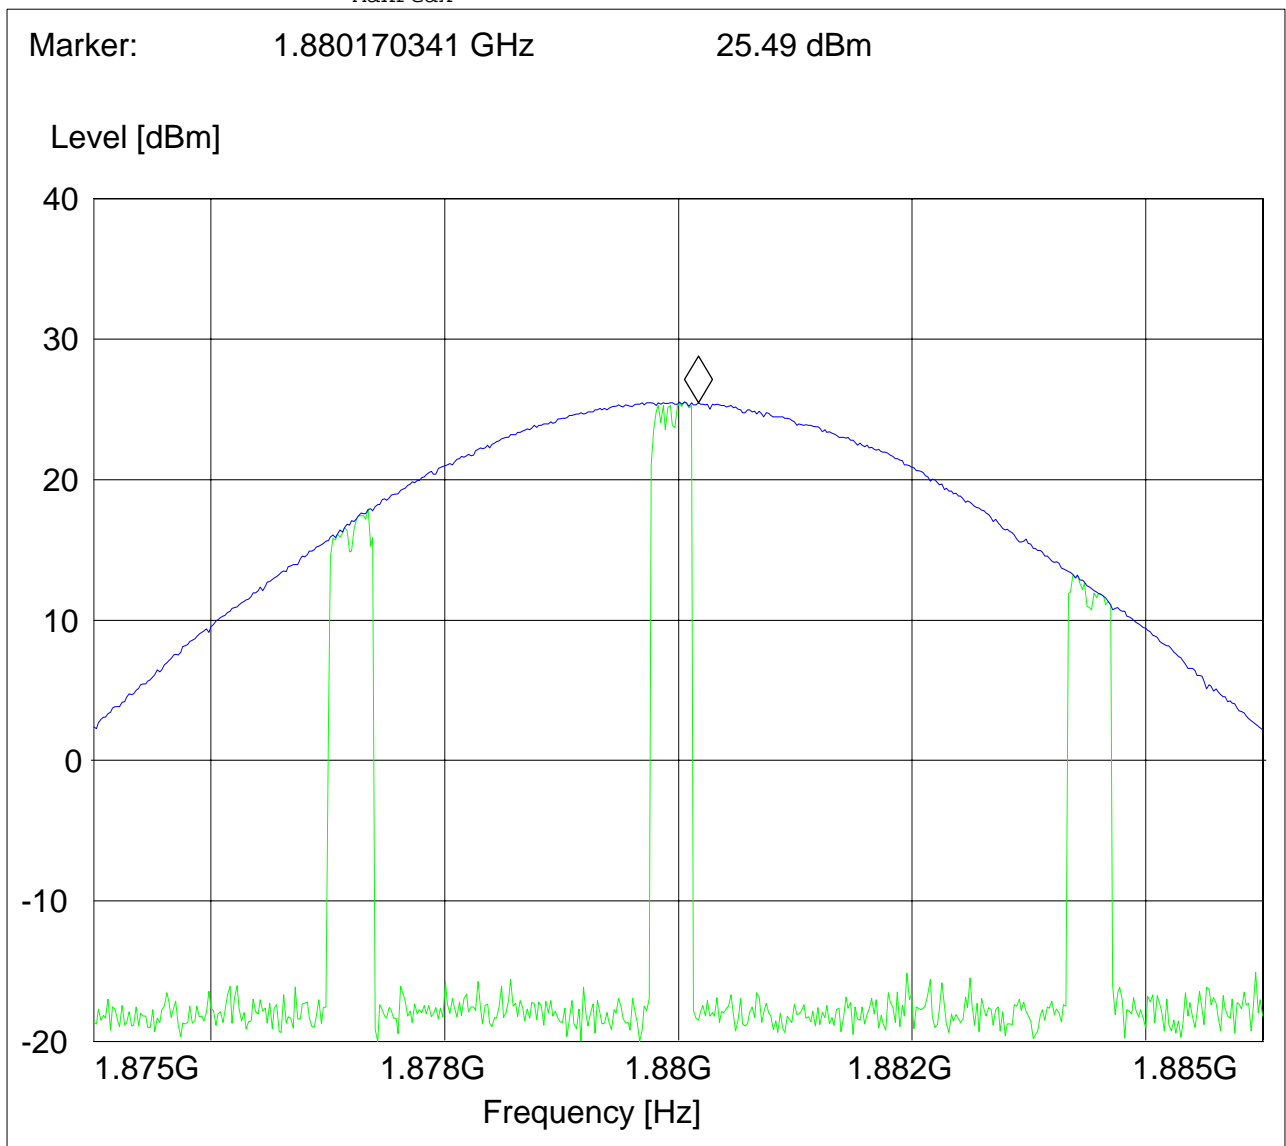






**EIRP (EGPRS 1900) CHANNEL 810 §24.232(b)**

EUT: 7505  
 Customer:: Psion Teklogix Inc  
 Test Mode: EGPRS1900  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: PETER  
 Voltage: Battery  
 Comments: TT270°

**SWEEP TABLE: "EIRP 1900 CH810"**

| Short Description: |           | EIRP PCS 1900 for channel-810 |         |        |            |
|--------------------|-----------|-------------------------------|---------|--------|------------|
| Start              | Stop      | Detector                      | Meas.   | IF     | Transducer |
| Frequency          | Frequency |                               | Time    | Bandw. |            |
| 1.9 GHz            | 1.9 GHz   | MaxPeak                       | Coupled | 3 MHz  | DUMMY-DBM  |

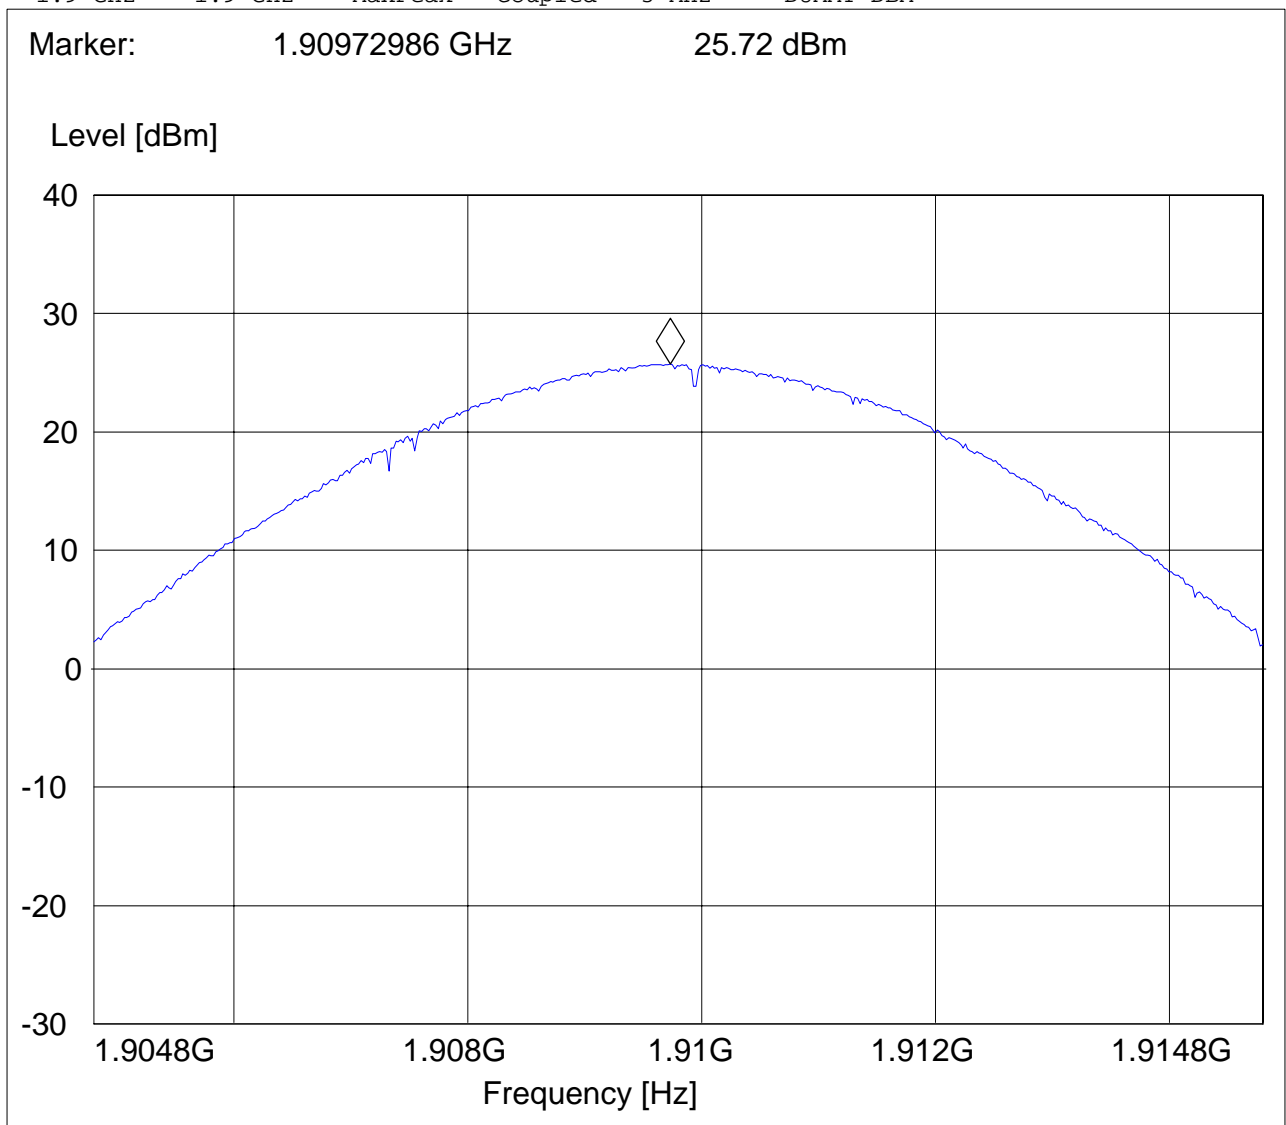




**EIRP (UMTS FDD2) CHANNEL 9262 §24.232(b)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD II  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC ADAPTER  
 Comments: TT@0°

**SWEEP TABLE: "EIRP 1900 CH 9262"**

| Start   | Stop    | Detector | Meas. Time | IF Bandw. | Transducer |
|---------|---------|----------|------------|-----------|------------|
| 1.8 GHz | 1.9 GHz | MaxPeak  | Coupled    | 5 MHz     | DUMMY-DBM  |

Marker: 1.853141483 GHz 19.73 dBm

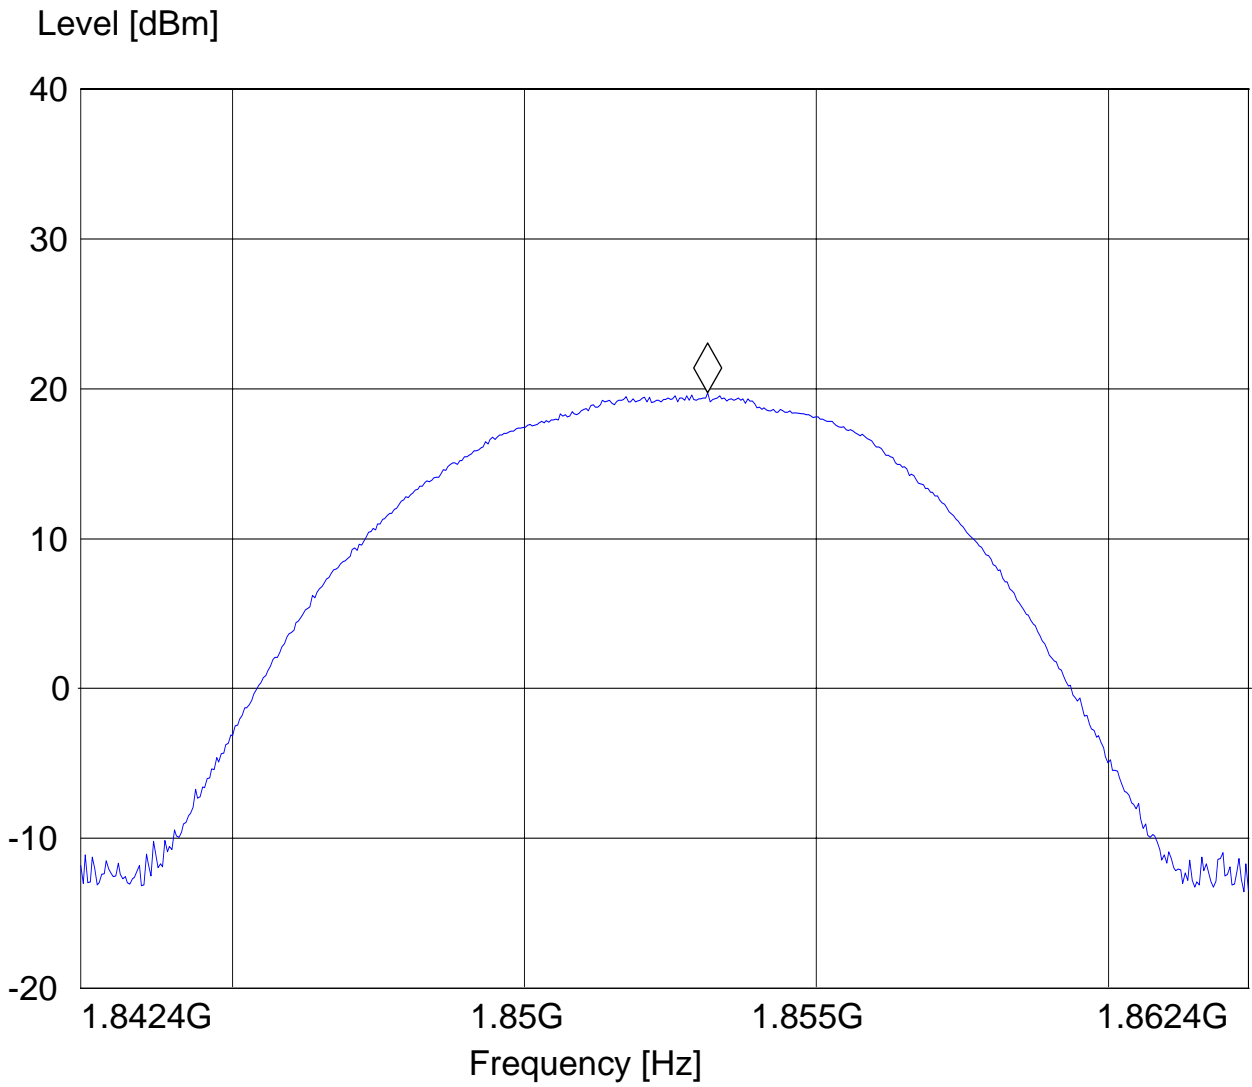




**EIRP (UMTS FDD2) CHANNEL 9400 §24.232(b)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD II  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC ADAPTER  
 Comments: TT@0°

**SWEEP TABLE: "EIRP 1900 CH 9400"**

| Short Description: |         | EIRP PCS 1900 for channel-661 |            |           |            |
|--------------------|---------|-------------------------------|------------|-----------|------------|
| Start              | Stop    | Detector                      | Meas. Time | IF Bandw. | Transducer |
| 1.9 GHz            | 1.9 GHz | MaxPeak                       | Coupled    | 5 MHz     | DUMMY-DBM  |
|                    |         | MaxPeak                       |            |           |            |

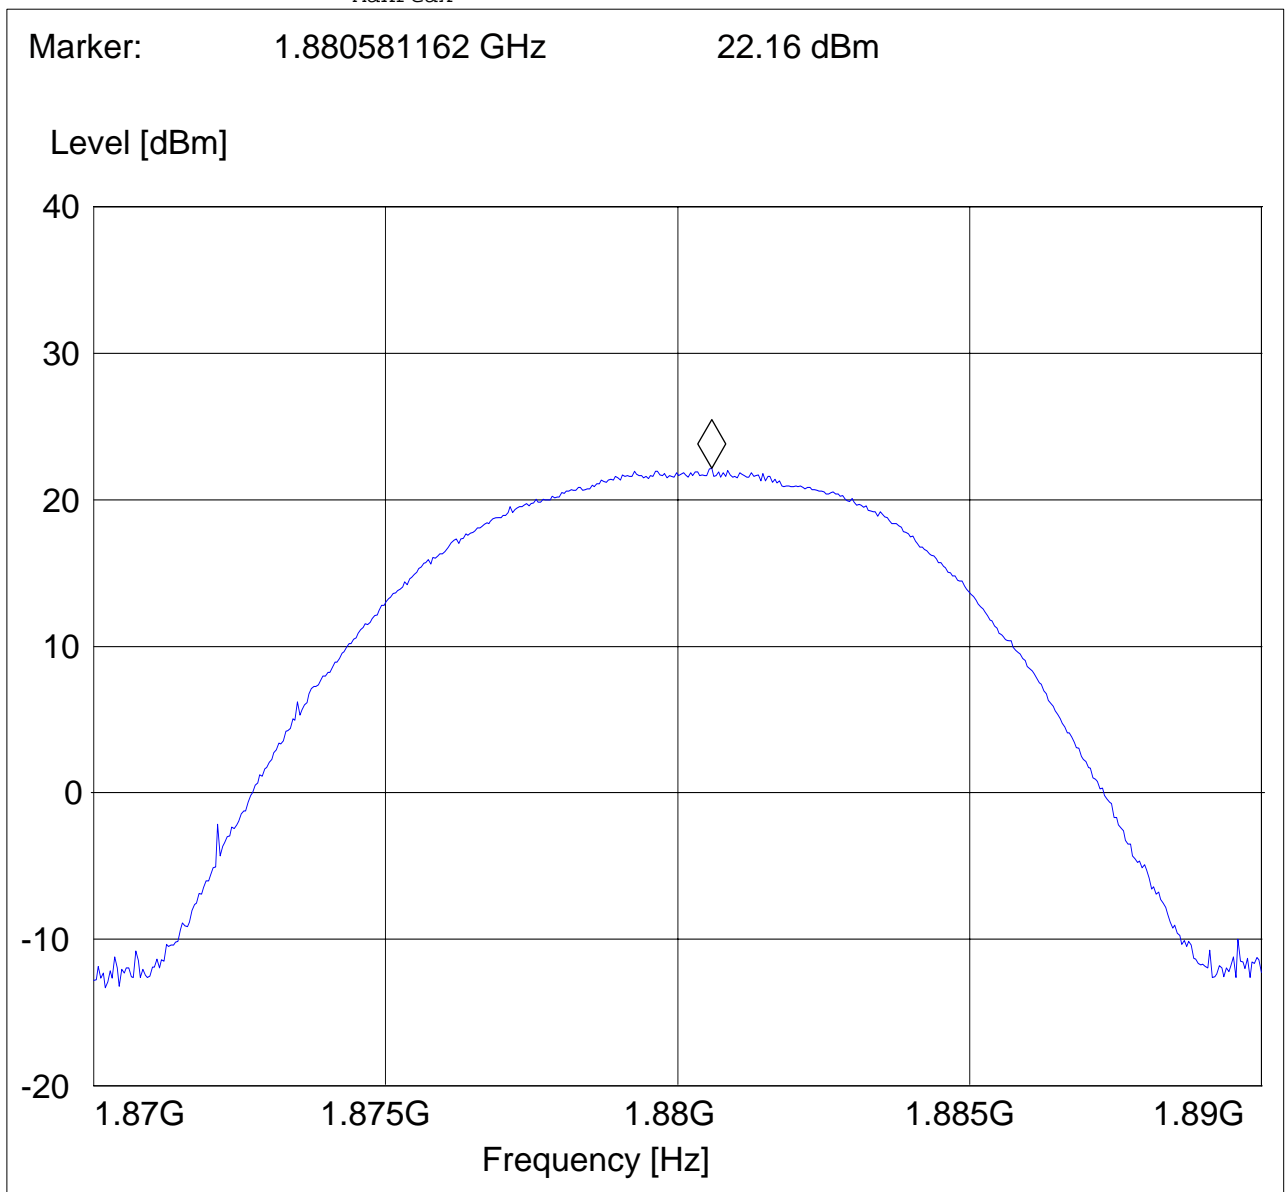




**EIRP (UMTS FDD2) CHANNEL 9538 §24.232(b)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD II  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC ADAPTER  
 Comments: TT@0°

**SWEEP TABLE: "EIRP 1900 CH 9538"**

|                    |           |                               |         |       |            |
|--------------------|-----------|-------------------------------|---------|-------|------------|
| Short Description: |           | EIRP PCS 1900 for channel-810 |         |       |            |
| Start              | Stop      | Detector                      | Meas.   | IF    | Transducer |
| Frequency          | Frequency | Time                          | Bandw.  |       |            |
| 1.9 GHz            | 1.9 GHz   | MaxPeak                       | Coupled | 5 MHz | DUMMY-DBM  |

Marker: 1.907459719 GHz 20.86 dBm

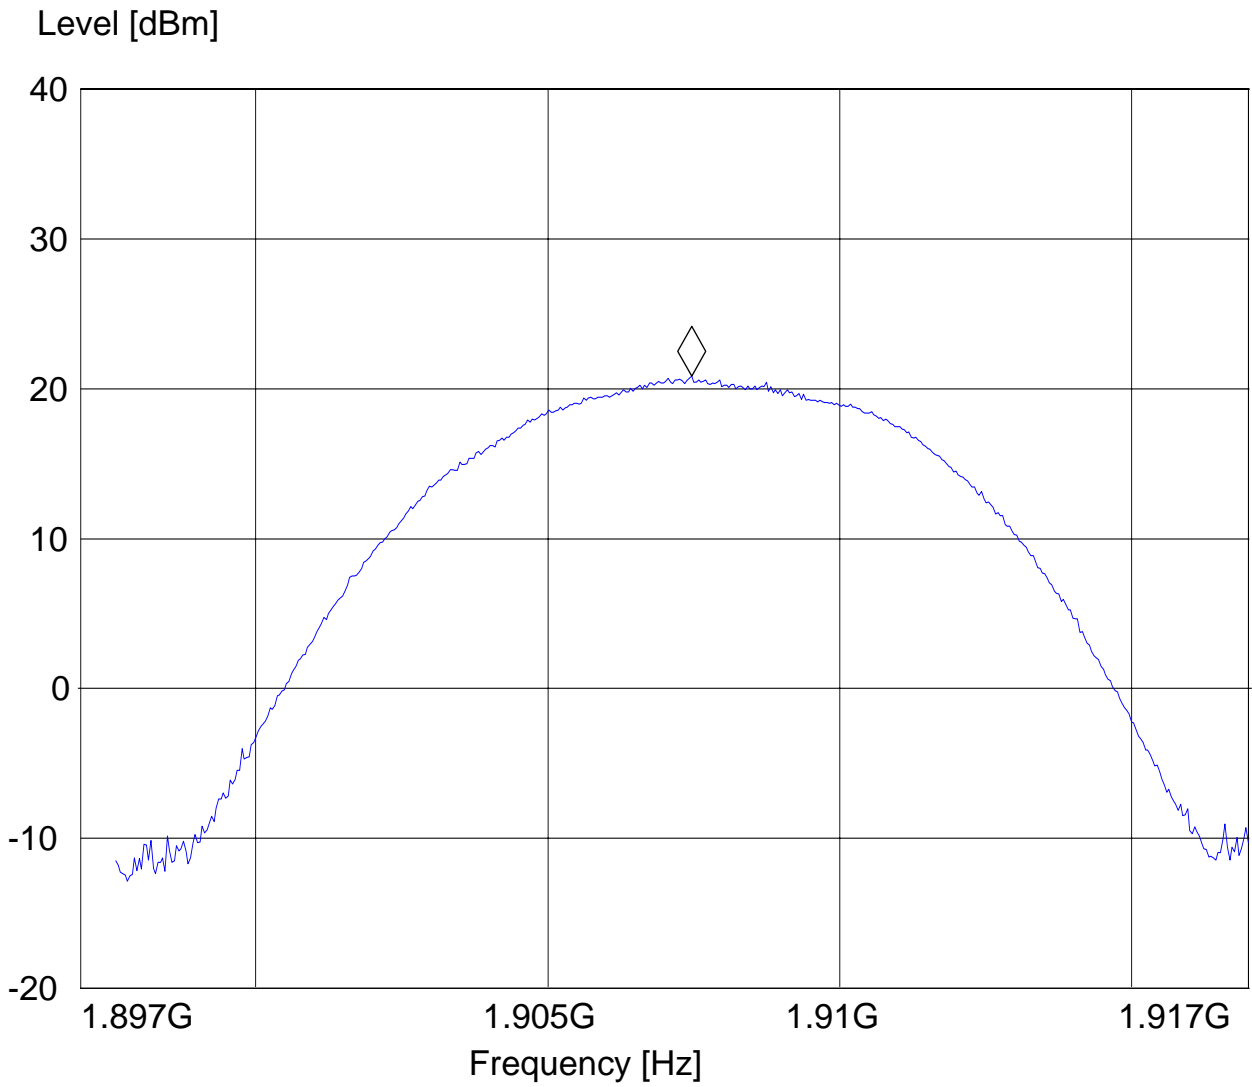


## 5.2 Occupied Bandwidth/Emission Bandwidth

### 5.2.1 FCC 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.

(h) Transmitters employing digital modulation techniques-when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated.

### 5.2.2 Occupied / emission bandwidth measurement procedure:

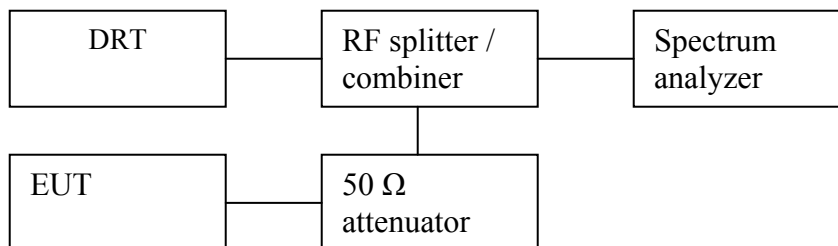

1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure the 99% (-20 dB) occupied bandwidth. Record the value.
4. Set the spectrum analyzer to measure the 99.5% (-26 dB) emission bandwidth. Record the value.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

### 5.2.3 Occupied / Emission bandwidth results 850 MHz band:

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the conducted test report.

### 5.3 Frequency Stability

#### 5.3.1 Limit

##### **For Hand carried battery powered equipment:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.2VDC and 4.5VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -2.7% and +21.62%. For the purposes of measuring frequency stability these voltage limits are to be used.

##### **Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU 200 UNIVERSAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30 C.
3. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 4183 for FDD5 & 661 for PCS-1900&9400 for FDD2), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10 C increments from -30 C to +50 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1 Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours un-powered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50 C.
7. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 4183 for FDD5 & 661 for PCS-1900&9400 for FDD2), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

##### **For equipment powered by primary supply voltage:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

For this EUT section 2.1055(d)(1) applies. This requires to vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.



### **5.3.2 Test Results Frequency Stability (GSM-850)**

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the conducted test report.

### **5.3.3 FREQUENCY STABILITY (PCS-1900)**

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the conducted test report.

## **5.4 Spurious Emissions Conducted**

### **5.4.1 FCC 2.1051 Measurements required: Spurious emissions at antenna terminals.**

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in FCC 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

### **5.4.2 Limits:**

#### **5.4.2.1 FCC 22.917 Emission limitations for cellular equipment.**

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### **5.4.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.**

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.




(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### 5.4.3 Conducted out of band emissions measurement procedure:

Based on TIA-603C 2004

#### 2.2.13 Unwanted Emissions: Conducted Spurious

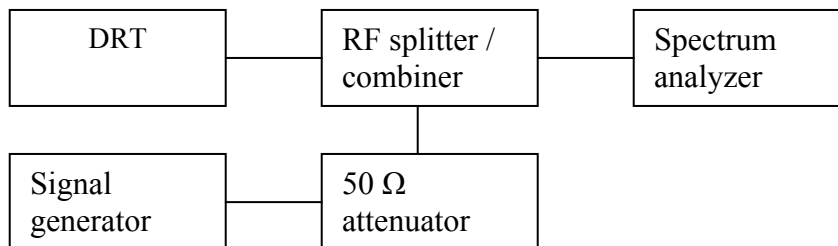

1. Connect the equipment as shown in the above diagram.
2. Set the spectrum analyzer to measure peak hold with the required settings.
3. Set the signal generator to a known output power and record the path loss in dB (**LOSS**) for frequencies up to the tenth harmonic of the EUT's carrier frequency. **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
4. Replace the signal generator with the EUT.
5. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
6. Set the spectrum analyzer to measure peak hold with the required settings. Offset the spectrum analyzer reference level by the path loss measured above.
7. Measure and record all spurious emissions up to the tenth harmonic of the carrier frequency.
8. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
9. If necessary steps 6 and 7 may be performed with the spectrum analyzer set to average detector.

(note: Step 3 above is performed prior to testing and LOSS is recorded by test software. Steps 2, 6, and 7 above are performed with test software.)

#### **5.4.4 Test Results: Conducted Emission:**

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the conducted test report.

### **5.5 Spurious Emissions Radiated**

#### **5.5.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.**

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

#### **5.5.2 Limits:**

##### **5.5.2.1 FCC 22.917 Emission limitations for cellular equipment.**

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

##### **5.5.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.**

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.


(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 5.5.3 Radiated out of band measurement procedure:

Based on TIA-603C 2004

#### 2.2.12 Unwanted emissions: Radiated Spurious

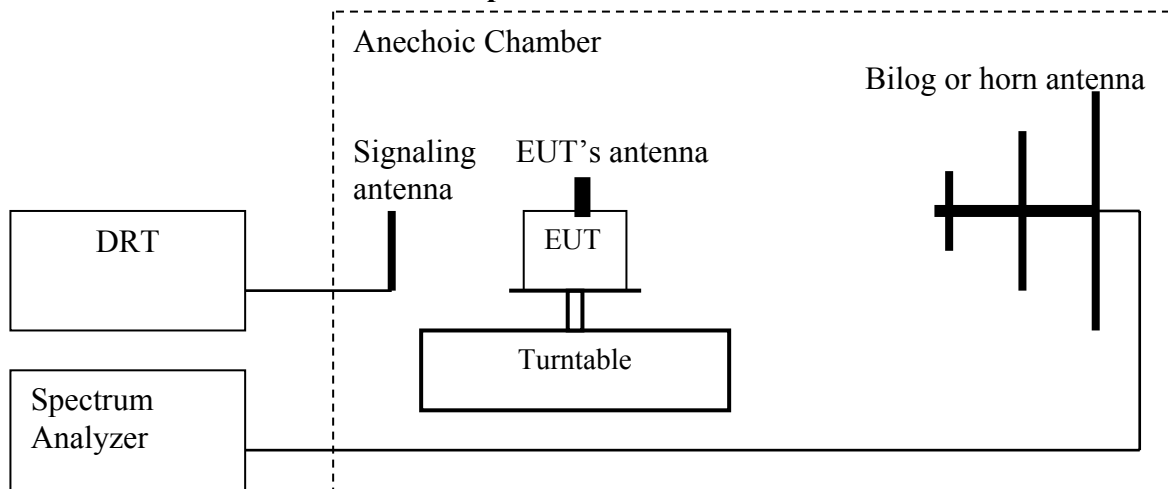

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (LVL) up to the tenth harmonic of the carrier frequency.

5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the level of spurious emissions using the following equation:  
**Spurious** (dBm) = **LVL** (dBm) + **LOSS** (dB):
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:  
**Spurious** (dBm) = **LVL** (dBm) + **LOSS** (dB):
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(**note:** Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

#### **Spectrum analyzer settings:**

Res B/W: 1 MHz

Vid B/W: 1 MHz

#### **Measurement Survey:**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

Radiated emission measurements were made only with Circuit Switched mode GMSK modulation because this mode represents the worse case emission for all the modulations for GSM. See section 5.5.4.1 and 5.5.4.3

Radiated emissions measurements were made also with UMTS FDD mode. See section 5.5.4.2 and 5.5.4.4



**5.5.4 Radiated out of band emissions results on EUT:**

**5.5.4.1 Test Results Transmitter Spurious Emission GSM850:**

| Harmonics        | Tx ch-128<br>Freq. (MHz) | Level (dBm) | Tx ch-190<br>Freq. (MHz) | Level (dBm) | Tx ch-251<br>Freq. (MHz) | Level (dBm) |
|------------------|--------------------------|-------------|--------------------------|-------------|--------------------------|-------------|
| 2                | 1648.4                   | NF          | 1673.2                   | NF          | 1697.6                   | NF          |
| 3                | 2472.6                   | NF          | 2509.8                   | NF          | 2546.4                   | NF          |
| 4                | 3296.8                   | NF          | 3346.4                   | NF          | 3395.2                   | NF          |
| 5                | 4121                     | NF          | 4183                     | NF          | 4244                     | NF          |
| 6                | 4945.2                   | NF          | 5019.6                   | NF          | 5092.8                   | NF          |
| 7                | 5769.4                   | NF          | 5856.2                   | NF          | 5941.6                   | NF          |
| 8                | 6593.6                   | NF          | 6692.8                   | NF          | 6790.4                   | NF          |
| 9                | 7417.8                   | NF          | 7529.4                   | NF          | 7639.2                   | NF          |
| 10               | 8242                     | NF          | 8366                     | NF          | 8488                     | NF          |
| NF = NOISE FLOOR |                          |             |                          |             |                          |             |



**RADIATED SPURIOUS EMISSIONS (GSM-850) TX: 30MHz - 1GHz**  
 Spurious emission limit -13dBm  
**Antenna: vertical**


**Note:**

1. The peak above the limit line is the carrier freq.
2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 850; CH 190  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments: Marker placed on uplink

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

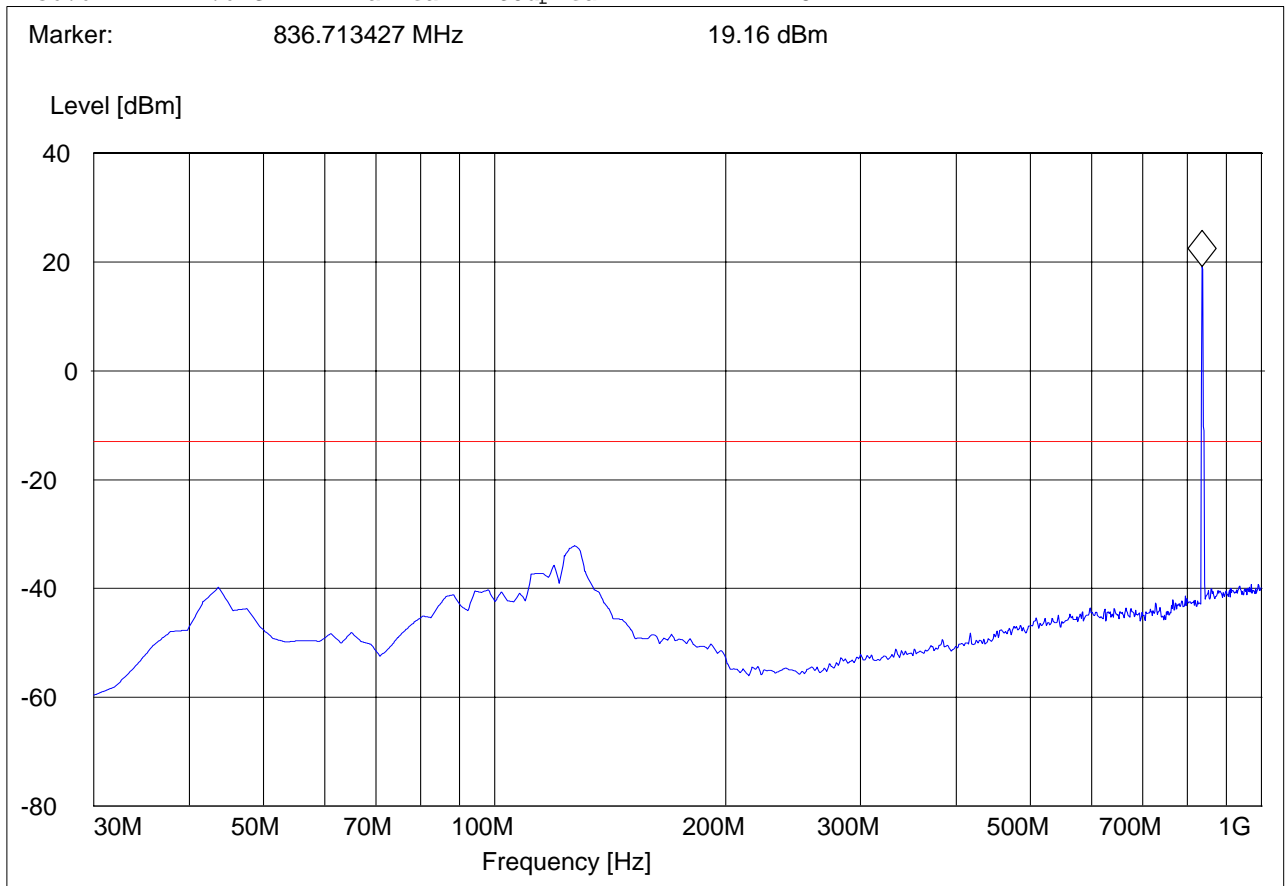



**RADIATED SPURIOUS EMISSIONS (GSM-850)TX: 30MHz - 1GHz**  
 Spurious emission limit -13dBm  
**Antenna: horizontal**


**Note:**

1. The peak above the limit line is the carrier freq.
2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 850; CH 190  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments: Marker placed on uplink

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_H"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 100 kHz   | DUMMY-DBM  |

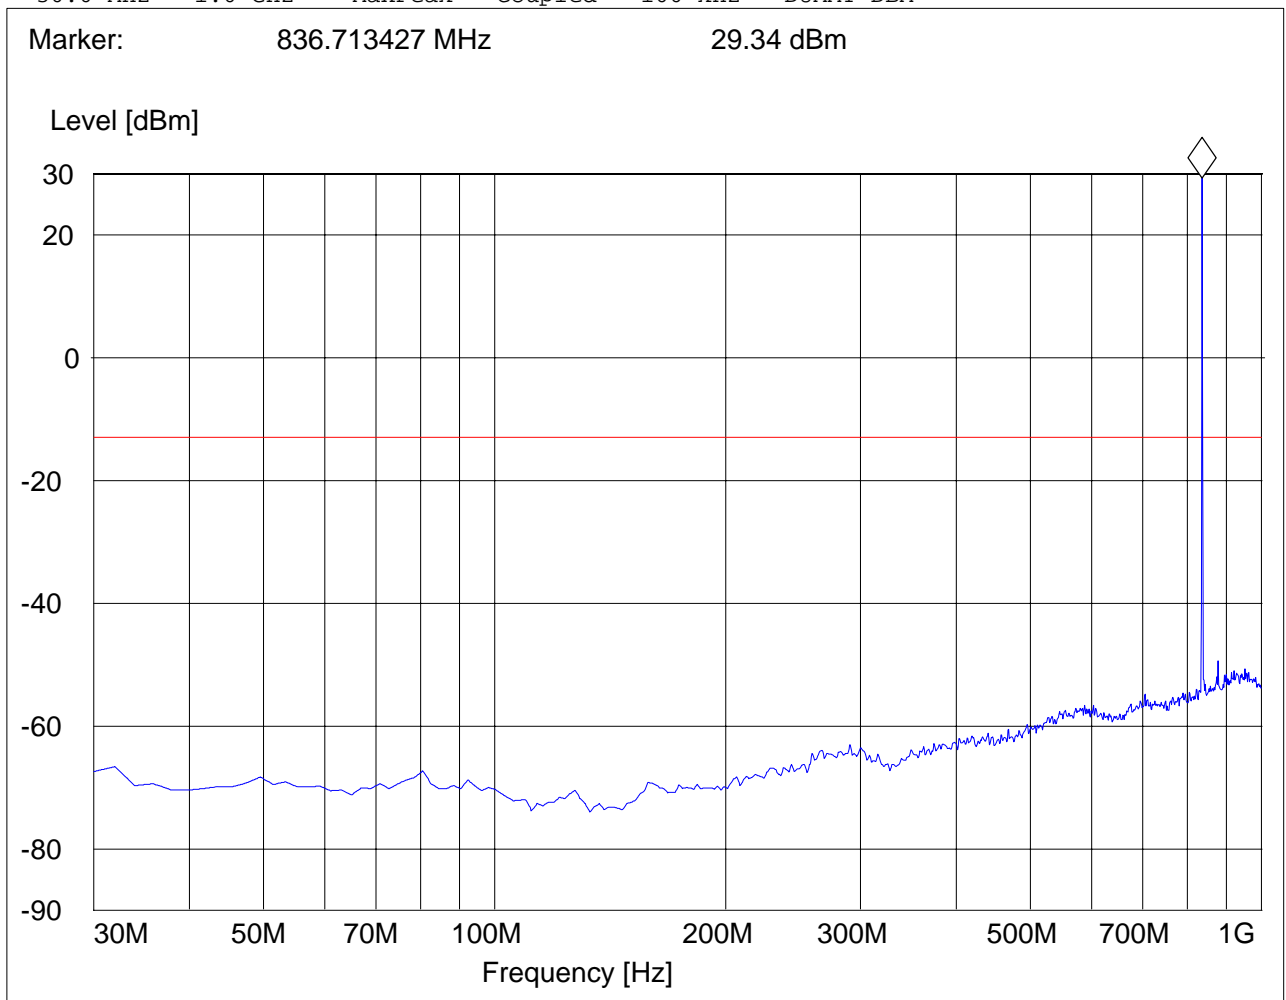




**RADIATED SPURIOUS EMISSIONS (GSM-850) CHANNEL 128 Tx : 1GHz – 1.58GHz**

EUT: 7505  
Customer:: PSION  
Test Mode: GSM 850; CH 128  
ANT Orientation: H  
EUT Orientation: H  
Test Engineer: Chris  
Voltage: AC Adapter  
Comments:

**SWEEP TABLE: "FCC 22Spuri 1-1.58G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.0 GHz         | 1.6 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 1.554428858 GHz -48.78 dBm

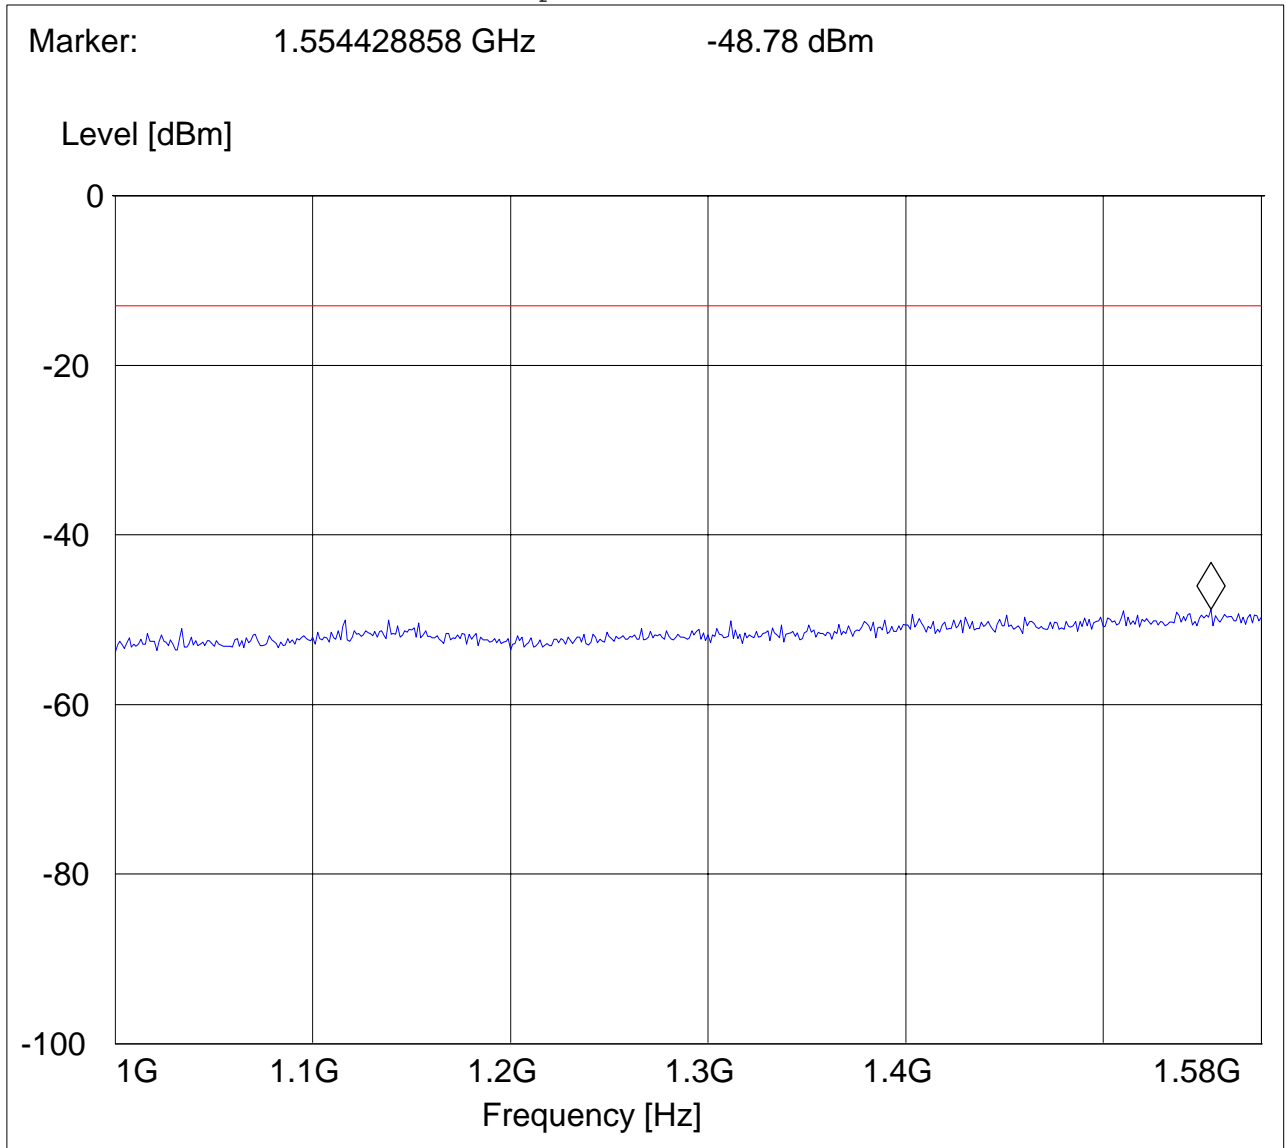






**RADIATED SPURIOUS EMISSIONS (GSM-850) Tx CHANNEL 128: 1.58GHz – 9GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 850; CH 128  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1.58-9G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.6 GHz         | 9.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 1.639478958 GHz -45.87 dBm

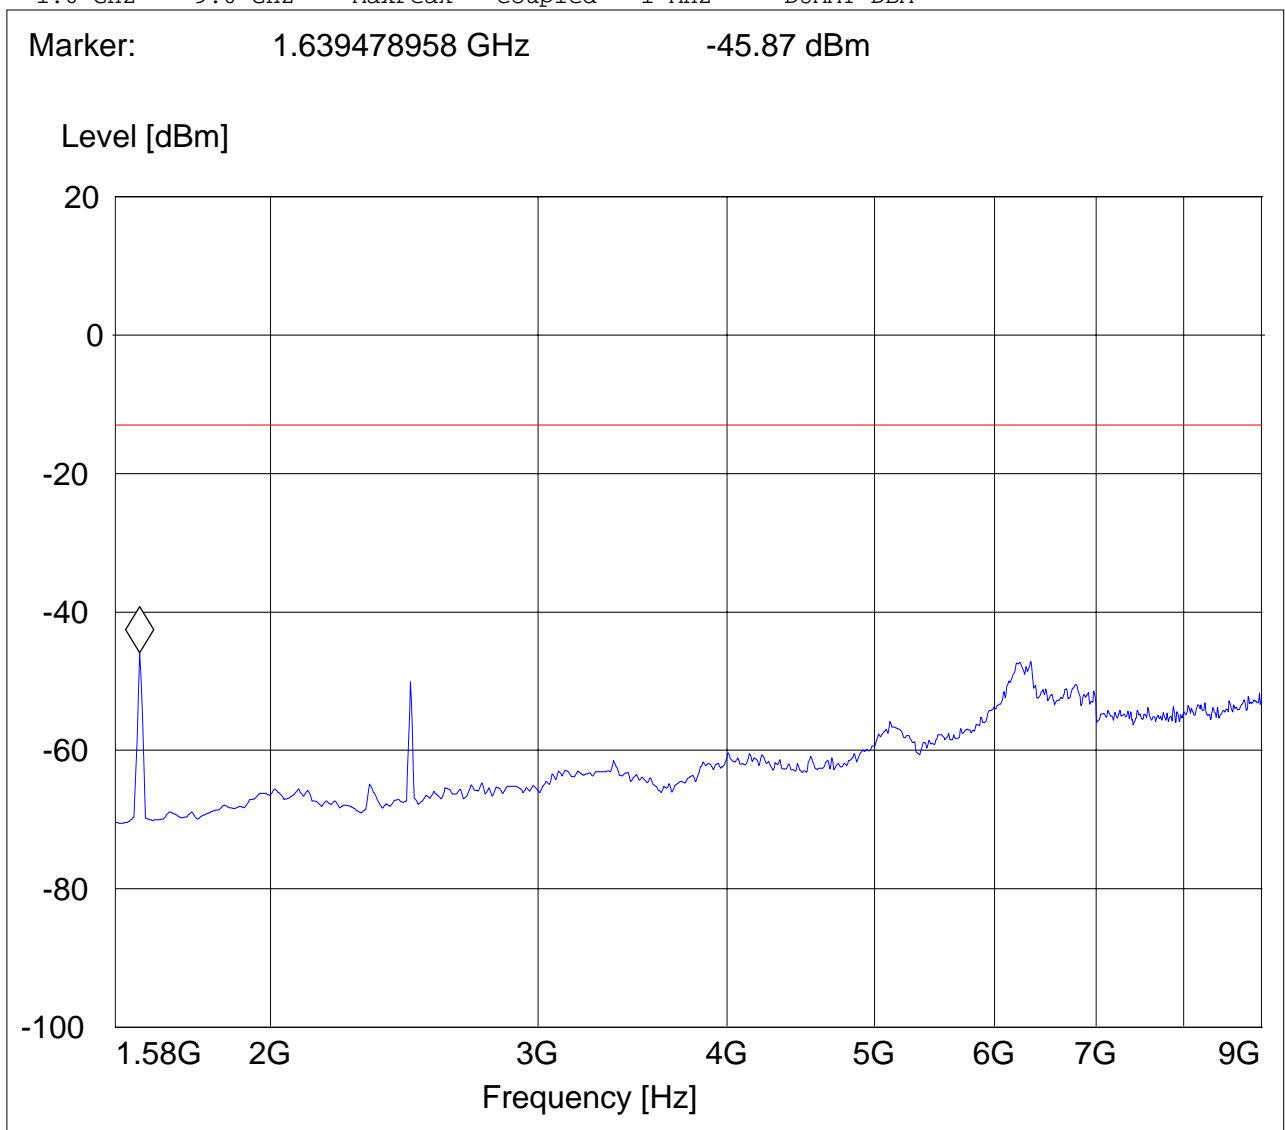




**RADIATED SPURIOUS EMISSIONS (GSM-850) Tx CHANNEL 190: 1GHz – 1.58GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 850; CH 190  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1-1.58G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.0 GHz         | 1.6 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

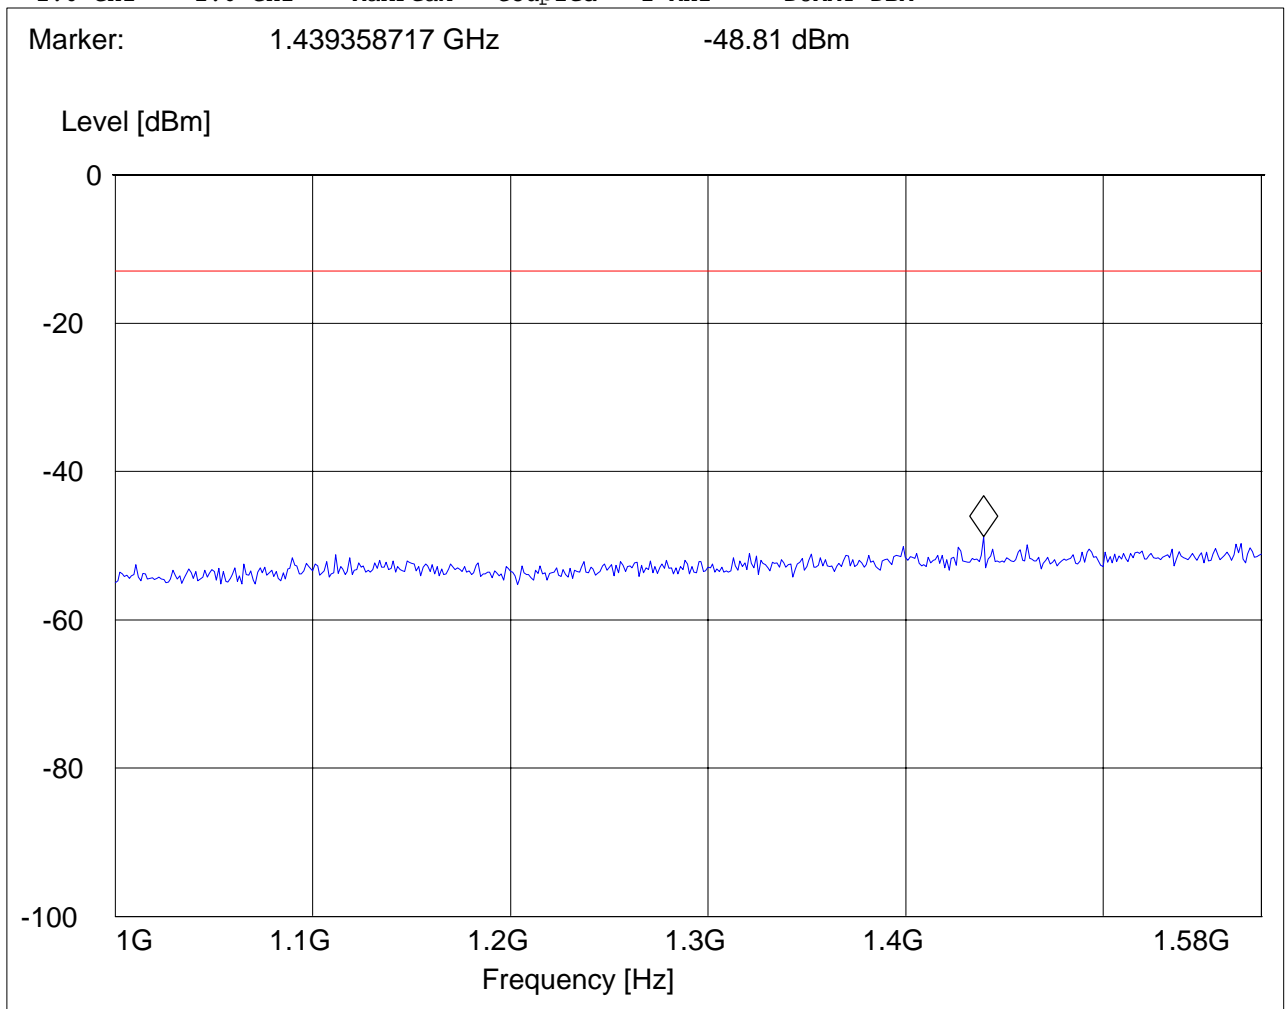




**RADIATED SPURIOUS EMISSIONS (GSM-850) Tx CHANNEL 190: 1.58GHz – 9GHz**

EUT: 7505  
Customer:: PSION  
Test Mode: GSM 850; CH 190  
ANT Orientation: H  
EUT Orientation: H  
Test Engineer: Chris  
Voltage: AC Adapter  
Comments:

***SWEEP TABLE: "FCC 22Spuri 1.58-9G"***

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.6 GHz         | 9.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 2.501923848 GHz -45.45 dBm

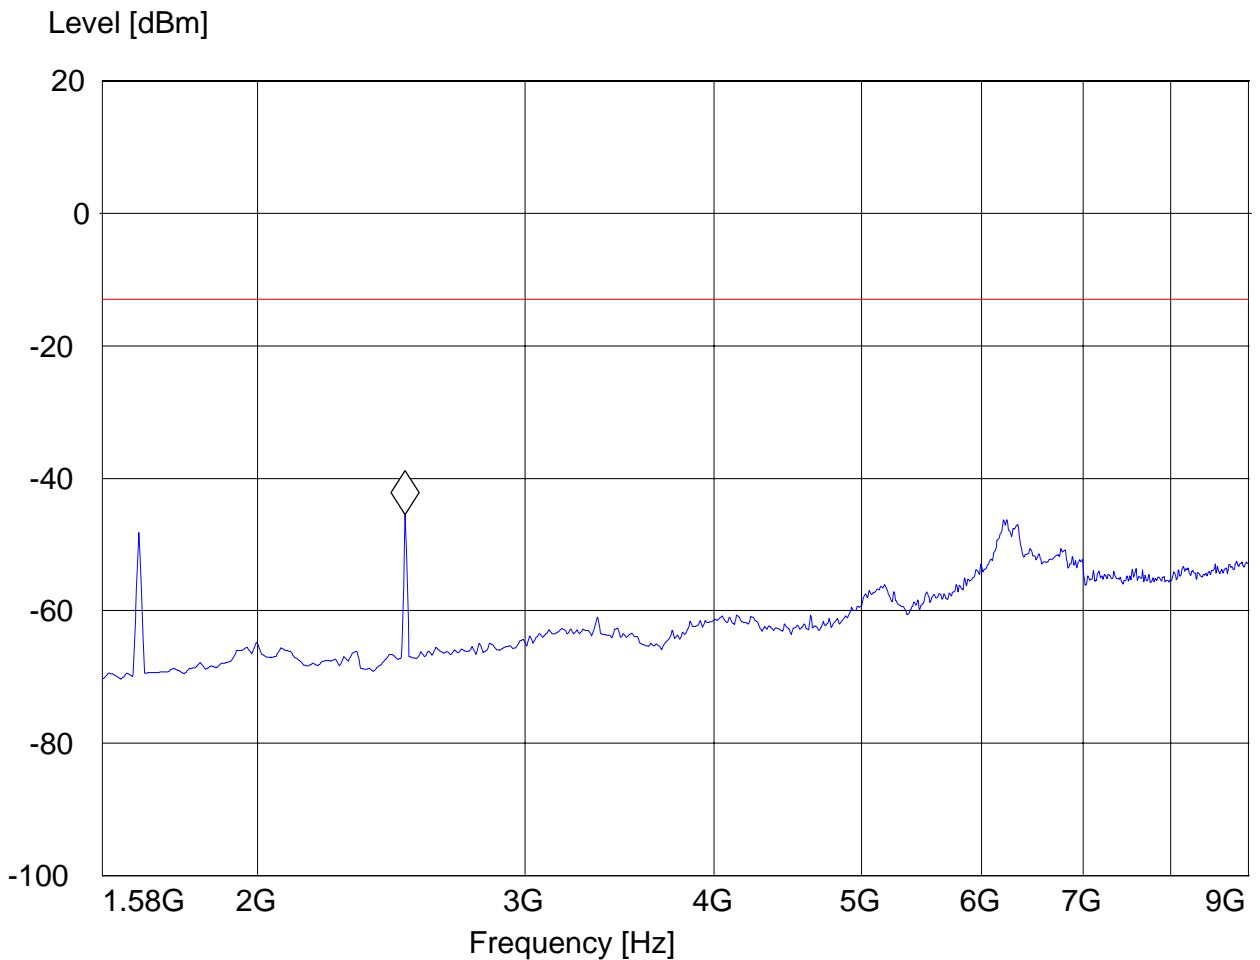




**RADIATED SPURIOUS EMISSIONS (GSM-850) Tx CHANNEL 251: 1GHz – 1.58GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 850; CH 251  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1-1.58G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.0 GHz         | 1.6 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 1.54745491 GHz -49.3 dBm

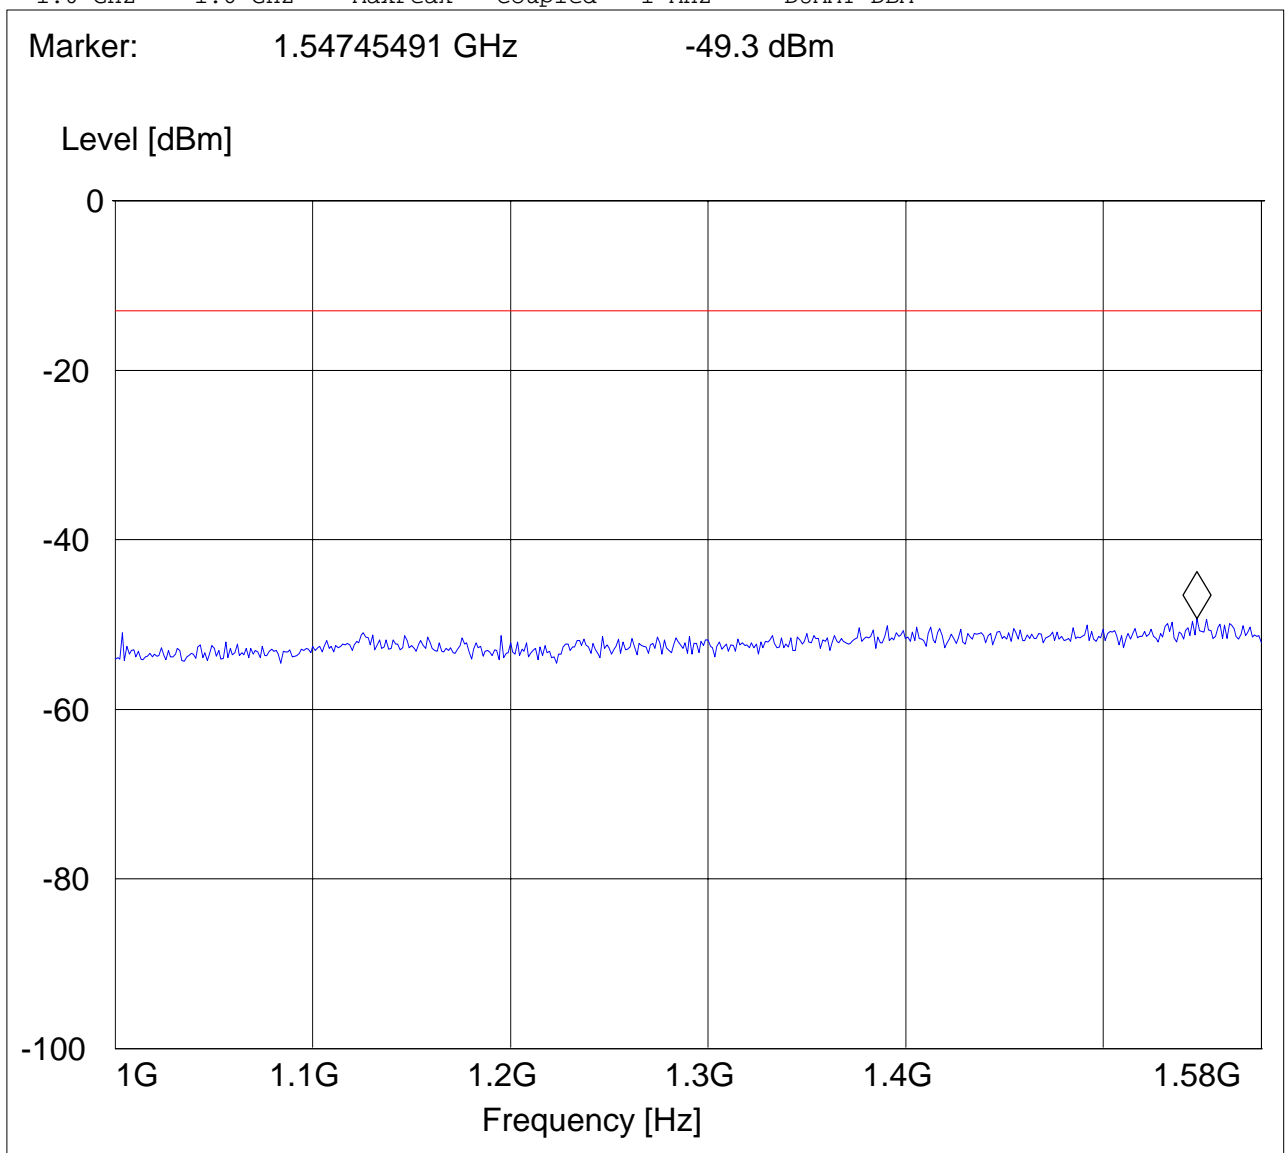




**RADIATED SPURIOUS EMISSIONS (GSM-850) Tx CHANNEL 251: 1.58GHz – 9GHz**

EUT: 7505  
Customer:: PSION  
Test Mode: GSM 850; CH 251  
ANT Orientation: H  
EUT Orientation: H  
Test Engineer: Chris  
Voltage: AC Adapter  
Comments:

**SWEEP TABLE: "FCC 22Spuri 1.58-9G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.6 GHz         | 9.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 6.234228457 GHz -46.35 dBm

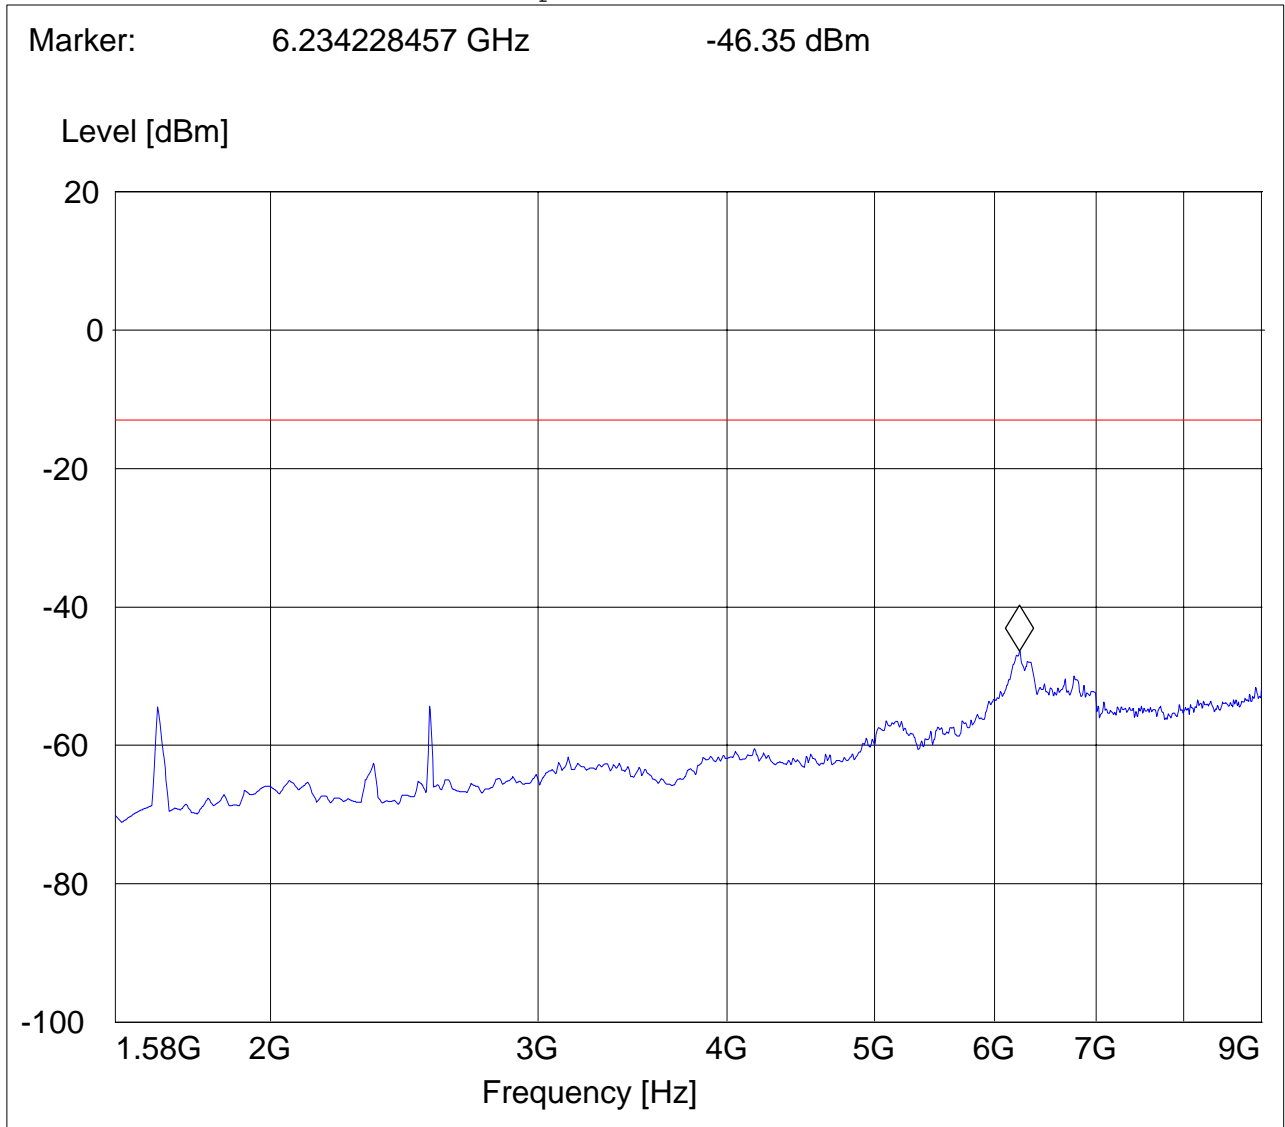



**5.5.4.2 Test Results Transmitter Spurious Emission UMTS FDD5**

| <b>Harmonics</b> | <b>Tx ch-4132 Freq. (MHz)</b> | <b>Level(dBm )</b> | <b>Tx ch-4183 Freq. (MHz)</b> | <b>Level(dBm )</b> | <b>Tx ch-4233 Freq. (MHz)</b> | <b>Level(dBm )</b> |
|------------------|-------------------------------|--------------------|-------------------------------|--------------------|-------------------------------|--------------------|
| <b>2</b>         | <b>1652.8</b>                 | NF                 | <b>1673.2</b>                 | NF                 | <b>1693.2</b>                 | NF                 |
| <b>3</b>         | <b>2479.2</b>                 | NF                 | <b>2509.8</b>                 | NF                 | <b>2539.8</b>                 | NF                 |
| <b>4</b>         | <b>3305.6</b>                 | NF                 | <b>3346.4</b>                 | NF                 | <b>3386.4</b>                 | NF                 |
| <b>5</b>         | <b>4132</b>                   | NF                 | <b>4183</b>                   | NF                 | <b>4233</b>                   | NF                 |
| <b>6</b>         | <b>4958.4</b>                 | NF                 | <b>5019.6</b>                 | NF                 | <b>5079.6</b>                 | NF                 |
| <b>7</b>         | <b>5784.8</b>                 | NF                 | <b>5856.2</b>                 | NF                 | <b>5926.2</b>                 | NF                 |
| <b>8</b>         | <b>6611.2</b>                 | NF                 | <b>6692.8</b>                 | NF                 | <b>6772.8</b>                 | NF                 |
| <b>9</b>         | <b>7437.6</b>                 | NF                 | <b>7529.4</b>                 | NF                 | <b>7619.4</b>                 | NF                 |
| <b>10</b>        | <b>8264</b>                   | NF                 | <b>8366</b>                   | NF                 | <b>8466</b>                   | NF                 |



**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) TX: 30MHz - 1GHz**  
**Spurious emission limit -13dBm**  
**Antenna: vertical**


**Note:**

- 1. The peak above the limit line is the carrier freq.
- 2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505  
Customer:: PSION  
Test Mode: WCDMA FDD V  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Sam  
Voltage: AC ADAPTER  
Comments: TT@210° ANT@142

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

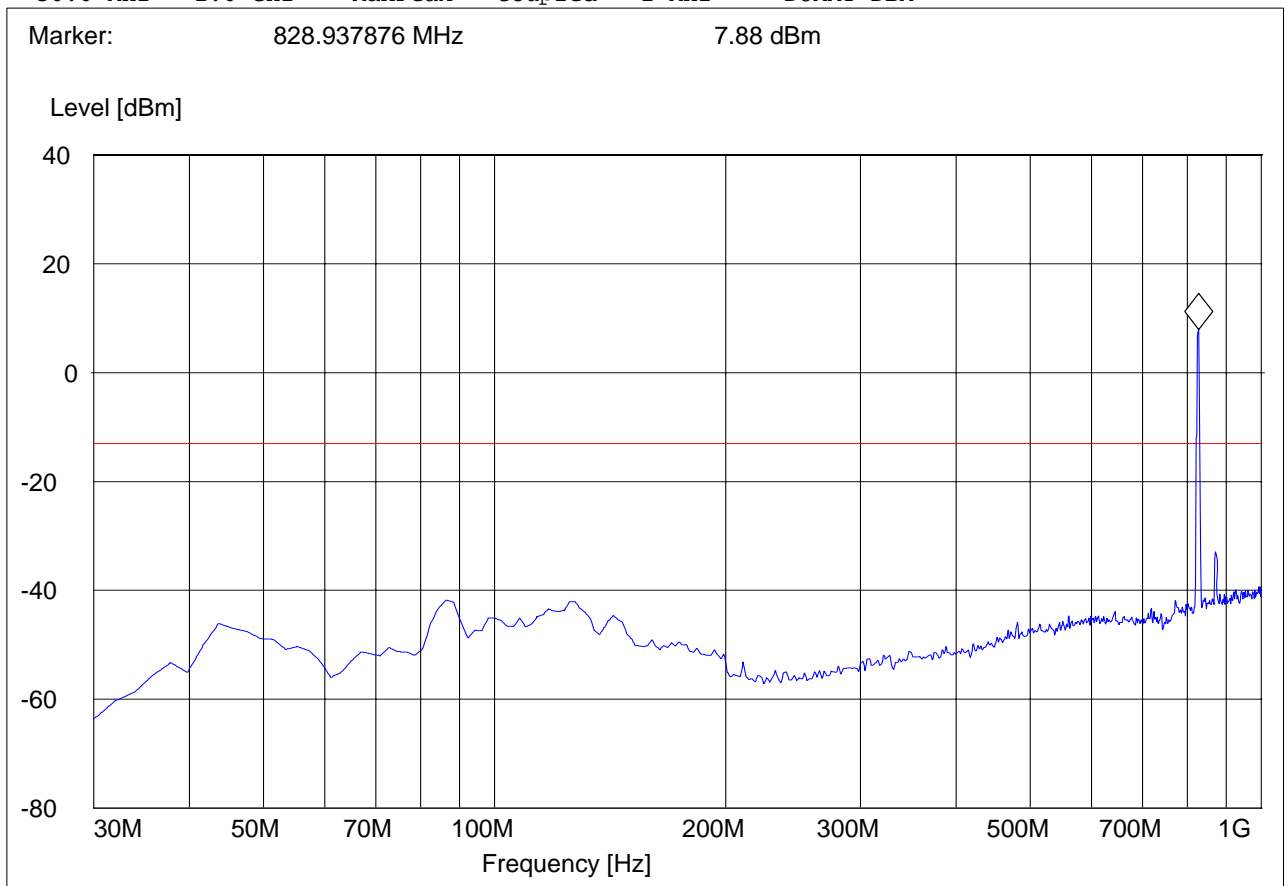



**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) TX: 30MHz - 1GHz**  
**Spurious emission limit -13dBm**  
**Antenna: Horizontal**


**Note:**

1. The peak above the limit line is the carrier freq.
2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD V  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Sam  
 Voltage: AC ADAPTER  
 Comments: TT@210° ANT@142

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_H"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 100 kHz   | DUMMY-DBM  |

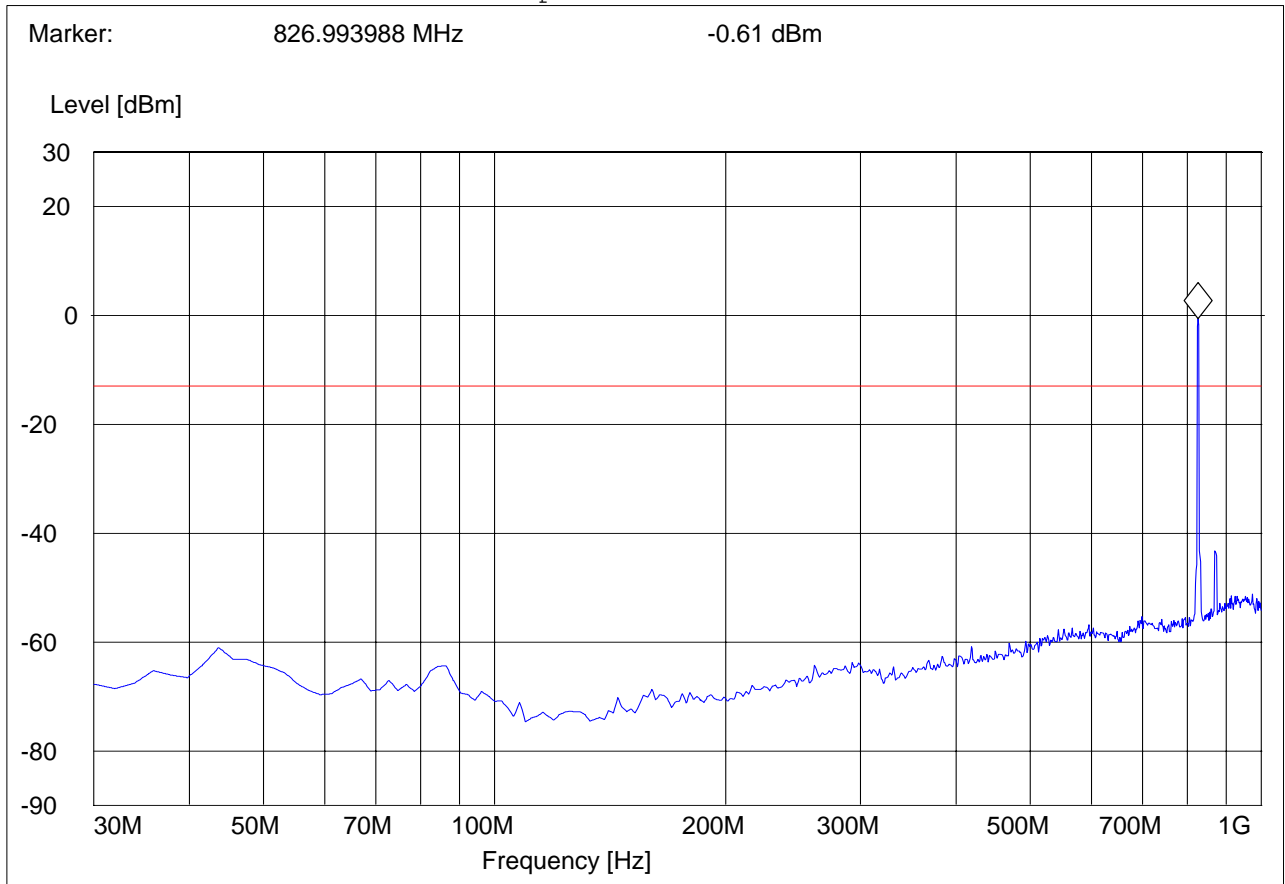






**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4132: 1GHz - 1.58GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD V  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Sam  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1-1.58G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.0 GHz         | 1.6 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 1.56256513 GHz -49.9 dBm

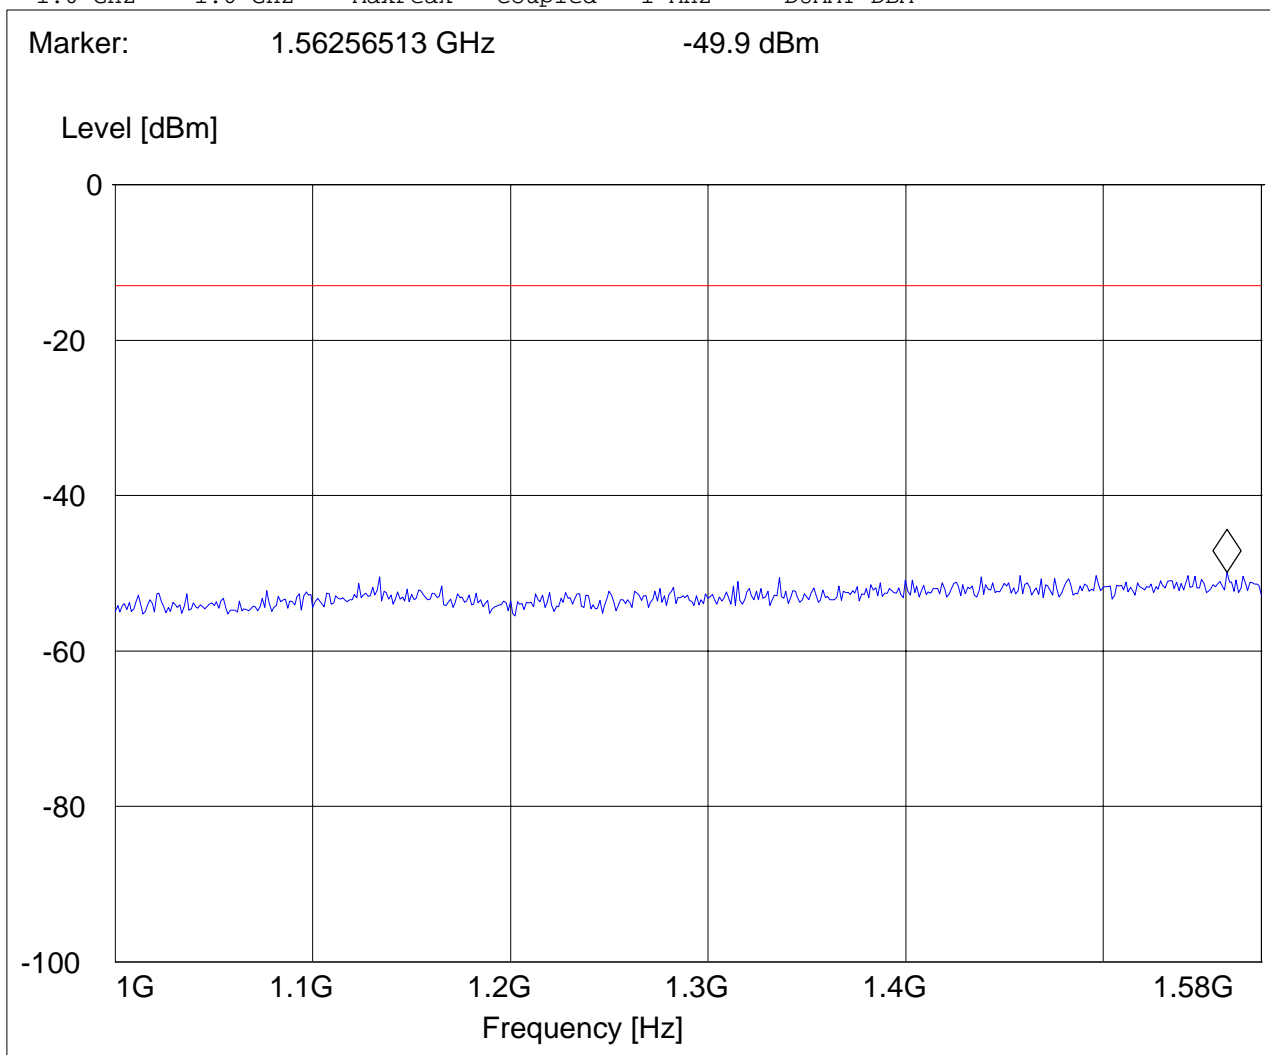




**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4132: 1.58GHz – 9GHz**

EUT: 7505  
Customer:: PSION  
Test Mode: WCDMA FDD V  
ANT Orientation: H  
EUT Orientation: H  
Test Engineer: Sam  
Voltage: AC ADAPTER  
Comments:

**SWEEP TABLE: "FCC 22Spuri 1.58-9G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.6 GHz         | 9.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 6.219358717 GHz -47.14 dBm

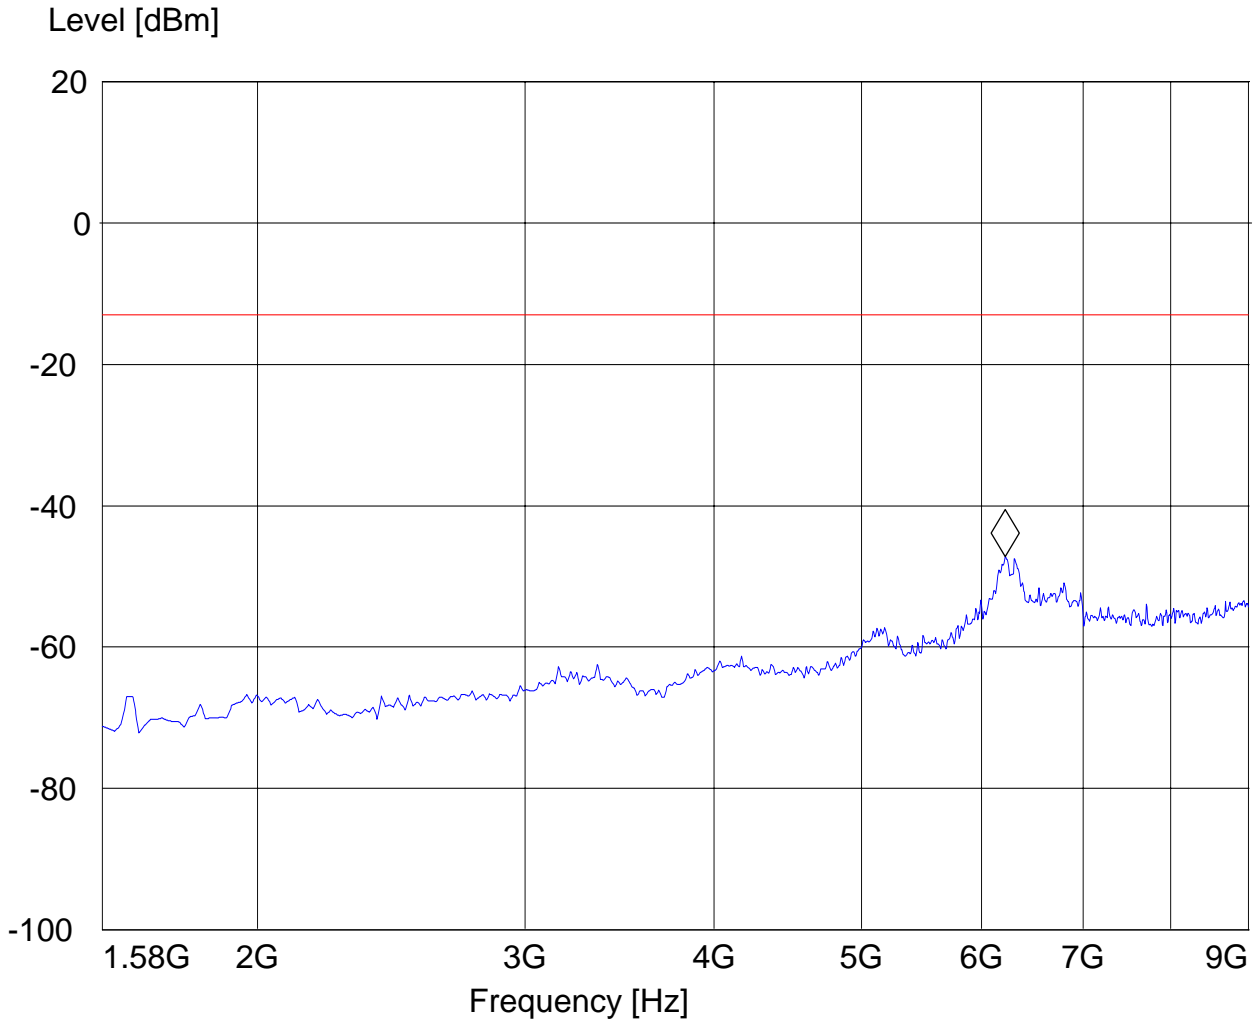




**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4183: 1GHz - 1.58GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD V  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Sam  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1-1.58G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.0 GHz         | 1.6 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 1.576513026 GHz -49.58 dBm

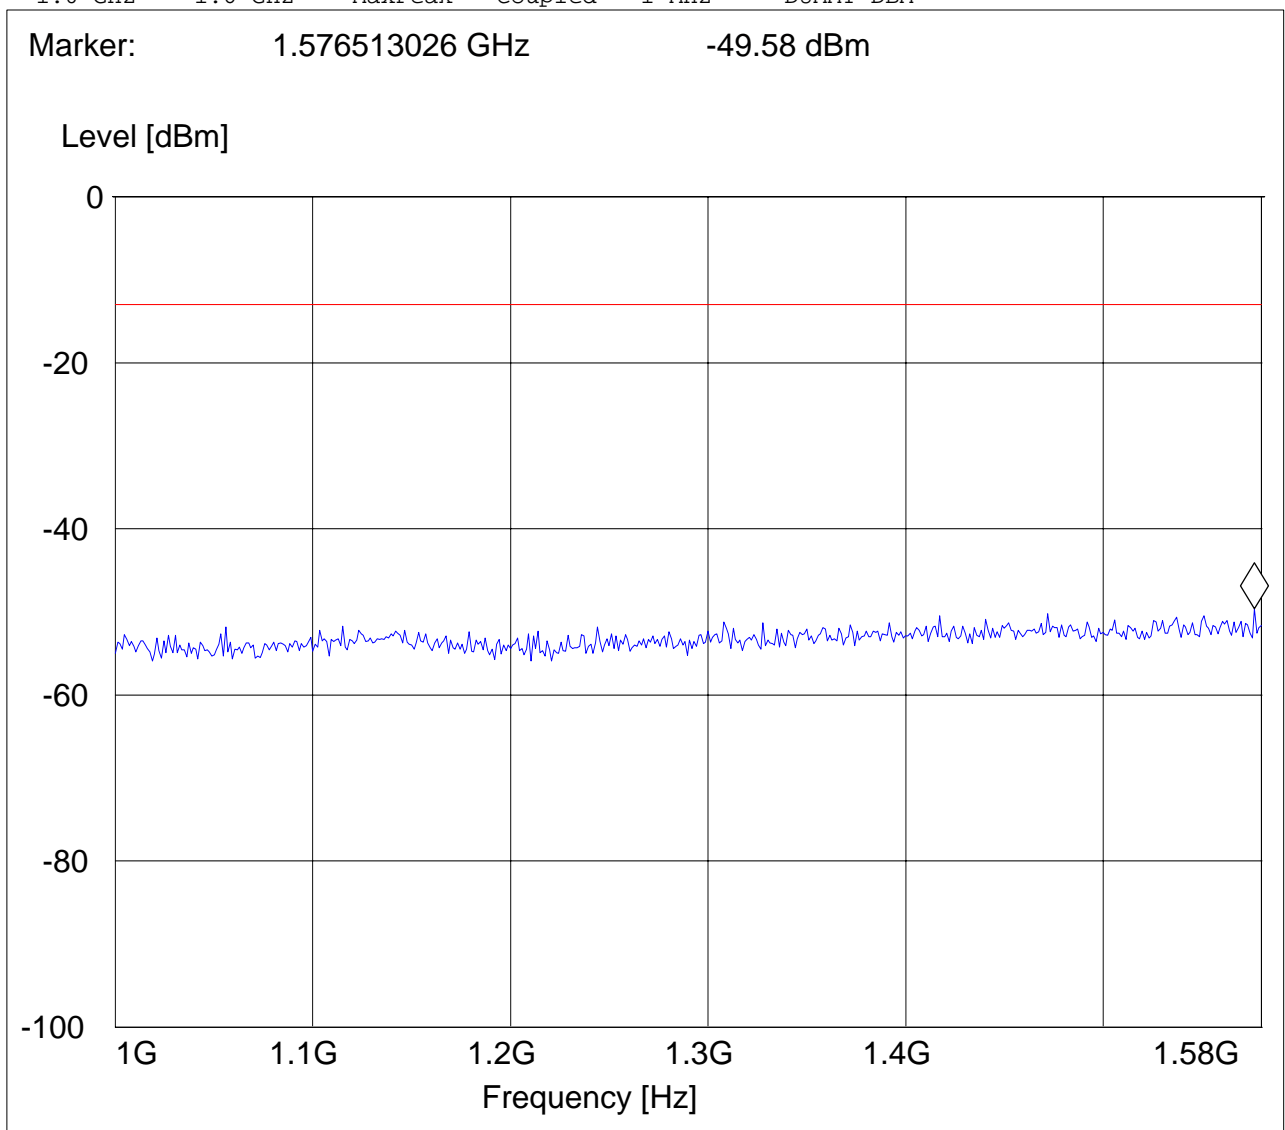




**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4183: 1.58GHz – 9GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD V  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Sam  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1.58-9G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.6 GHz         | 9.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 6.219358717 GHz -47.63 dBm

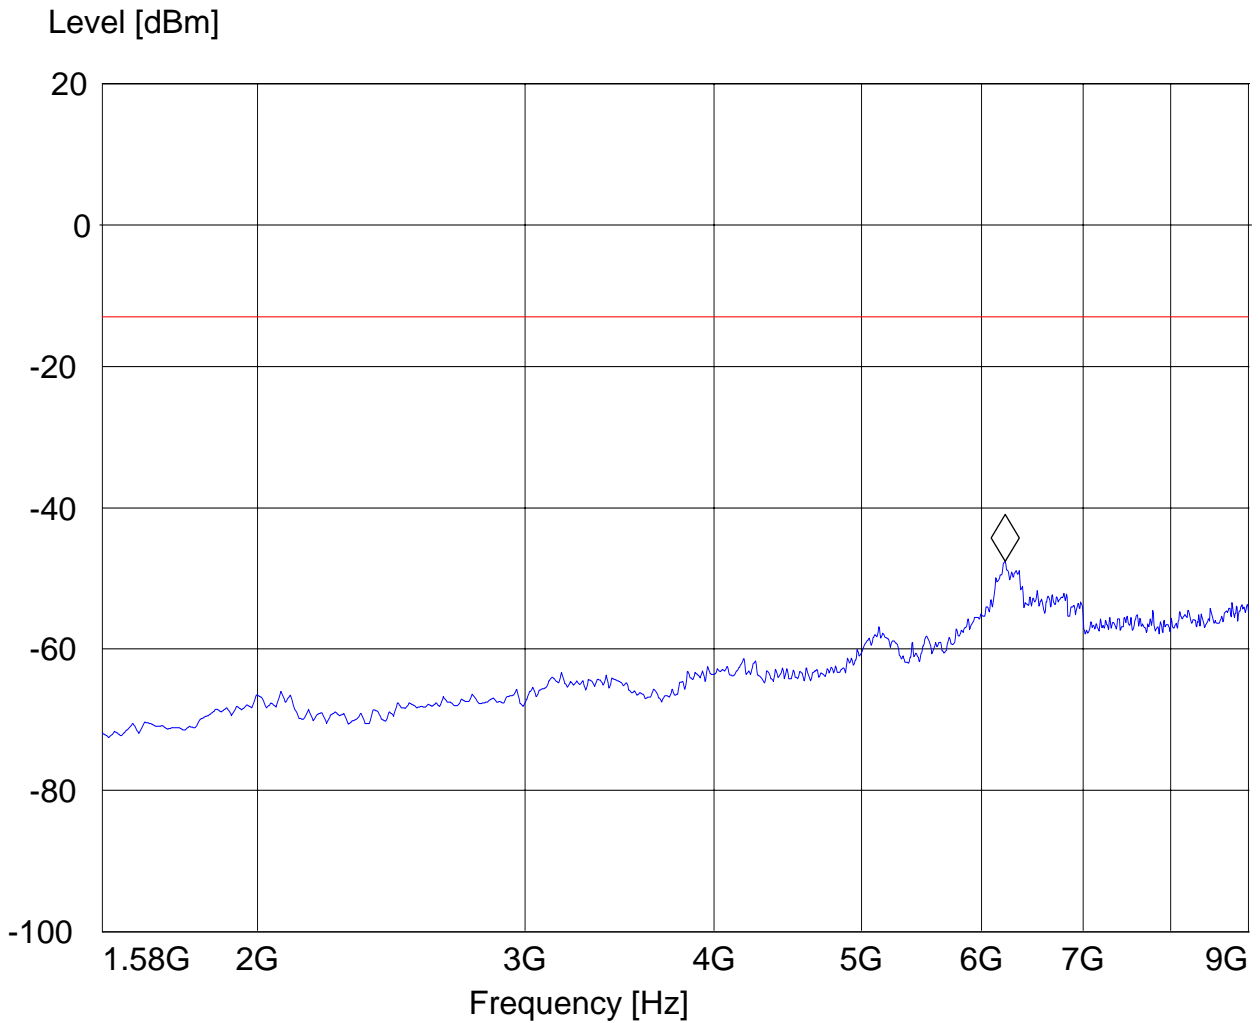




**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4233: 1GHz - 1.58GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD V  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Sam  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1-1.58G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.0 GHz         | 1.6 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 1.58 GHz -50.66 dBm

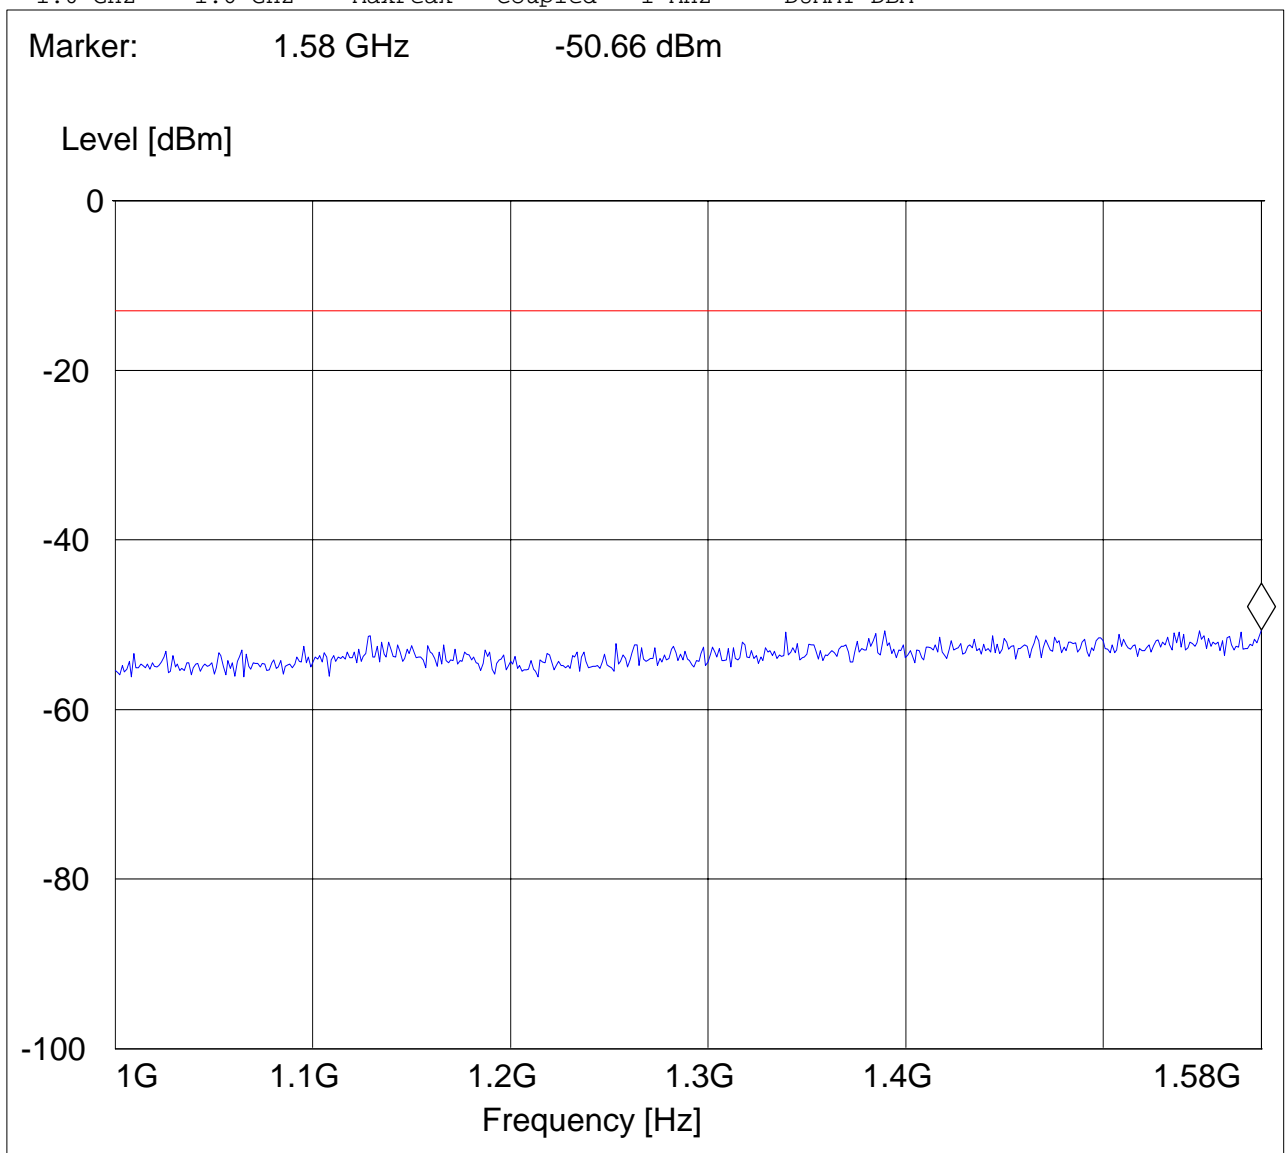




**RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx CHANNEL 4233: 1.58GHz – 9GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD V  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Sam  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "FCC 22Spuri 1.58-9G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.6 GHz         | 9.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 6.189619238 GHz -47.6 dBm

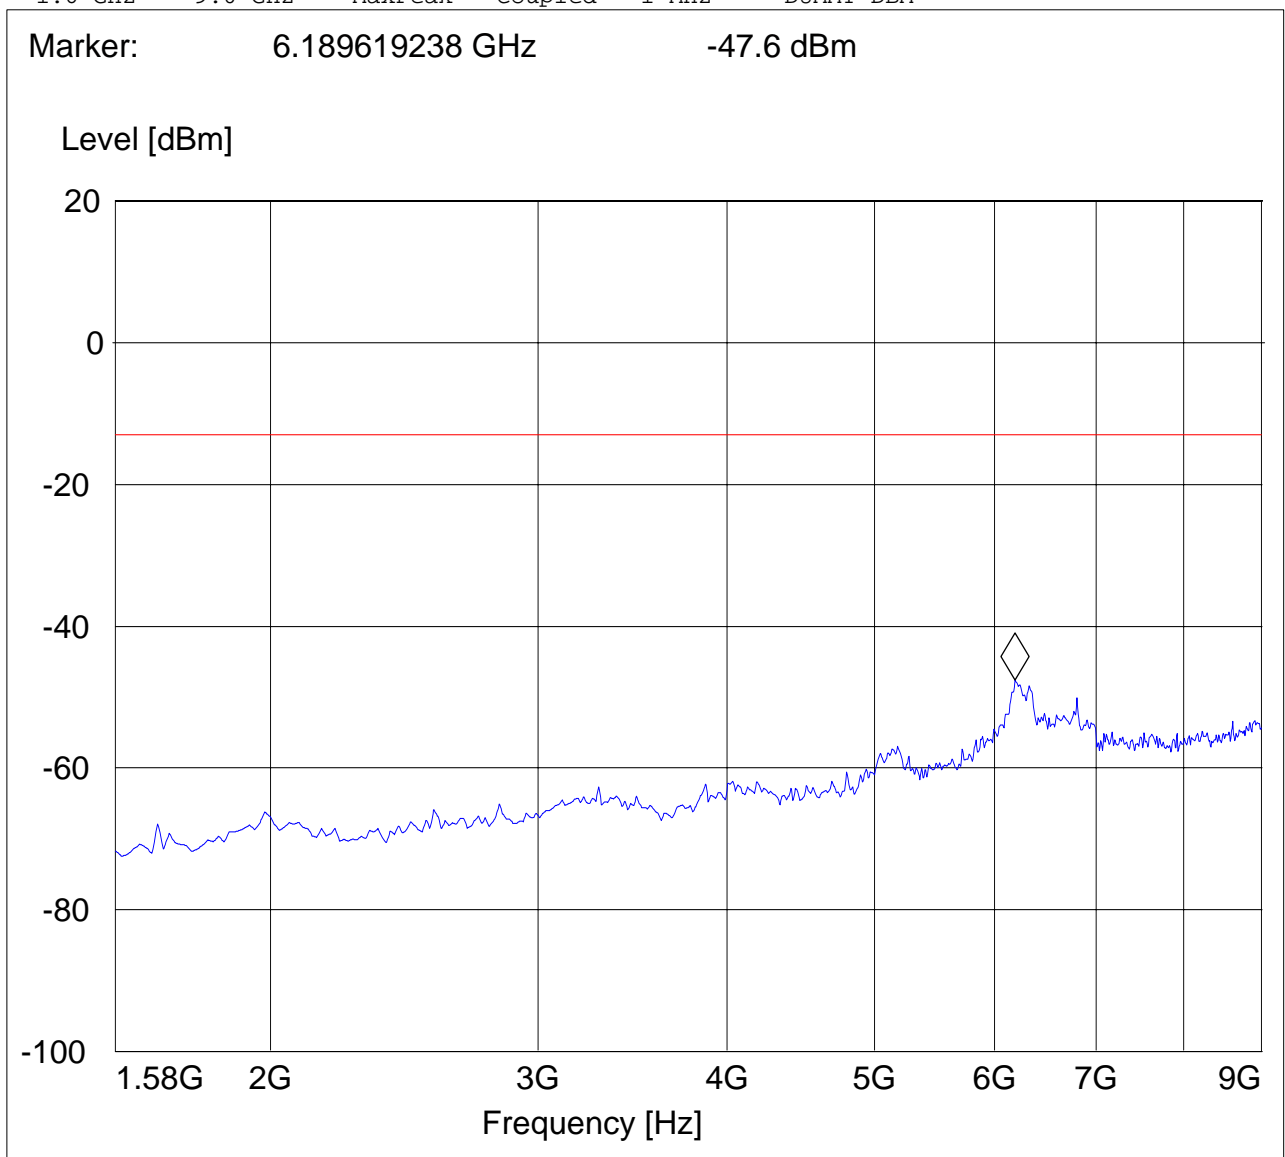



**5.5.4.3 Test Results Transmitter Spurious Emission PCS-1900:**

| <b>Harmonic</b>  | <b>Tx ch-512<br/>Freq.(MHz)</b> | <b>Level<br/>(dBm)</b> | <b>Tx ch-661<br/>Freq. (MHz)</b> | <b>Level<br/>(dBm)</b> | <b>Tx ch-810<br/>Freq. (MHz)</b> | <b>Level<br/>(dBm)</b> |
|------------------|---------------------------------|------------------------|----------------------------------|------------------------|----------------------------------|------------------------|
| 2                | 3700.4                          | NF                     | 3760                             | NF                     | 3819.6                           | NF                     |
| 3                | 5550.6                          | NF                     | 5640                             | NF                     | 5729.4                           | NF                     |
| 4                | 7400.8                          | NF                     | 7520                             | NF                     | 7639.2                           | NF                     |
| 5                | 9251                            | NF                     | 9400                             | NF                     | 9549                             | NF                     |
| 6                | 11101.2                         | NF                     | 11280                            | NF                     | 11458.8                          | NF                     |
| 7                | 12951.4                         | NF                     | 13160                            | NF                     | 13368.6                          | NF                     |
| 8                | 14801.6                         | NF                     | 15040                            | NF                     | 15278.4                          | NF                     |
| 9                | 16651.8                         | NF                     | 16920                            | NF                     | 17188.2                          | NF                     |
| 10               | 18502                           | NF                     | 18800                            | NF                     | 19098                            | NF                     |
| NF = NOISE FLOOR |                                 |                        |                                  |                        |                                  |                        |



**RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 30MHz - 1GHz**


**Antenna: Vertical**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 1900 CH 512  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 125.250501 MHz -38.24 dBm

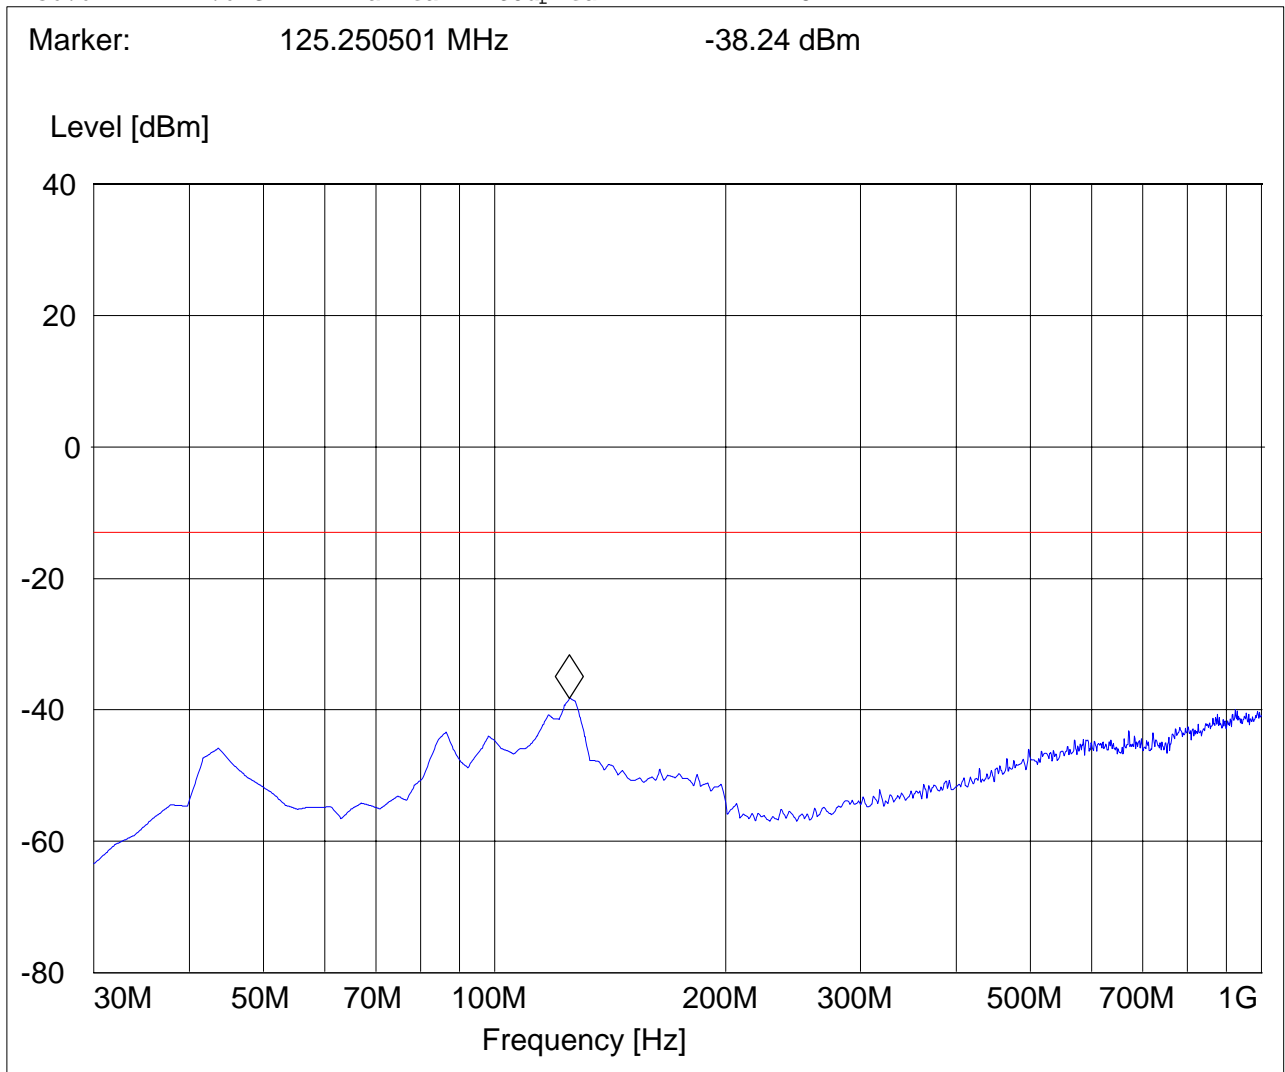





**RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 30MHz - 1GHz**


**Antenna: Horizontal**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 1900 CH 512  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_H"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 100 kHz   | DUMMY-DBM  |

Marker: 951.402806 MHz -50.66 dBm

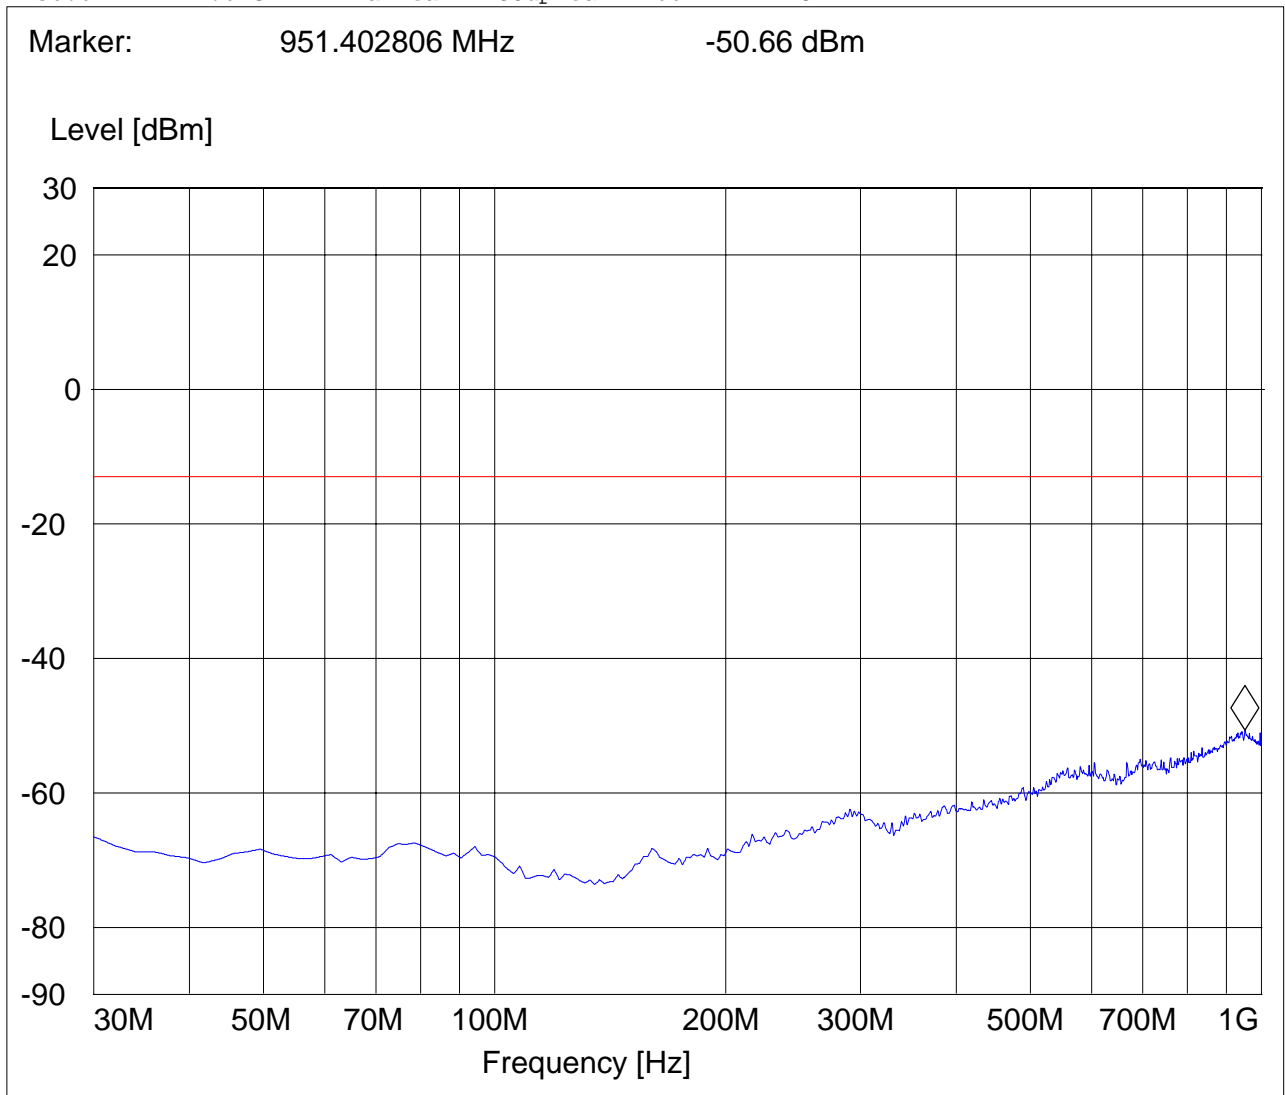




**RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 512: 1GHz – 3GHz**

EUT: 7505  
 Customer:: Psion  
 Test Mode: GSM 1900, CH 512  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: CHRIS  
 Voltage: Battery  
 Comments: Marker placed on uplink

**SWEEP TABLE: "FCC 24Spuri 1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

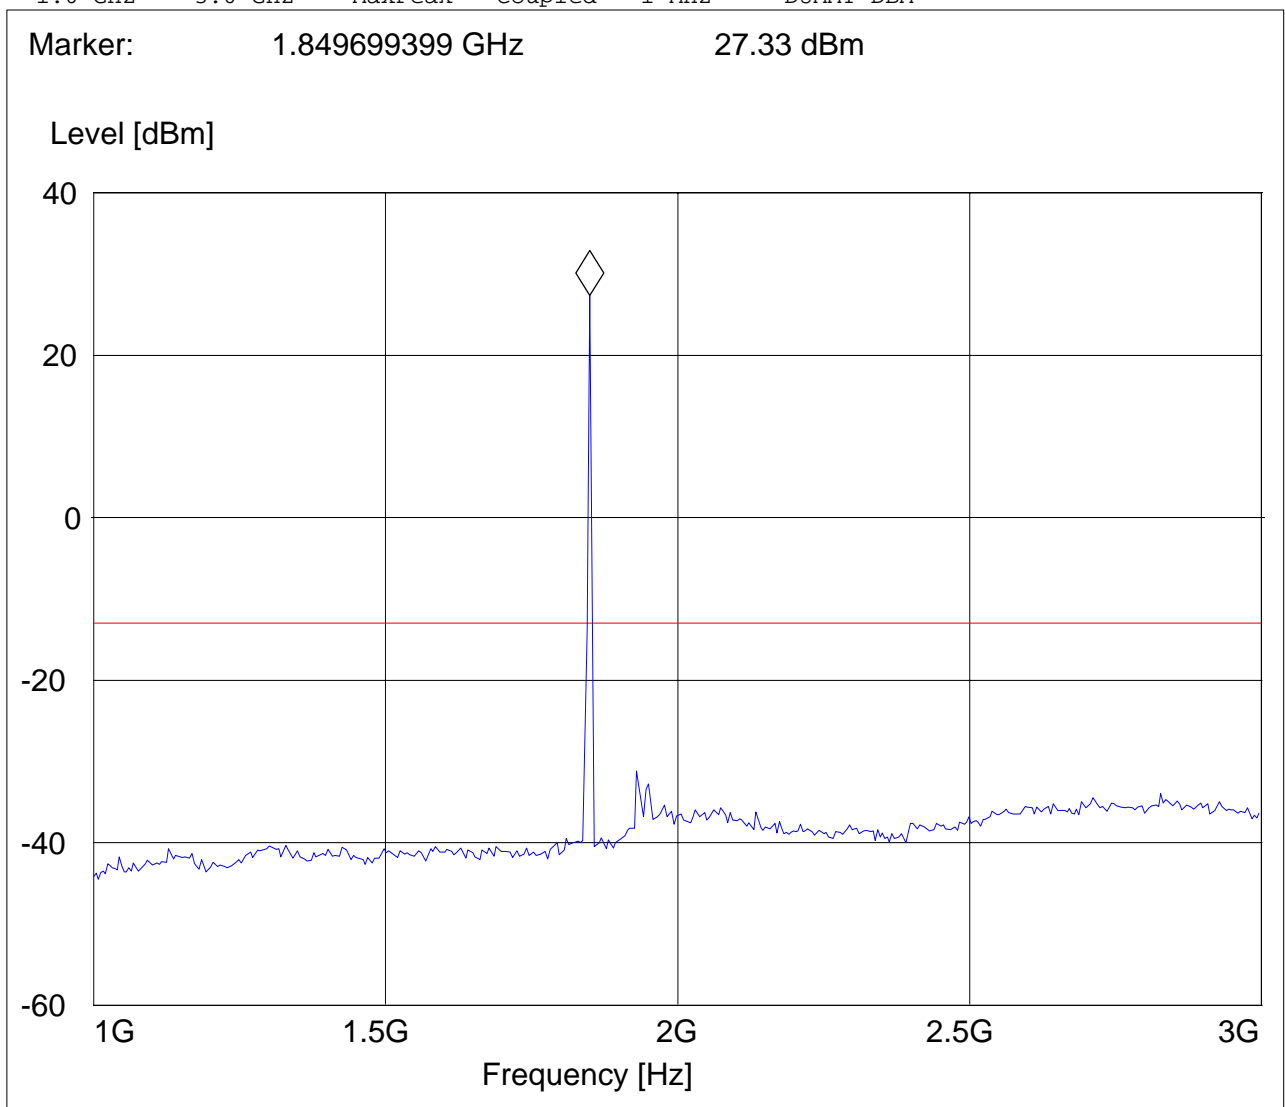




**RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 512: 3GHz – 18GHz**

EUT: 7505  
 Customer:: Psion  
 Test Mode: GSM 1900, CH 512  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: CHRIS  
 Voltage: Battery  
 Comments:

**SWEEP TABLE: "FCC 24Spuri 3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 3.0 GHz         | 18.0 GHz       | Average  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 17.729458918 GHz -50.78 dBm

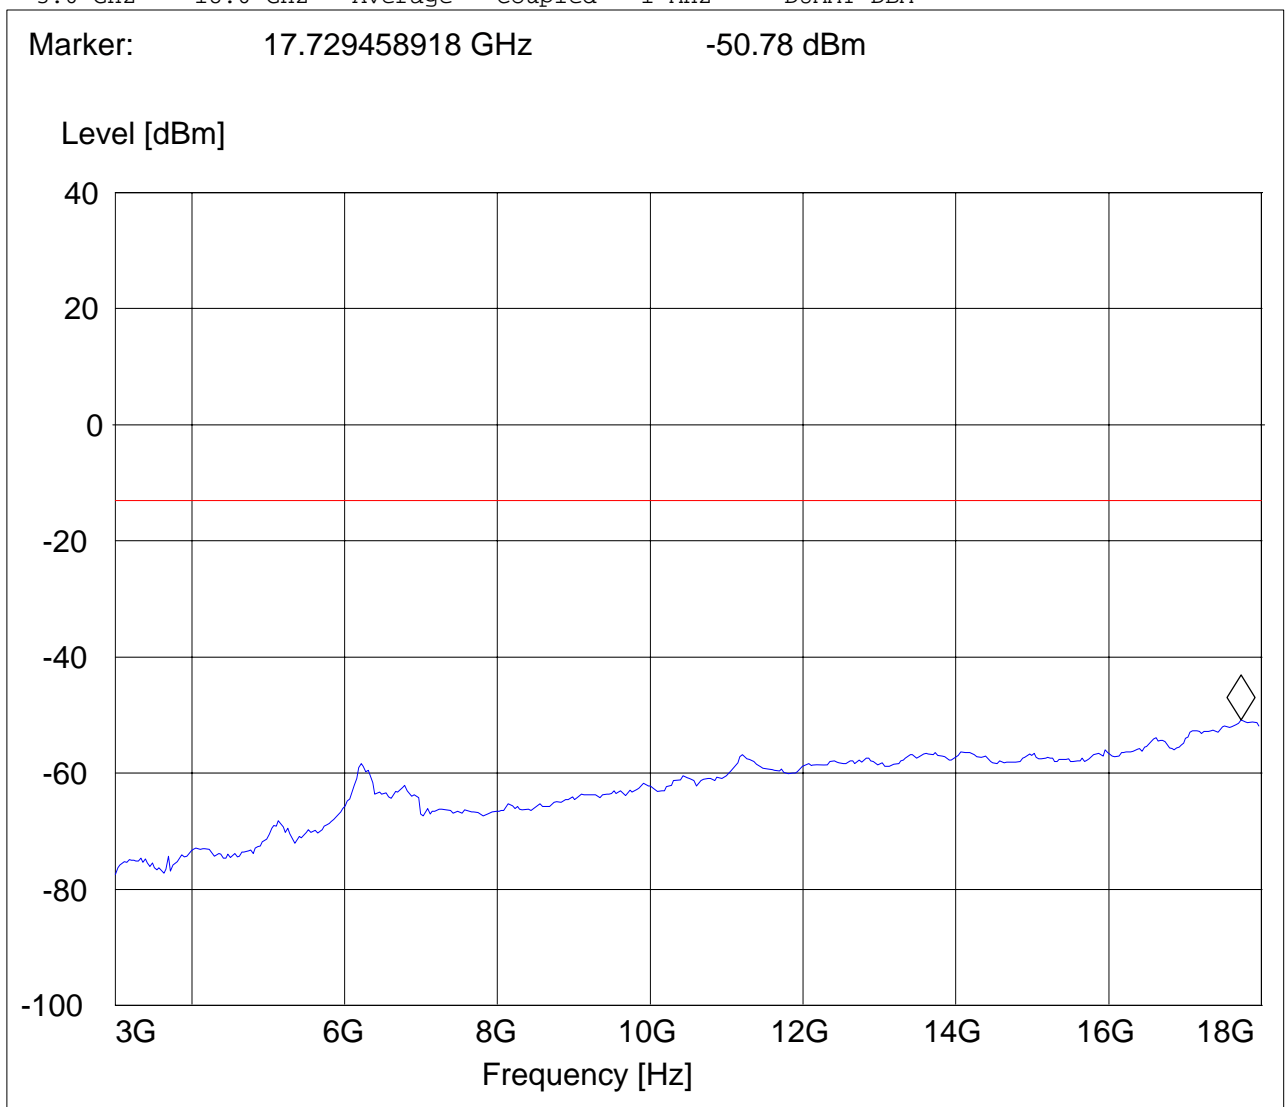




**RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 661: 1GHz – 3GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 1900; CH 661  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24Spuri 1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 1.881763527 GHz 27.56 dBm

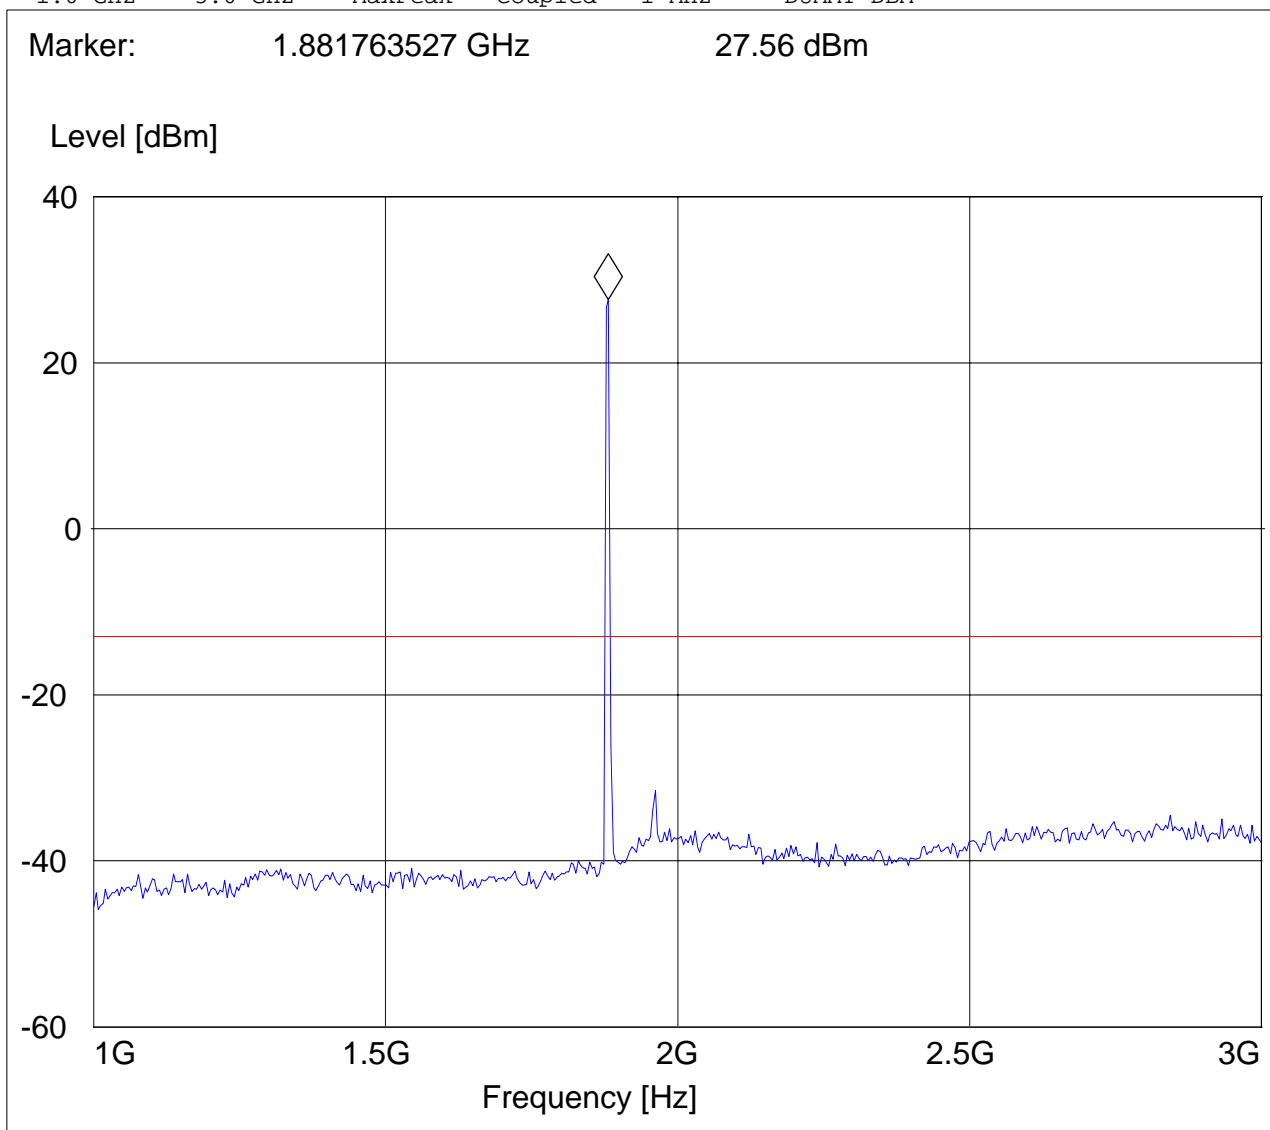




**RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 661: 3GHz – 18GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 1900; CH 661  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24Spuri 3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 3.0 GHz         | 18.0 GHz       | Average  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 17.759519038 GHz -51.26 dBm

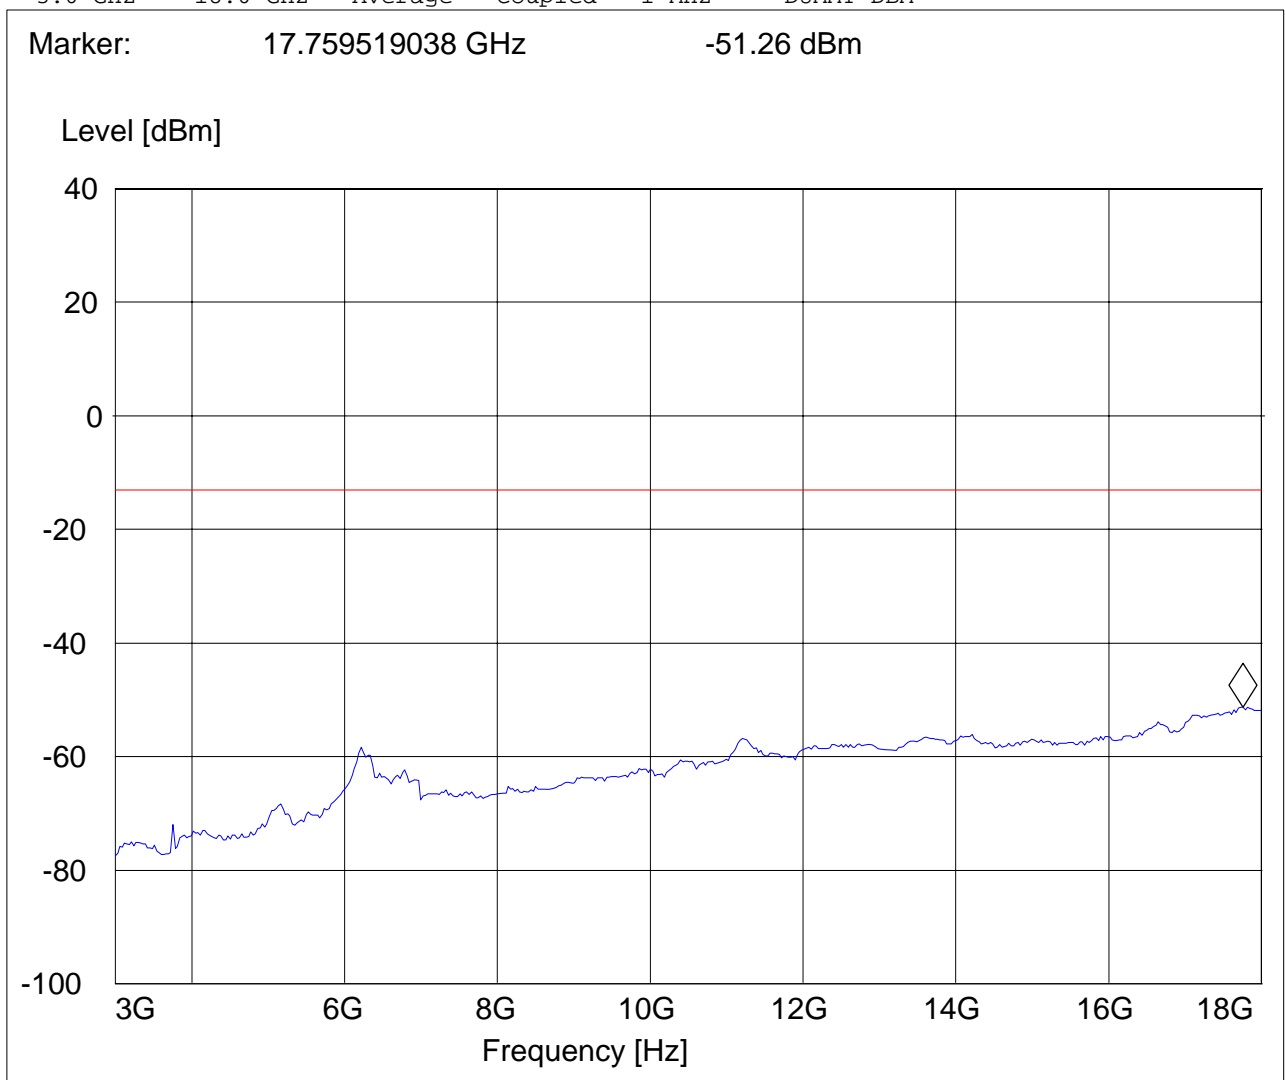




**RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 810: 1GHz – 3GHz**

EUT: 7505  
Customer:: PSION  
Test Mode: GSM 1900; CH 810  
ANT Orientation: H  
EUT Orientation: V  
Test Engineer: Chris  
Voltage: AC Adapter  
Comments: Marker placed on downlink

**SWEEP TABLE: "FCC 24Spuri 1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 1.909819639 GHz 27.28 dBm

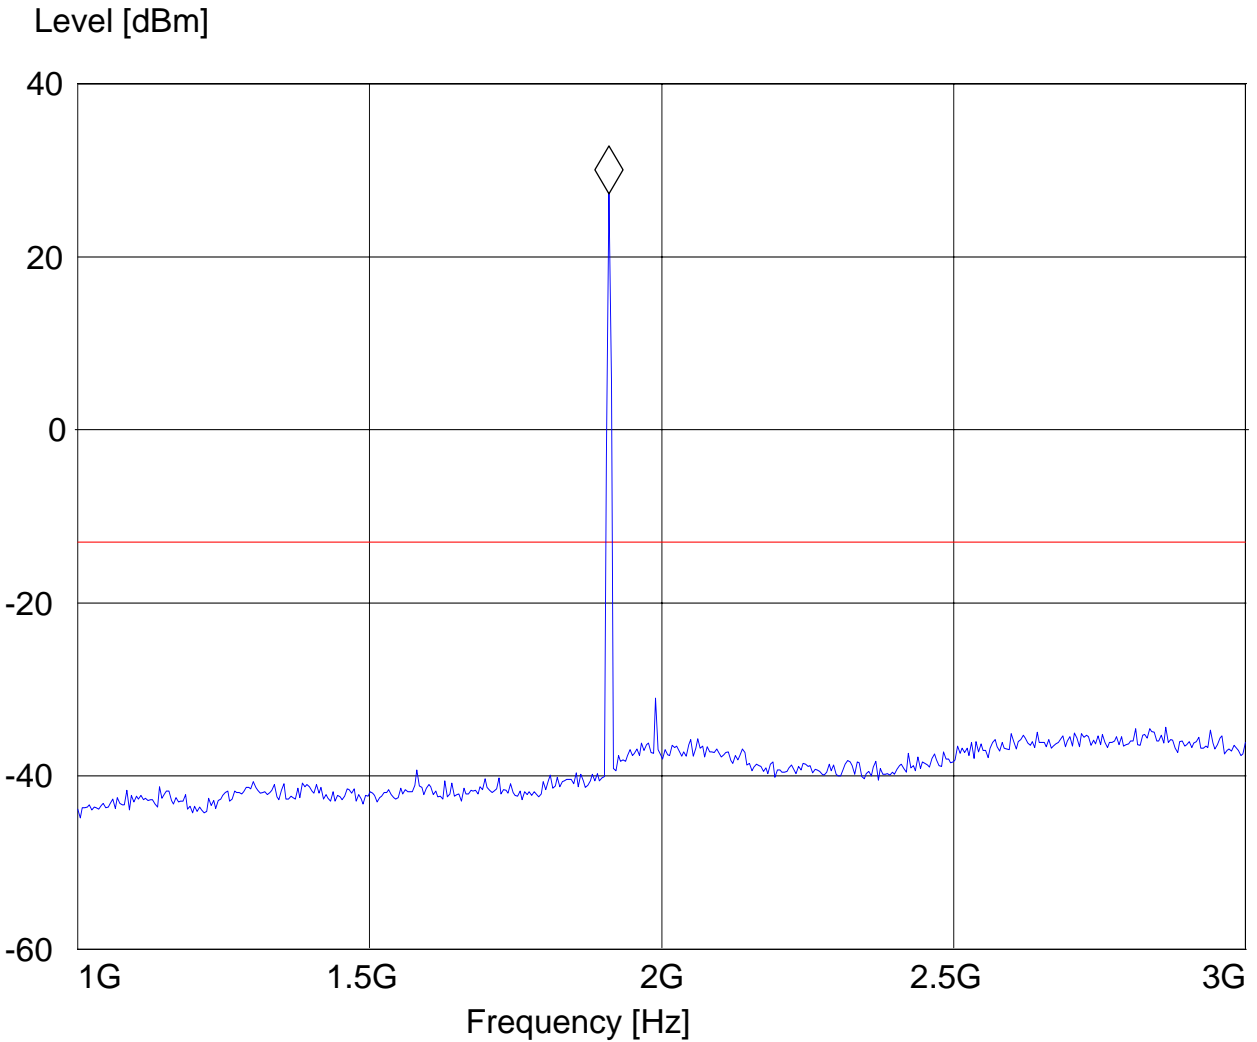




**RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx CHANNEL 810: 3GHz – 18GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 1900; CH 810  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24Spuri 3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 3.0 GHz         | 18.0 GHz       | Average  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 17.819639279 GHz -50.74 dBm

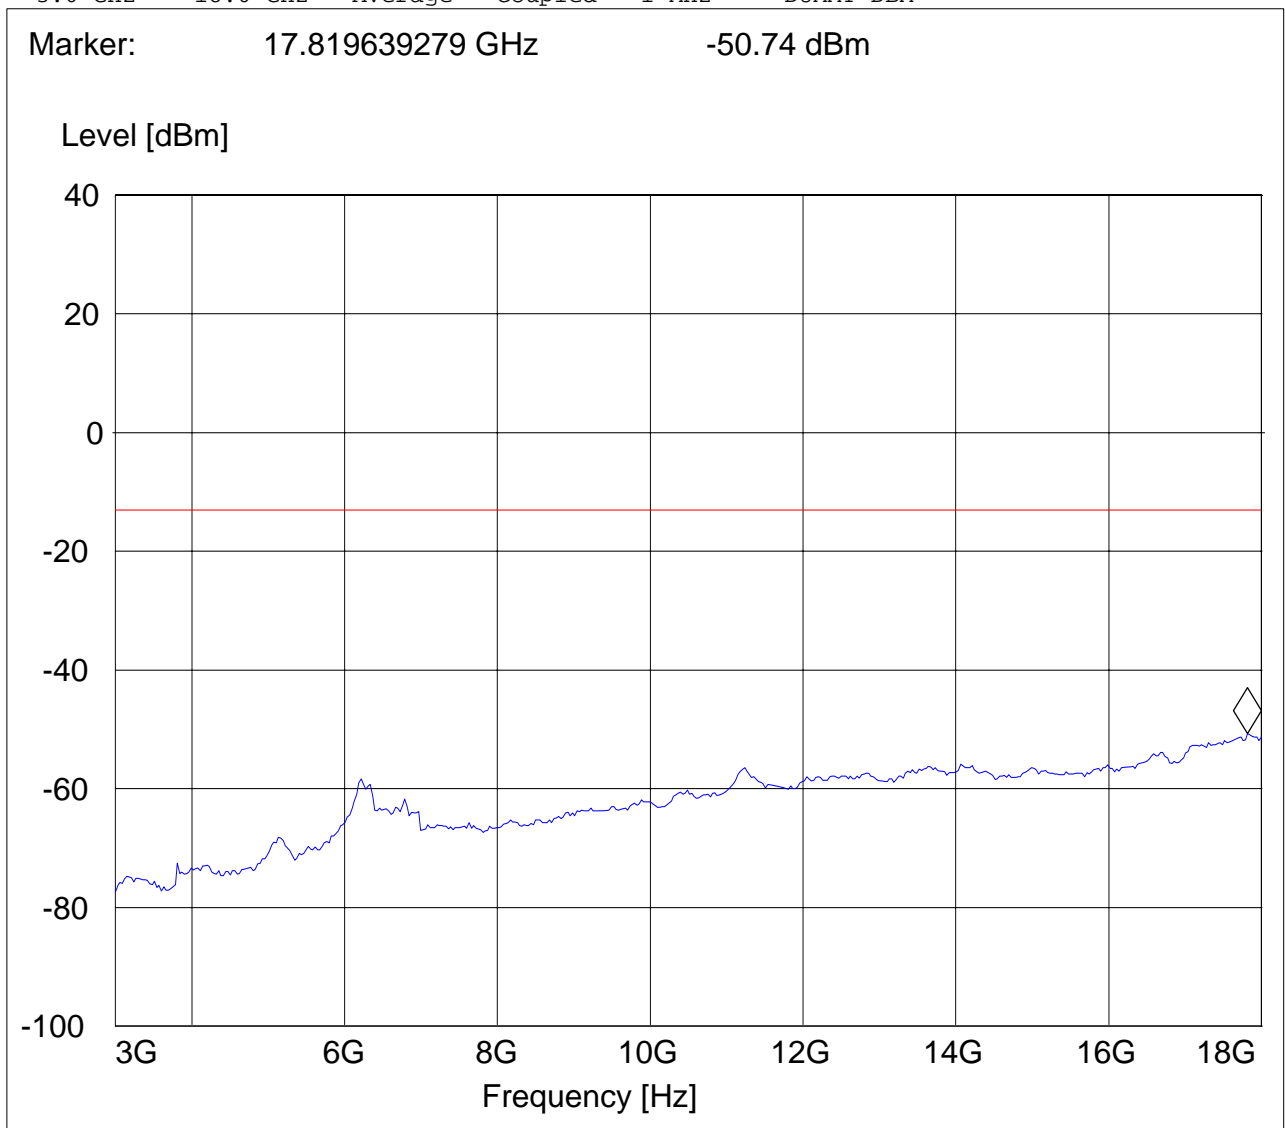




**RADIATED SPURIOUS EMISSIONS(PCS 1900) 18GHz – 19.1GHz**

**Note: This plot is valid for low, mid & high channels (worst-case plot)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 1900 CH 512  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24spuri 18-19.1G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 18.0 GHz        | 19.1 GHz       | Average  | Coupled    | 1 MHz     | DUMMY-DBM  |

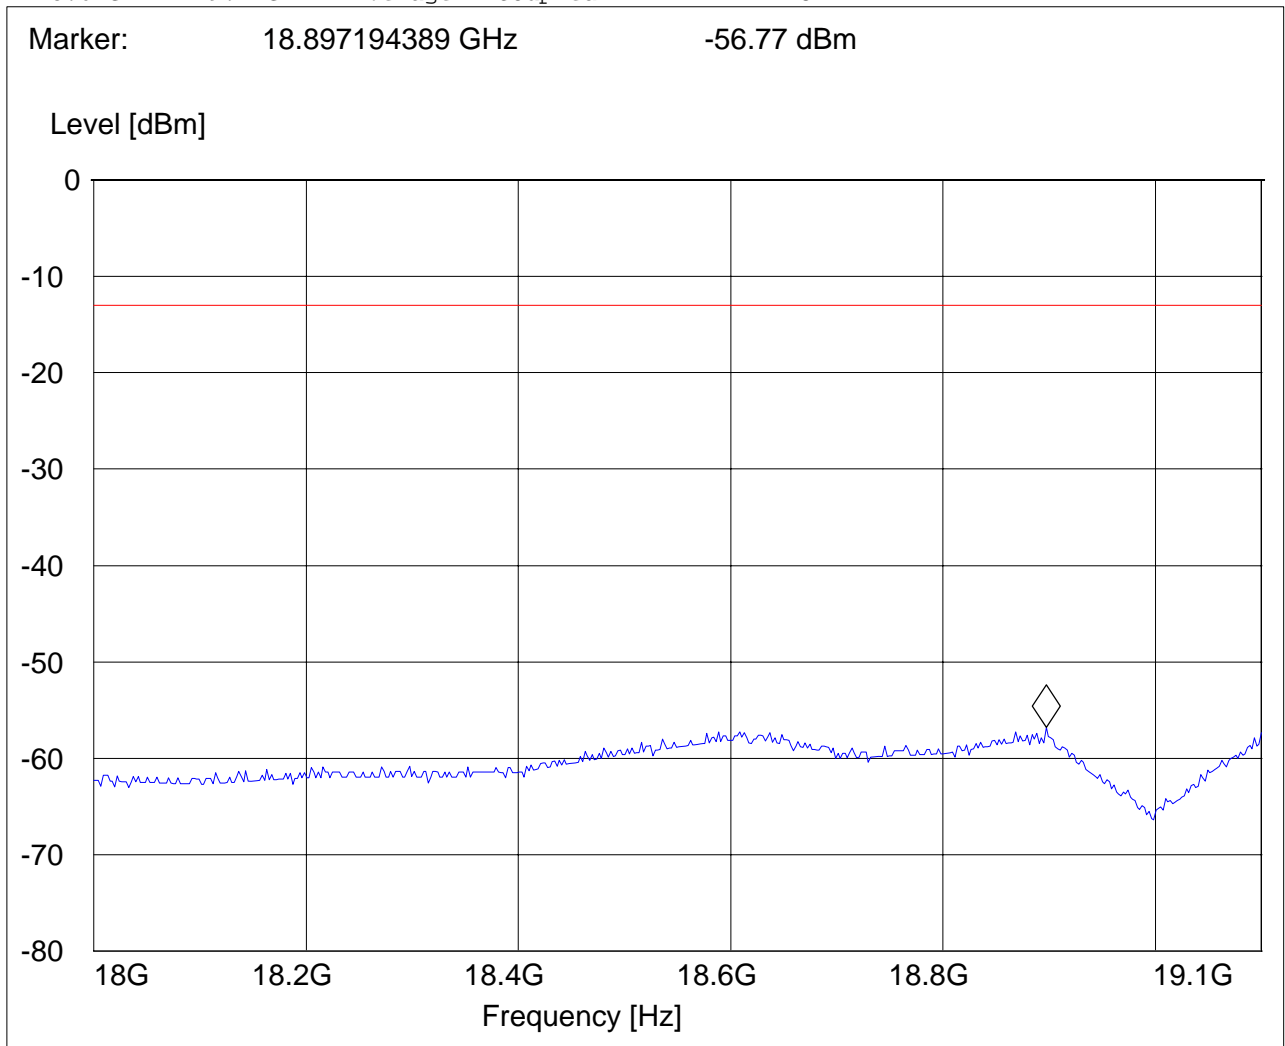





**5.5.4.4 Test Results Transmitter Spurious Emission UMTS FDD2:**

| Harmonics | Tx ch-9262<br>Freq. (MHz) | Level (dBm) | Tx ch-9400<br>Freq. (MHz) | Level (dBm) | Tx ch-9538<br>Freq. (MHz) | Level (dBm) |
|-----------|---------------------------|-------------|---------------------------|-------------|---------------------------|-------------|
| <b>2</b>  | <b>3704.8</b>             | NF          | <b>3760</b>               | NF          | <b>3815.2</b>             | NF          |
| <b>3</b>  | <b>5557.2</b>             | NF          | <b>5640</b>               | NF          | <b>5722.8</b>             | NF          |
| <b>4</b>  | <b>7409.6</b>             | NF          | <b>7520</b>               | NF          | <b>7630.4</b>             | NF          |
| <b>5</b>  | <b>9262</b>               | NF          | <b>9400</b>               | NF          | <b>9538</b>               | NF          |
| <b>6</b>  | <b>11114.4</b>            | NF          | <b>11280</b>              | NF          | <b>11445.6</b>            | NF          |
| <b>7</b>  | <b>12966.8</b>            | NF          | <b>13160</b>              | NF          | <b>13353.2</b>            | NF          |
| <b>8</b>  | <b>14819.2</b>            | NF          | <b>15040</b>              | NF          | <b>15260.8</b>            | NF          |
| <b>9</b>  | <b>16671.6</b>            | NF          | <b>16920</b>              | NF          | <b>17168.4</b>            | NF          |
| <b>10</b> | <b>18524</b>              | NF          | <b>18800</b>              | NF          | <b>19076</b>              | NF          |




**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) TX: 30MHz - 1GHz**

**Antenna: Vertical**

EUT: 7505  
 Customer:: PSION  
 Test Mode: FDD2  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

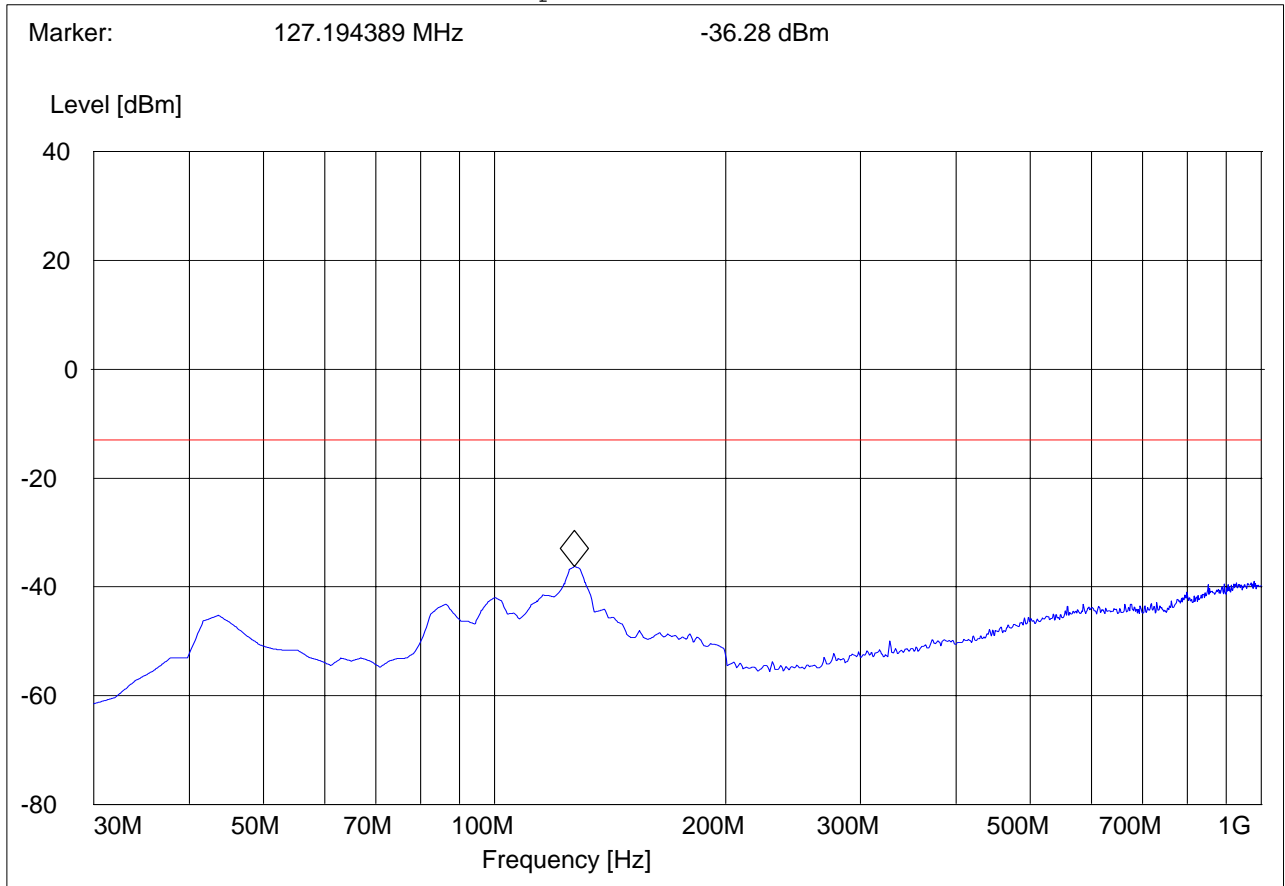



**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) TX: 30MHz - 1GHz**


**Antenna: Horizontal**

EUT: 7505  
 Customer:: PSION  
 Test Mode: FDD2  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_H"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 100 kHz   | DUMMY-DBM  |

Marker: 945.571142 MHz -51.34 dBm

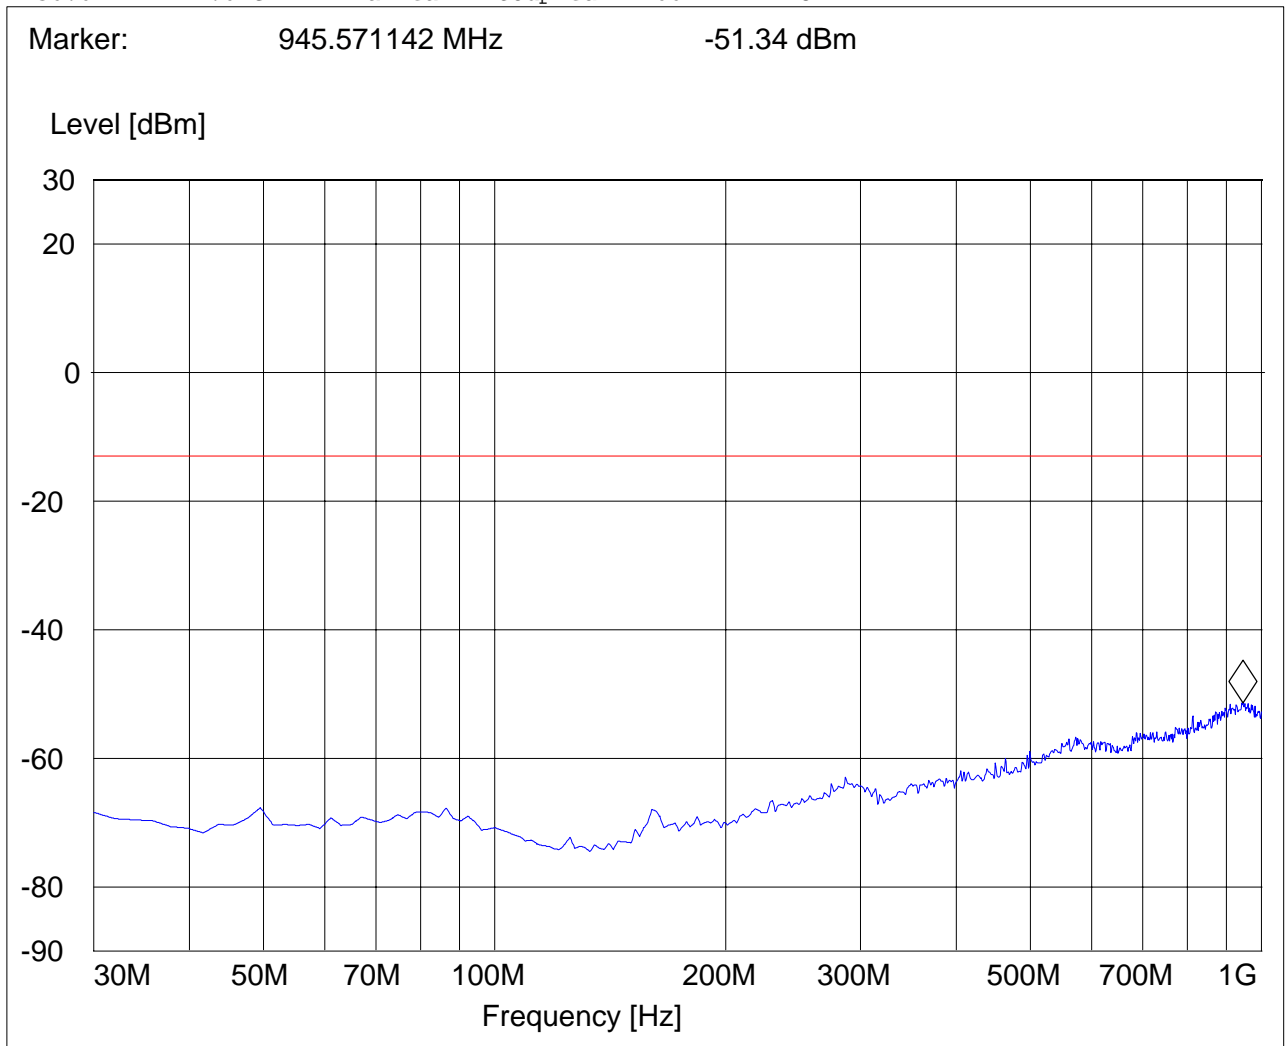




**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9262: 1GHz – 3GHz**

**Note: The peak above the limit line is the carrier freq. at ch-9262.**

EUT: 7505  
Customer:: PSION  
Test Mode: WCDMA FDD II  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Chris  
Voltage: AC ADAPTER  
Comments:

**SWEEP TABLE: "FCC 24Spuri 1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

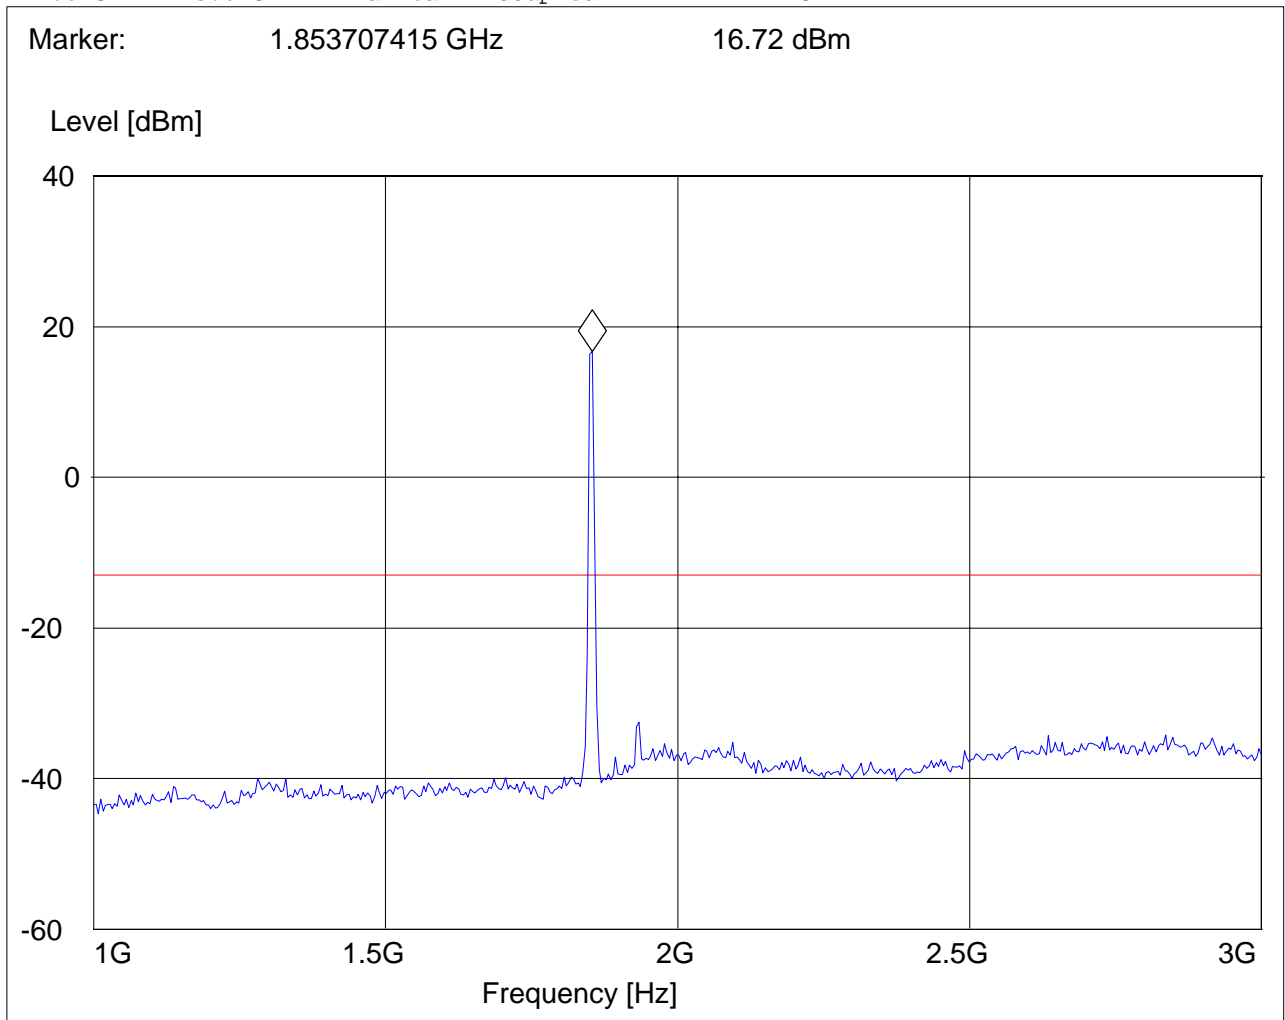




**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9262: 3GHz – 18GHz**

EUT: 7505  
Customer:: PSION  
Test Mode: WCDMA FDD II  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Chris  
Voltage: AC ADAPTER  
Comments:

**SWEEP TABLE: "FCC 24Spuri 3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 3.0 GHz         | 18.0 GHz       | Average  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 17.849699399 GHz -50.94 dBm

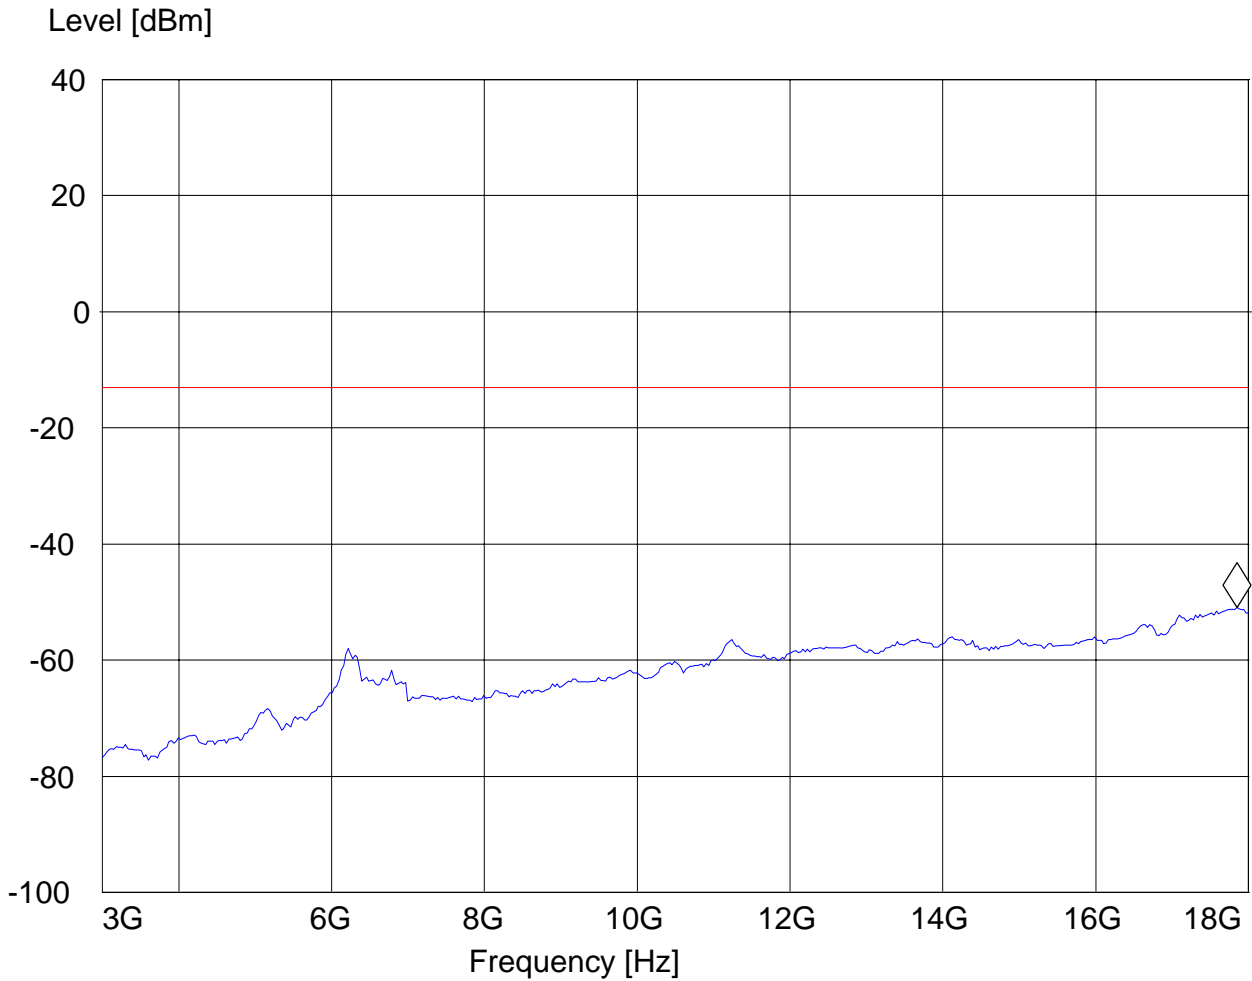




**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9400: 1GHz – 3GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD II  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "FCC 24Spuri 1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 1.881763527 GHz 17.76 dBm

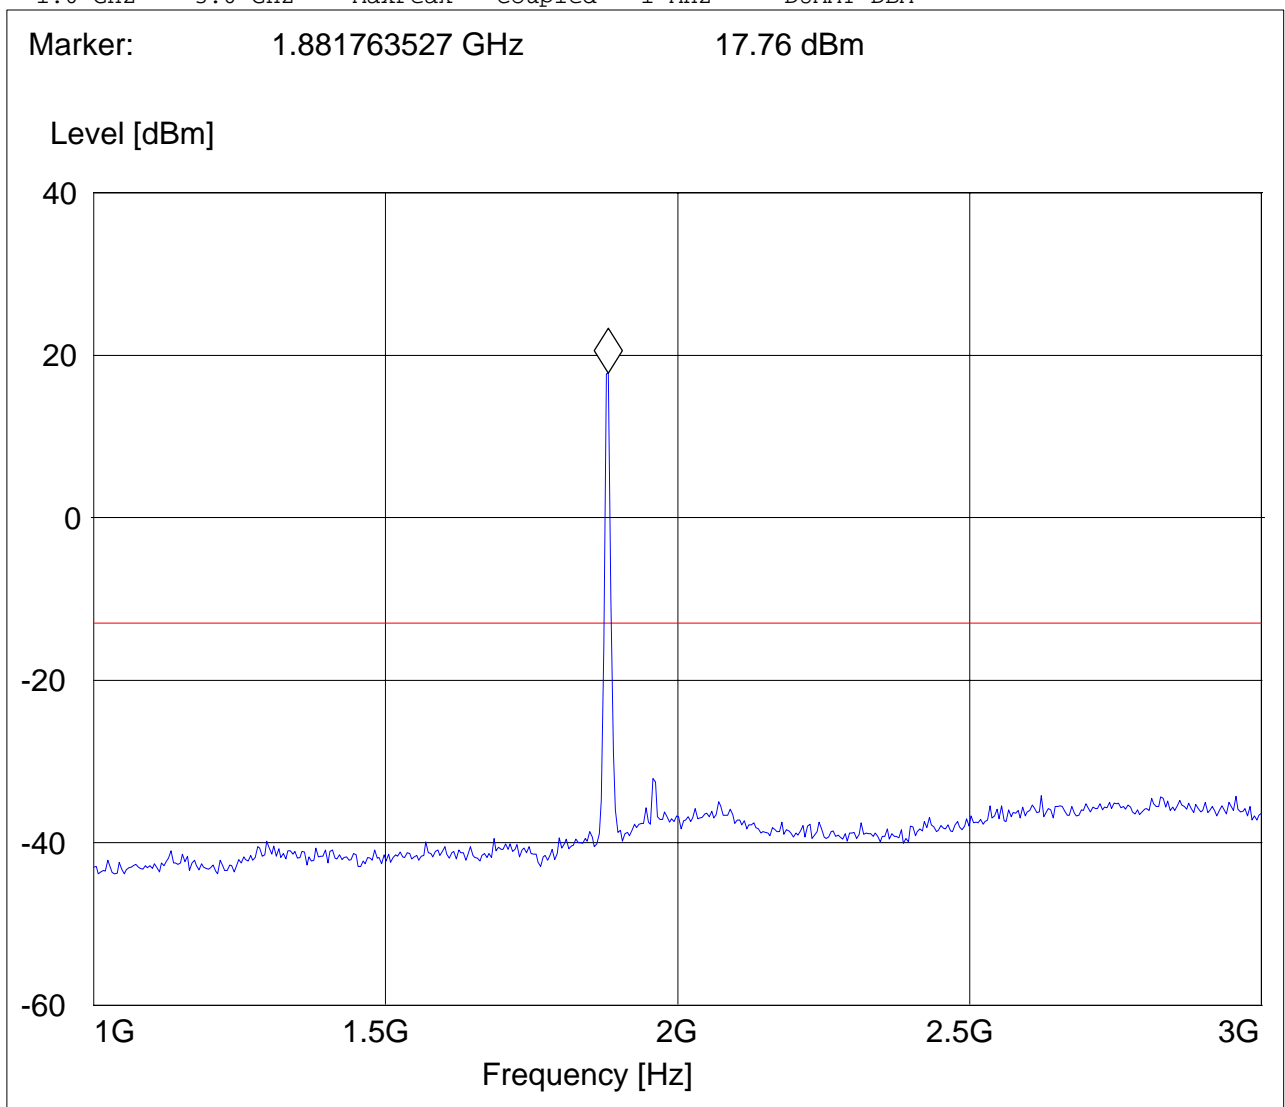




**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL9400: 3GHz – 18GHz**

EUT: 7505  
Customer:: PSION  
Test Mode: WCDMA FDD II  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Chris  
Voltage: AC ADAPTER  
Comments:

**SWEEP TABLE: "FCC 24Spuri 3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 3.0 GHz         | 18.0 GHz       | Average  | Coupled    | 1 MHz     | DUMMY-     |

DBM

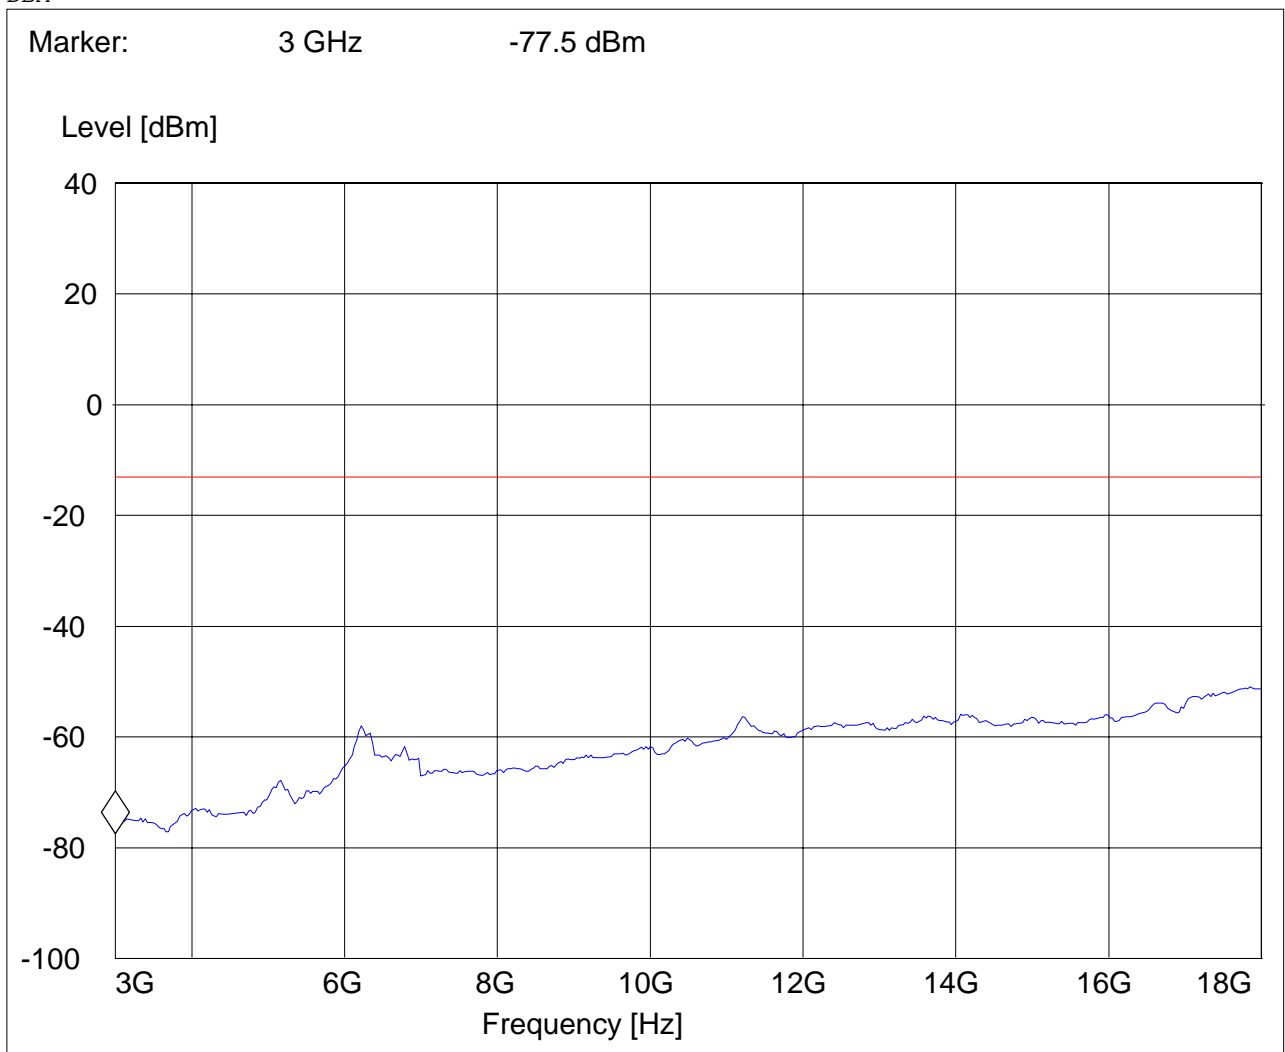




**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9538: 1GHz – 3GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD II  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "FCC 24Spuri 1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 1.905811623 GHz 17.62 dBm

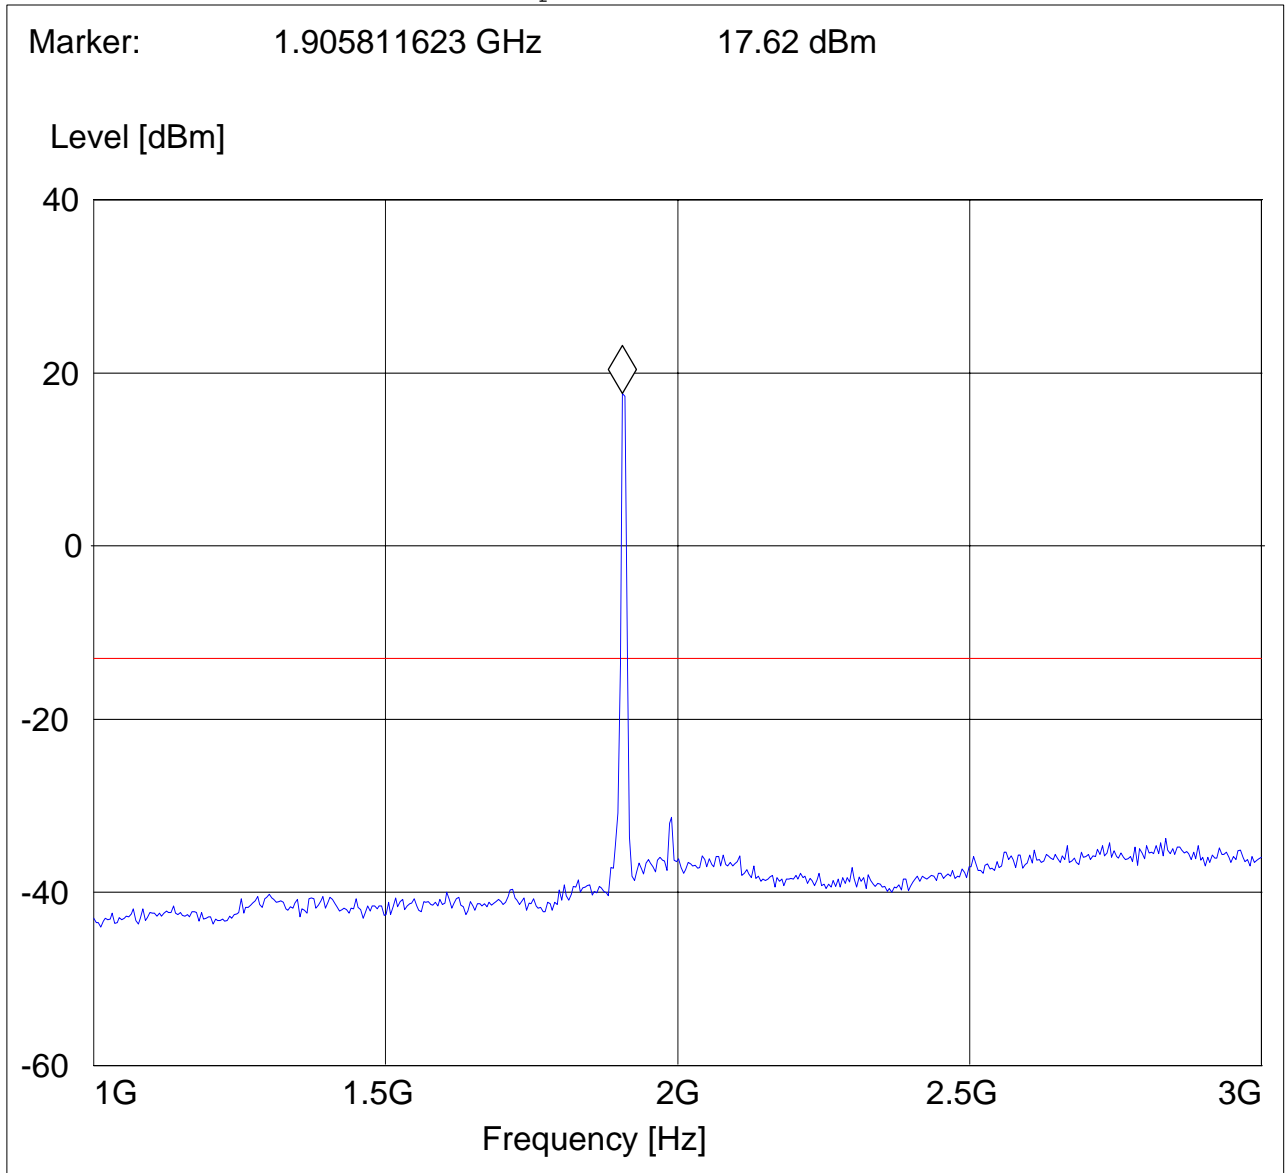






**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx CHANNEL 9538: 3GHz – 18GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD II  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "FCC 24Spuri 3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 3.0 GHz         | 18.0 GHz       | Average  | Coupled    | 1 MHz     | DUMMY-DBM  |

Marker: 17.819639279 GHz -50.74 dBm

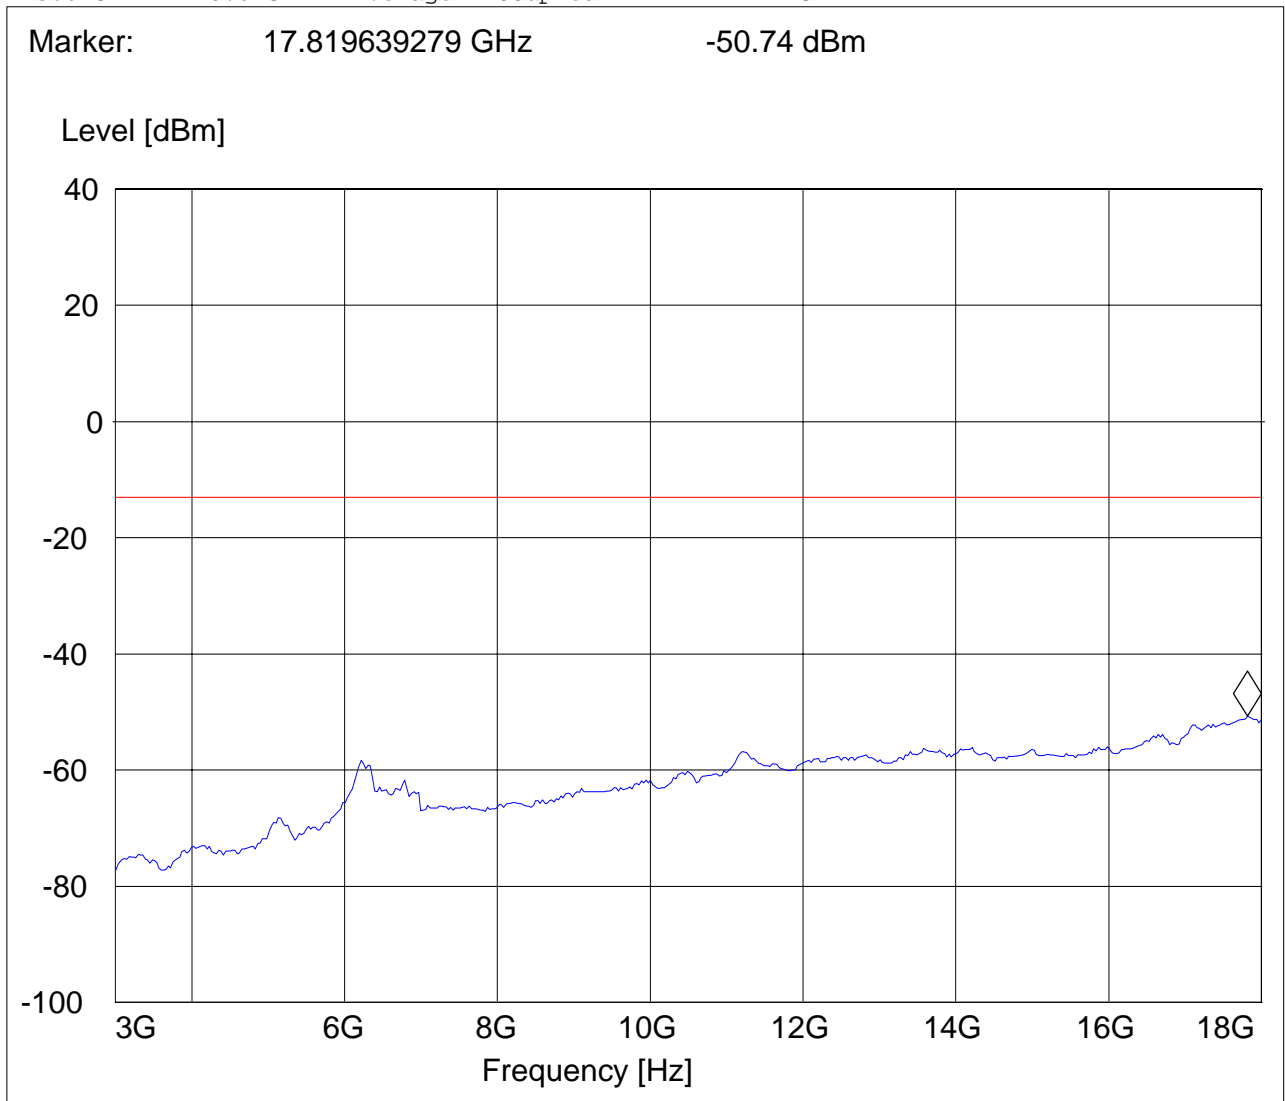




**RADIATED SPURIOUS EMISSIONS(UMTS FDD2) 18GHz – 19.1GHz**

**Note: This plot is valid for low, mid & high channels (worst-case plot)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD II  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "FCC 24spuri 18-19.1G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 18.0 GHz        | 19.1 GHz       | Average  | Coupled    | 1 MHz     | DUMMY-DBM  |

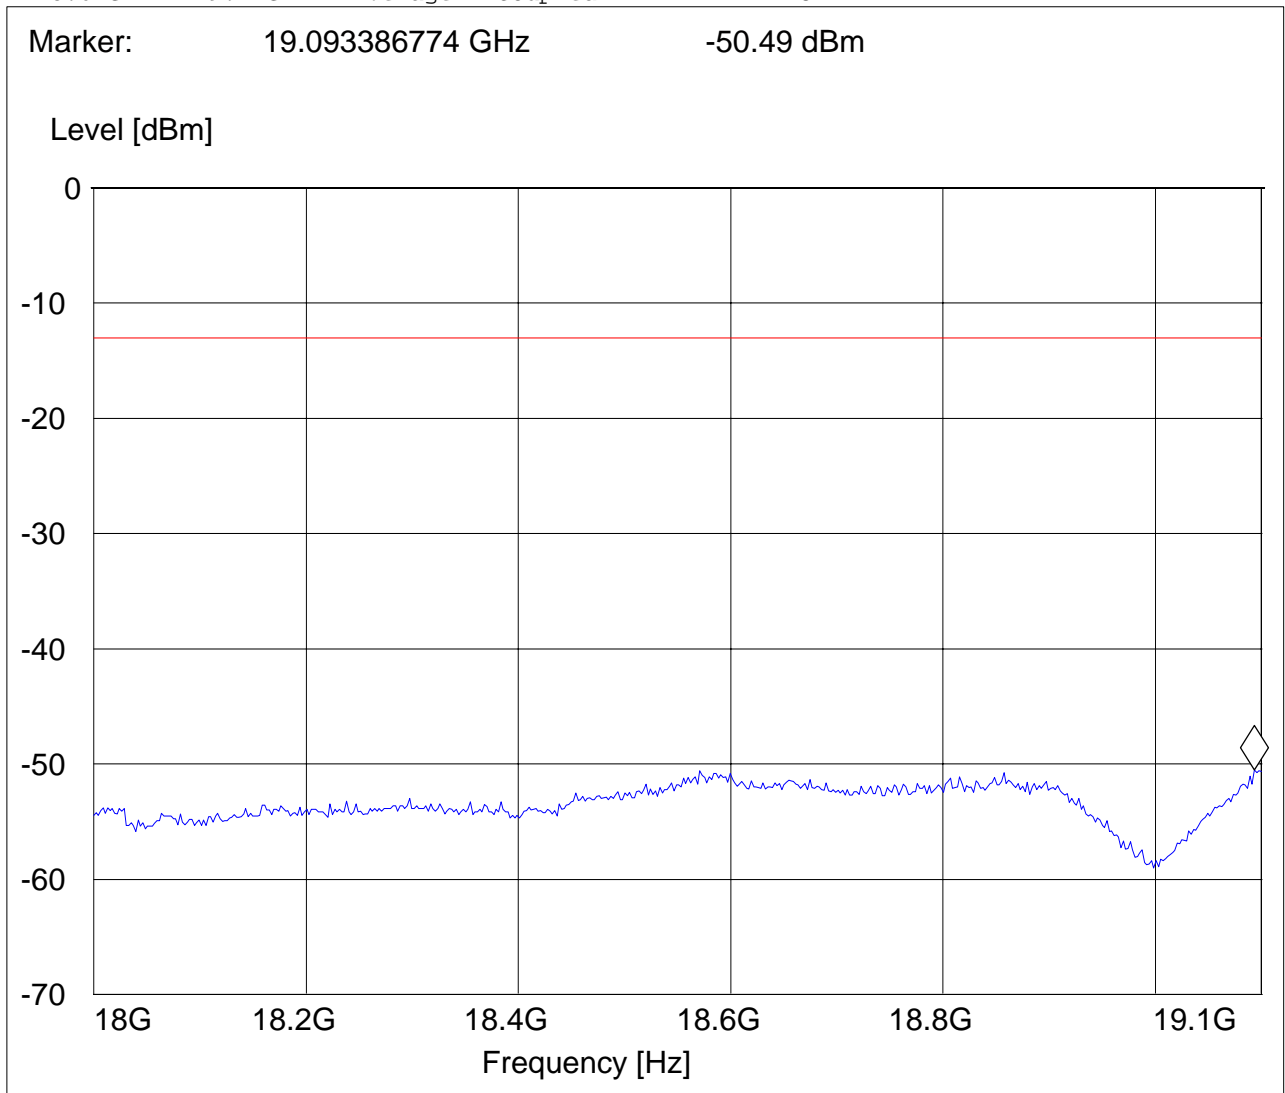



#### **5.5.4.5 Test Results Transmitter Spurious Emission Radio Collocated GSM/WLAN/BT**

**No measurable emissions captured.**




**Radiated Spurious Emission: Radio Collocation GSM/WLAN/BT  
 30M-1GHz, Antenna Vertical**

**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 1900 CH 661; WLAN CH 6; BT ON  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

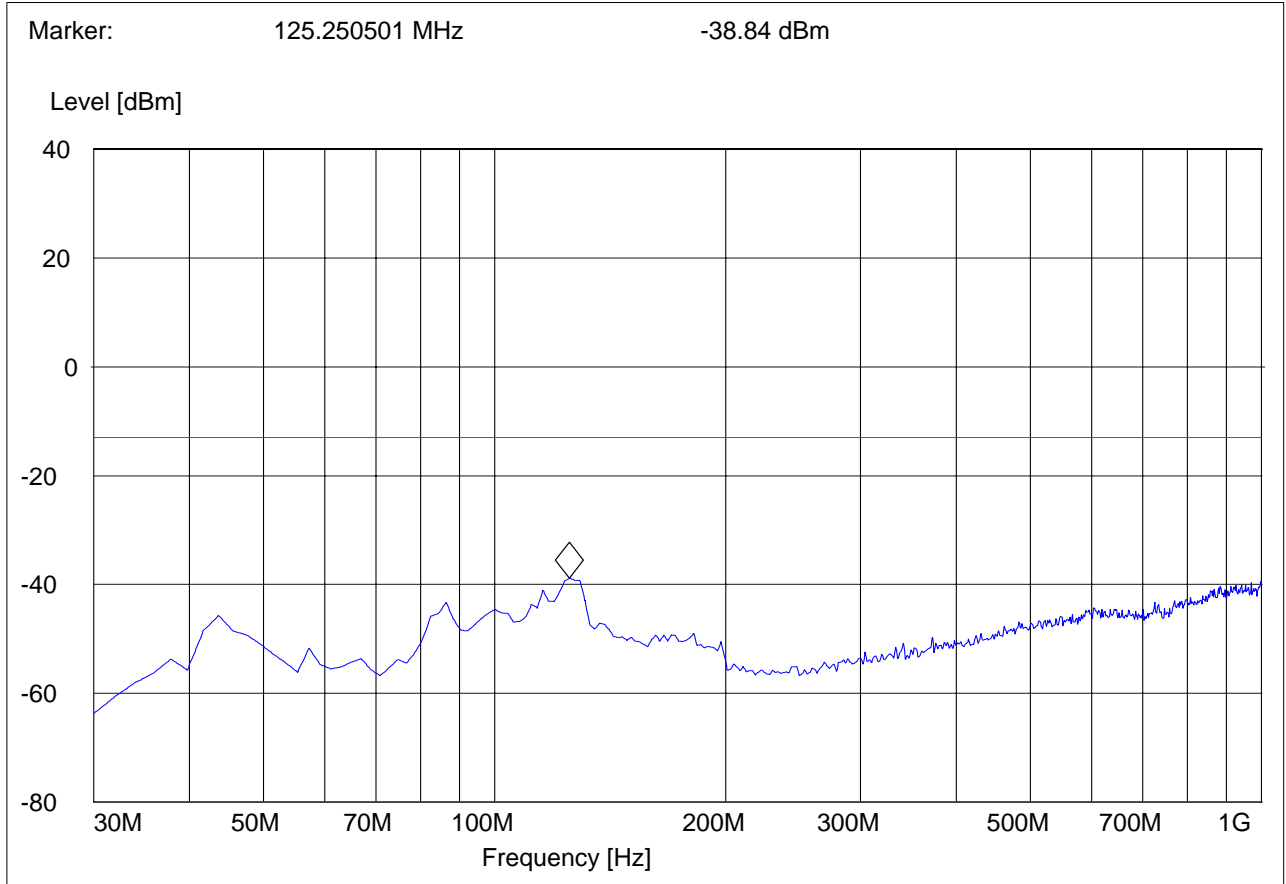




**Radiated Spurious Emission: Radio Collocation GSM/WLAN/BT  
 30M-1GHz, Antenna Horizontal**

**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 1900 CH 661; WLAN CH 6; BT ON  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24 Spur 30M-1G\_H"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 100 kHz   | DUMMY-DBM  |

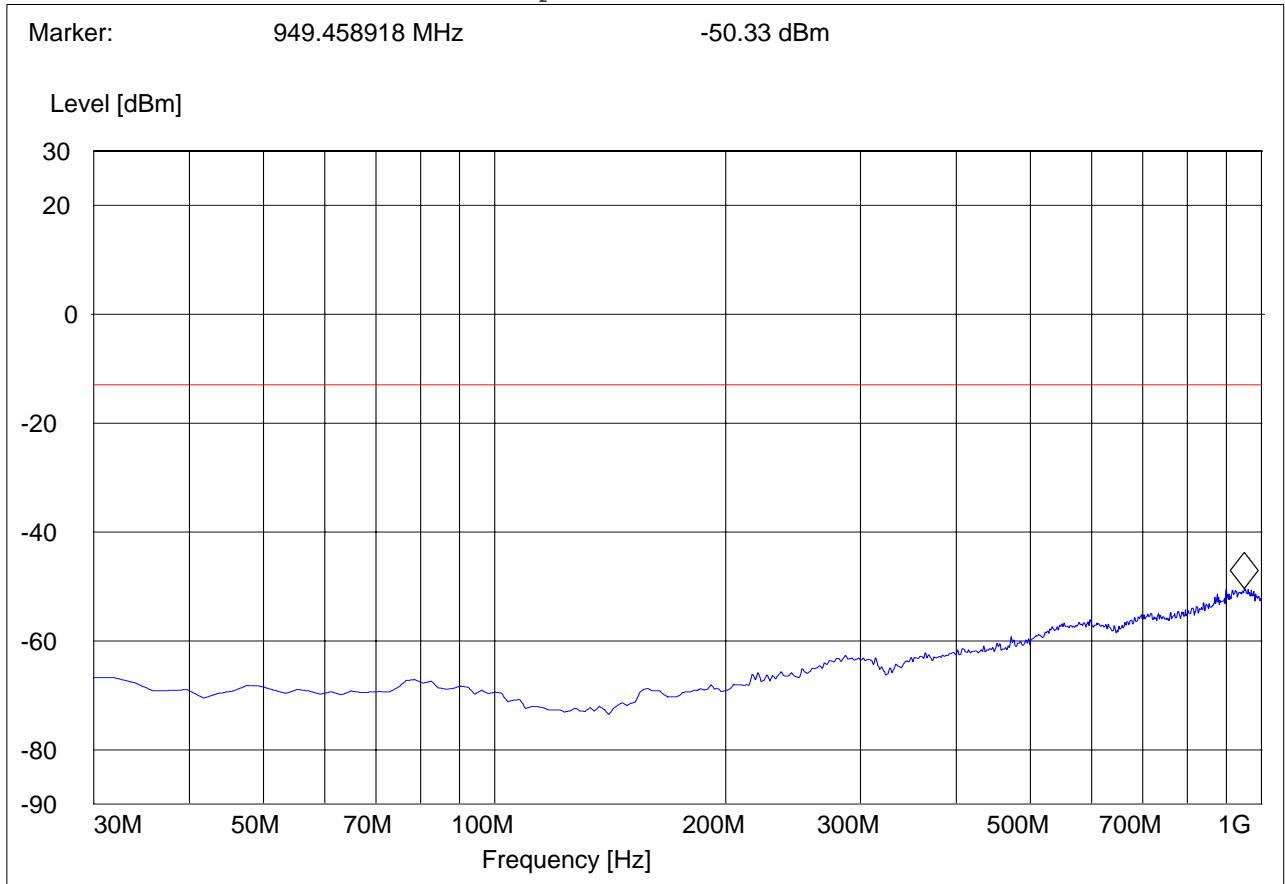




**Radiated Spurious Emission: Radio Collocation GSM/WLAN/BT  
 1-3GHz**

**Note the emissions over the limit are intentional transmission from the radios.**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 1900 CH 661; WLAN CH 6; BT ON  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24Spuri 1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | DUMMY-DBM  |

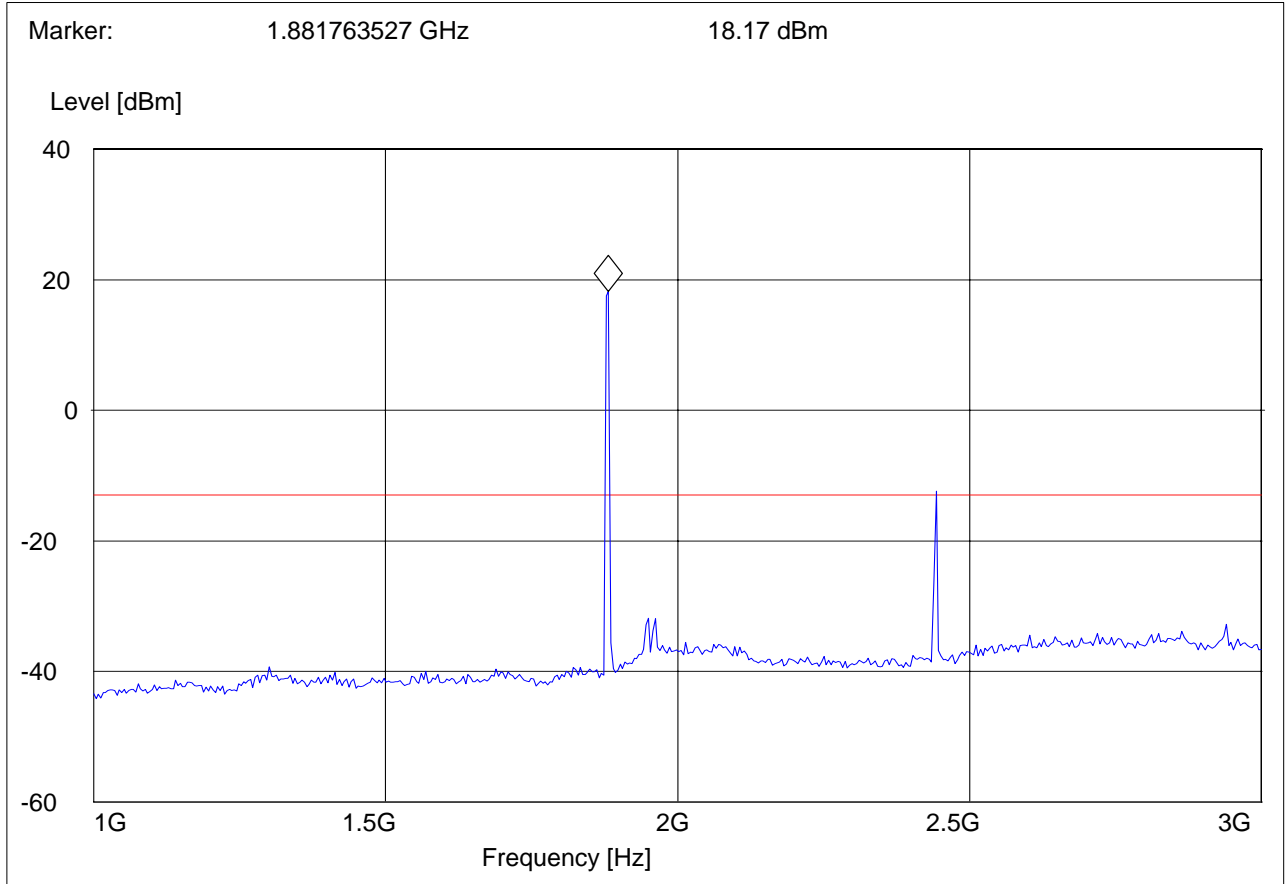




**Radiated Spurious Emission: Radio Collocation GSM/WLAN/BT**  
**3-18GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 1900 CH 661; WLAN CH 6; BT ON  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24Spuri 3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 3.0 GHz         | 18.0 GHz       | Average  | Coupled    | 1 MHz     | DUMMY-DBM  |

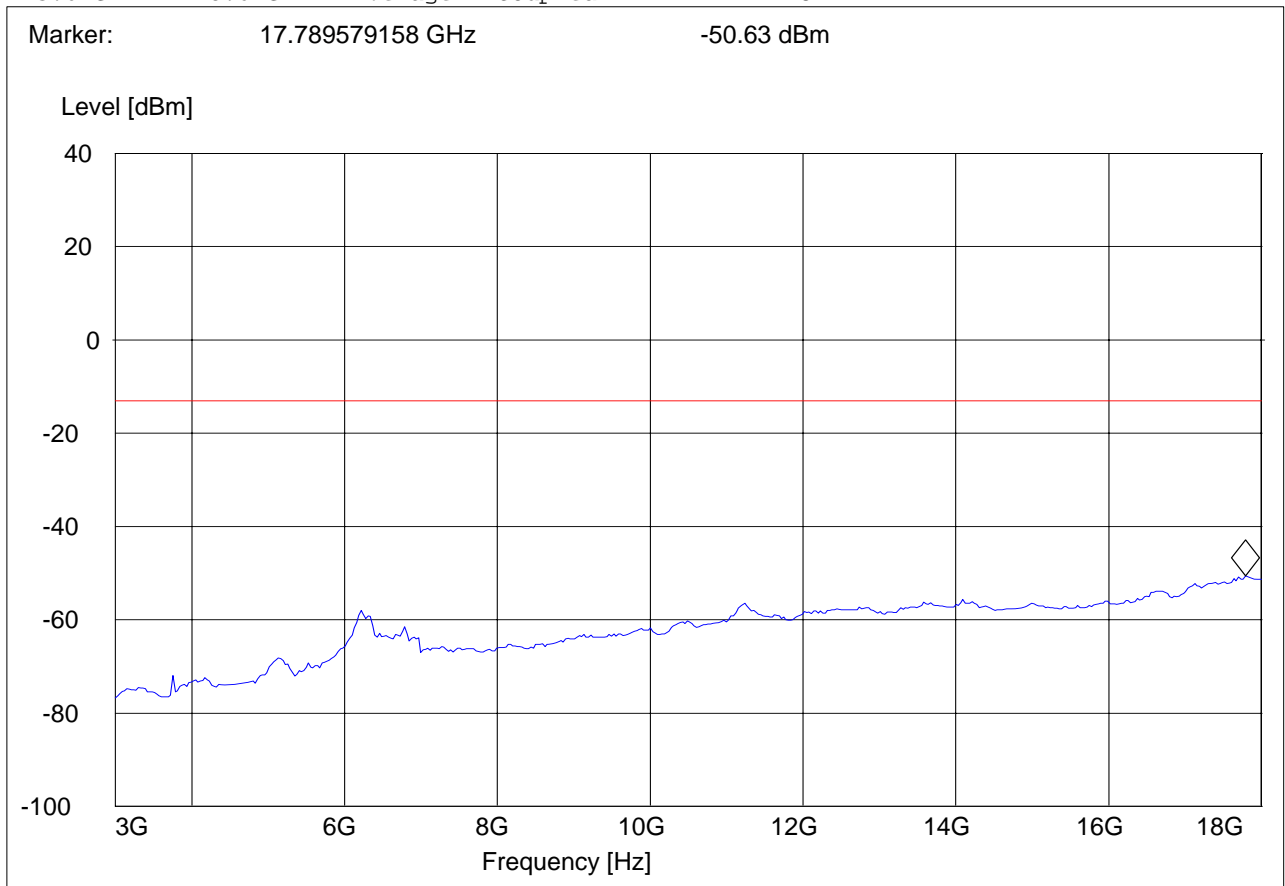




**Radiated Spurious Emission: Radio Collocation GSM/WLAN/BT**  
**18-19.1GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 1900 CH 661; WLAN CH 6; BT ON  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "FCC 24spuri 18-19.1G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|----------|------------|-----------|------------|
| 18.0 GHz        | 19.1 GHz       | Average  | Coupled    | 1 MHz     | DUMMY-DBM  |

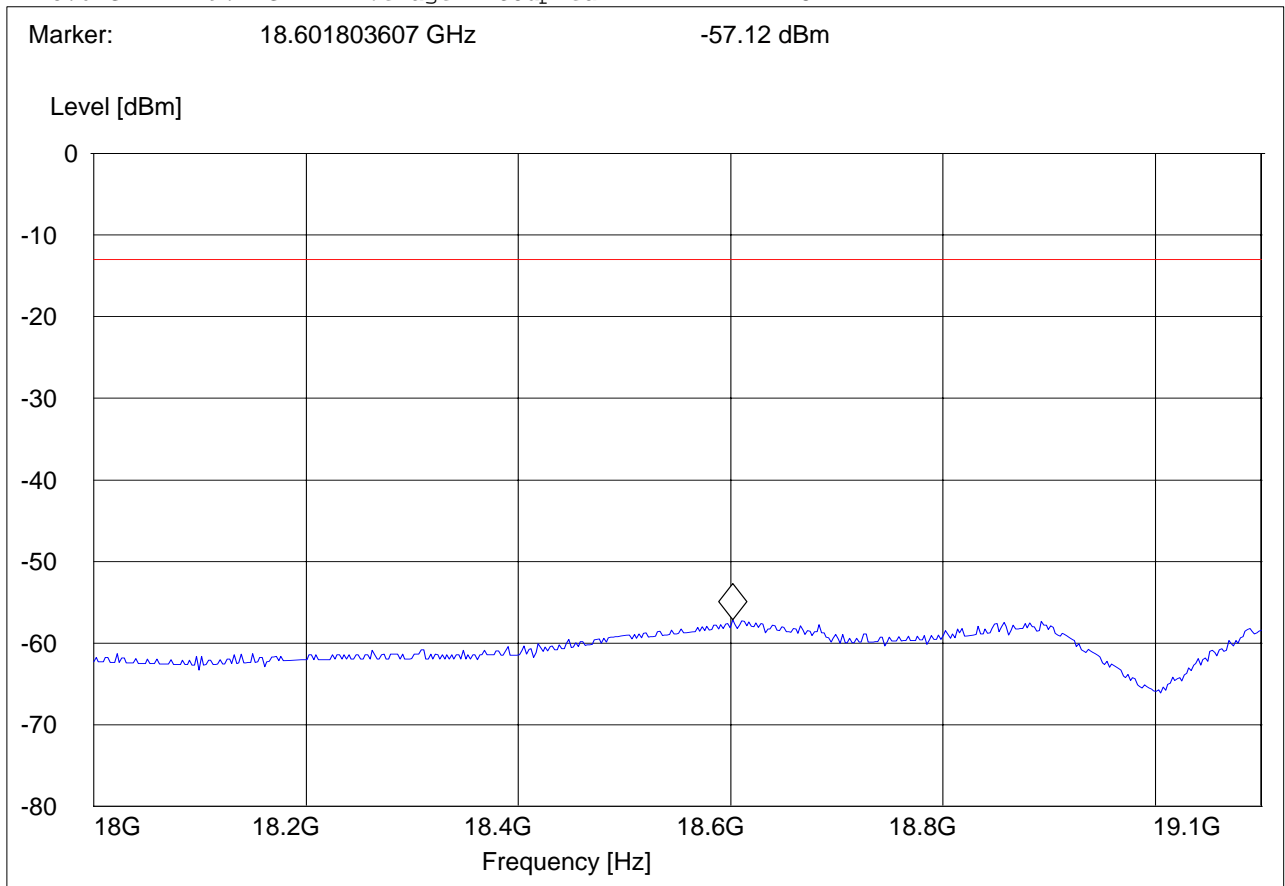





**5.5.5 RECEIVER RADIATED EMISSIONS** **§ 2.1053 / RSS-132 & 133**

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.

**Limits**

**SUBCLAUSE § RSS-133**

| Frequency (MHz) | Field strength ( $\mu\text{V/m}$ ) | Measurement distance (m) |
|-----------------|------------------------------------|--------------------------|
| 0.009 - 0.490   | 2400/F (kHz)                       | 300                      |
| 0.490 - 1.705   | 24000/F (kHz)                      | 30                       |
| 1.705 - 30.0    | 30                                 | 30                       |
| 30 - 88         | 100                                | 3                        |
| 88 - 216        | 150                                | 3                        |
| 216 - 960       | 200                                | 3                        |
| Above 960       | 500                                | 3                        |

No significant emissions measurable. Plots reported here represent the worse case emissions.



**5.5.5.1 Test Results Receiver Spurious Emission GSM850**


**30M-1GHz, Antenna Vertical**

**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 850; CH 190  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "CANADA RE\_30M-1G\_Ver"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer      |
|-----------------|----------------|----------|------------|-----------|-----------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 100 kHz   | 3141-#1186_Vert |

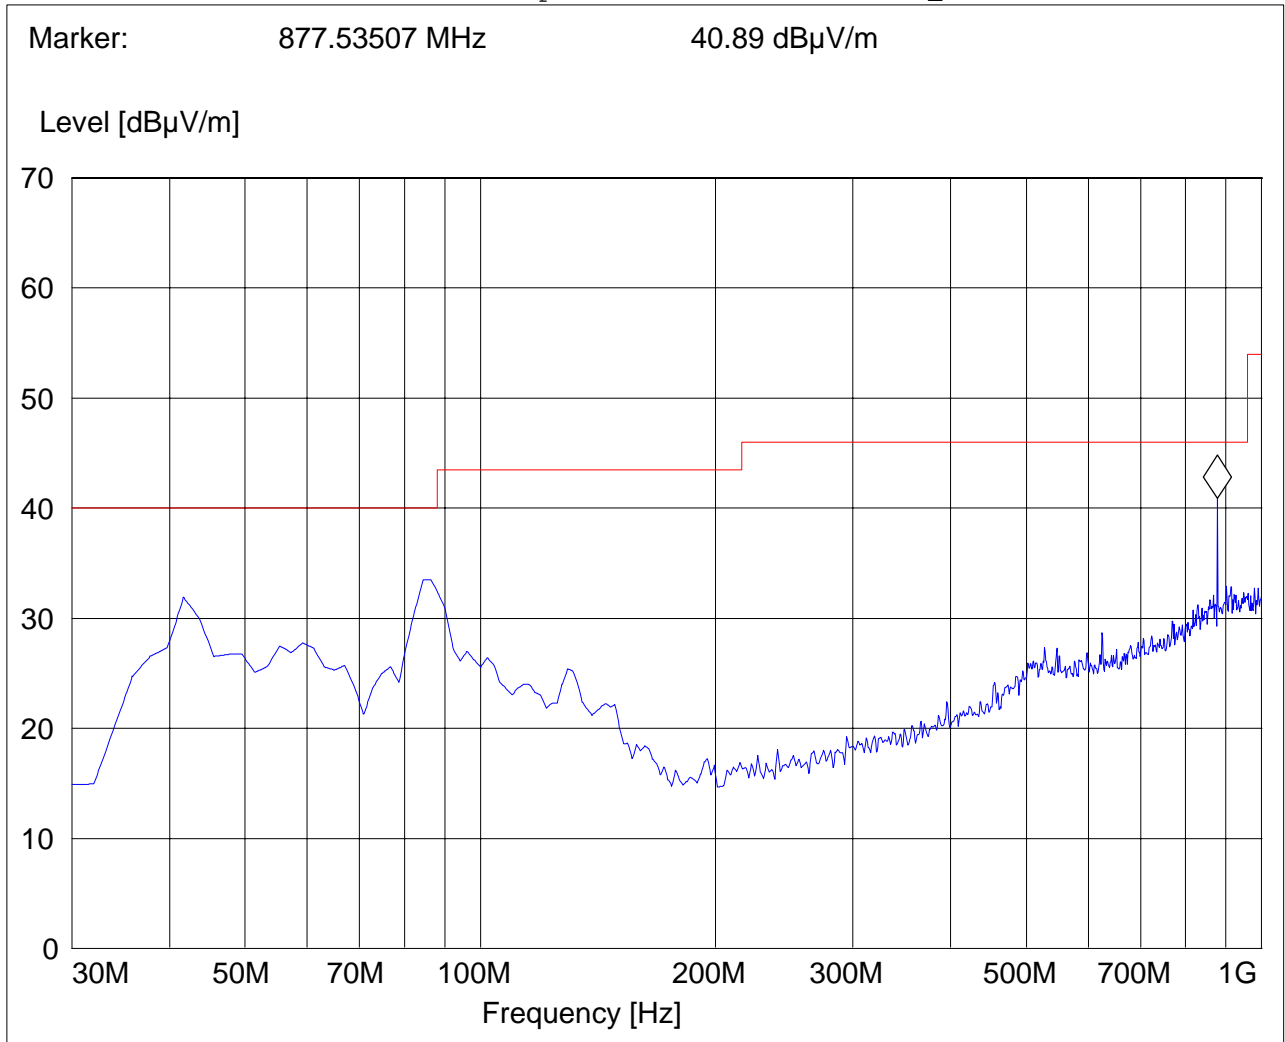




**Receiver Spurious Emission GSM850 30M-1GHz, Antenna Horizontal**  
**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: 7505  
Customer: PSION  
Test Mode: GSM 850; CH 128  
ANT Orientation: H  
EUT Orientation: H  
Test Engineer: Satya  
Voltage: AC Adapter  
Comments:

**SWEEP TABLE: "CANDA RE\_30M-1G\_Hor"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer      |
|-----------------|----------------|----------|------------|-----------|-----------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 100 kHz   | 3141-#1186_Horz |

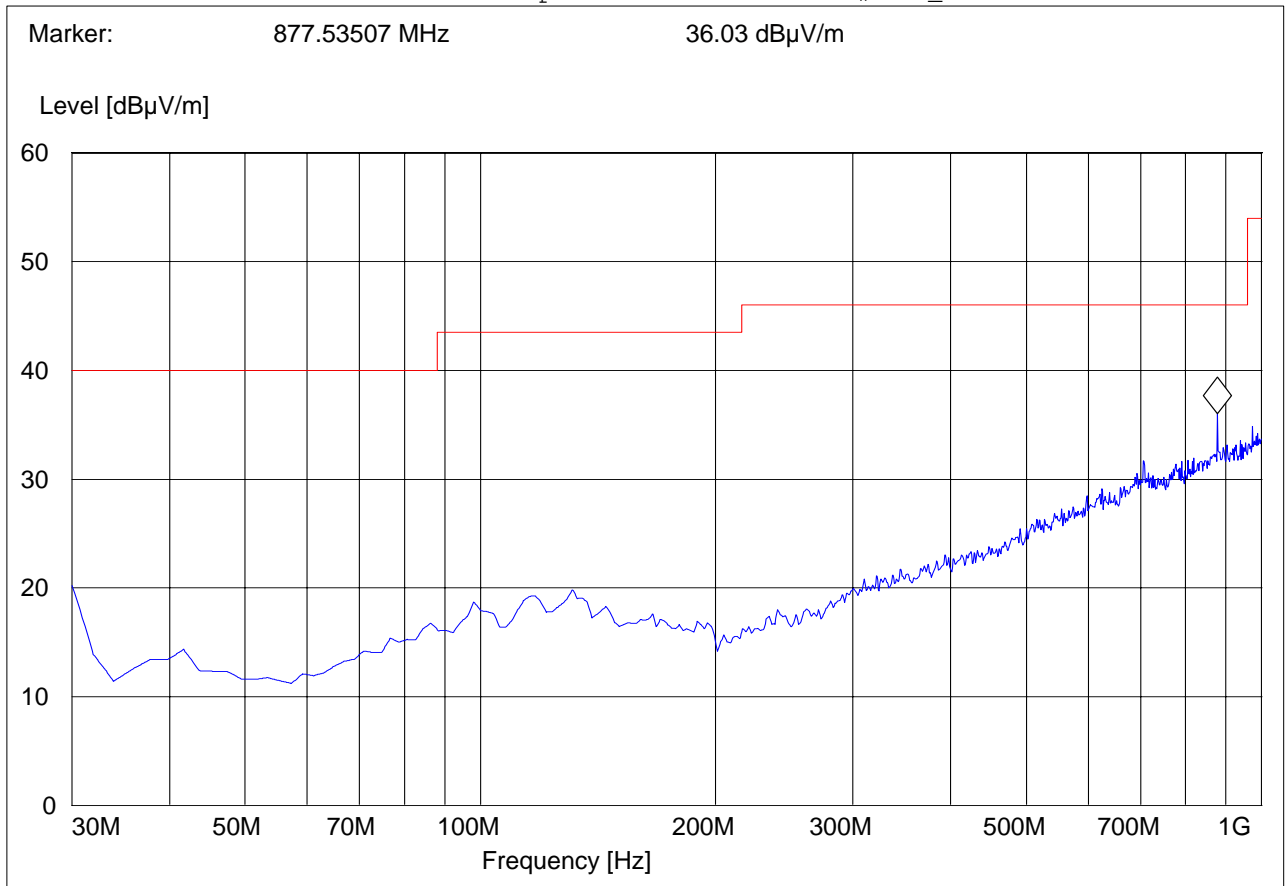




**Receiver Spurious Emission GSM850 CHANNEL 128: 1-3GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 850; CH128  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Satya  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "CANADA RE\_1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

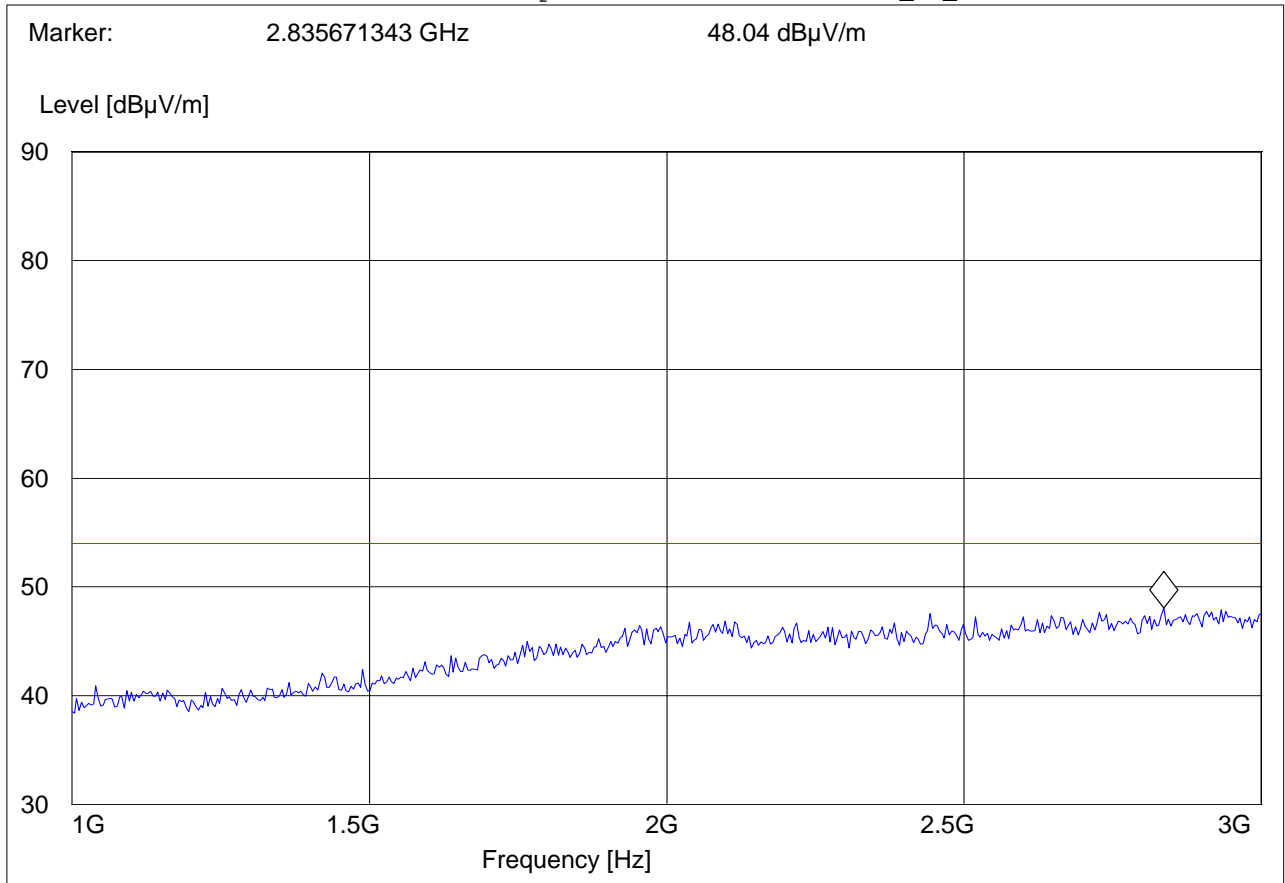




**RECEIVER SPURIOUS EMISSION GSM850 CHANNEL190: 1-3GHz**

EUT: 7505  
Customer:: PSION  
Test Mode: GSM 850; CH190  
ANT Orientation: H  
EUT Orientation: H  
Test Engineer: Satya  
Voltage: AC Adapter  
Comments:

**SWEEP TABLE: "CANADA RE\_1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

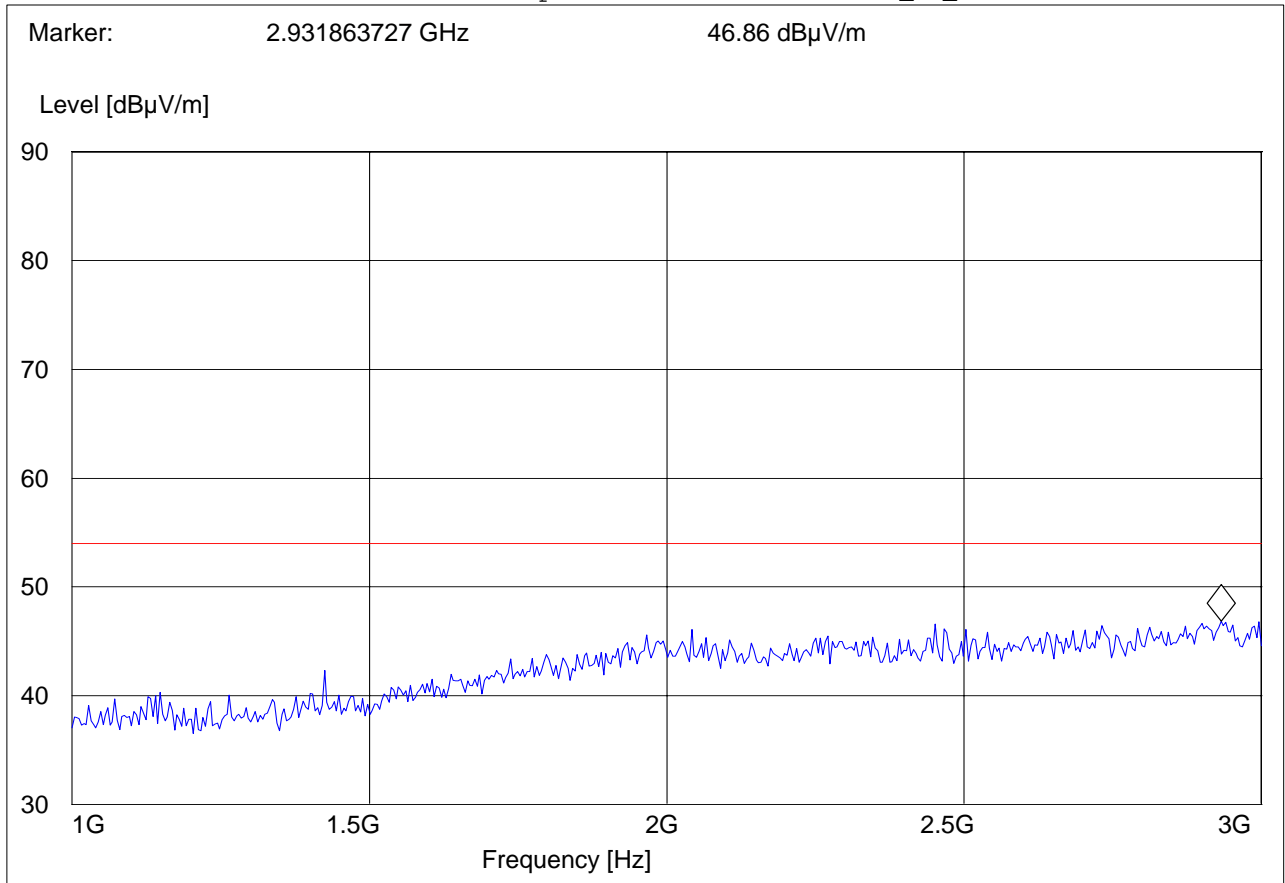




**RECEIVER SPURIOUS EMISSION GSM850 CHANNEL 251: 1-3GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 850; CH251  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Satya  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "CANADA RE\_1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

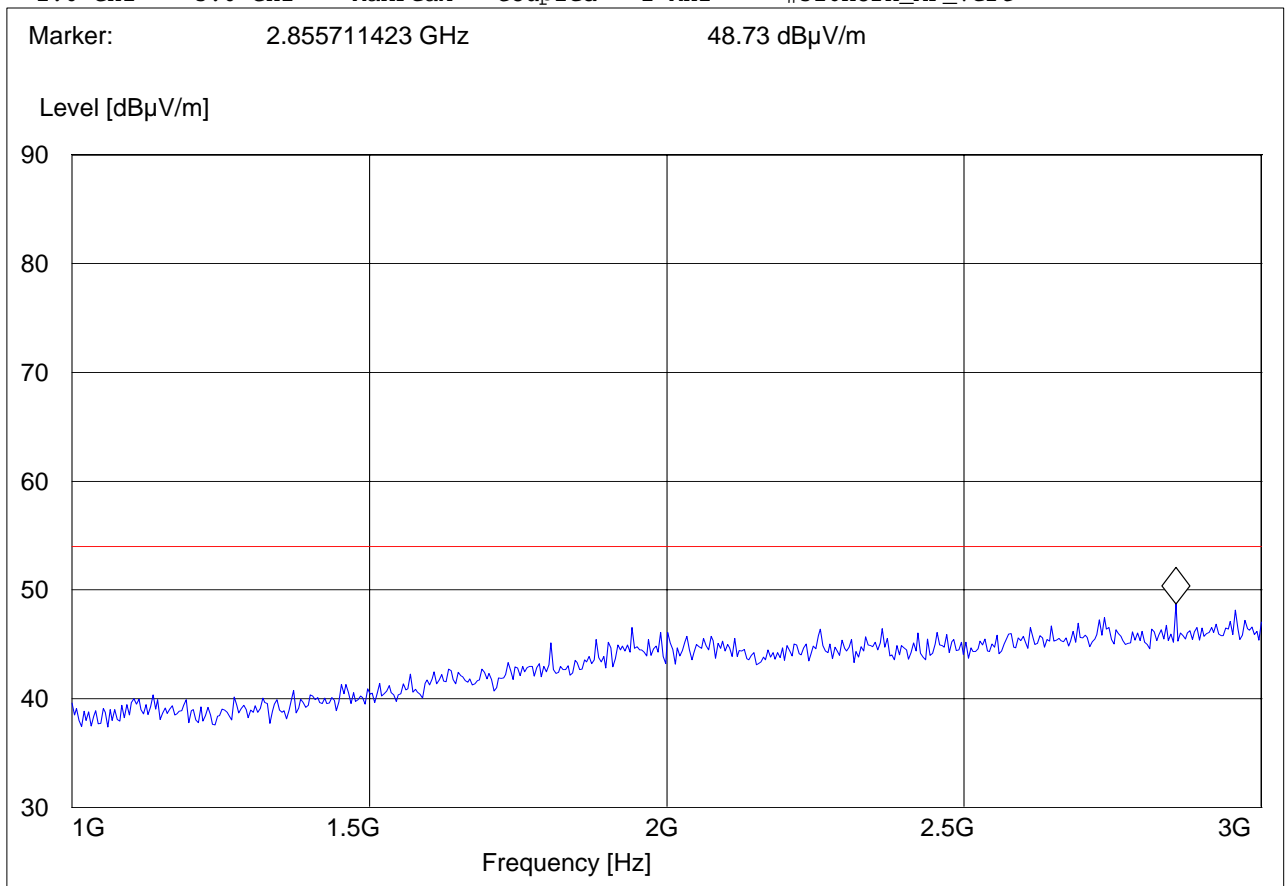




**RECEIVER SPURIOUS EMISSION GSM850 CHANNEL 128: 3-9GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 850; CH128  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Satya  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "CANADA RE\_3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 18.0 GHz       | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

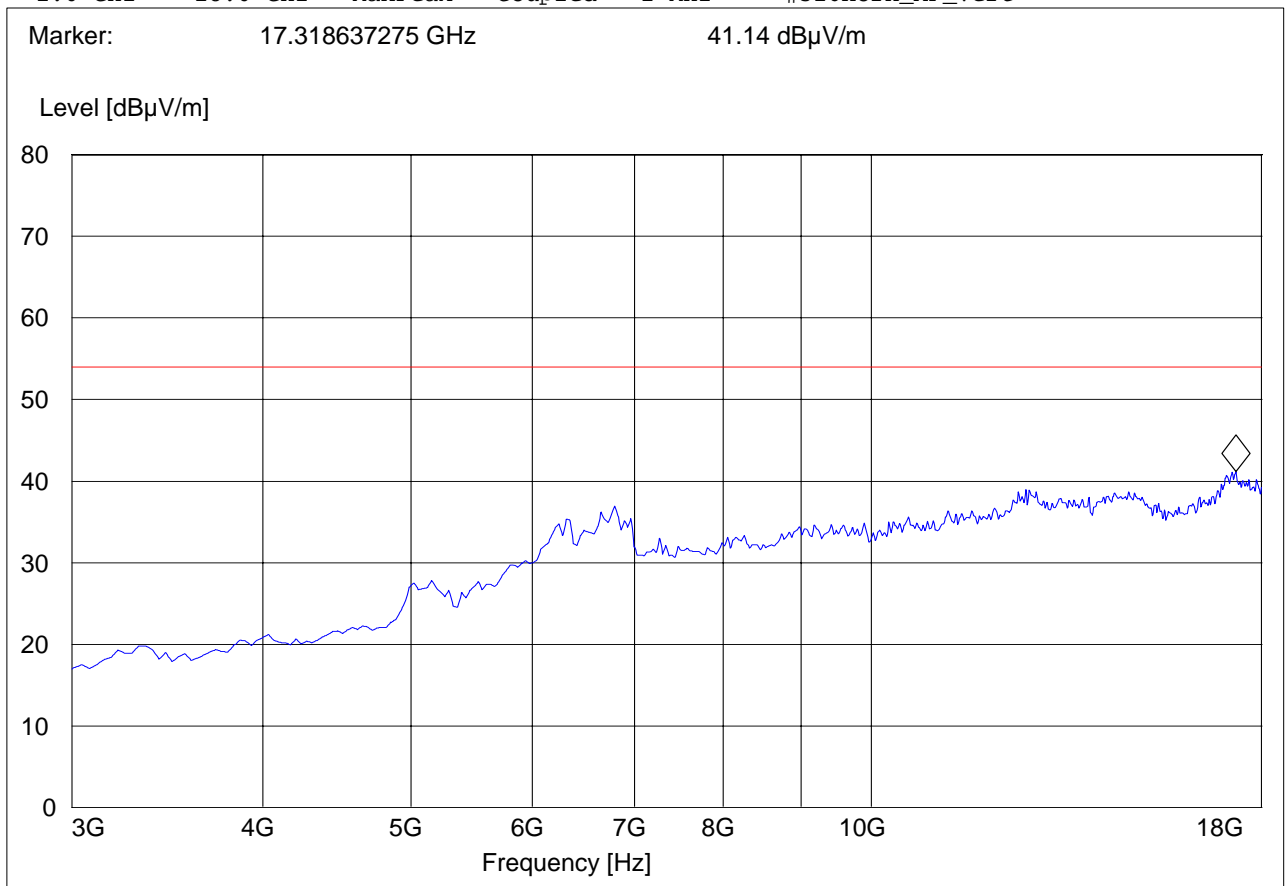




**RECEIVER SPURIOUS EMISSION GSM850 CHANNEL 190: 3-9GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 850; CH190  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Satya  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "CANADA RE\_3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 18.0 GHz       | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

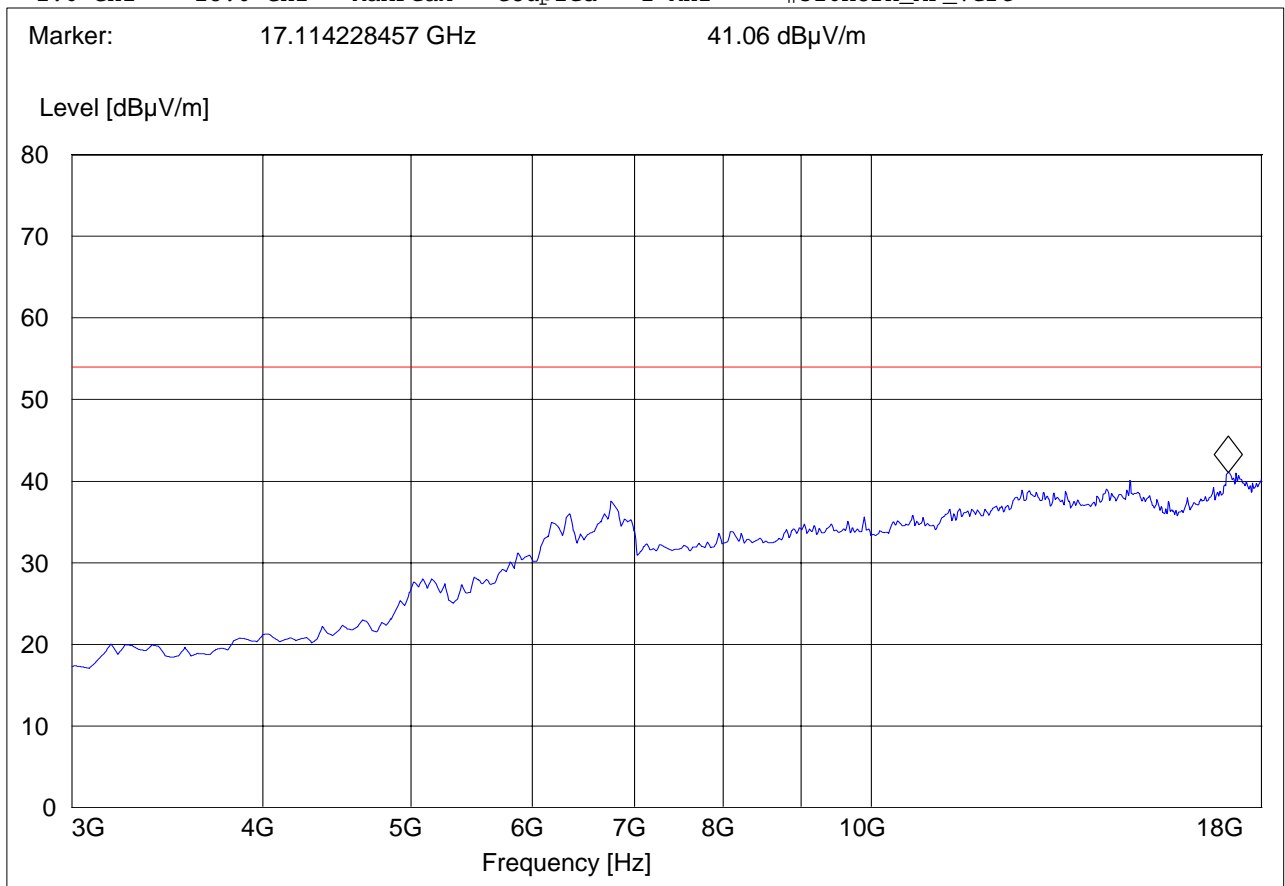






**RECEIVER SPURIOUS EMISSION GSM850 CHANNEL 251: 3-9GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: GSM 850; CH251  
 ANT Orientation: H  
 EUT Orientation: H  
 Test Engineer: Satya  
 Voltage: AC Adapter  
 Comments:

**SWEEP TABLE: "CANADA RE\_3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 18.0 GHz       | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

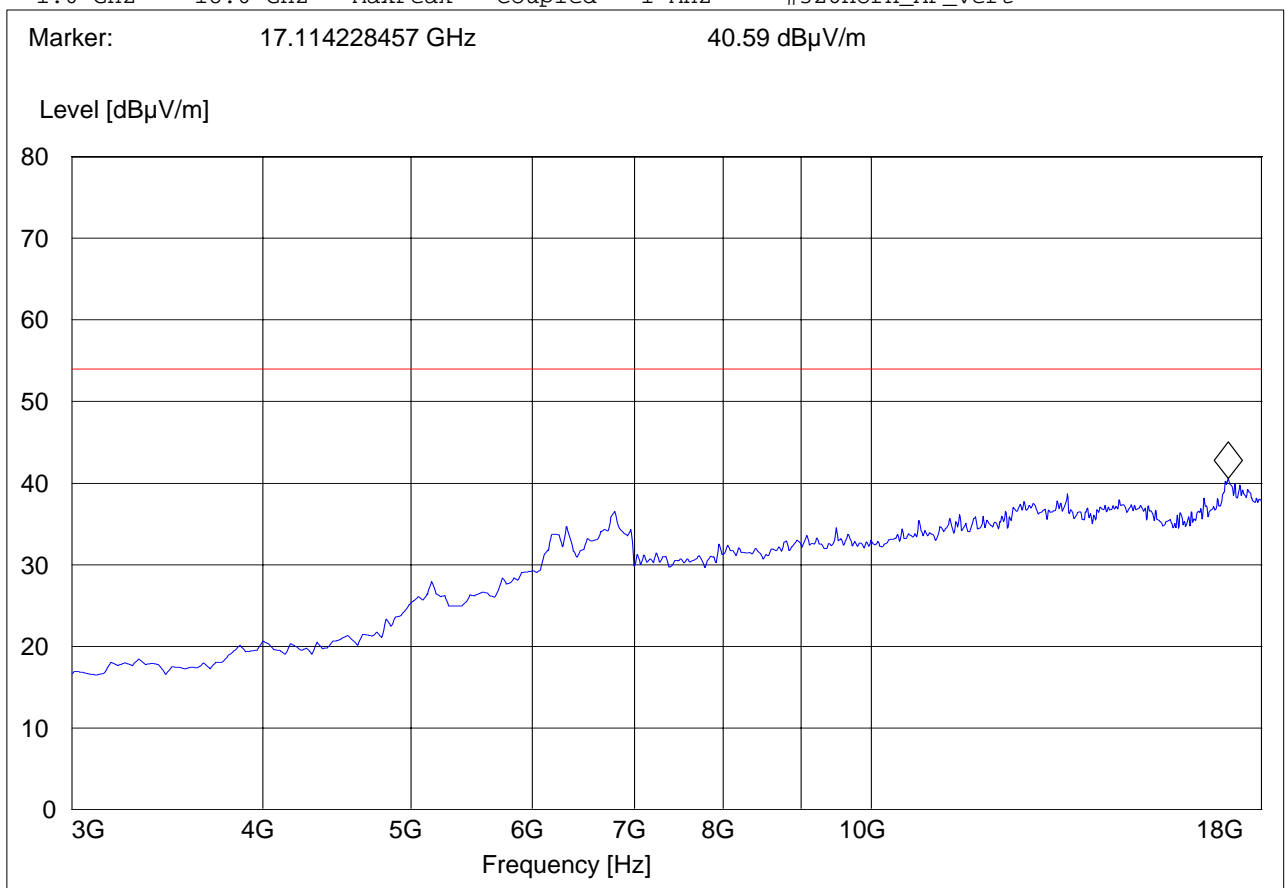



**5.5.5.2 Test Results Receiver Spurious Emission UMTS FDD5**


**30M-1GHz, Antenna Vertical**

**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: 7505  
 Customer: Psion  
 Test Mode: WCDMA FDD V ch.4132  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: CHRIS  
 Voltage: Battery  
 Comments: Marker placed on downlink

**SWEEP TABLE: "CANADA RE\_30M-1G\_Ver"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer      |
|-----------------|----------------|----------|------------|-----------|-----------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 100 kHz   | 3141-#1186_Vert |

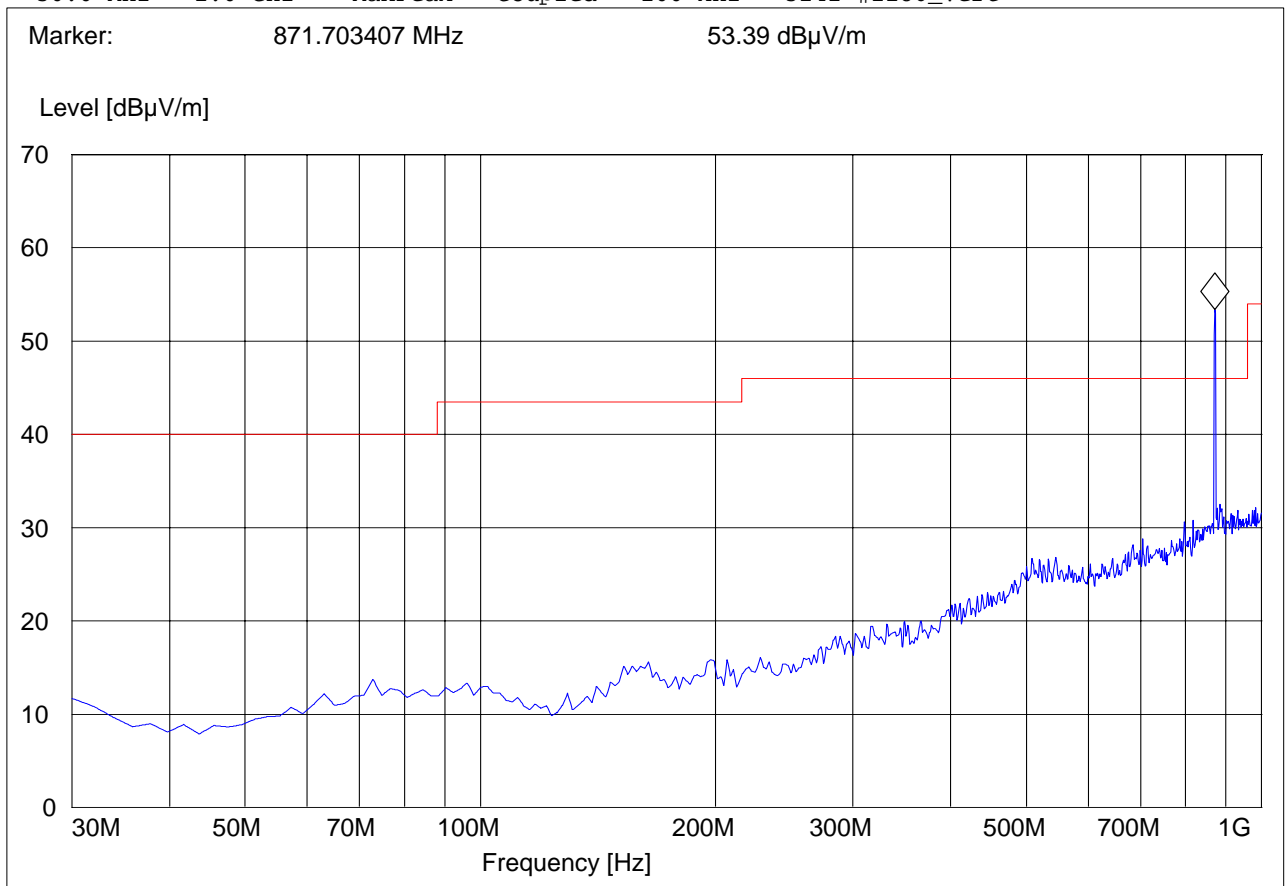




**Receiver Spurious Emission UMTS FDD5 30M-1GHz, Antenna Horizontal**  
**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: 7505  
Customer:: Psion  
Test Mode: WCDMA FDD V ch. 4233  
ANT Orientation: H  
EUT Orientation: V  
Test Engineer: CHRIS  
Voltage: Battery  
Comments:

**SWEEP TABLE: "CANDA RE\_30M-1G\_Hor"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer      |
|-----------------|----------------|----------|------------|-----------|-----------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 100 kHz   | 3141-#1186_Horz |

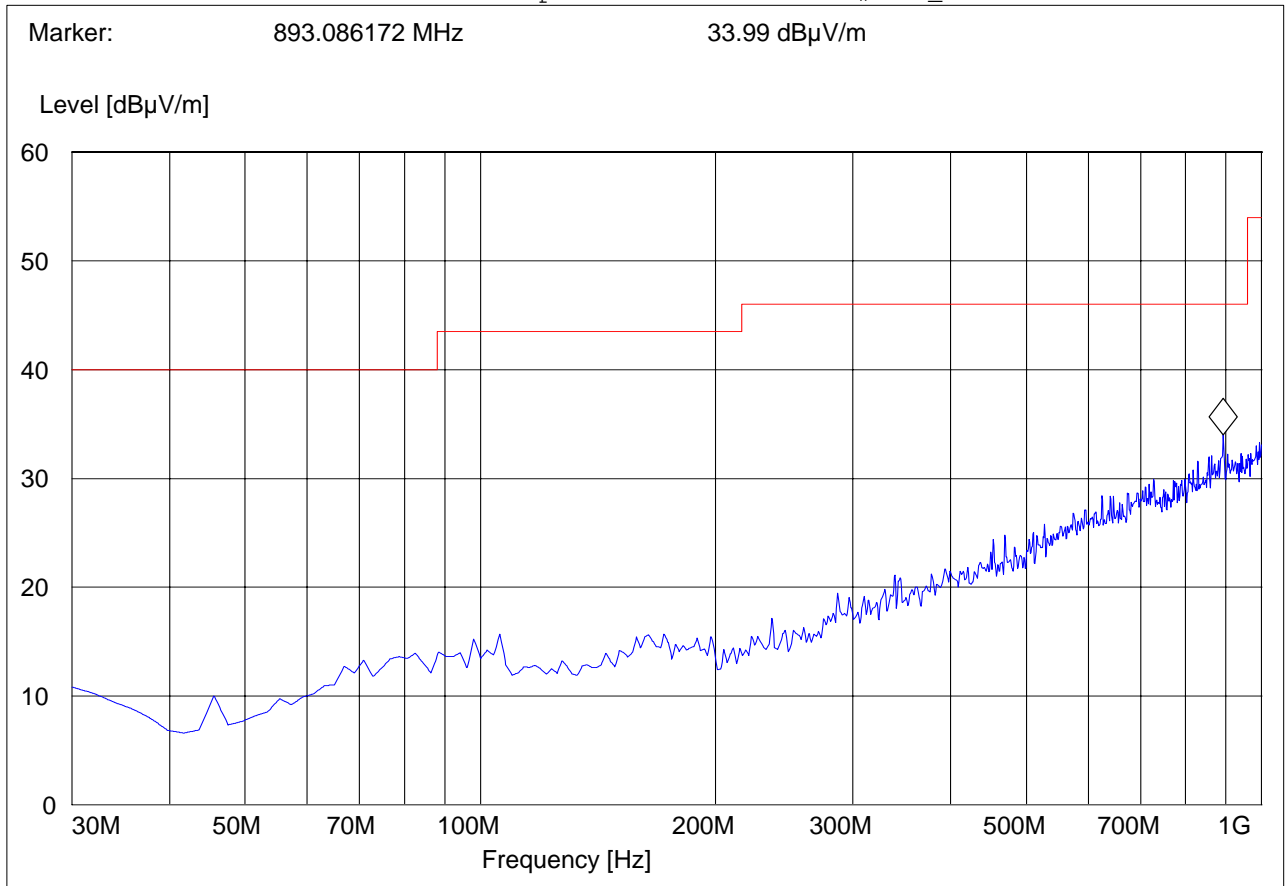




**Receiver Spurious Emission UMTS FDD5 CHANNEL 4132: 1-3GHz**

EUT: 7505  
 Customer:: Psion  
 Test Mode: WCDMA FDD V ch. 4132  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: CHRIS  
 Voltage: Battery  
 Comments:

**SWEEP TABLE: "CANADA RE\_1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

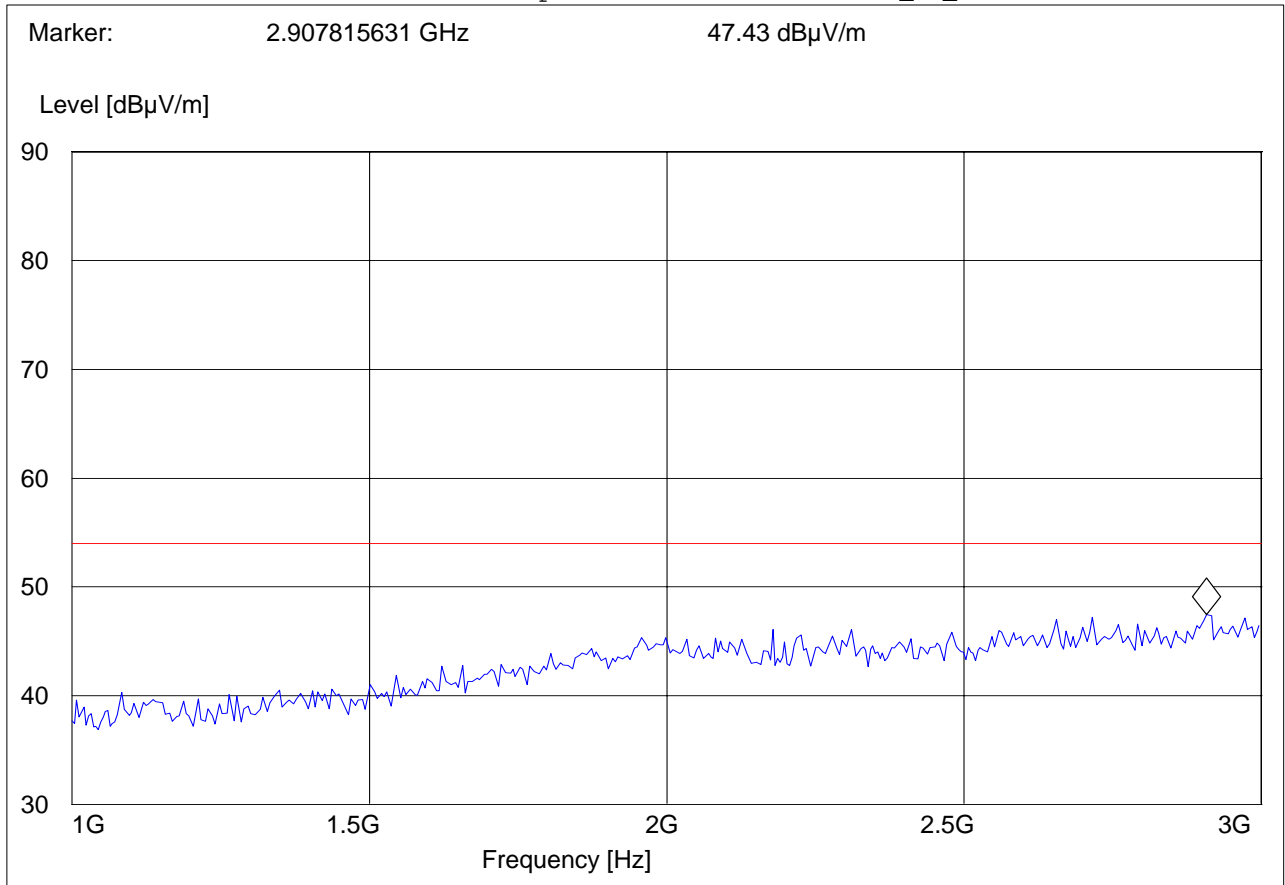




**RECEIVER SPURIOUS EMISSION UMTS FDD5 CHANNEL4183: 1-3GHz**

EUT: 7505  
Customer:: Psion  
Test Mode: WCDMA FDD V ch. 4183  
ANT Orientation: H  
EUT Orientation: V  
Test Engineer: CHRIS  
Voltage: Battery  
Comments:

**SWEEP TABLE: "CANADA RE\_1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

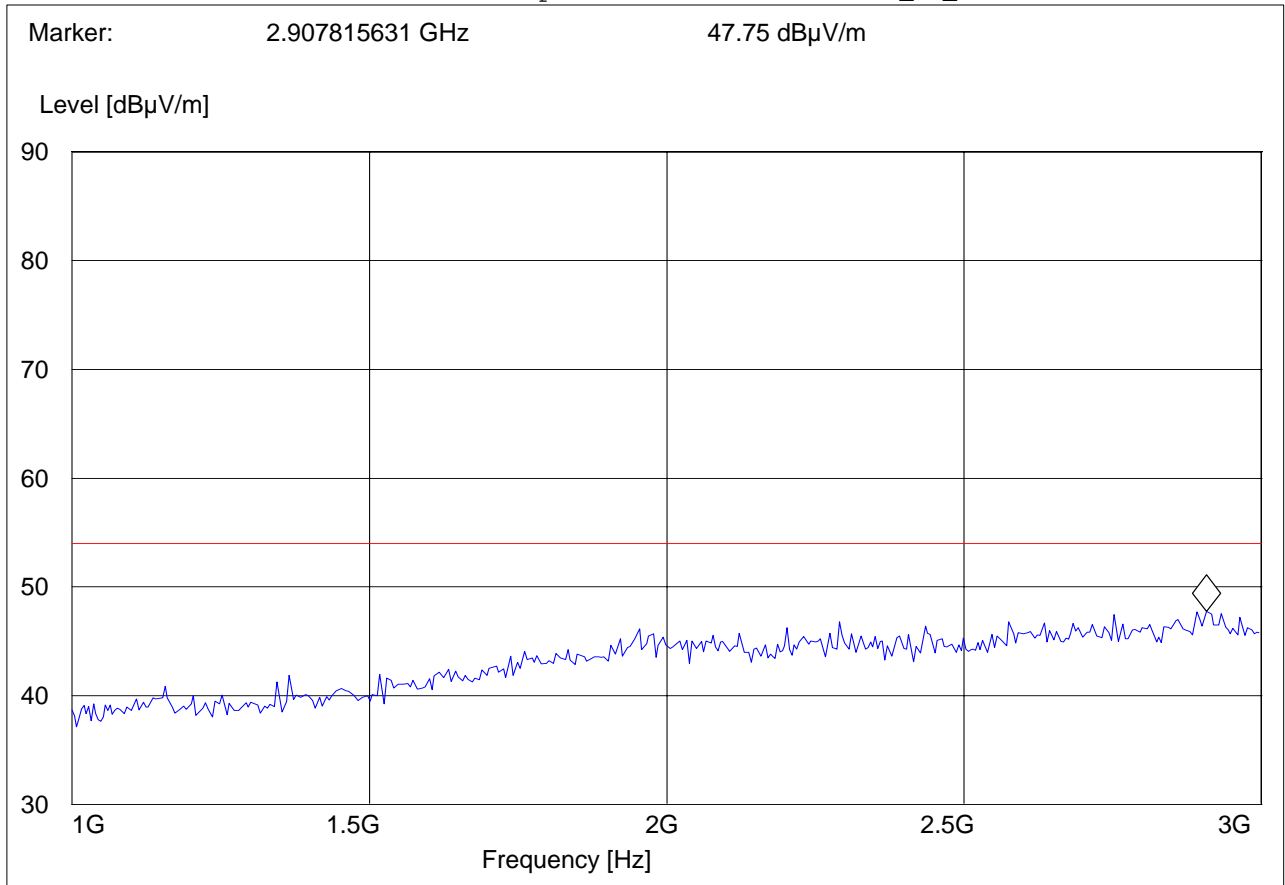




**RECEIVER SPURIOUS EMISSION UMTS FDD5CHANNEL 4233: 1-3GHz**

EUT: 7505  
 Customer:: Psion  
 Test Mode: WCDMA FDD V ch. 4233  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: CHRIS  
 Voltage: Battery  
 Comments:

**SWEEP TABLE: "CANADA RE\_1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

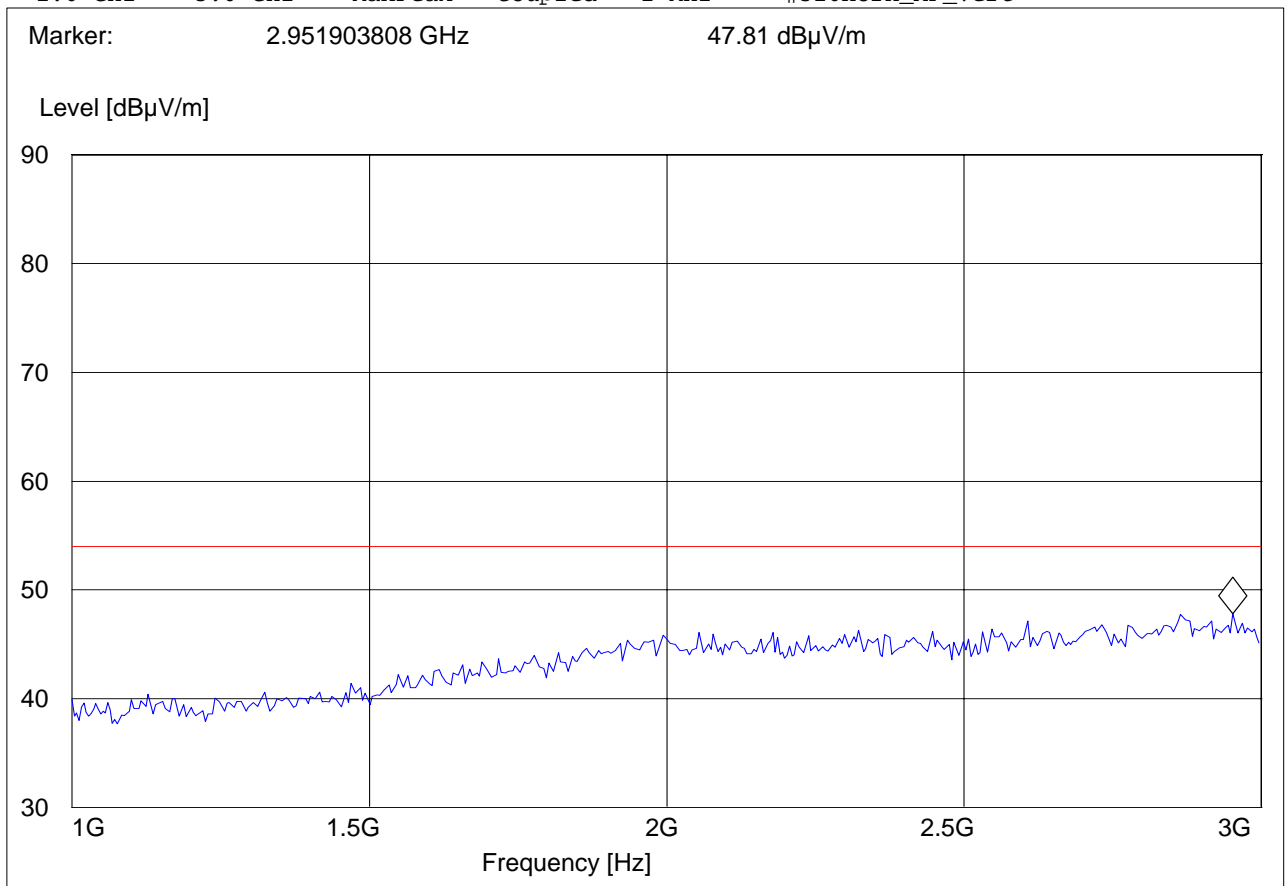




**RECEIVER SPURIOUS EMISSION UMTS FDD5CHANNEL 4132: 3-18GHz**

EUT: 7505  
 Customer:: Psion  
 Test Mode: WCDMA FDD V ch. 4132  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: CHRIS  
 Voltage: Battery  
 Comments:

**SWEEP TABLE: "CANADA RE\_3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 18.0 GHz       | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

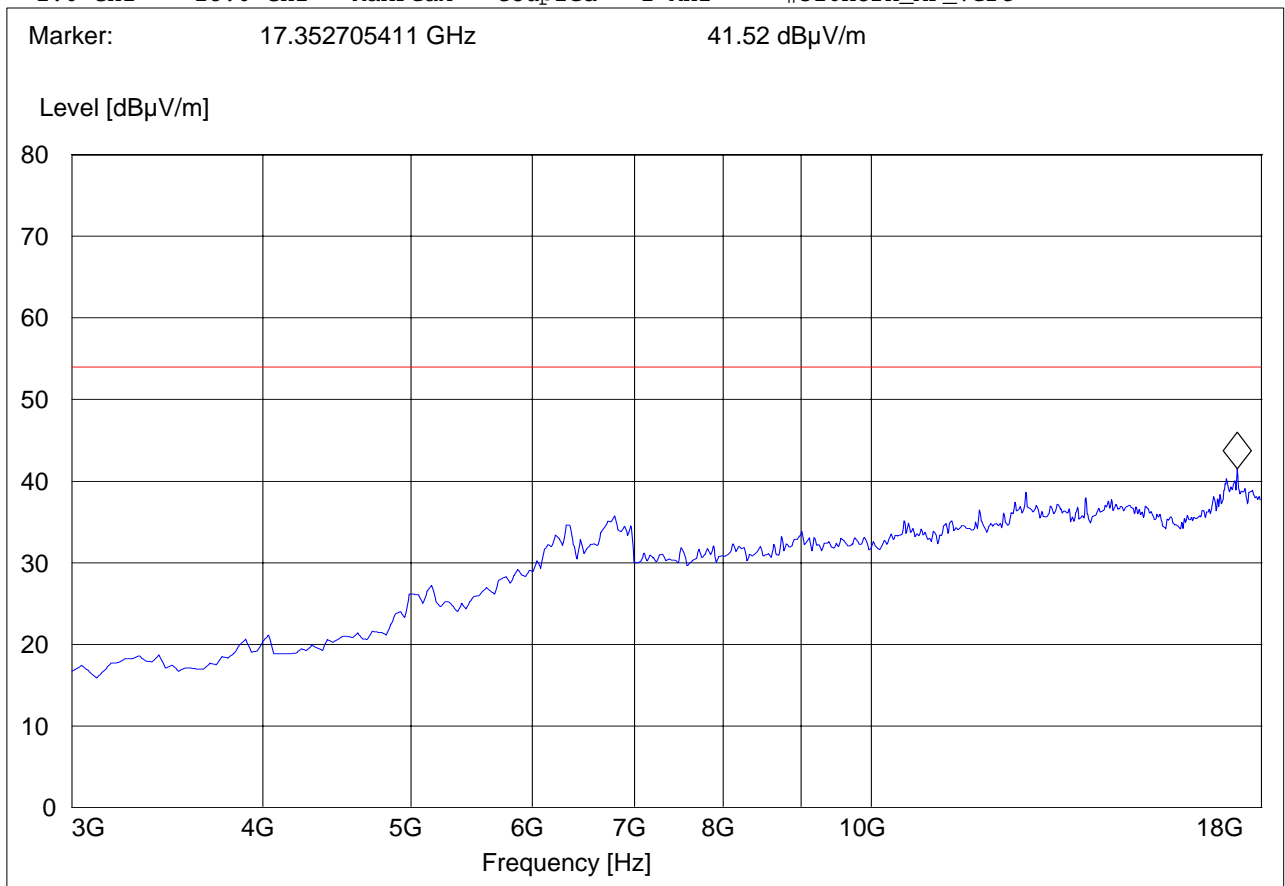




**RECEIVER SPURIOUS EMISSION UMTS FDD5CHANNEL 4183: 3-18GHz**

EUT: 7505  
Customer:: Psion  
Test Mode: WCDMA FDD V ch. 4183  
ANT Orientation: H  
EUT Orientation: V  
Test Engineer: CHRIS  
Voltage: Battery  
Comments:

***SWEEP TABLE: "CANADA RE\_3-18G"***

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 18.0 GHz       | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

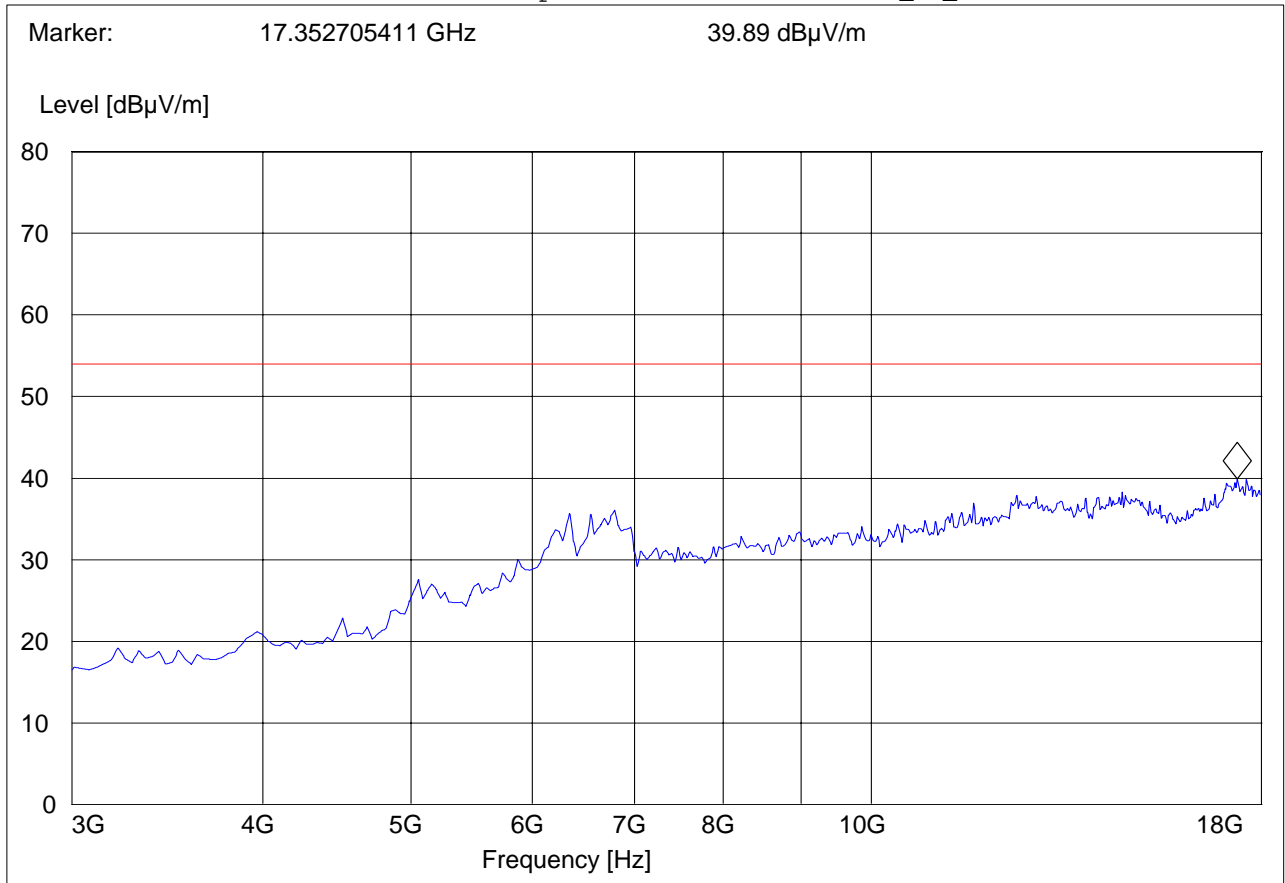






**RECEIVER SPURIOUS EMISSION UMTS FDD5CHANNEL 4233: 3-18GHz**

EUT: 7505  
 Customer:: Psion  
 Test Mode: WCDMA FDD V ch. 4233  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: CHRIS  
 Voltage: Battery  
 Comments:

**SWEEP TABLE: "CANADA RE\_3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 18.0 GHz       | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

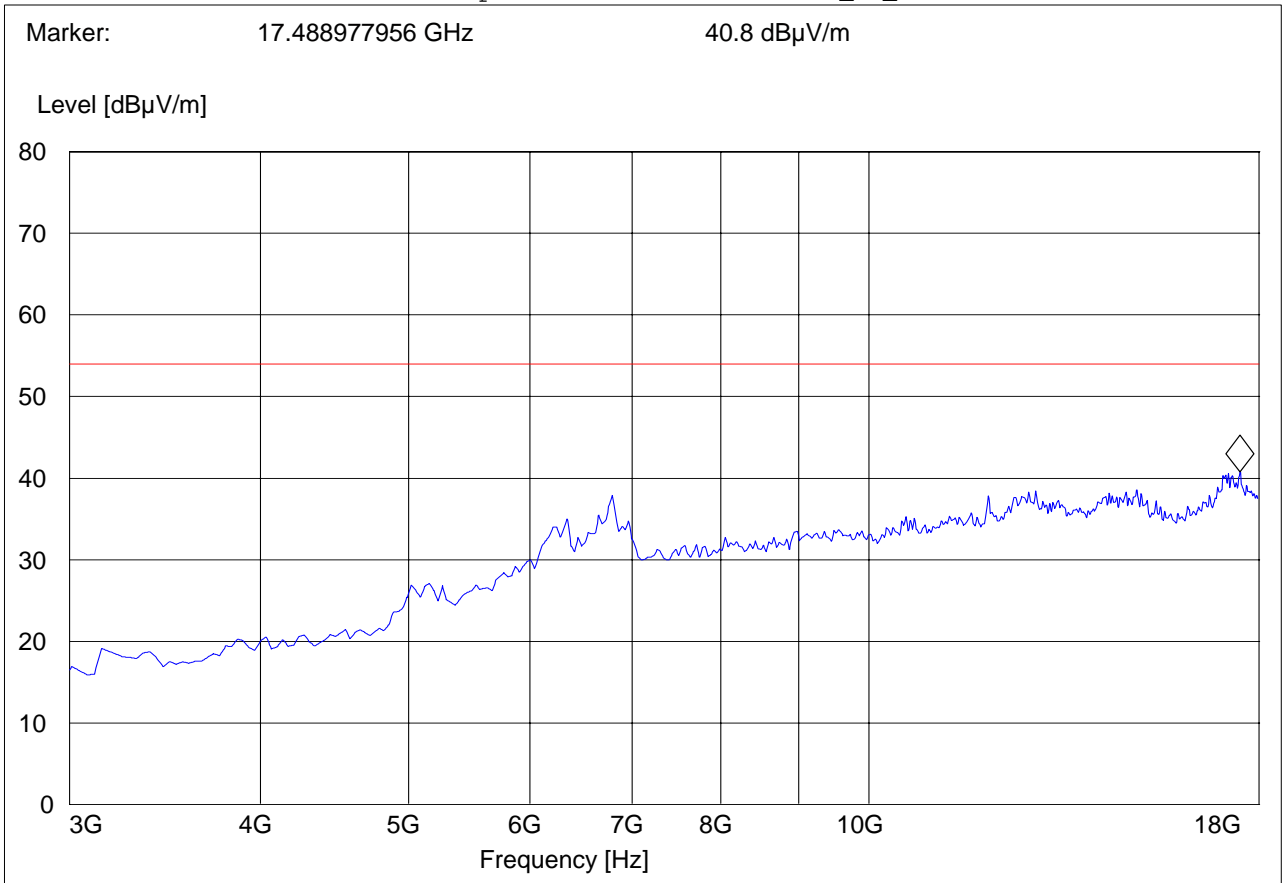




**5.5.5.3 Test Results Receiver Spurious Emission GSM1900  
 30M-1GHz, Antenna Vertical**

**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: 7505  
 Customer: Psion  
 Test Mode: GSM 1900  
 ANT Orientation: V  
 EUT Orientation: V  
 Test Engineer: CHRIS  
 Voltage: Battery  
 Comments:

**SWEEP TABLE: "CANADA RE\_30M-1G\_Ver"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer      |
|-----------------|----------------|----------|------------|-----------|-----------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 100 kHz   | 3141-#1186_Vert |

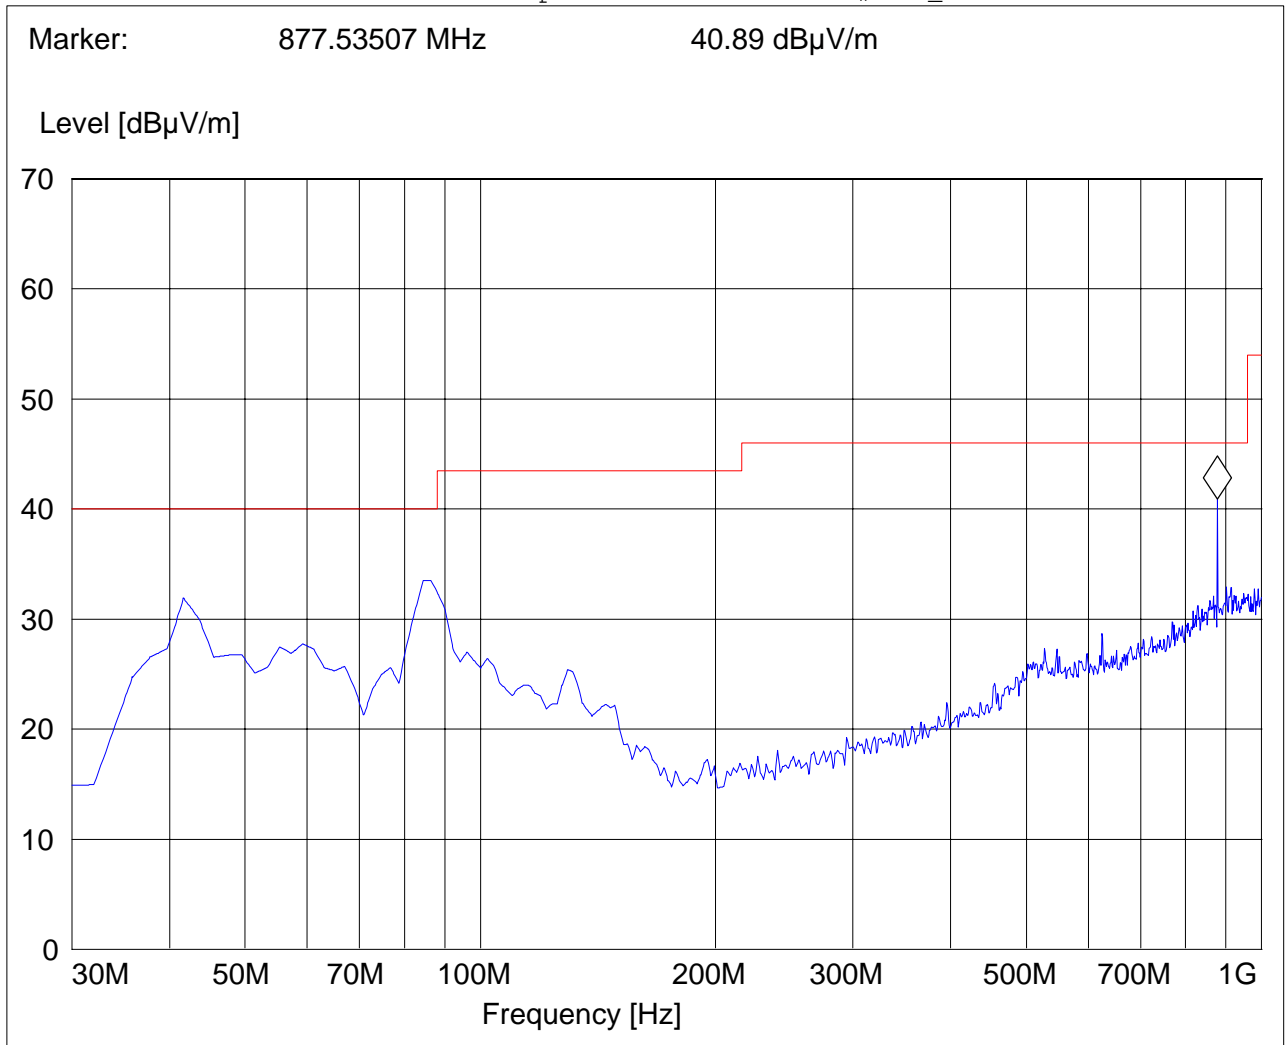




**Receiver Spurious Emission GSM1900 30M-1GHz, Antenna Horizontal**  
**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: 7505  
Customer:: Psion  
Test Mode: GSM 1900  
ANT Orientation: H  
EUT Orientation: V  
Test Engineer: CHRIS  
Voltage: Battery  
Comments:

**SWEEP TABLE: "CANDA RE\_30M-1G\_Horz"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer      |
|-----------------|----------------|----------|------------|-----------|-----------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 100 kHz   | 3141-#1186_Horz |

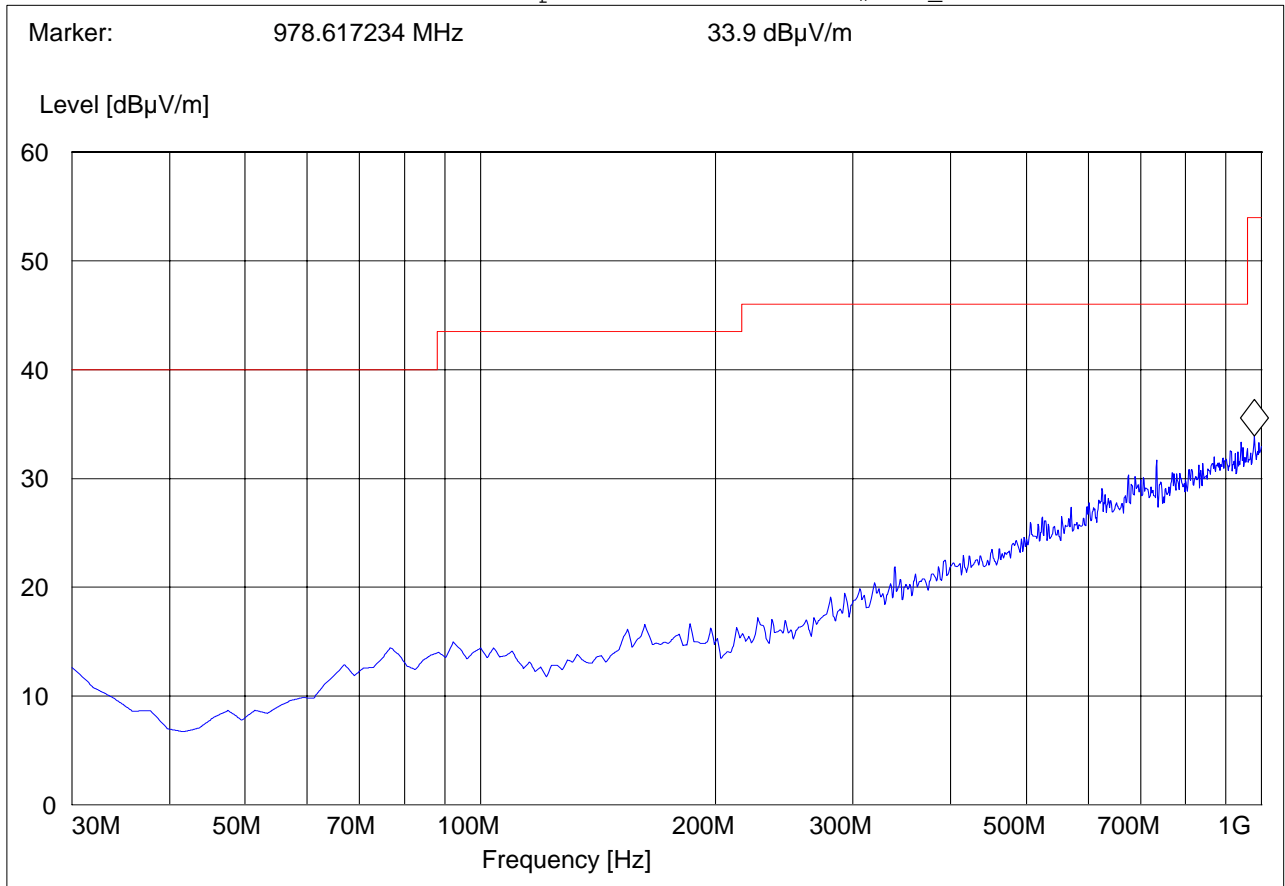




**Receiver Spurious Emission GSM1900: 1-3GHz**

EUT: 7505  
Customer:: Psion  
Test Mode: GSM 1900  
ANT Orientation: H  
EUT Orientation: V  
Test Engineer: CHRIS  
Voltage: AC ADAPTER  
Comments:

**SWEEP TABLE: "CANADA RE\_1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

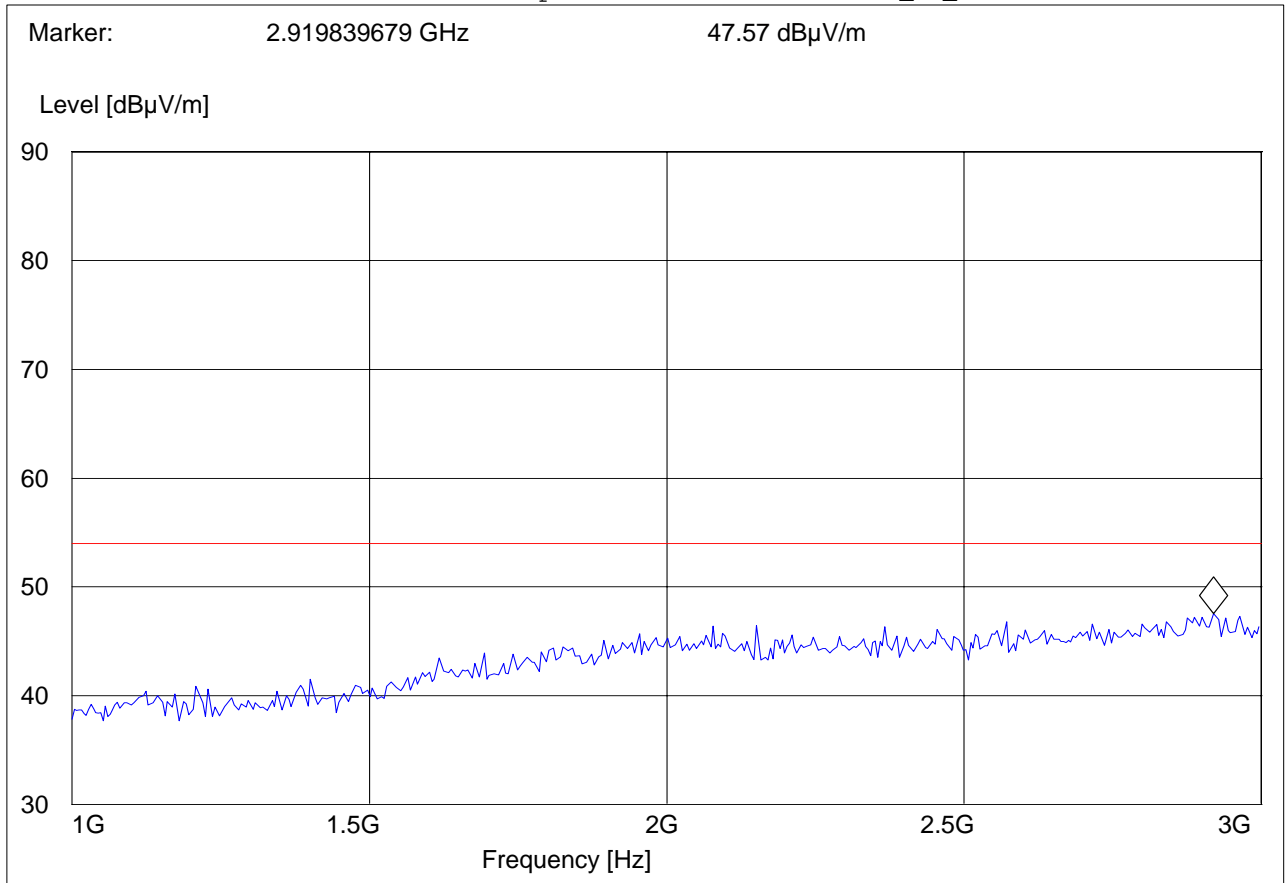




**RECEIVER SPURIOUS EMISSION GSM1900: 3-18GHz**

EUT: 7505  
 Customer:: Psion  
 Test Mode: GSM 1900  
 ANT Orientation: H  
 EUT Orientation: V  
 Test Engineer: CHRIS  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "CANADA RE\_3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 18.0 GHz       | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

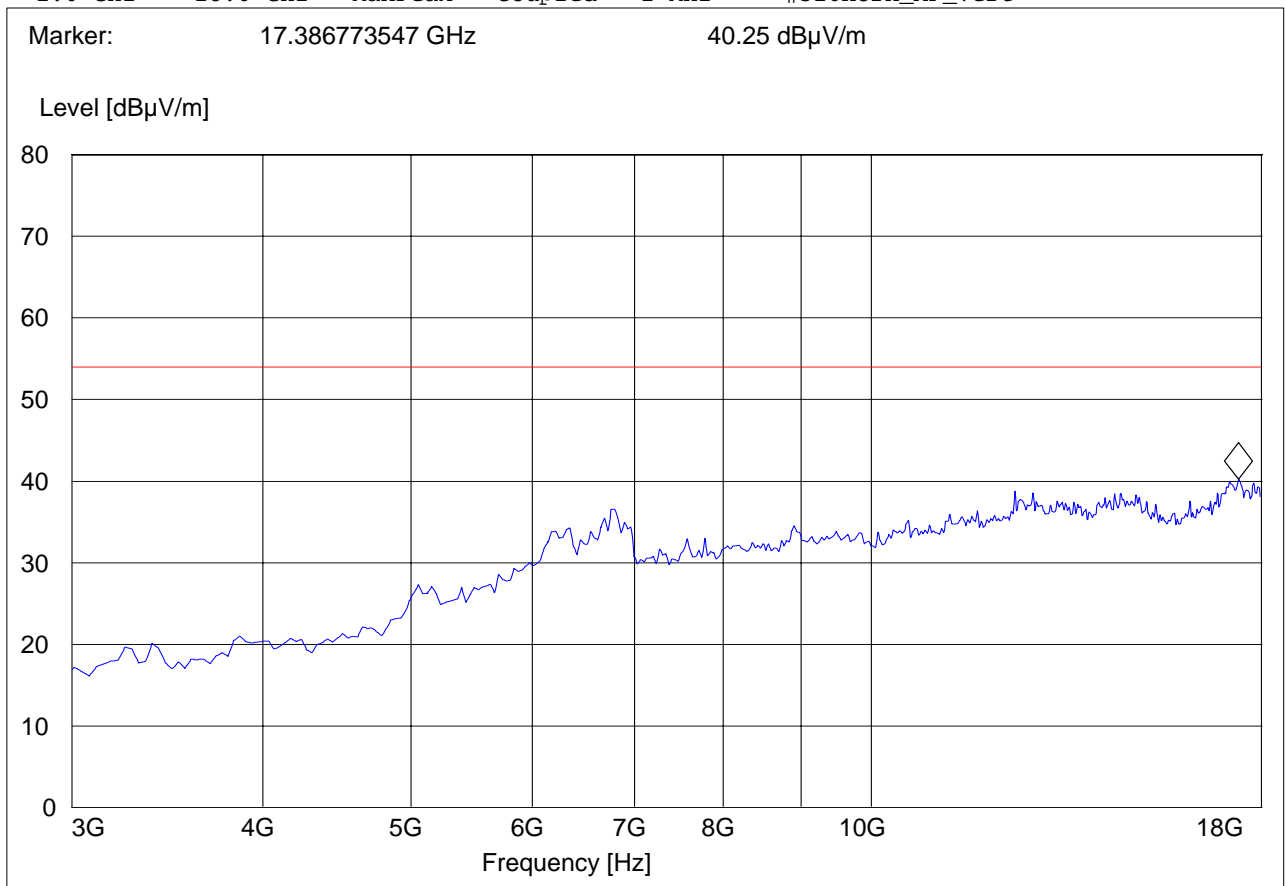



**5.5.5.4 Test Results Receiver Spurious Emission UMTS FDD2**


**30M-1GHz, Antenna Vertical**

**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD II  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "CANADA RE\_30M-1G\_Ver"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer      |
|-----------------|----------------|----------|------------|-----------|-----------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 100 kHz   | 3141-#1186_Vert |

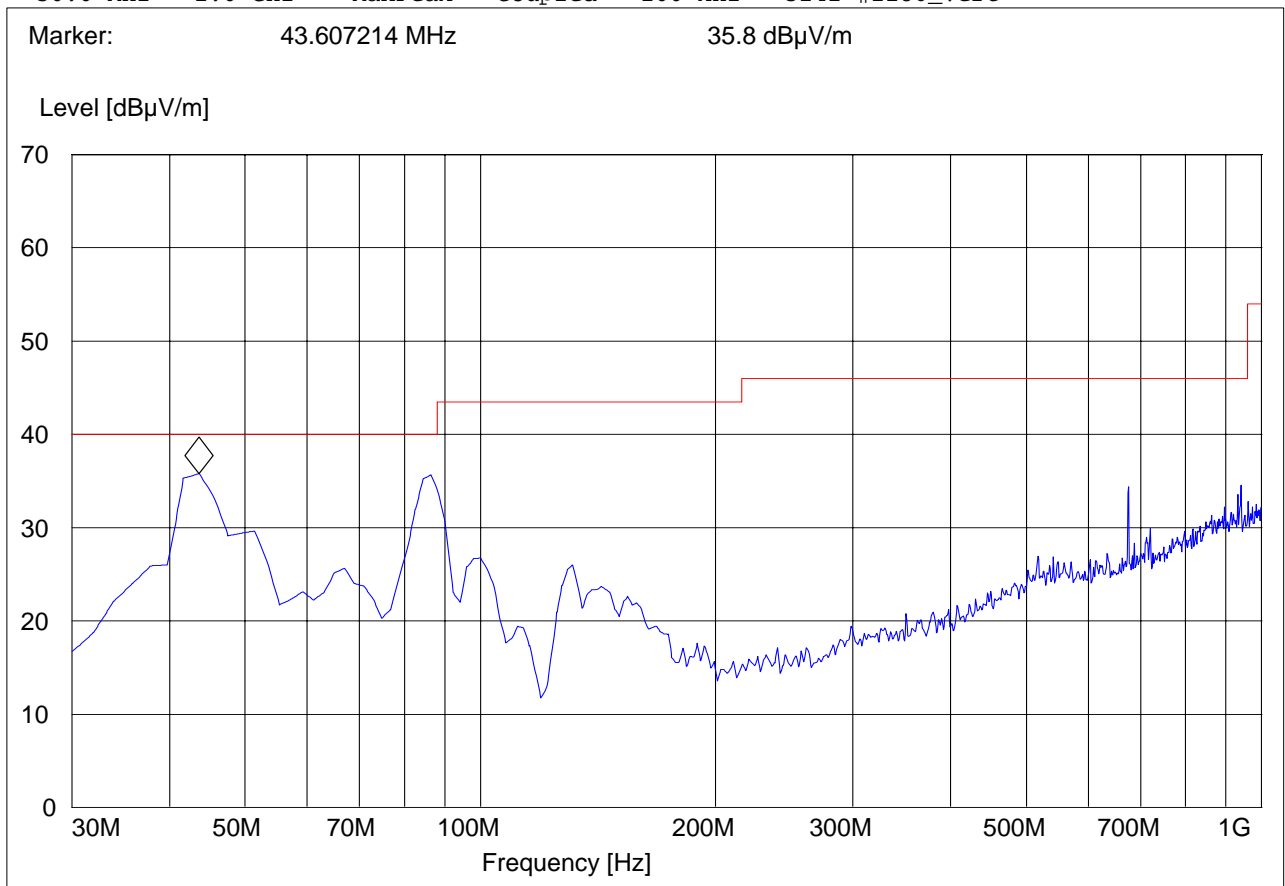




**Receiver Spurious Emission UMTS FDD2 30M-1GHz, Antenna Horizontal**  
**This plot is valid for low, mid & high channels (worst-case plot)**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD II  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "CANDA RE\_30M-1G\_Horz"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer      |
|-----------------|----------------|----------|------------|-----------|-----------------|
| 30.0 MHz        | 1.0 GHz        | MaxPeak  | Coupled    | 100 kHz   | 3141-#1186_Horz |

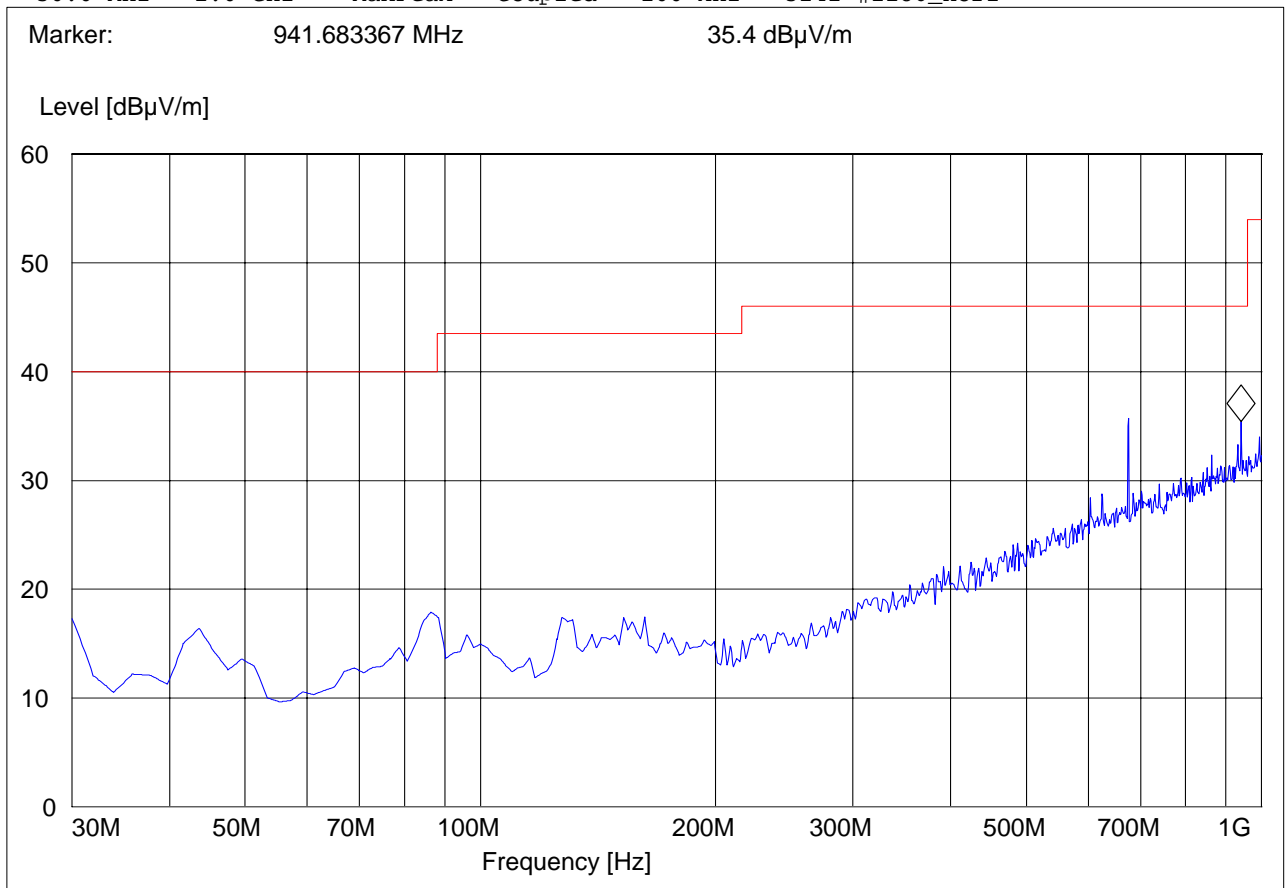




**Receiver Spurious Emission UMTS FDD2: 1-3GHz**  
**Marker is base station downlink**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD II  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC ADAPTER  
 Comments: Marker placed on downlink

**SWEEP TABLE: "CANADA RE\_1-3G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 3.0 GHz        | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

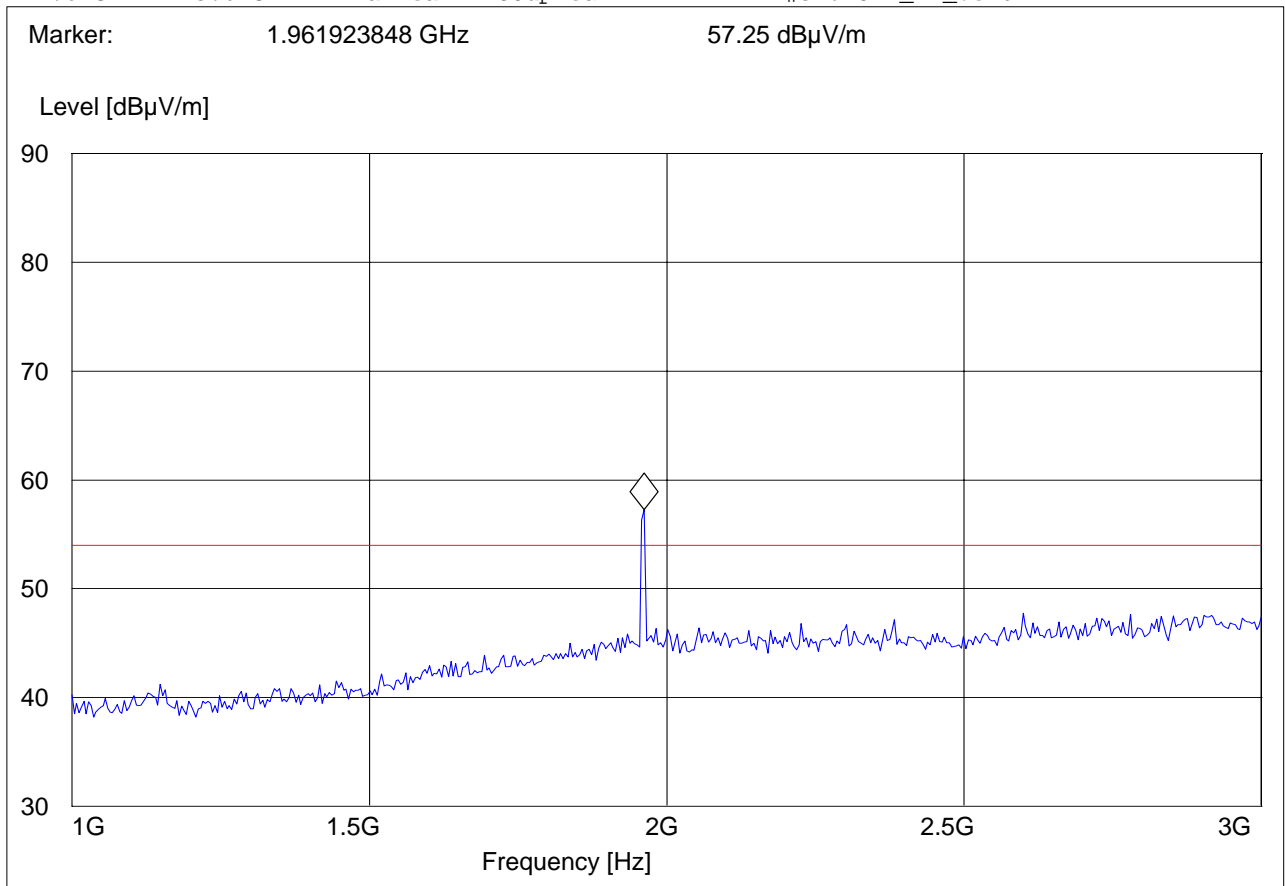






**RECEIVER SPURIOUS EMISSION UMTS FDD2: 3-18GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD II  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "CANADA RE\_3-18G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer       |
|-----------------|----------------|----------|------------|-----------|------------------|
| 1.0 GHz         | 18.0 GHz       | MaxPeak  | Coupled    | 1 MHz     | #326horn_AF_vert |

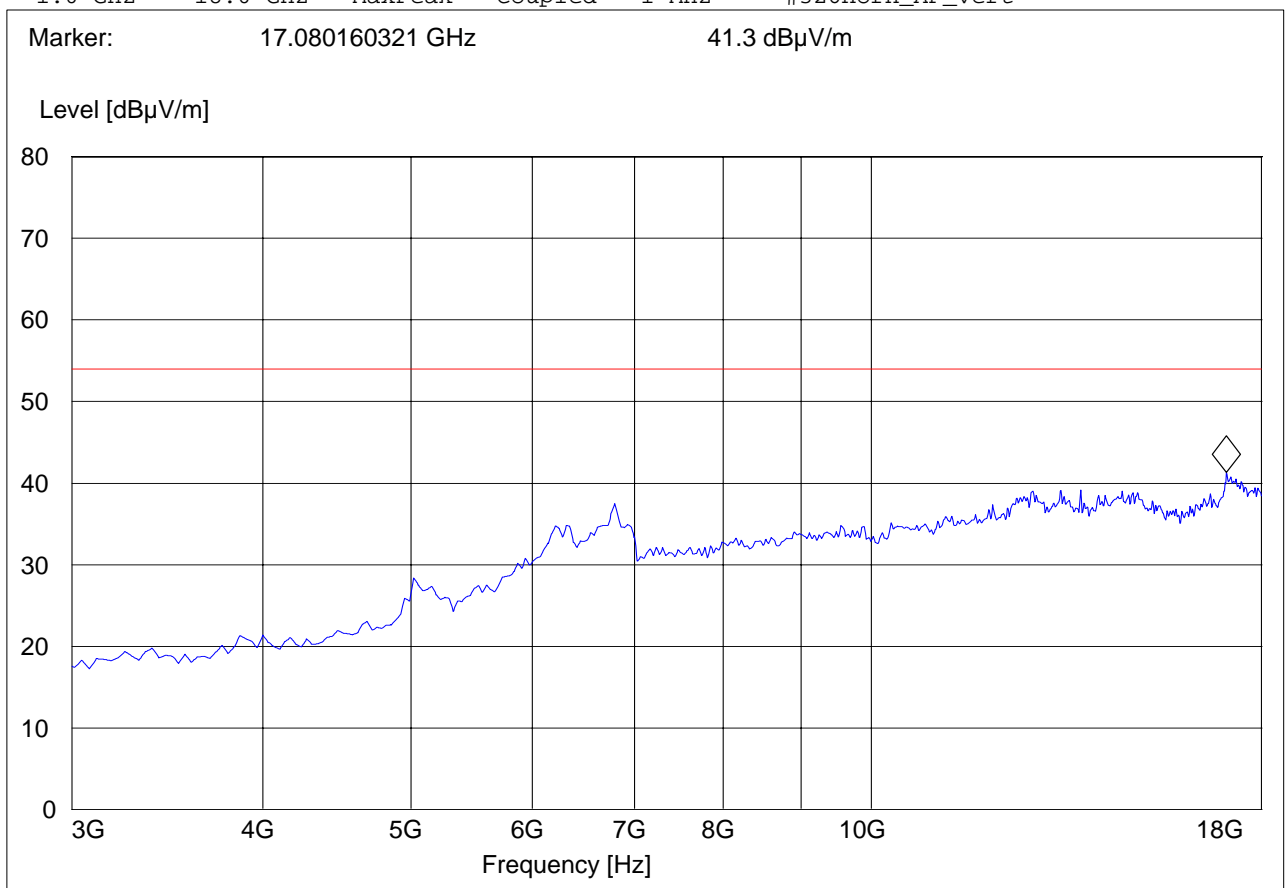




**RECEIVER SPURIOUS EMISSION UMTS FDD2: 18.25GHz**

EUT: 7505  
 Customer:: PSION  
 Test Mode: WCDMA FDD II  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Chris  
 Voltage: AC ADAPTER  
 Comments:

**SWEEP TABLE: "CANADA RE\_18-26.5G"**

| Start Frequency | Stop Frequency | Detector | Meas. Time | IF Bandw. | Transducer   |
|-----------------|----------------|----------|------------|-----------|--------------|
| 18.0 GHz        | 26.0 GHz       | MaxPeak  | Coupled    | 1 MHz     | #572 horn AF |

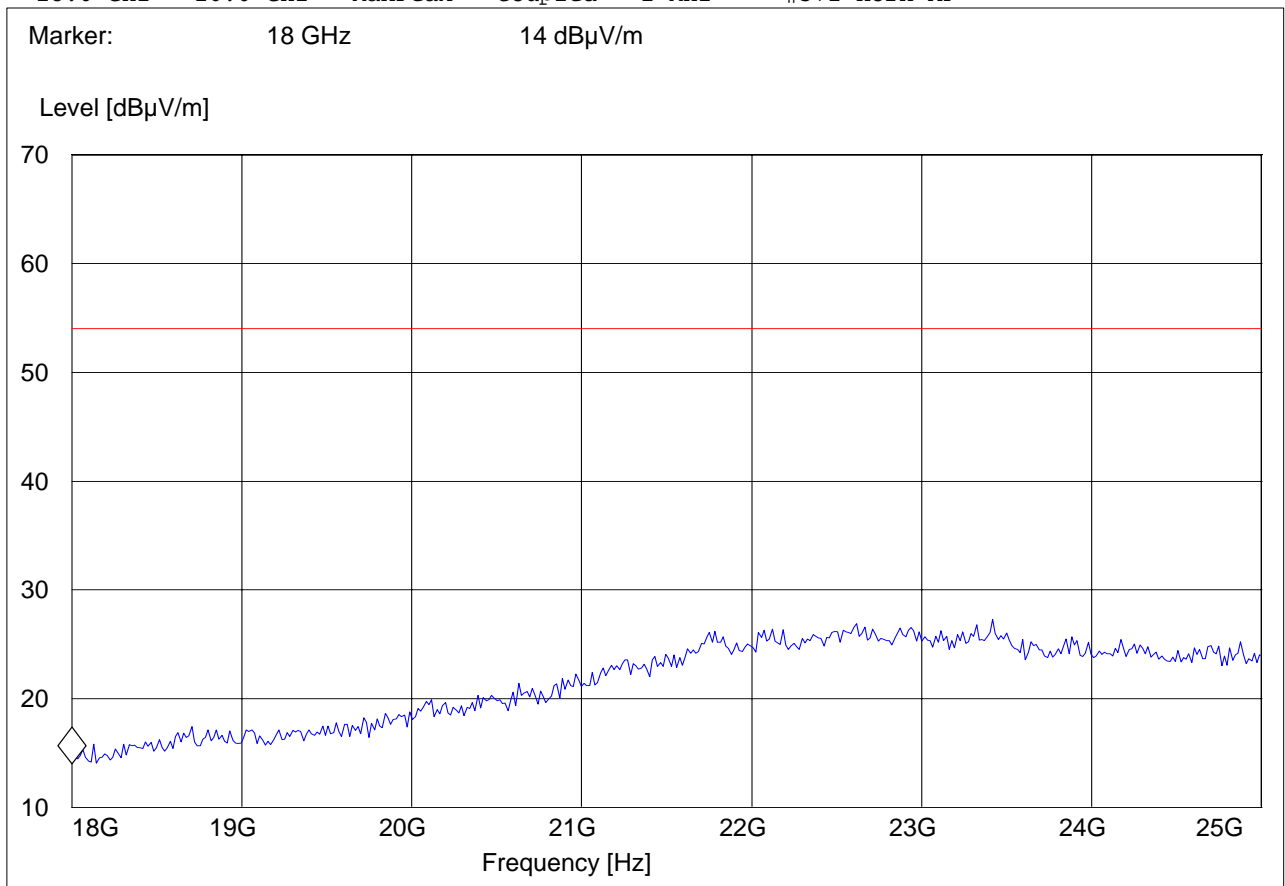



**5.6 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207**

**5.6.1 Limits**

**Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)**

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

**Limit**

| Frequency of Emission (MHz) | Conducted Limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-Peak                   | Average   |
| 0.15 – 0.5                  | 66 to 56*                    | 56 to 46* |
| 0.5 – 5                     | 56                           | 46        |
| 5 – 30                      | 60                           | 50        |


\* Decreases with logarithm of the frequency

**ANALYZER SETTINGS: RBW = 10KHz VBW = 10KHz**



**5.6.2 Results, TX Transmit Line:**

EUT: 7505  
 Manufacturer: PSION  
 Operating Condition: GSM 850 Ch 190; WLAN CH 11; BT 2480MHz  
 ANT Orientation:: Conducted  
 EUT Orientation:: H  
 Test Engineer:: Marc  
 Power Supply: : AC Adapter  
 Comments: : Line

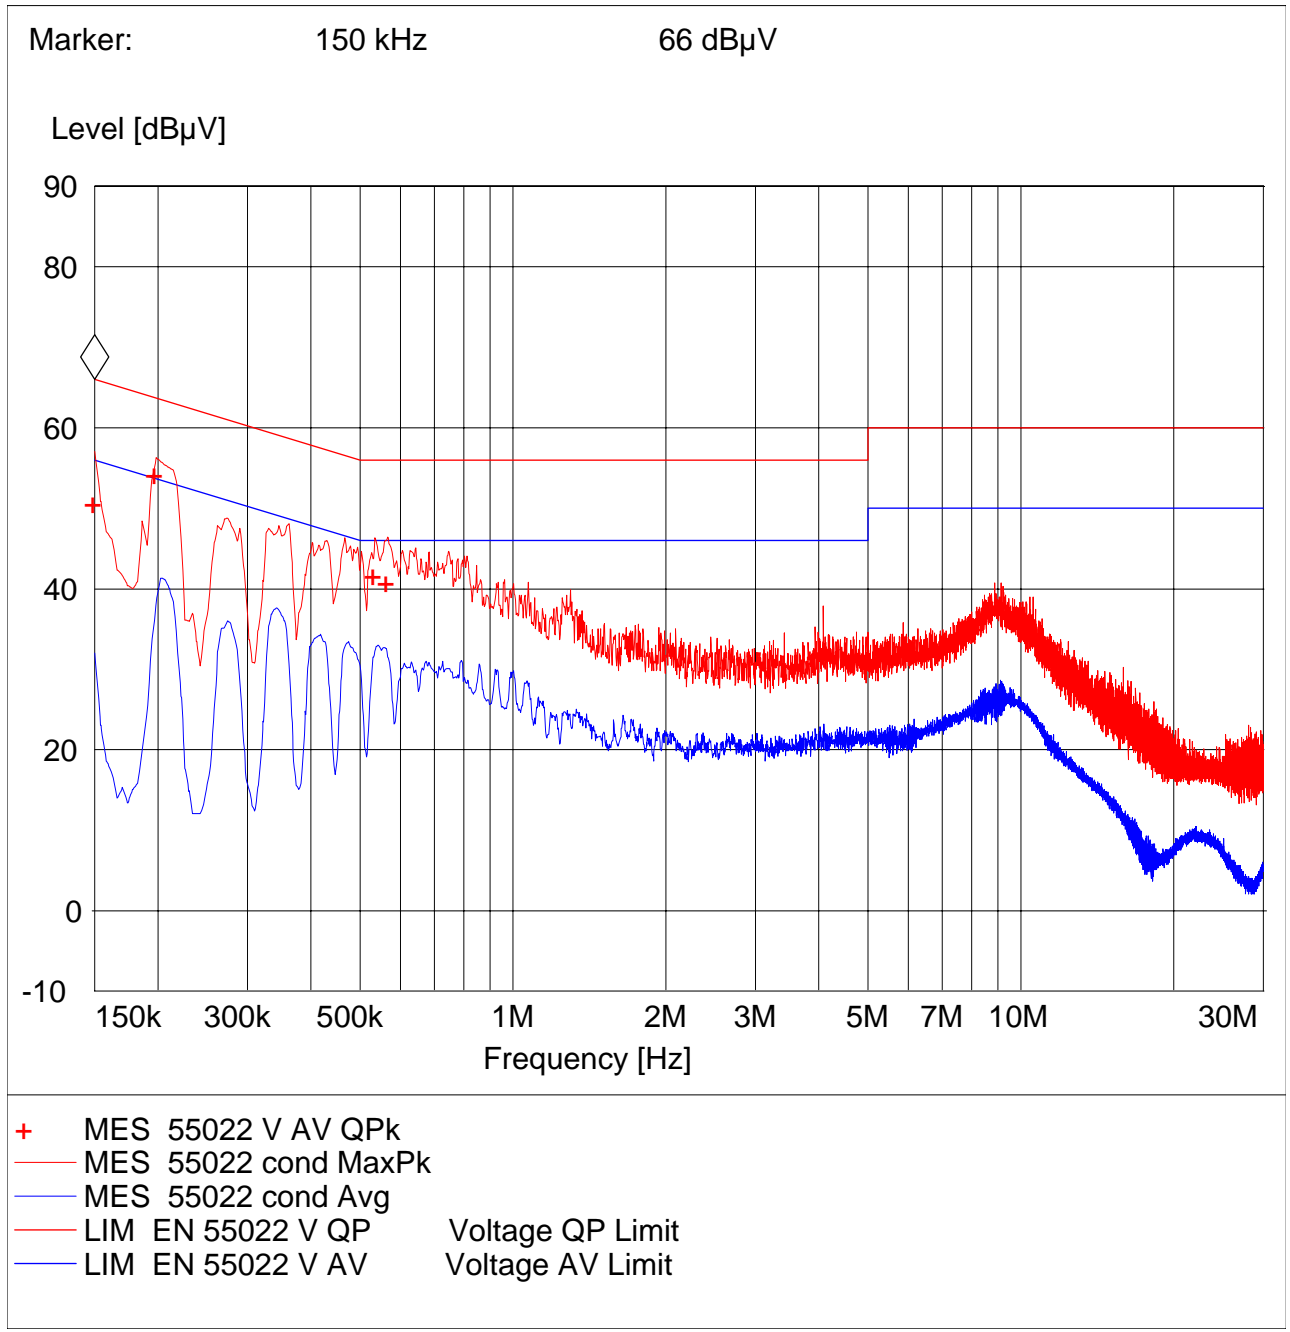



**MEASUREMENT RESULT: "55022 V AV QPk"**

11/26/2007 10:57AM

| Frequency<br>MHz | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.150000         | 50.60         | 0.0          | 66            | 15.4         | ---  | --- |
| 0.198000         | 54.30         | 0.0          | 64            | 9.4          | ---  | --- |
| 0.534000         | 41.70         | 0.0          | 56            | 14.3         | ---  | --- |
| 0.566000         | 40.90         | 0.0          | 56            | 15.1         | ---  | --- |

**LIMIT LINE: "EN 55022 V AV"**

Short Description: Voltage AV Limit  
4/27/1998 2:24PM

| Frequency<br>MHz | Level<br>dBµV |
|------------------|---------------|
| 0.150000         | 56.00         |
| 0.500000         | 46.00         |
| 5.000000         | 46.00         |
| 5.000000         | 50.00         |
| 30.000000        | 50.00         |

**LIMIT LINE: "EN 55022 V QP"**


Short Description: Voltage QP Limit  
4/27/1998 2:24PM

| Frequency<br>MHz | Level<br>dBµV |
|------------------|---------------|
| 0.150000         | 66.00         |
| 0.500000         | 56.00         |
| 5.000000         | 56.00         |
| 5.000000         | 60.00         |
| 30.000000        | 60.00         |



**5.6.3 TX Transmit Neutral:**

EUT: 7505  
 Manufacturer: PSION  
 Operating Condition: GSM 850 Ch 190; WLAN CH 11; BT 2480MHz  
 ANT Orientation:: Conducted  
 EUT Orientation:: H  
 Test Engineer:: Marc  
 Power Supply: : AC Adapter  
 Comments: : N

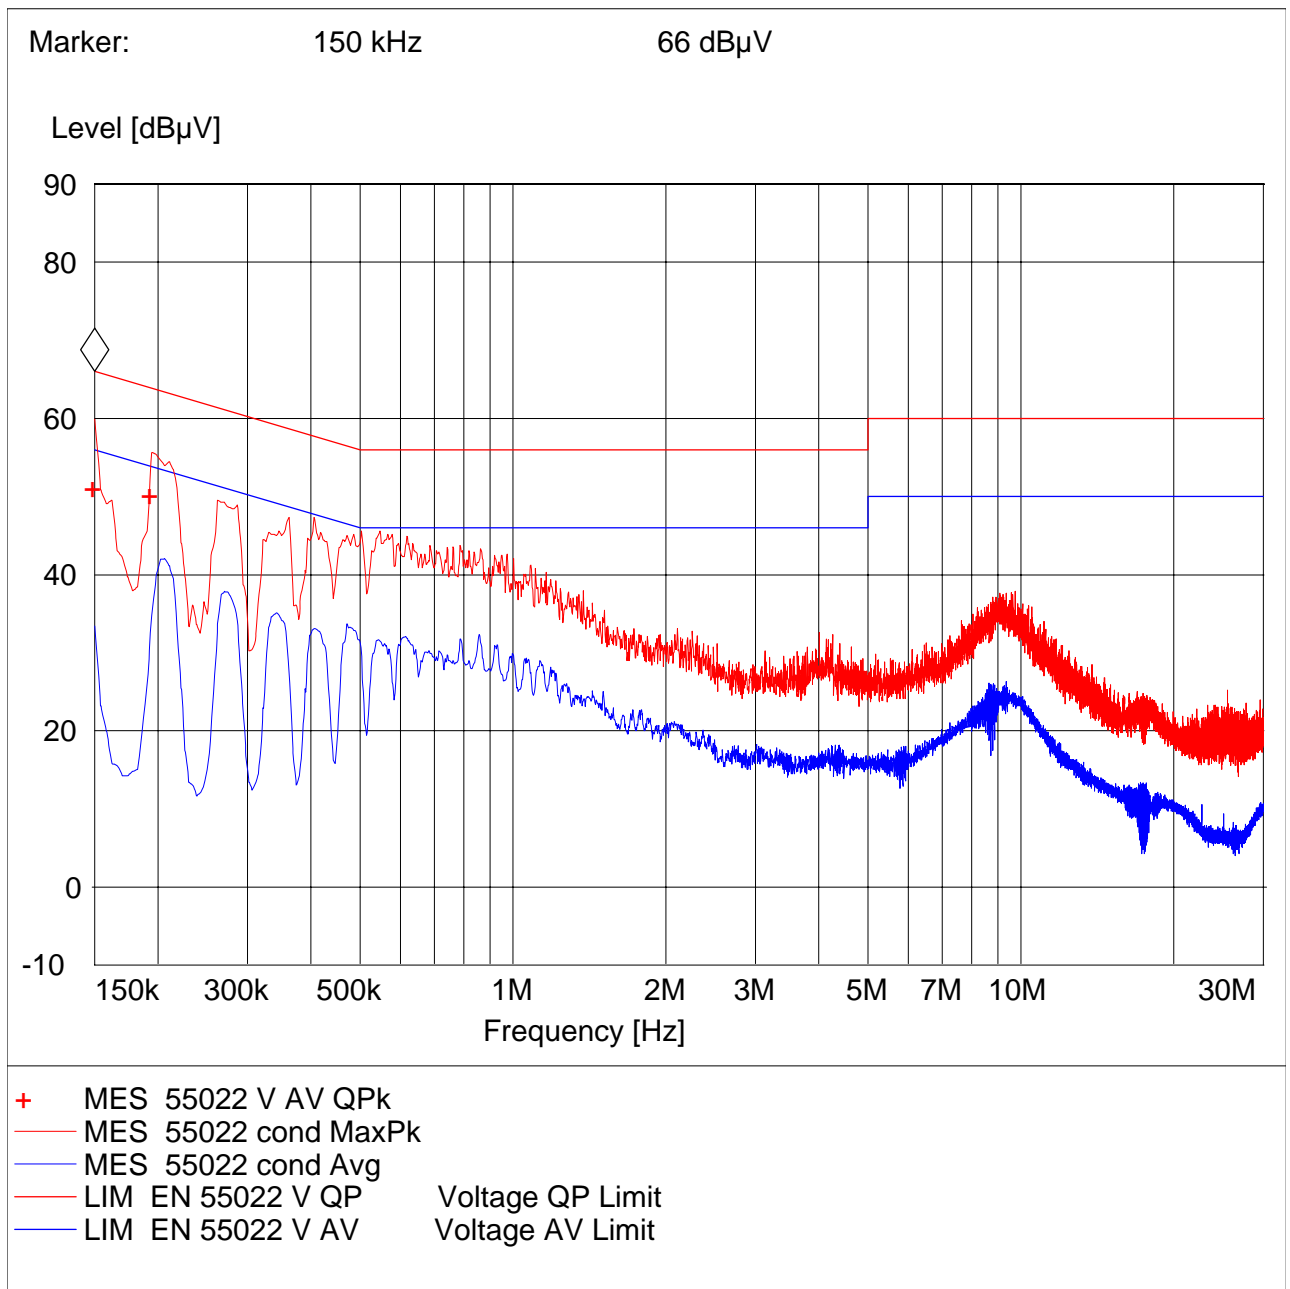



**MEASUREMENT RESULT: "55022 V AV QPk"**

11/26/2007 10:50AM

| Frequency<br>MHz | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.150000         | 51.10         | 0.0          | 66            | 14.9         | ---  | --- |
| 0.194000         | 50.30         | 0.0          | 64            | 13.5         | ---  | --- |

**LIMIT LINE: "EN 55022 V AV"**

Short Description: Voltage AV Limit  
4/27/1998 2:24PM

| Frequency<br>MHz | Level<br>dBµV |
|------------------|---------------|
| 0.150000         | 56.00         |
| 0.500000         | 46.00         |
| 5.000000         | 46.00         |
| 5.000000         | 50.00         |
| 30.000000        | 50.00         |

**LIMIT LINE: "EN 55022 V QP"**


Short Description: Voltage QP Limit  
4/27/1998 2:24PM

| Frequency<br>MHz | Level<br>dBµV |
|------------------|---------------|
| 0.150000         | 66.00         |
| 0.500000         | 56.00         |
| 5.000000         | 56.00         |
| 5.000000         | 60.00         |
| 30.000000        | 60.00         |



**5.6.4 Results, Idle Line:**

EUT: 7505  
 Manufacturer: PSION  
 Operating Condition: IDLE  
 ANT Orientation:: Conducted  
 EUT Orientation:: H  
 Test Engineer:: Marc  
 Power Supply: : AC Adapter  
 Comments: : line; idle

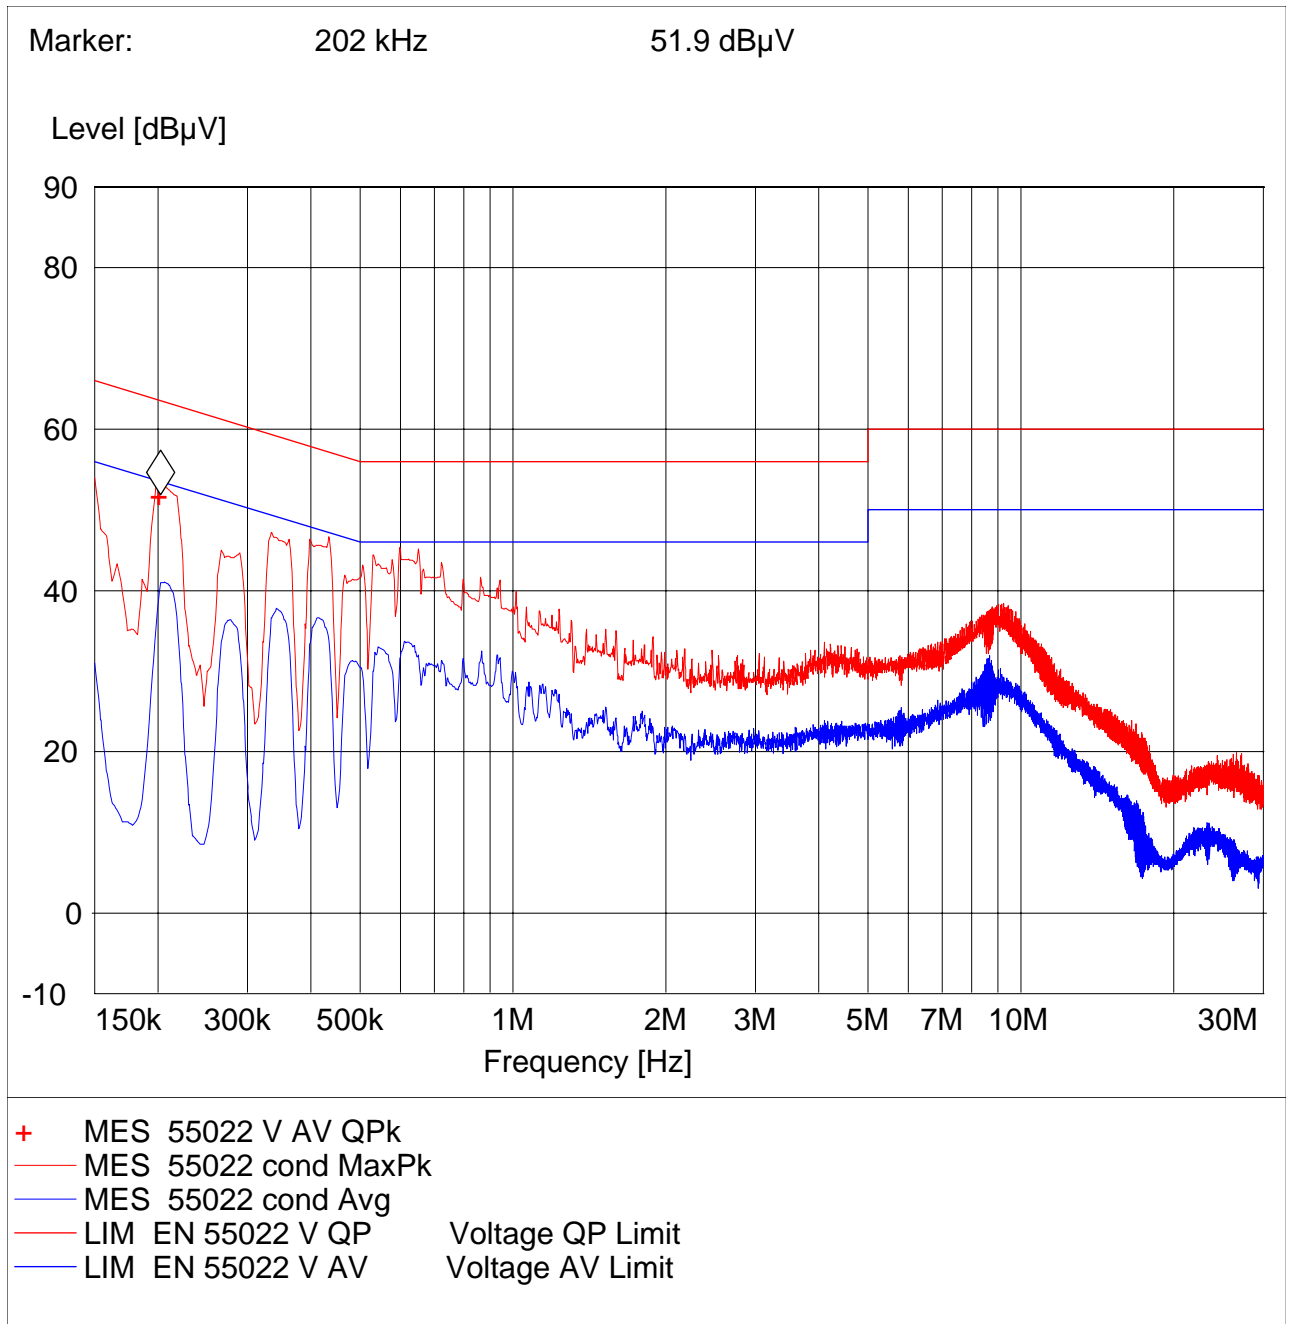





**MEASUREMENT RESULT: "55022 V AV QPk"**

11/26/2007 12:32PM

| Frequency<br>MHz | Level<br>dB $\mu$ V | Transd<br>dB | Limit<br>dB $\mu$ V | Margin<br>dB | Line | PE  |
|------------------|---------------------|--------------|---------------------|--------------|------|-----|
| 0.202000         | 51.90               | 0.0          | 64                  | 11.6         | ---  | --- |

**LIMIT LINE: "EN 55022 V AV"**

Short Description: Voltage AV Limit  
4/27/1998 2:24PM

| Frequency<br>MHz | Level<br>dB $\mu$ V |
|------------------|---------------------|
| 0.150000         | 56.00               |
| 0.500000         | 46.00               |
| 5.000000         | 46.00               |
| 5.000000         | 50.00               |
| 30.000000        | 50.00               |

**LIMIT LINE: "EN 55022 V QP"**


Short Description: Voltage QP Limit  
4/27/1998 2:24PM

| Frequency<br>MHz | Level<br>dB $\mu$ V |
|------------------|---------------------|
| 0.150000         | 66.00               |
| 0.500000         | 56.00               |
| 5.000000         | 56.00               |
| 5.000000         | 60.00               |
| 30.000000        | 60.00               |



**5.6.5 TX Idle Neutral:**

EUT: 7505  
Manufacturer: PSION  
Operating Condition: IDLE  
ANT Orientation: Conducted  
EUT Orientation: H  
Test Engineer: Marc  
Power Supply: AC Adapter  
Comments: neutral; idle

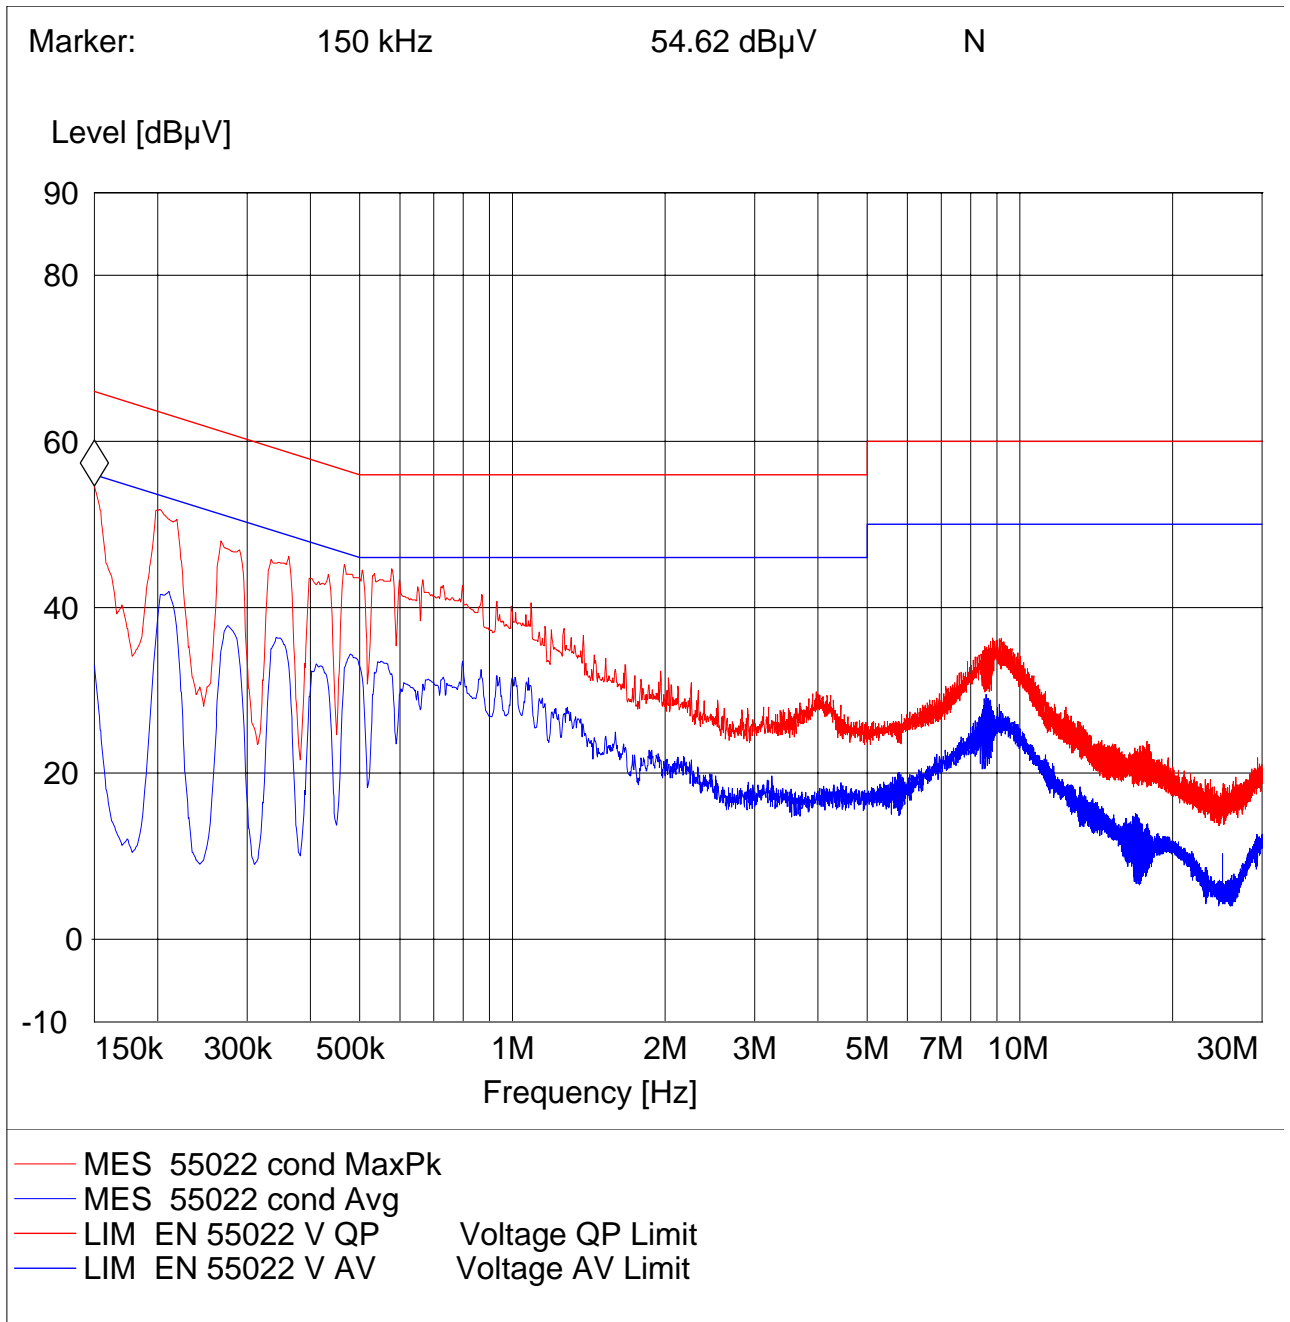



**LIMIT LINE: "EN 55022 V AV"**

Short Description: Voltage AV Limit  
4/27/1998 2:24PM

| Frequency<br>MHz | Level<br>dBµV |
|------------------|---------------|
| 0.150000         | 56.00         |
| 0.500000         | 46.00         |
| 5.000000         | 46.00         |
| 5.000000         | 50.00         |
| 30.000000        | 50.00         |

**LIMIT LINE: "EN 55022 V QP"**

Short Description: Voltage QP Limit  
4/27/1998 2:24PM

| Frequency<br>MHz | Level<br>dBµV |
|------------------|---------------|
| 0.150000         | 66.00         |
| 0.500000         | 56.00         |
| 5.000000         | 56.00         |
| 5.000000         | 60.00         |
| 30.000000        | 60.00         |



## **6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

| <b>No</b> | <b>Instrument/Ancillary</b>  | <b>Type</b>  | <b>Manufacturer</b> | <b>Serial No.</b> | <b>Cal Due</b> | <b>Interval</b> |
|-----------|------------------------------|--------------|---------------------|-------------------|----------------|-----------------|
| 01        | Spectrum Analyzer            | ESIB 40      | Rohde & Schwarz     | 100107            | May 2008       | 1 year          |
| 02        | Spectrum Analyzer            | FSEM 30      | Rohde & Schwarz     | 100017            | August 2008    | 1 year          |
| 03        | Signal Generator             | SMY02        | Rohde & Schwarz     | 836878/011        | May 2008       | 1 year          |
| 04        | Power-Meter                  | NRVD         | Rohde & Schwarz     | 0857.8008.02      | May 2008       | 1 year          |
| 05        | Biconilog Antenna            | 3141         | EMCO                | 0005-1186         | June 2008      | 1 year          |
| 06        | Horn Antenna (1-18GHz)       | SAS-200/571  | AH Systems          | 325               | June 2008      | 1 year          |
| 07        | Horn Antenna (18-26.5GHz)    | 3160-09      | EMCO                | 1240              | June 2008      | 1 year          |
| 08        | Power Splitter               | 11667B       | Hewlett Packard     | 645348            | n/a            | n/a             |
| 09        | Climatic Chamber             | VT4004       | Voltsch             | G1115             | May 2008       | 1 year          |
| 10        | High Pass Filter             | 5HC2700      | Trilithic Inc.      | 9926013           | n/a            | n/a             |
| 11        | High Pass Filter             | 4HC1600      | Trilithic Inc.      | 9922307           | n/a            | n/a             |
| 12        | Pre-Amplifier                | JS4-00102600 | Miteq               | 00616             | May 2008       | 1 year          |
| 13        | Power Sensor                 | URV5-Z2      | Rohde & Schwarz     | DE30807           | May 2008       | 1 year          |
| 14        | Digital Radio Comm. Tester   | CMD-55       | Rohde & Schwarz     | 847958/008        | May 2008       | 1 year          |
| 15        | Universal Radio Comm. Tester | CMU 200      | Rohde & Schwarz     | 832221/06         | May 2008       | 1 year          |
| 16        | LISN                         | ESH3-Z5      | Rohde & Schwarz     | 836679/003        | May 2008       | 1 year          |
| 17        | Loop Antenna                 | 6512         | EMCO                | 00049838          | July 2008      | 2 years         |

## **7 References**

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 2--FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS October 1, 2001.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 22 PUBLIC MOBILE SERVICES October 1, 1998.


FCC Report and order 02-229 September 24, 2002.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 24 PERSONAL COMMUNICATIONS SERVICES October 1, 1998.

ANSI / TIA-603-C-2004 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard November 7, 2002.

## 8 BLOCK DIAGRAMS

### Conducted Testing

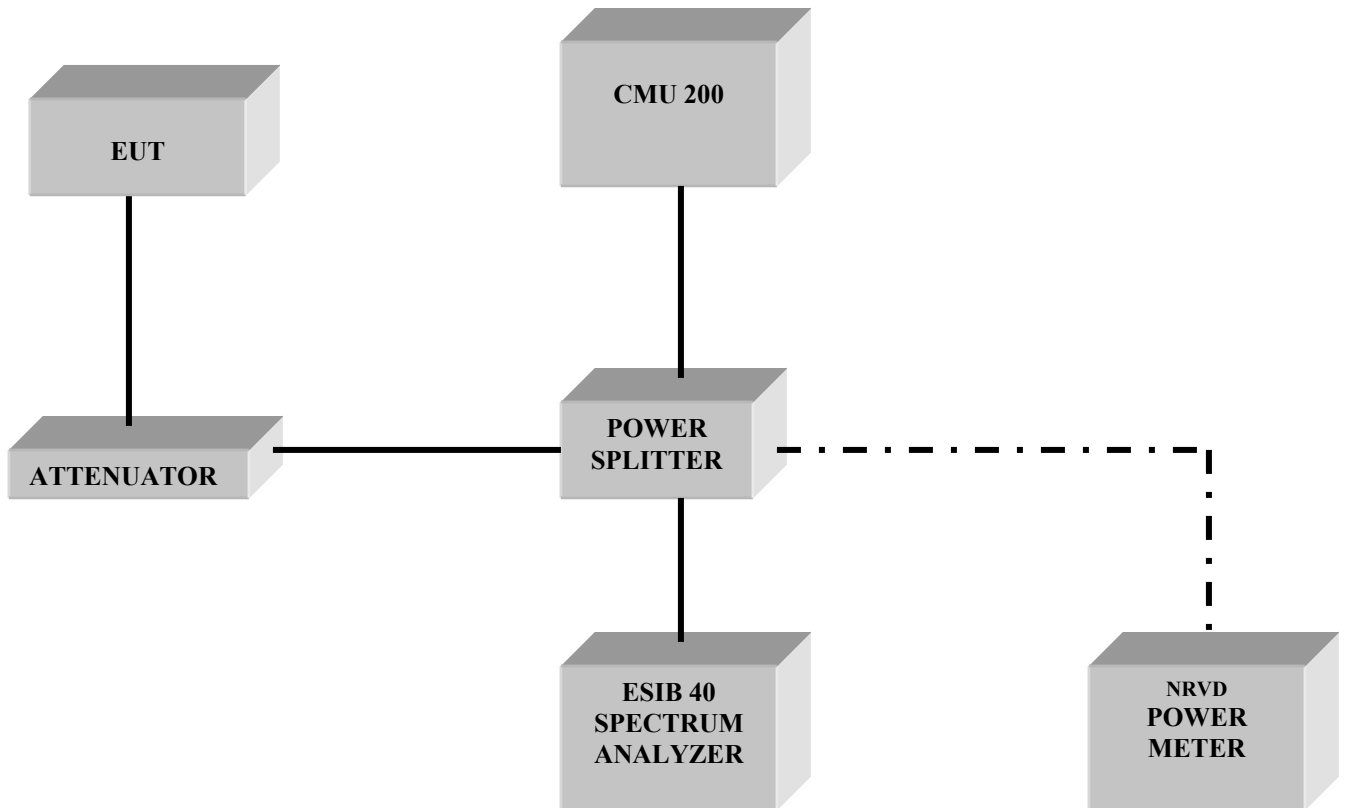

## Radiated Testing

### ANECHOIC CHAMBER

