




<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 7:17:58 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	41.1%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.7°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-12.00 mm
<b>DUT Position:</b>	Left Touch	<b>Max SAR Z-axis Location:</b>	-113.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	28.67 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	0.762 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.314 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.324 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.28 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

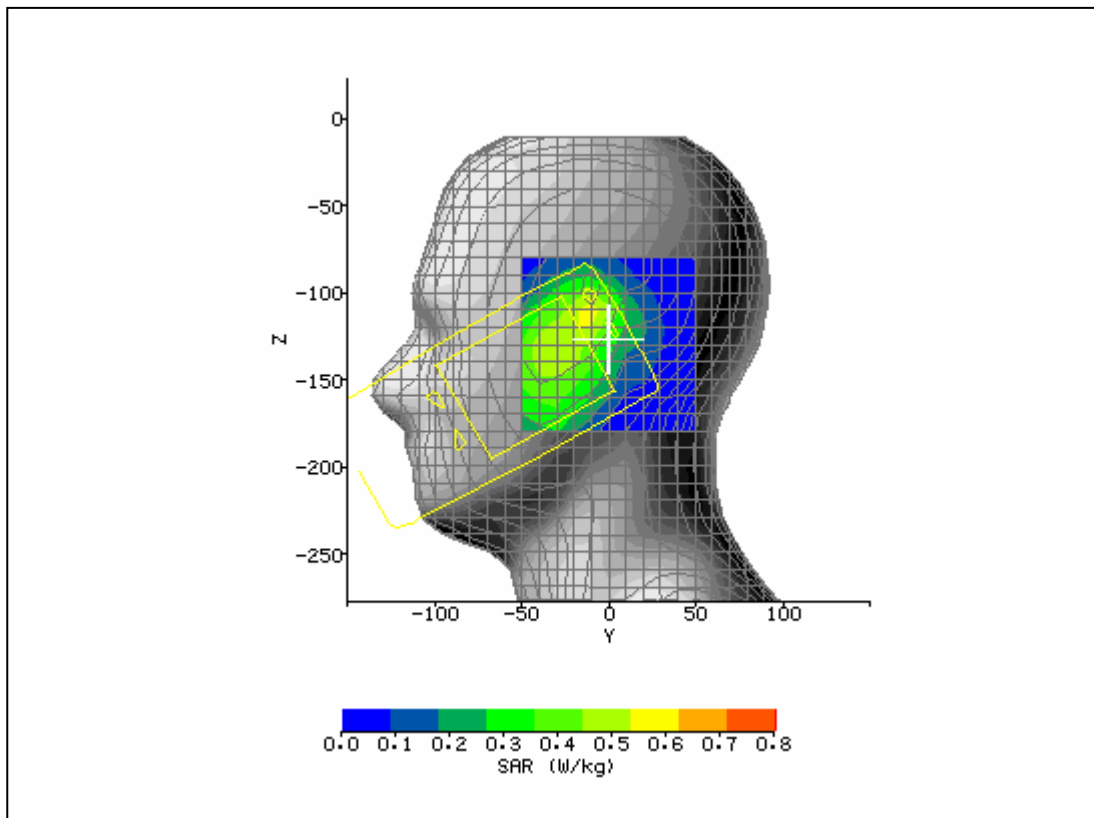


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 7:34:04 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Touch_190_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.2°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	42.9%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.1°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-8.00 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-110.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	33.09 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	0.944 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.314 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.327 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.16 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

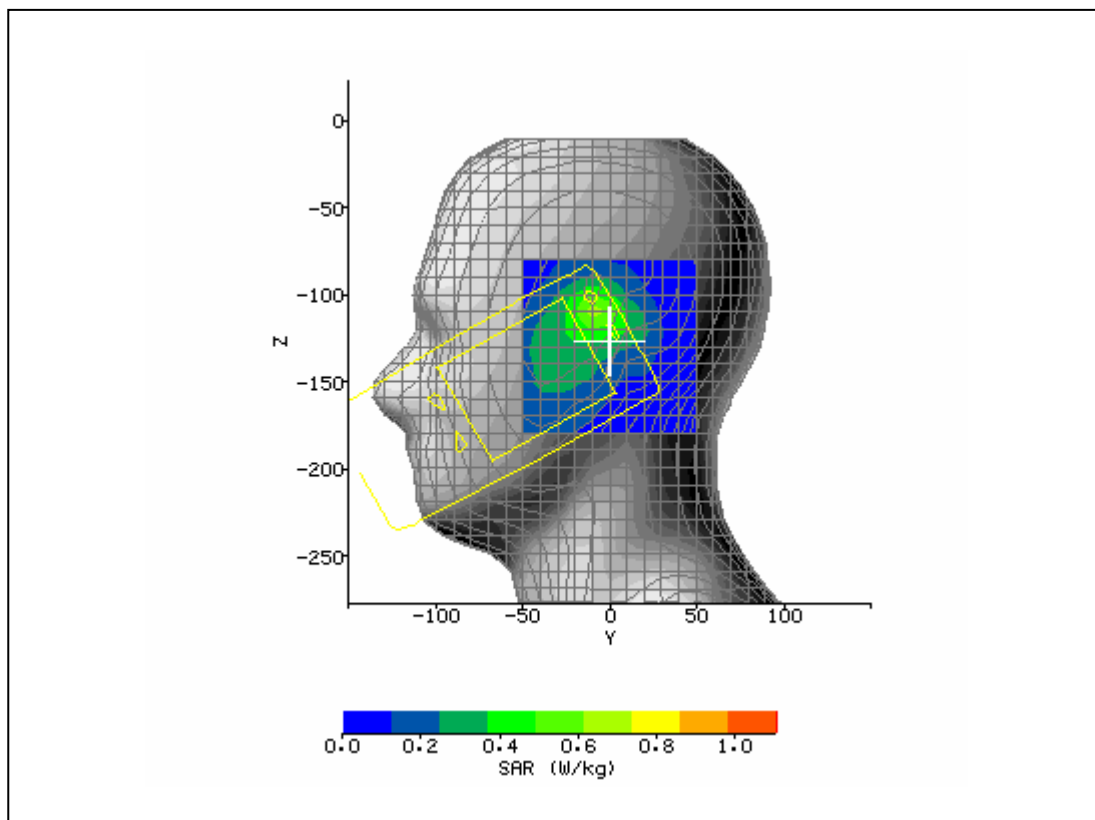


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 7:49:57 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_190_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.2°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	42.9%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.1°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR Y-axis Location:</b>	-20.00 mm
<b>DUT Position:</b>	Right Touch	<b>Max SAR Z-axis Location:</b>	-129.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	21.62 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	0.393 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.169 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.166 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-1.53 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

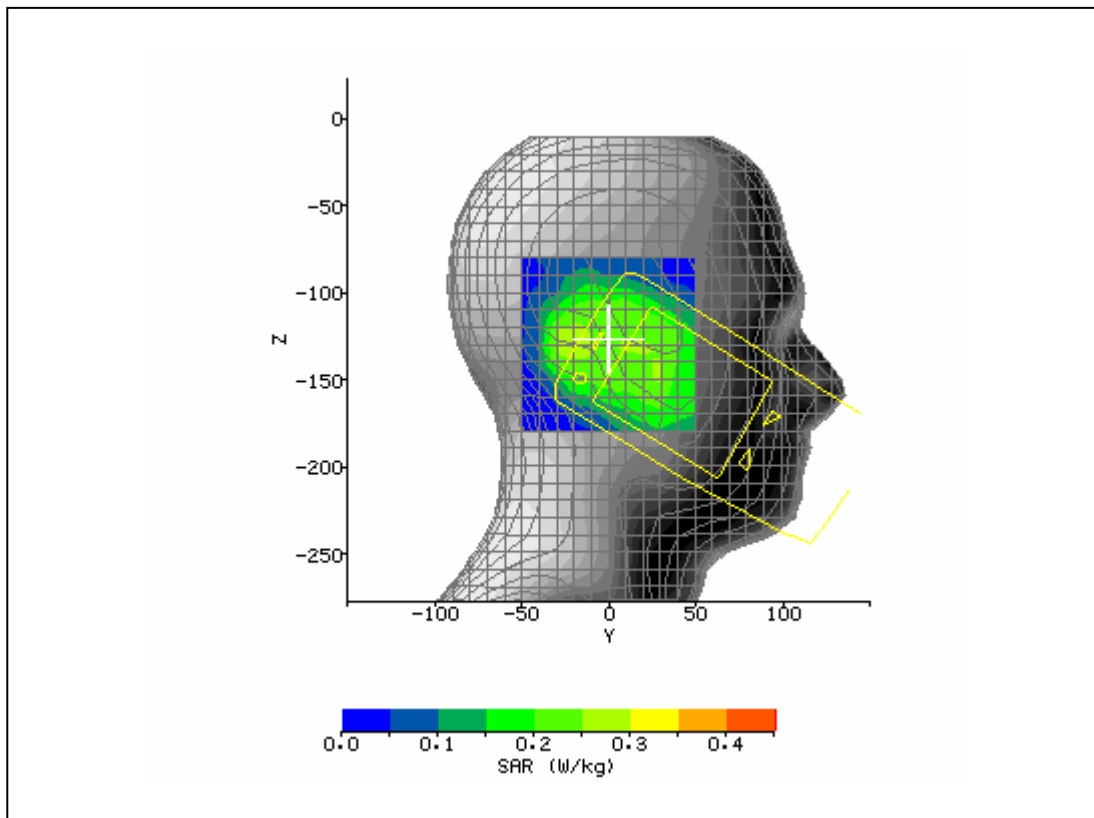


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 8:03:19 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_Touch_190_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.6°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	42.9%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.5°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR Y-axis Location:</b>	-24.00 mm
<b>DUT Position:</b>	Right Tilt	<b>Max SAR Z-axis Location:</b>	-125.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	23.47 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	0.461 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.182 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.185 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.33 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

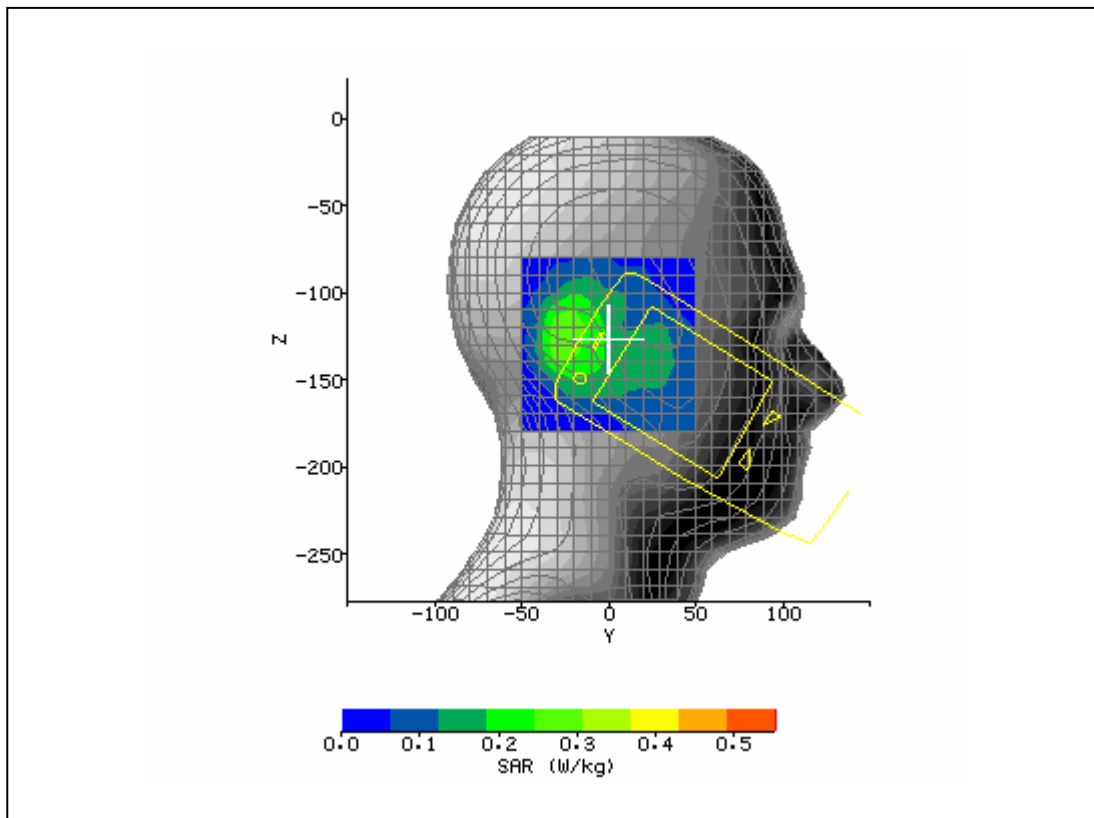


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 8:23:25 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_Tilt_190_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.2°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	41.58
<b>Relative Humidity:</b>	40.9%	<b>Conductivity:</b>	0.907
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-3.00 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-100.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	35.13 V/m
<b>Test Frequency:</b>	824.2MHz	<b>SAR 1g:</b>	1.059 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.321 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.325 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.35 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

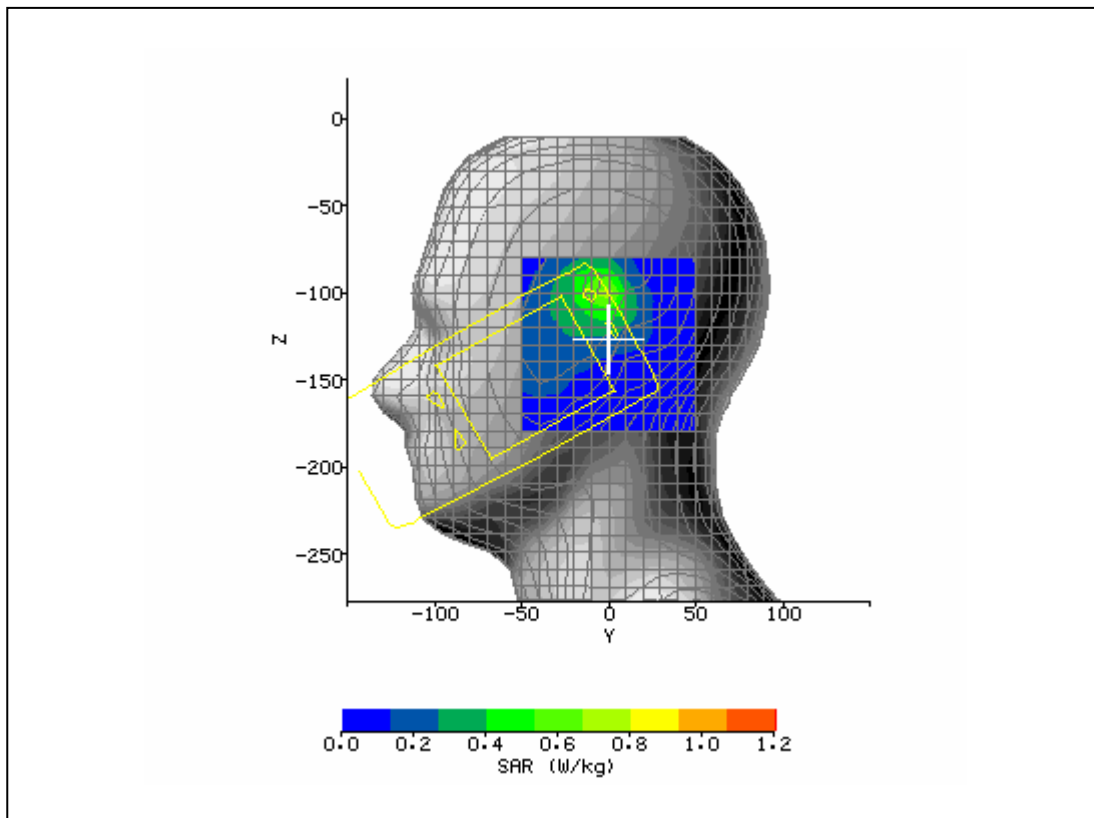


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 8:45:13 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_128_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.6°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	41.51
<b>Relative Humidity:</b>	40.8%	<b>Conductivity:</b>	0.942
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.5°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-3.00 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-100.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	27.23 V/m
<b>Test Frequency:</b>	848.8MHz	<b>SAR 1g:</b>	0.693 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.200 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.203 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.71 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	PCL 5	<b>Extrapolation:</b>	poly4

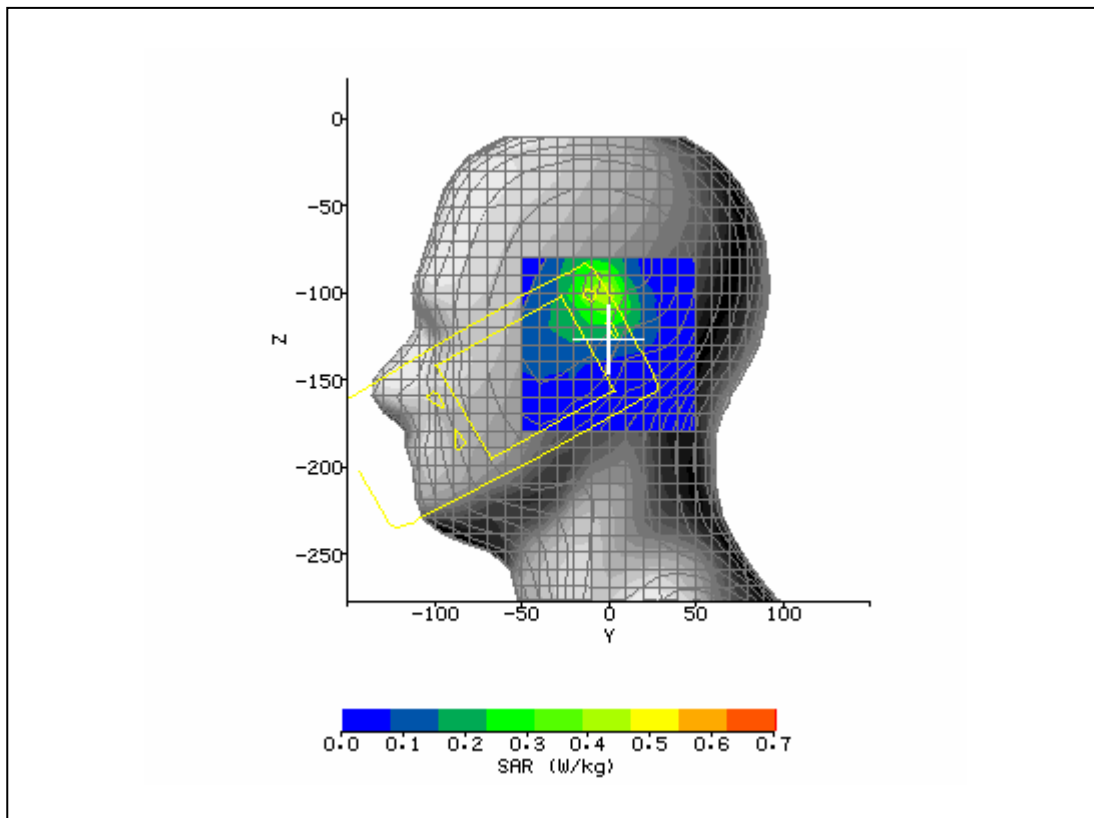

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 10:59:41 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.4°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	40.83
<b>Relative Humidity:</b>	46.1%	<b>Conductivity:</b>	1.403
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.3°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-30.20 mm
<b>DUT Position:</b>	Left Touch	<b>Max SAR Z-axis Location:</b>	-113.60 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	16.04 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.269 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.093 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.096 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.55 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	PCL 0	<b>Extrapolation:</b>	poly4

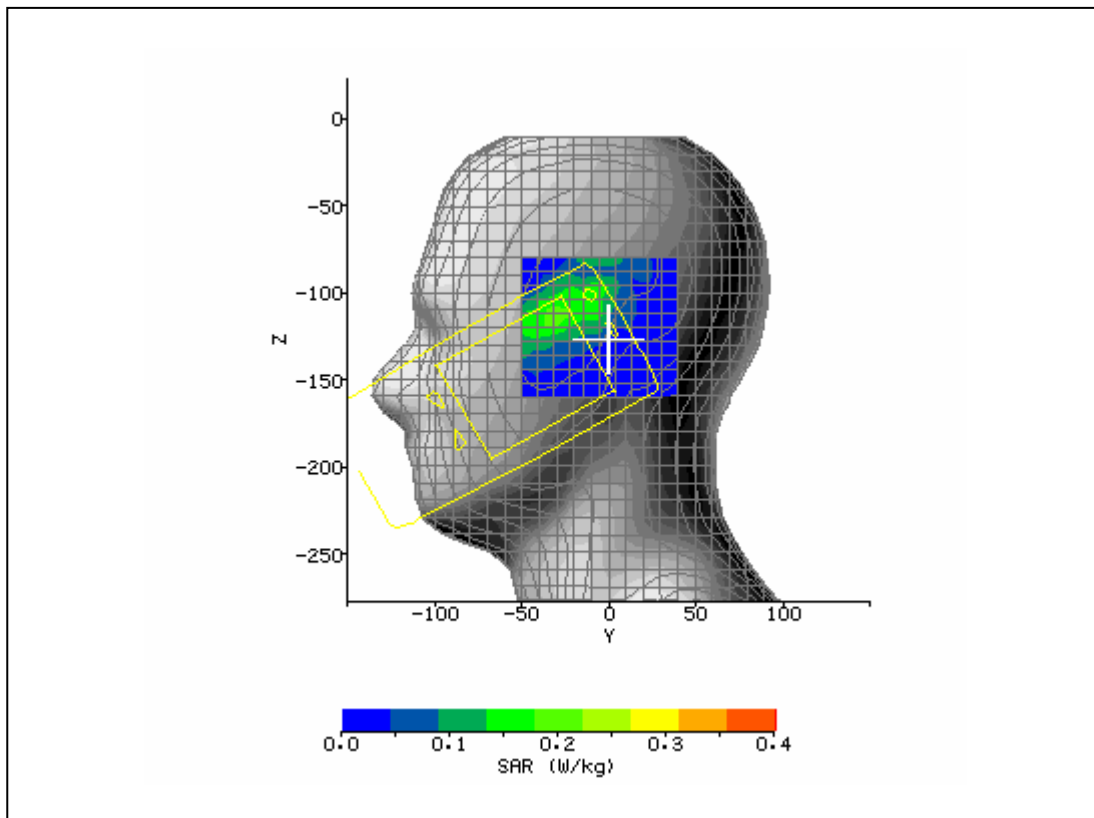


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 11:17:30 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Touch_661_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.4°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	40.83
<b>Relative Humidity:</b>	46.1%	<b>Conductivity:</b>	1.403
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.3°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-14.00 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-110.40 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	15.76 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.305 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.093 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.095 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.25 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	PCL 0	<b>Extrapolation:</b>	poly4

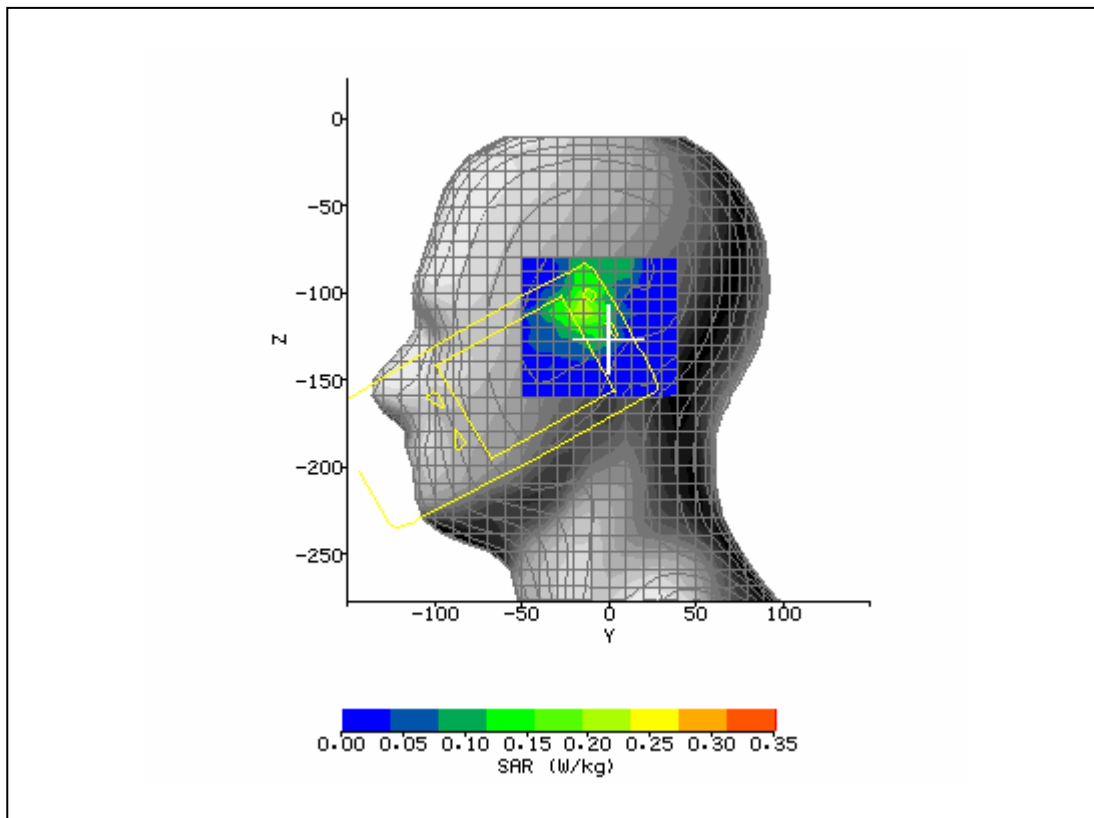





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 11:38:33 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_661_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.4°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	40.83
<b>Relative Humidity:</b>	46.1%	<b>Conductivity:</b>	1.403
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.3°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR Y-axis Location:</b>	6.70 mm
<b>DUT Position:</b>	Right Touch	<b>Max SAR Z-axis Location:</b>	-104.80 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.00 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.196 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.028 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.029 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.29 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	PCL 0	<b>Extrapolation:</b>	poly4

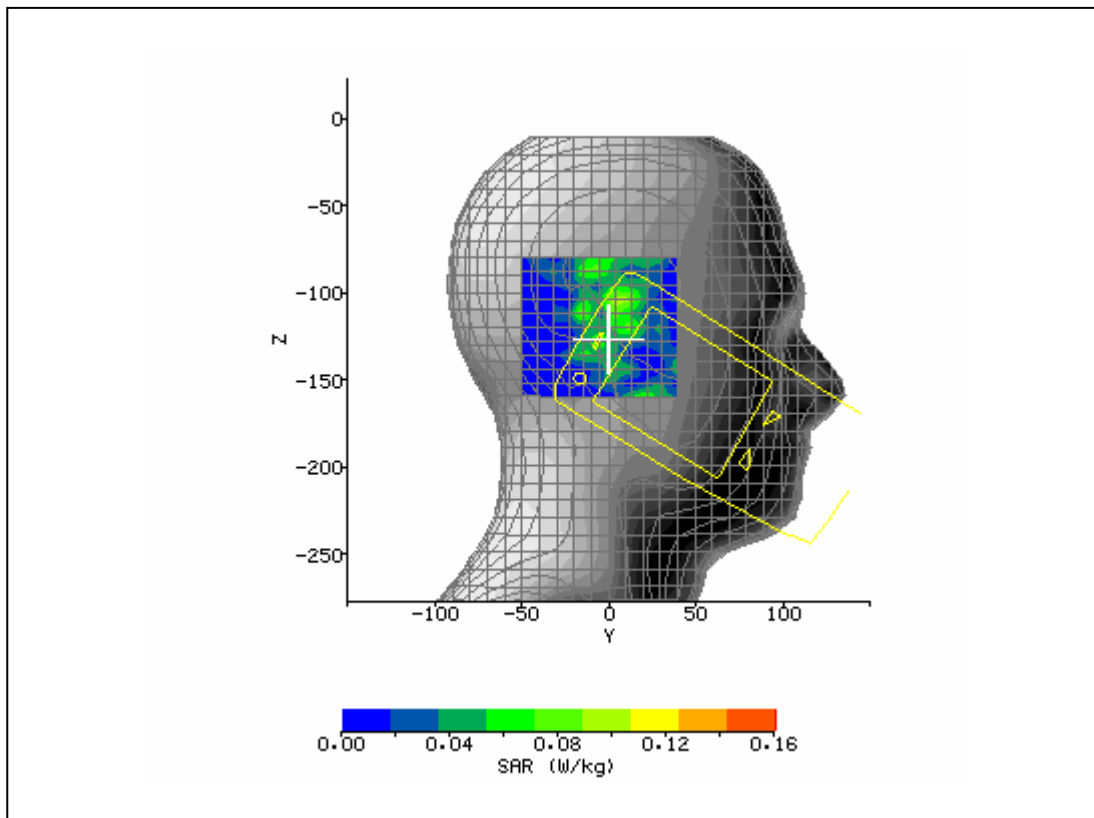


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 11:38:33 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_661_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.4°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	40.83
<b>Relative Humidity:</b>	46.1%	<b>Conductivity:</b>	1.403
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.3°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR Y-axis Location:</b>	-3.20 mm
<b>DUT Position:</b>	Right Tilt	<b>Max SAR Z-axis Location:</b>	-106.40 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	12.42 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.157 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.035 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.034 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-3.25 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	PCL 0	<b>Extrapolation:</b>	poly4

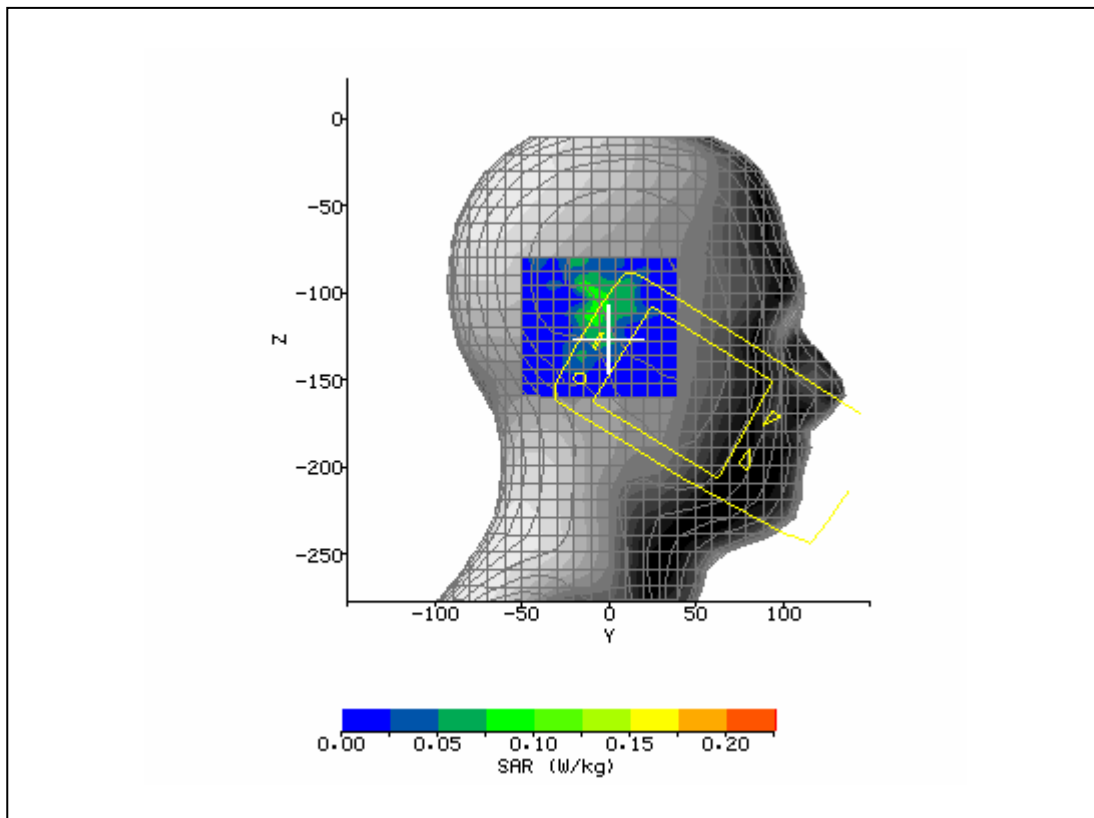


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 1:40:07 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_Tilt_661_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.4°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	40.95
<b>Relative Humidity:</b>	46.1%	<b>Conductivity:</b>	1.37
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.3°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-8.60 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-109.60 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	15.96 V/m
<b>Test Frequency:</b>	1850.2MHz	<b>SAR 1g:</b>	0.283 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.087 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.090 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.68 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	PCL 0	<b>Extrapolation:</b>	poly4

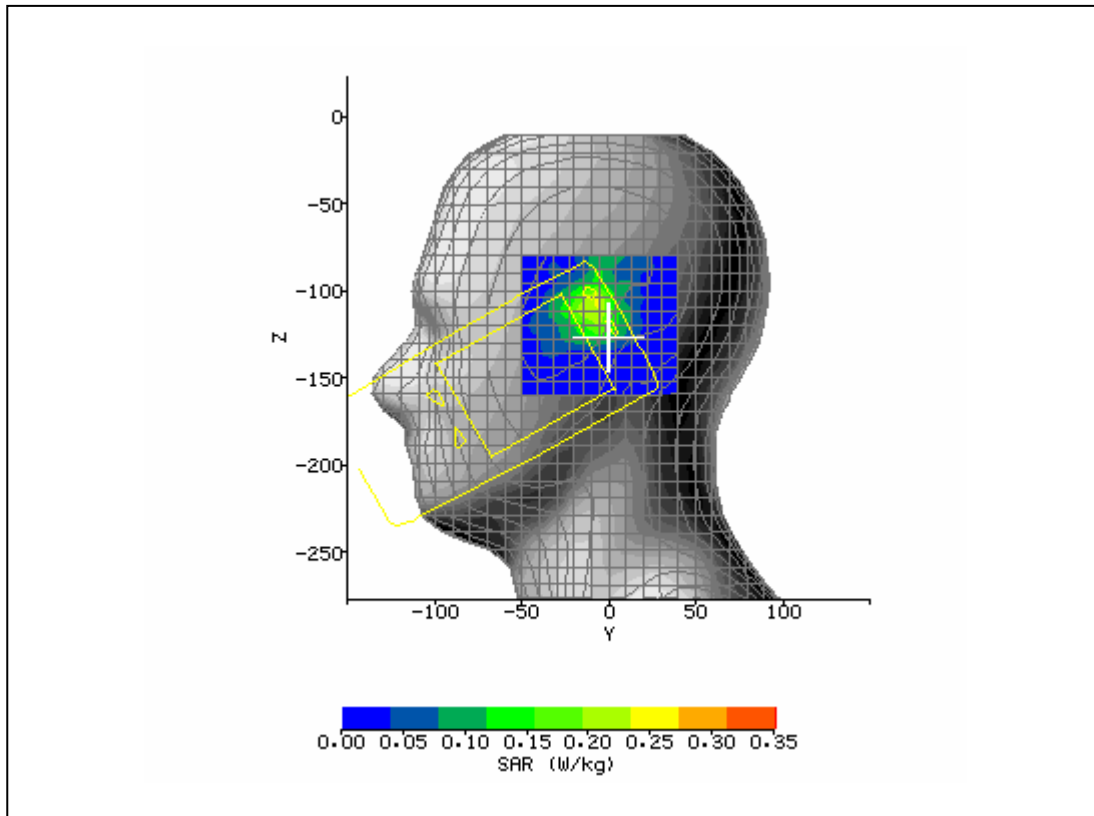


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 1:57:24 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_512_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	40.65
<b>Relative Humidity:</b>	37.3%	<b>Conductivity:</b>	1.43
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.1°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-5.90 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-107.20 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	15.71 V/m
<b>Test Frequency:</b>	1909.8MHz	<b>SAR 1g:</b>	0.270 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.085 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.084 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-1.08 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	PCL 0	<b>Extrapolation:</b>	poly4

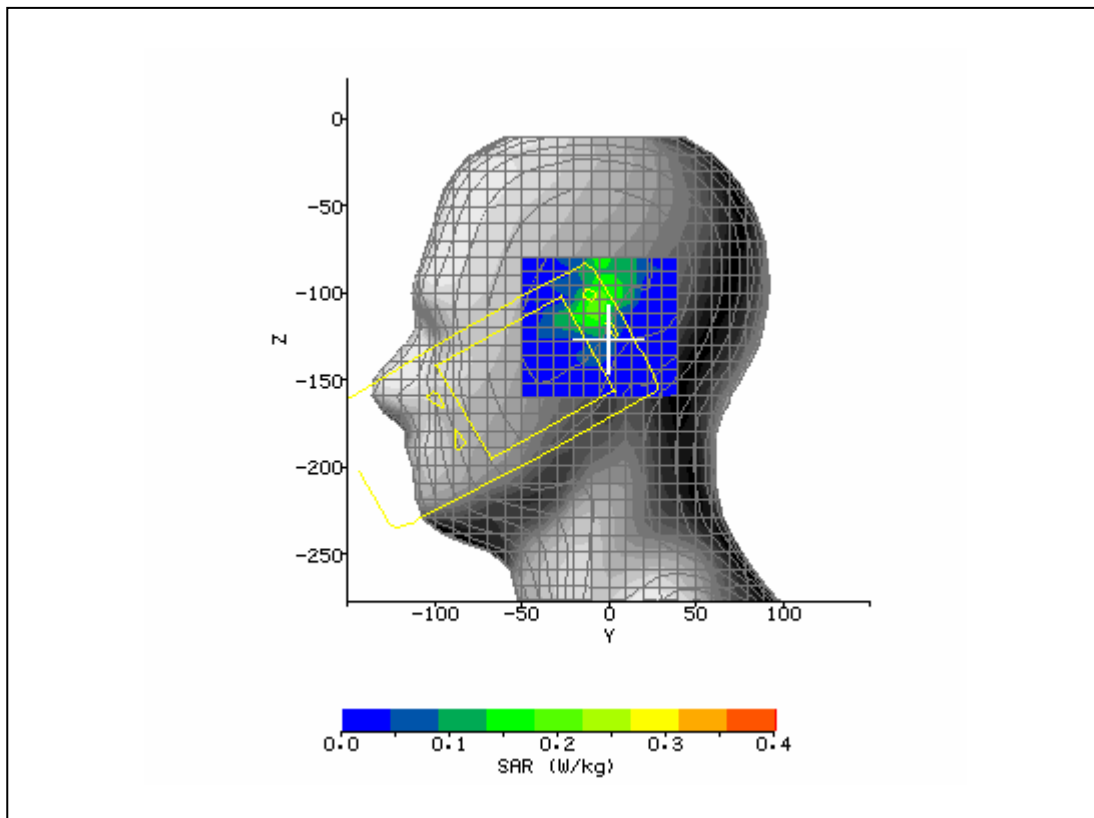


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 9:08:27 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_251_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.1°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	45.3%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-17.60 mm
<b>DUT Position:</b>	Left Touch	<b>Max SAR Z-axis Location:</b>	-109.60 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	22.62 V/m
<b>Test Frequency:</b>	835MHz	<b>SAR 1g:</b>	0.425 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.201 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.205 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.08 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	TPC all 1's	<b>Extrapolation:</b>	poly4

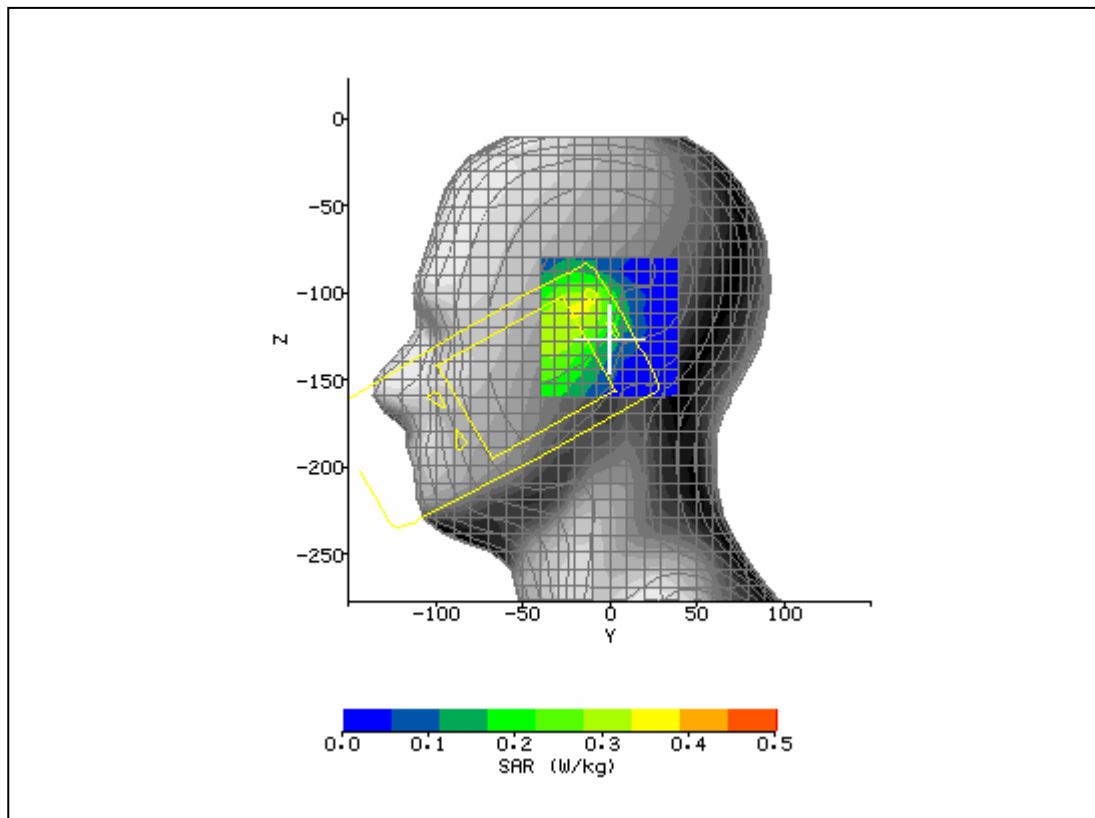


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 9:25:52 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Touch_4175_3d.tx t	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.1°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	45.3%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-8.00 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-108.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	26.33 V/m
<b>Test Frequency:</b>	835MHz	<b>SAR 1g:</b>	0.546 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.188 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.195 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.87 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	TPC all 1's	<b>Extrapolation:</b>	poly4

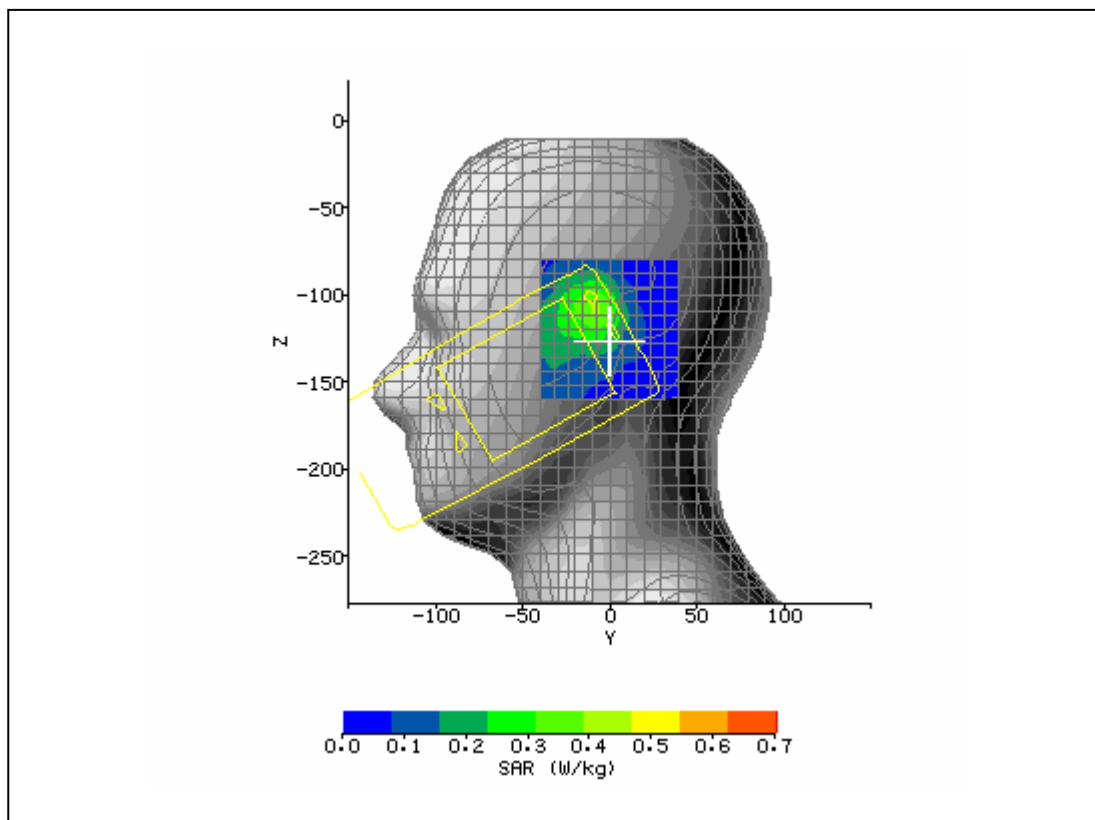

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 9:45:08 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_4175_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.5°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	45.3%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.4°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR Y-axis Location:</b>	16.80 mm
<b>DUT Position:</b>	Right Touch	<b>Max SAR Z-axis Location:</b>	-136.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	18.10 V/m
<b>Test Frequency:</b>	835MHz	<b>SAR 1g:</b>	0.275 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.146 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.145 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.50 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	TPC all 1's	<b>Extrapolation:</b>	poly4

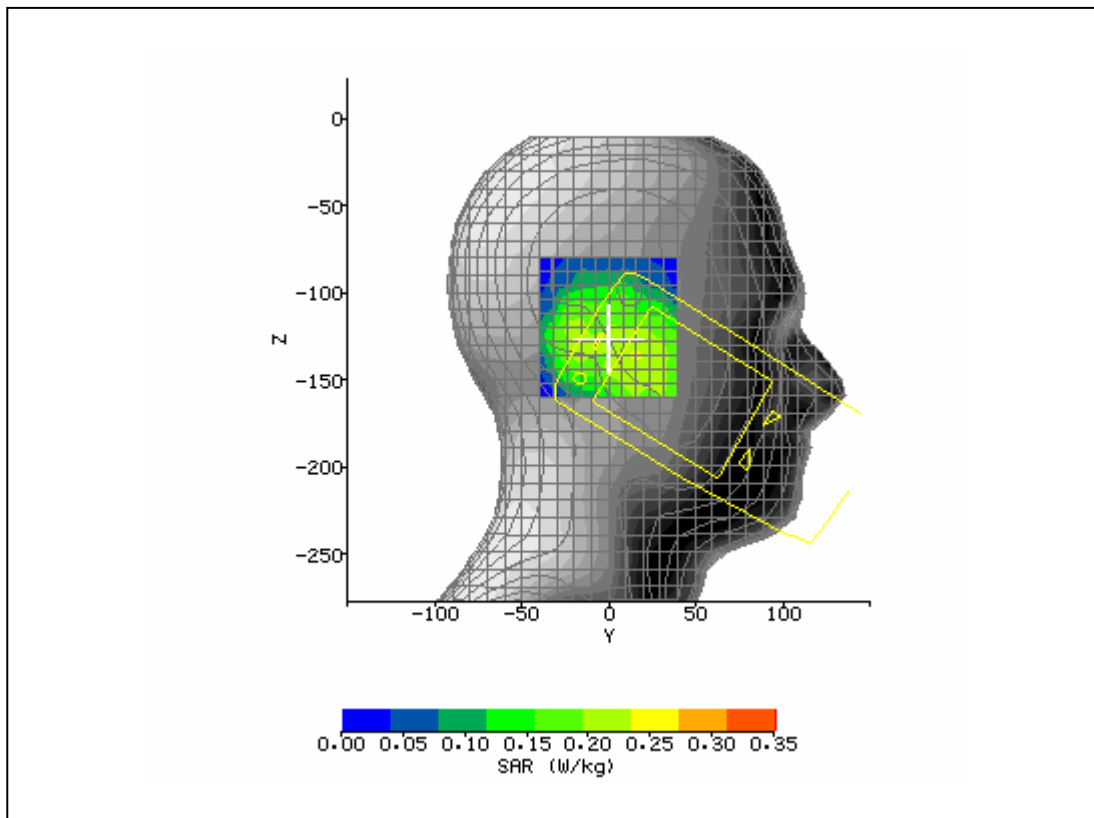


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 10:01:54 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_Touch_4175_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.5°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	45.3%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.4°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR Y-axis Location:</b>	-23.20 mm
<b>DUT Position:</b>	Right Tilt	<b>Max SAR Z-axis Location:</b>	-125.60 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	18.41 V/m
<b>Test Frequency:</b>	835MHz	<b>SAR 1g:</b>	0.286 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.109 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.110 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.16 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	TPC all 1's	<b>Extrapolation:</b>	poly4

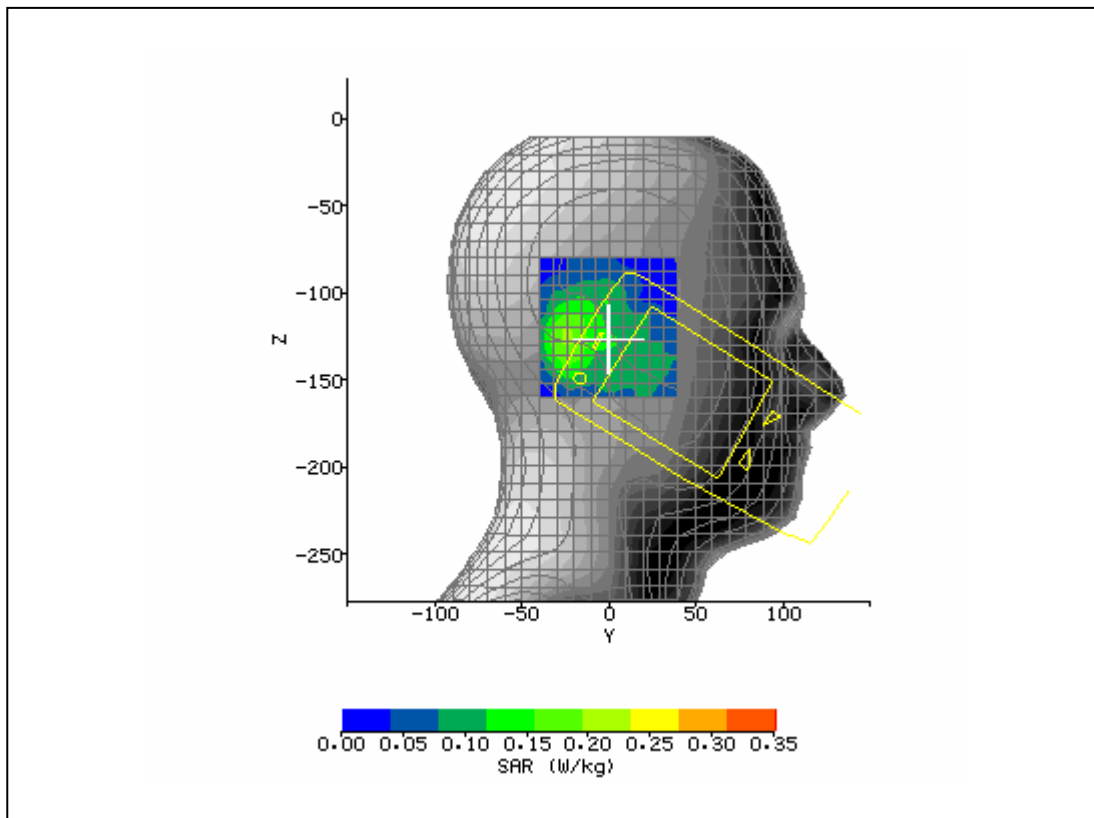





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 10:23:03 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_Tilt_4175_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	41.58
<b>Relative Humidity:</b>	45.5%	<b>Conductivity:</b>	0.908
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.8°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-6.40 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-101.60 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	27.23 V/m
<b>Test Frequency:</b>	826.4MHz	<b>SAR 1g:</b>	0.574 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.201 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.205 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.46 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	TPC all 1's	<b>Extrapolation:</b>	poly4

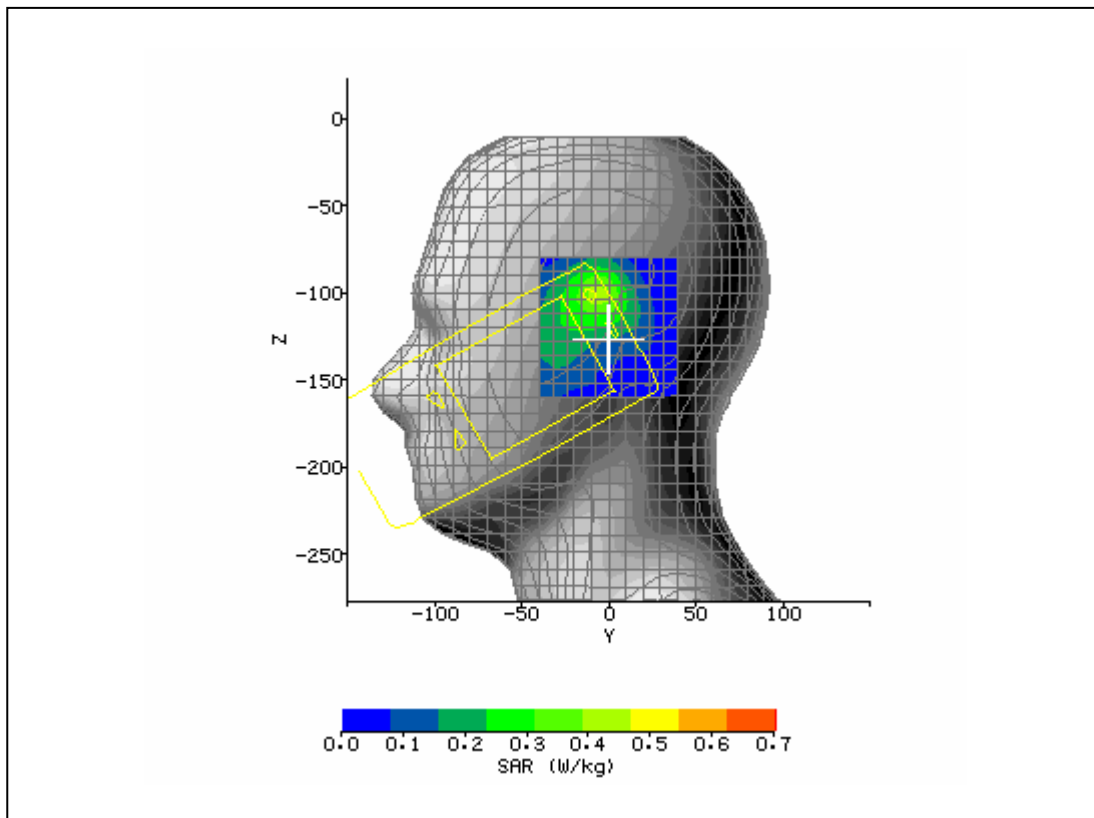


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 10:42:04 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_4132_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	41.51
<b>Relative Humidity:</b>	45.5%	<b>Conductivity:</b>	0.941
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.8°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-4.00 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-100.80 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	26.19 V/m
<b>Test Frequency:</b>	846.6MHz	<b>SAR 1g:</b>	0.551 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.185 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.190 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.65 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	TPC all 1's	<b>Extrapolation:</b>	poly4

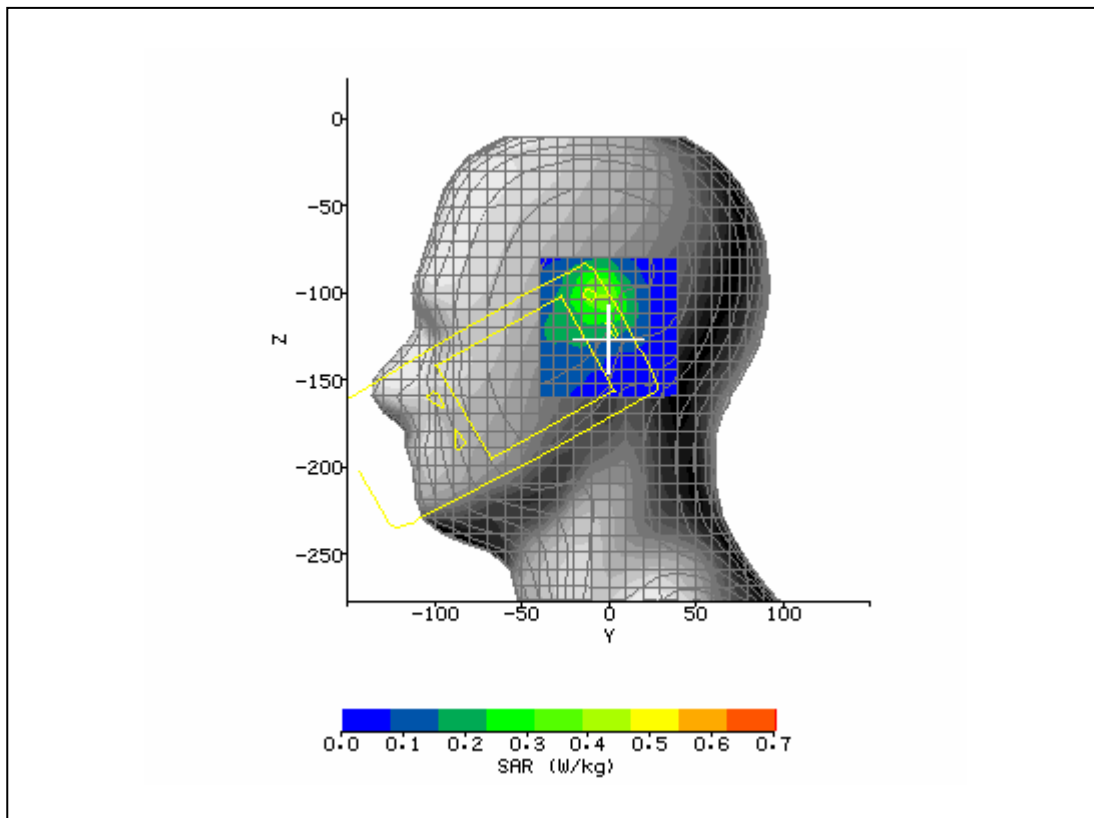


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 7:20:49 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.3°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	40.83
<b>Relative Humidity:</b>	46.6%	<b>Conductivity:</b>	1.403
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.5°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-33.80 mm
<b>DUT Position:</b>	Left Touch	<b>Max SAR Z-axis Location:</b>	-118.40 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	19.74 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.455 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.199 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.202 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.51 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

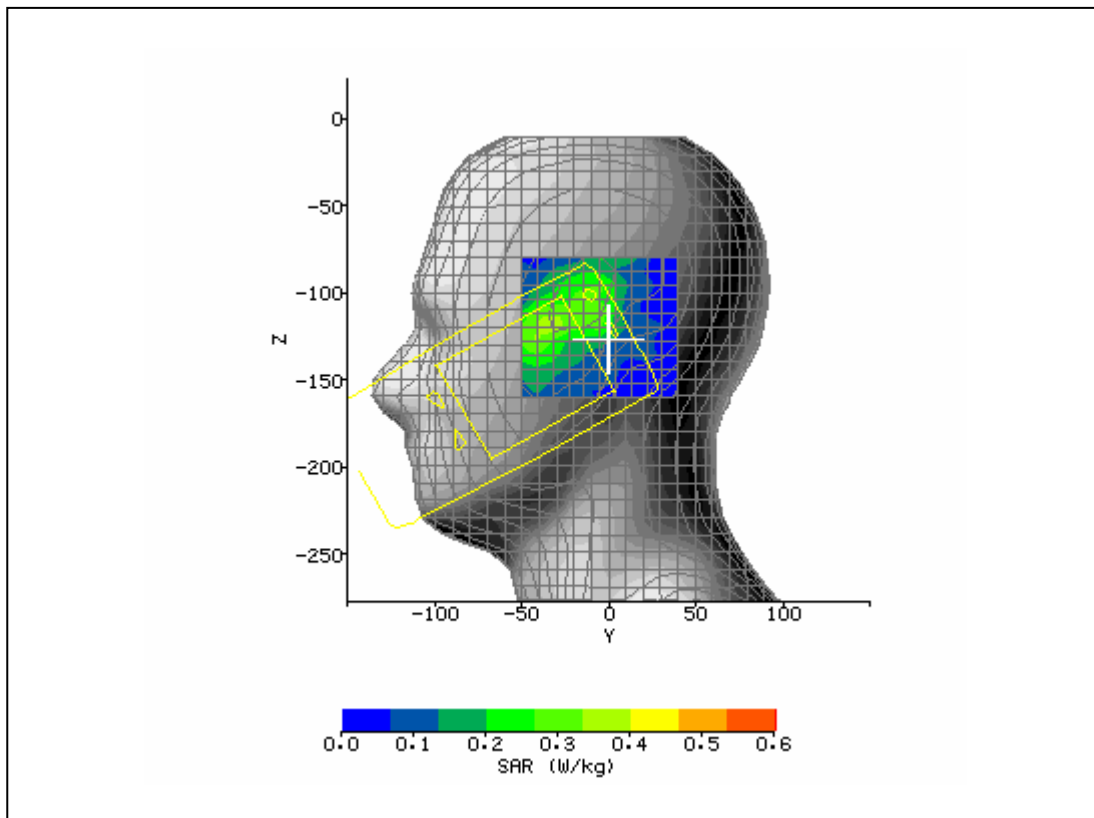


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 7:35:39 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Touch_9400_3d.tx t	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.3°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	40.83
<b>Relative Humidity:</b>	46.6%	<b>Conductivity:</b>	1.403
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.5°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-7.70 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-112.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	19.84 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.490 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.188 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.191 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.65 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

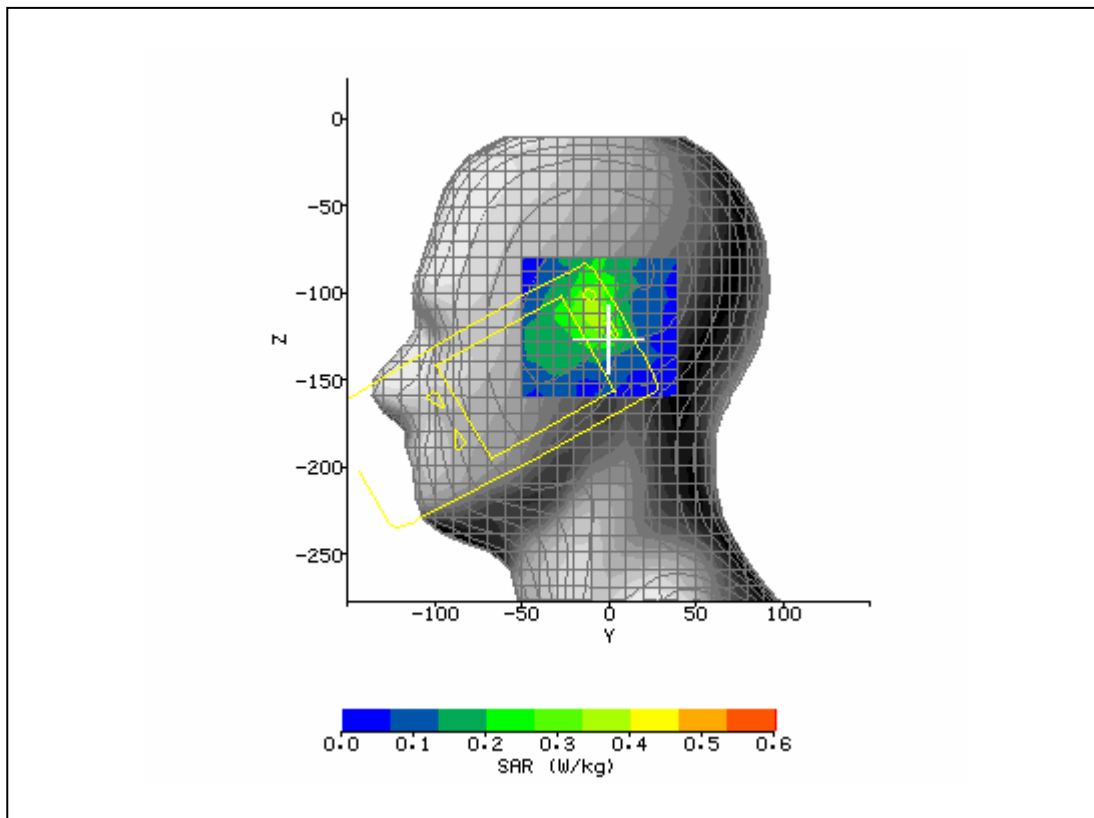


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 7:50:54 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_9400_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.3°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	40.83
<b>Relative Humidity:</b>	46.6%	<b>Conductivity:</b>	1.403
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.5°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR Y-axis Location:</b>	2.20 mm
<b>DUT Position:</b>	Right Touch	<b>Max SAR Z-axis Location:</b>	-99.20 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	13.48 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.296 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.096 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.098 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.77 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

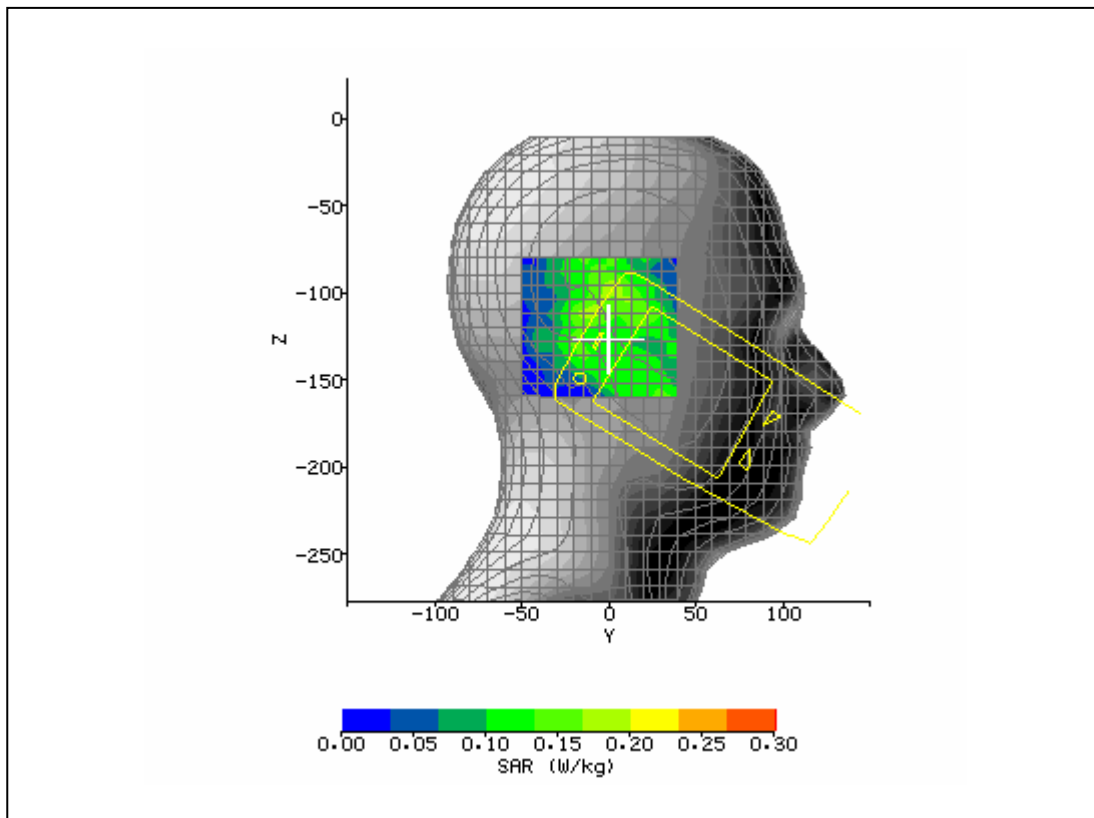


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 8:07:03 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_Touch_9400_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	40.83
<b>Relative Humidity:</b>	46.6%	<b>Conductivity:</b>	1.403
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.7°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR Y-axis Location:</b>	-11.30 mm
<b>DUT Position:</b>	Right Tilt	<b>Max SAR Z-axis Location:</b>	-119.20 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	13.93 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.245 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.081 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.083 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.59 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

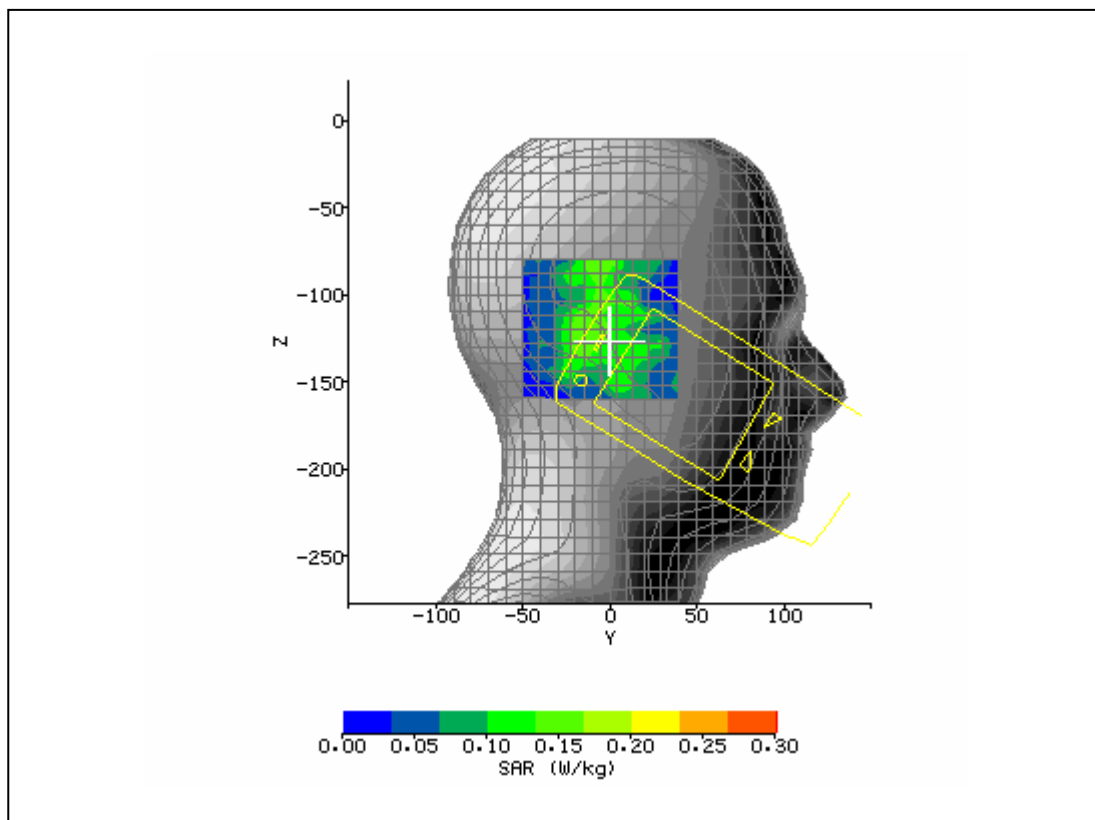

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 8:24:38 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Right_Tilt_9400_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.2°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	40.94
<b>Relative Humidity:</b>	46.3%	<b>Conductivity:</b>	1.371
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.1°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-6.80 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-108.80 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	22.10 V/m
<b>Test Frequency:</b>	1852.4MHz	<b>SAR 1g:</b>	0.571 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.227 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.234 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.42 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

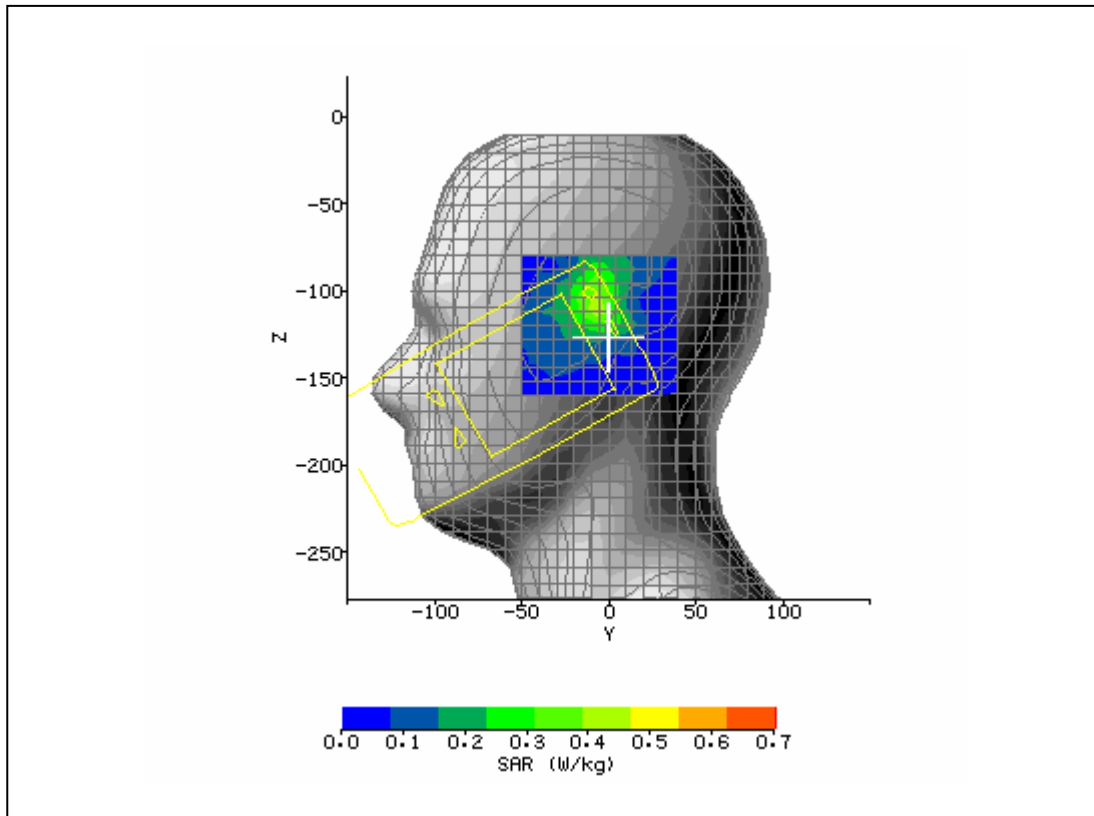


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 8:41:22 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Tilt_9262_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.4°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	40.67
<b>Relative Humidity:</b>	46.1%	<b>Conductivity:</b>	1.429
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.3°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-7.70 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-103.20 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	17.21 V/m
<b>Test Frequency:</b>	1907.5MHz	<b>SAR 1g:</b>	0.359 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	0.133 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.135 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.73 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

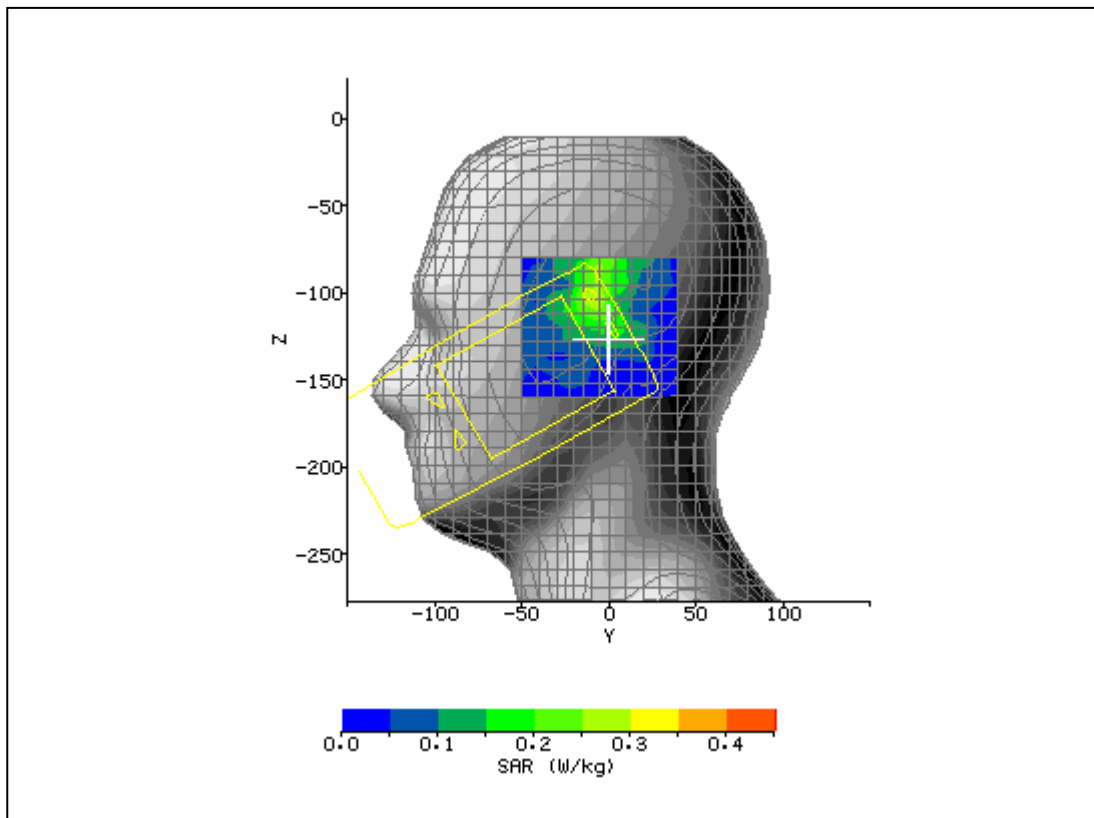





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 1:12:34 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.3°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	56.08
<b>Relative Humidity:</b>	40.7%	<b>Conductivity:</b>	0.972
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	0.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	-7.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	14.93 V/m
<b>Test Frequency:</b>	824.2MHz	<b>SAR 1g:</b>	0.246 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.355 / .355 / .355	<b>SAR Start:</b>	0.098 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.101 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.37 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	2 Timeslots up	<b>Extrapolation:</b>	poly4

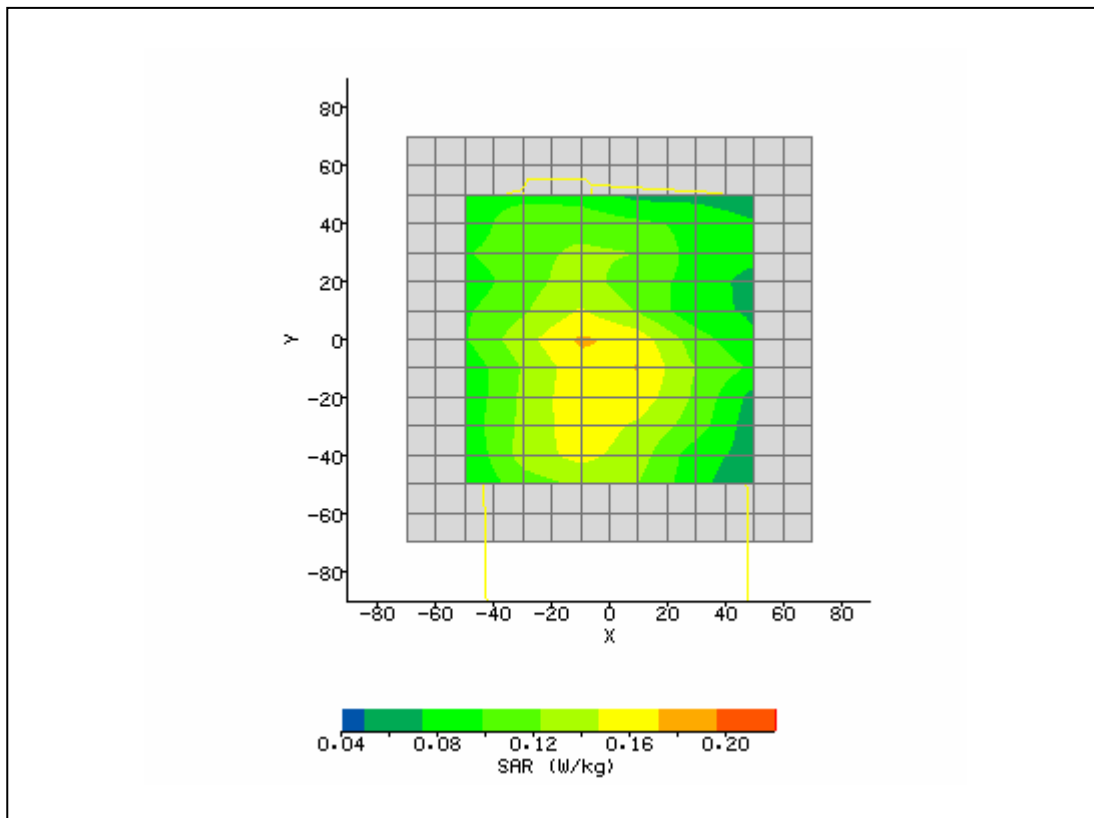


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 1:25:55 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Touch_128_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.3°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	55.73
<b>Relative Humidity:</b>	40.7%	<b>Conductivity:</b>	0.987
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	2.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	-15.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	13.30 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	0.208 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.355 / .355 / .355	<b>SAR Start:</b>	0.084 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.087 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.71 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	2 Timeslots up	<b>Extrapolation:</b>	poly4

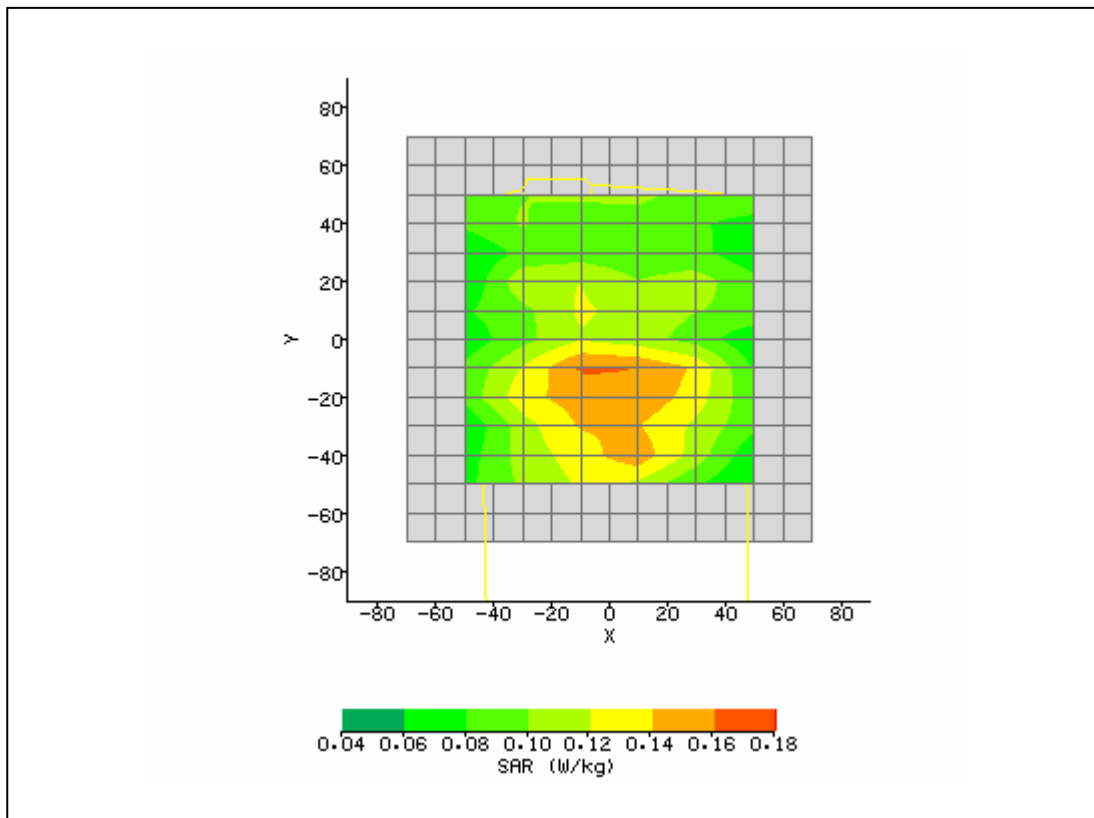


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 1:38:32 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Touch_190_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.3°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	55.46
<b>Relative Humidity:</b>	40.7%	<b>Conductivity:</b>	0.982
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-4.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	-22.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	11.44 V/m
<b>Test Frequency:</b>	848.8MHz	<b>SAR 1g:</b>	0.166 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.355 / .355 / .355	<b>SAR Start:</b>	0.067 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.069 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.13 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	2 Timeslots up	<b>Extrapolation:</b>	poly4

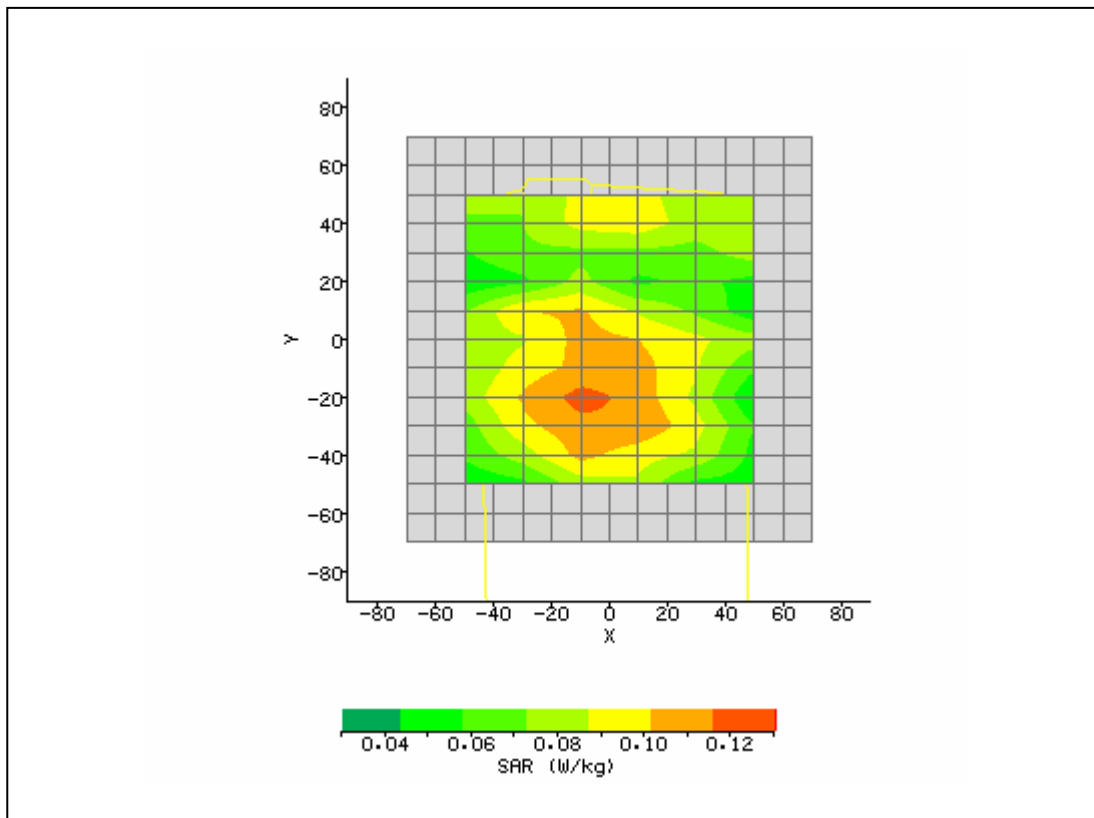


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 2:17:10 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Touch_661_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.6°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	51.29
<b>Relative Humidity:</b>	40.1%	<b>Conductivity:</b>	1.554
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.5°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	20.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.60 V/m
<b>Test Frequency:</b>	1850.2MHz	<b>SAR 1g:</b>	0.255 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.489 / .489 / .489	<b>SAR Start:</b>	0.071 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.072 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.83 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	2 Timeslots up	<b>Extrapolation:</b>	poly4

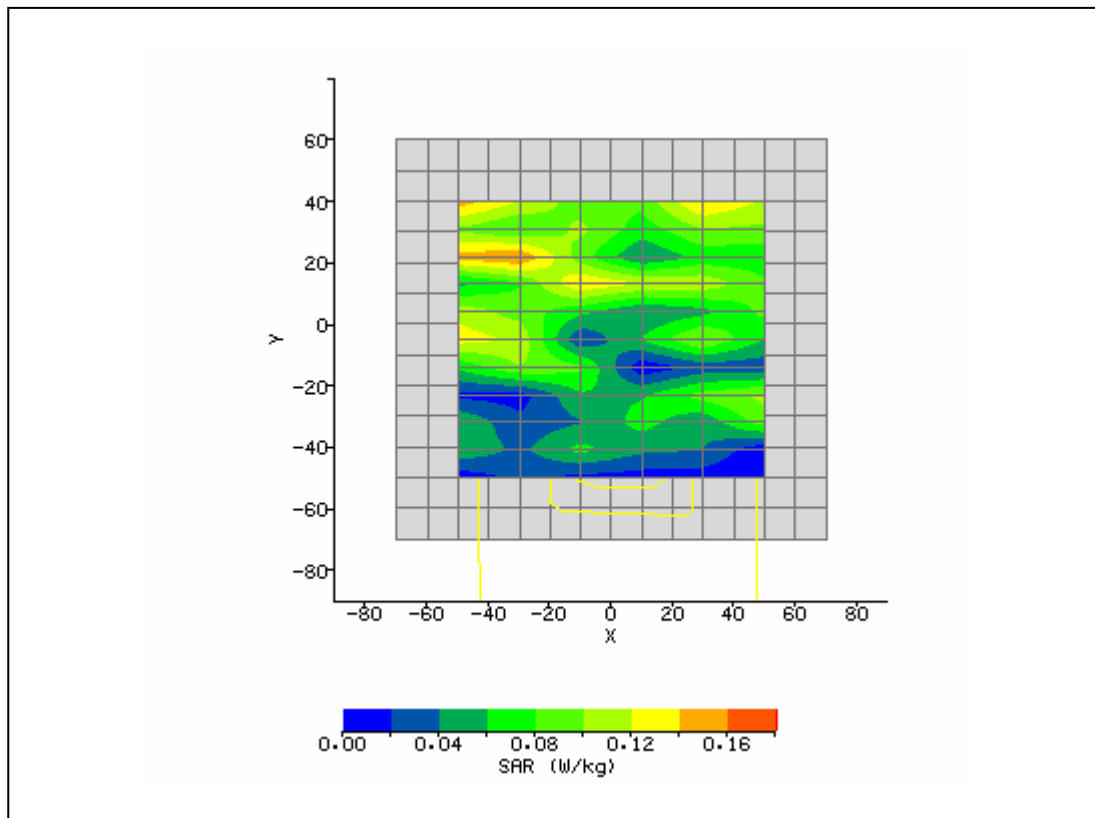


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 2:32:07 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.6°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	52.78
<b>Relative Humidity:</b>	40.1%	<b>Conductivity:</b>	1.57
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.5°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.96 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.206 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.489 / .489 / .489	<b>SAR Start:</b>	0.089 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.086 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-4.03 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	2 Timeslots up	<b>Extrapolation:</b>	poly4

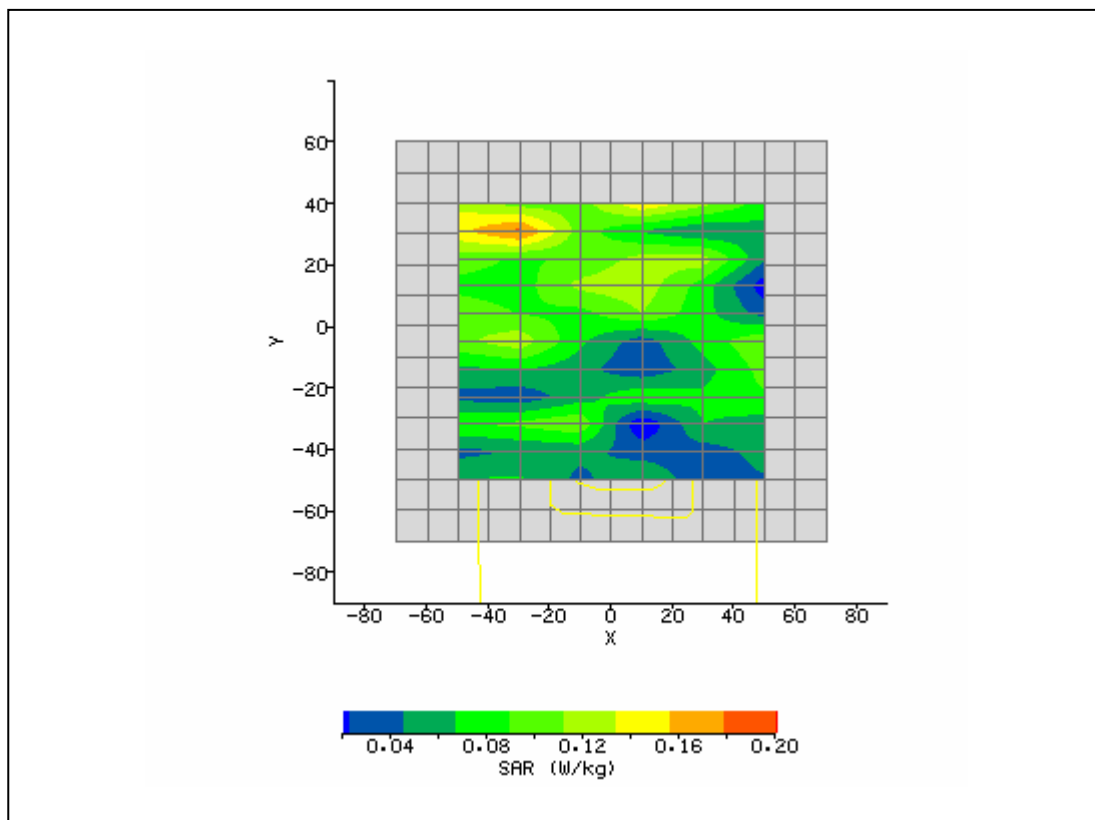


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 2:49:23 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.6°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	55.07
<b>Relative Humidity:</b>	40.1%	<b>Conductivity:</b>	1.572
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.5°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR X-axis Location:</b>	-20.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	20.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	11.35 V/m
<b>Test Frequency:</b>	1909.8MHz	<b>SAR 1g:</b>	0.177 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.489 / .489 / .489	<b>SAR Start:</b>	0.110 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.113 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.01 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	2 Timeslots up	<b>Extrapolation:</b>	poly4

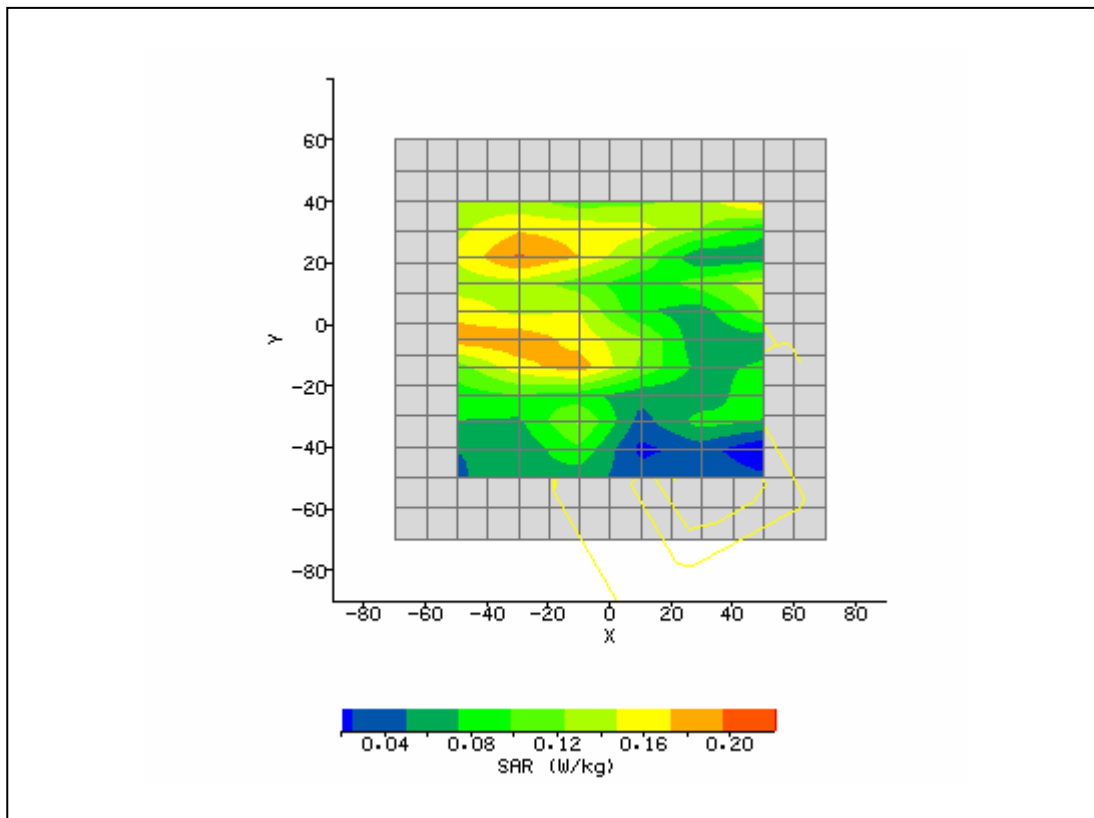

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 2:41:45 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.7°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	56.06
<b>Relative Humidity:</b>	40.2%	<b>Conductivity:</b>	0.974
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	0.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	-41.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	11.33 V/m
<b>Test Frequency:</b>	826.4MHz	<b>SAR 1g:</b>	0.166 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.355 / .355 / .355	<b>SAR Start:</b>	0.055 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.056 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.36 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

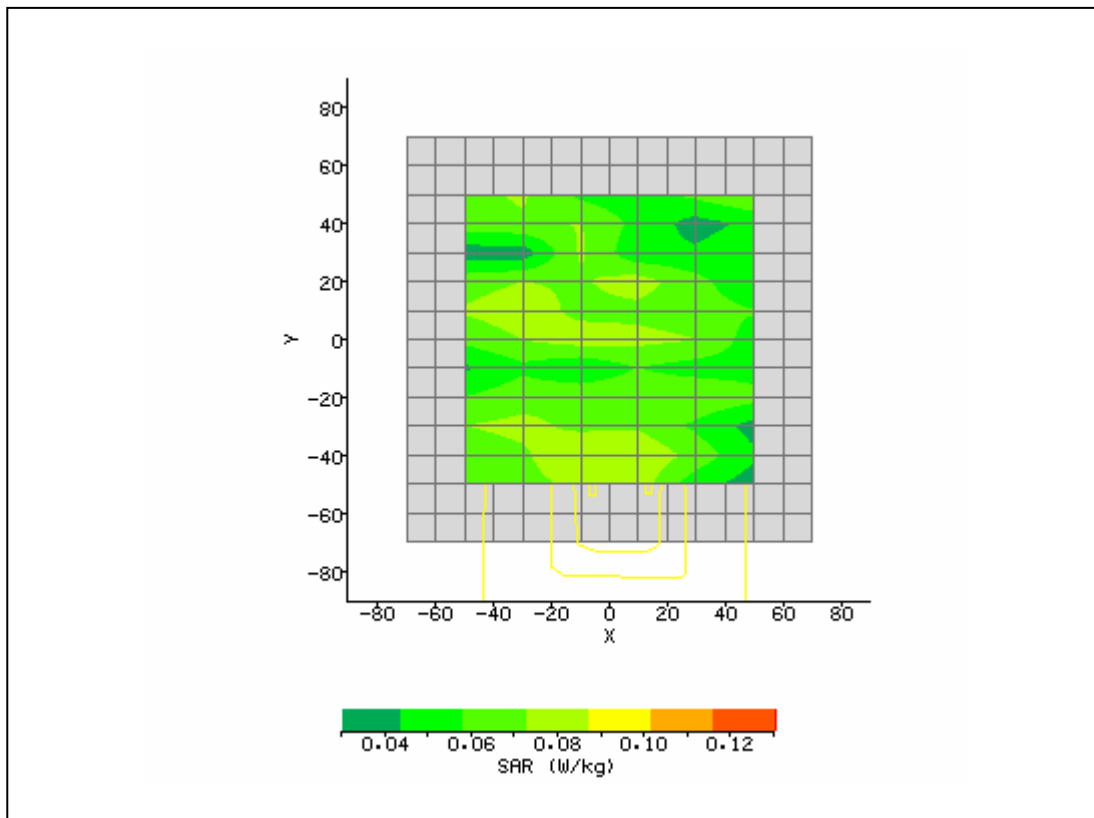


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 2:59:06 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.7°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	55.73
<b>Relative Humidity:</b>	40.2%	<b>Conductivity:</b>	0.987
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	0.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	-34.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	11.30 V/m
<b>Test Frequency:</b>	835MHz	<b>SAR 1g:</b>	0.135 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.355 / .355 / .355	<b>SAR Start:</b>	0.060 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.062 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.51 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

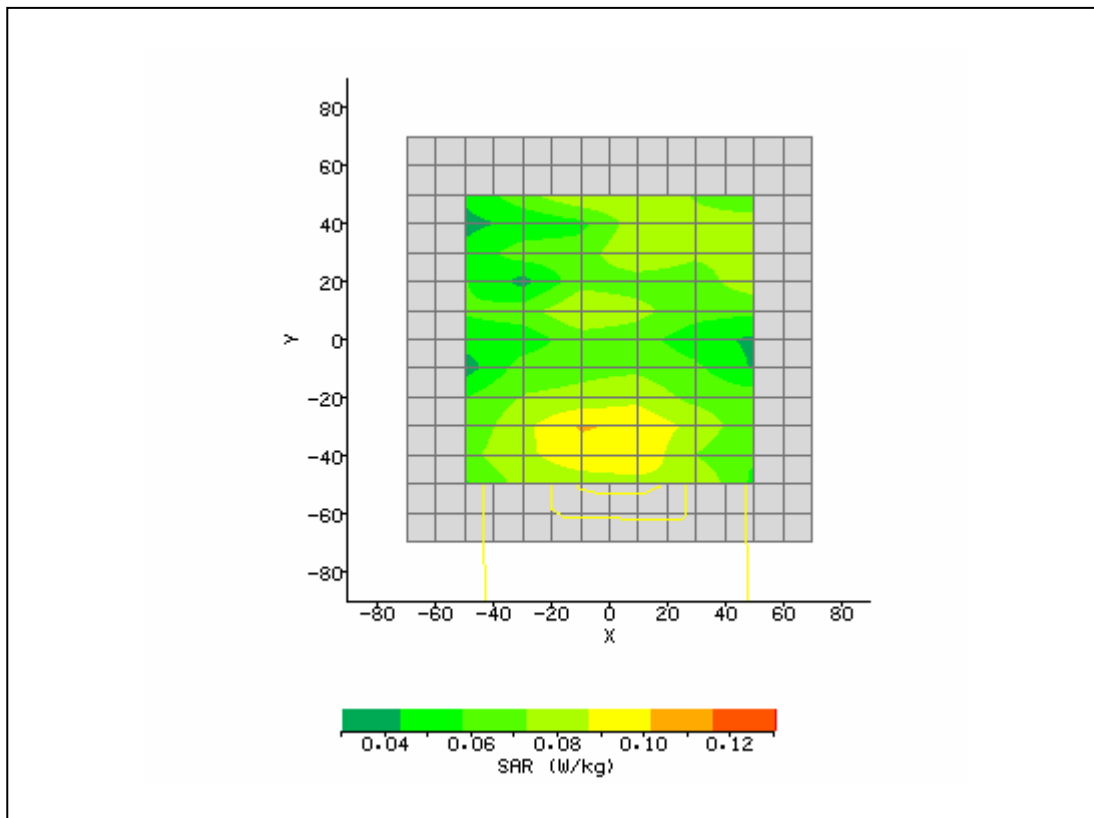





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 3:15:43 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Touch_4175_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.7°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	55.46
<b>Relative Humidity:</b>	40.2%	<b>Conductivity:</b>	0.982
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-6.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	-3.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.93 V/m
<b>Test Frequency:</b>	846.6MHz	<b>SAR 1g:</b>	0.148 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.355 / .355 / .355	<b>SAR Start:</b>	0.053 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.055 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.96 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

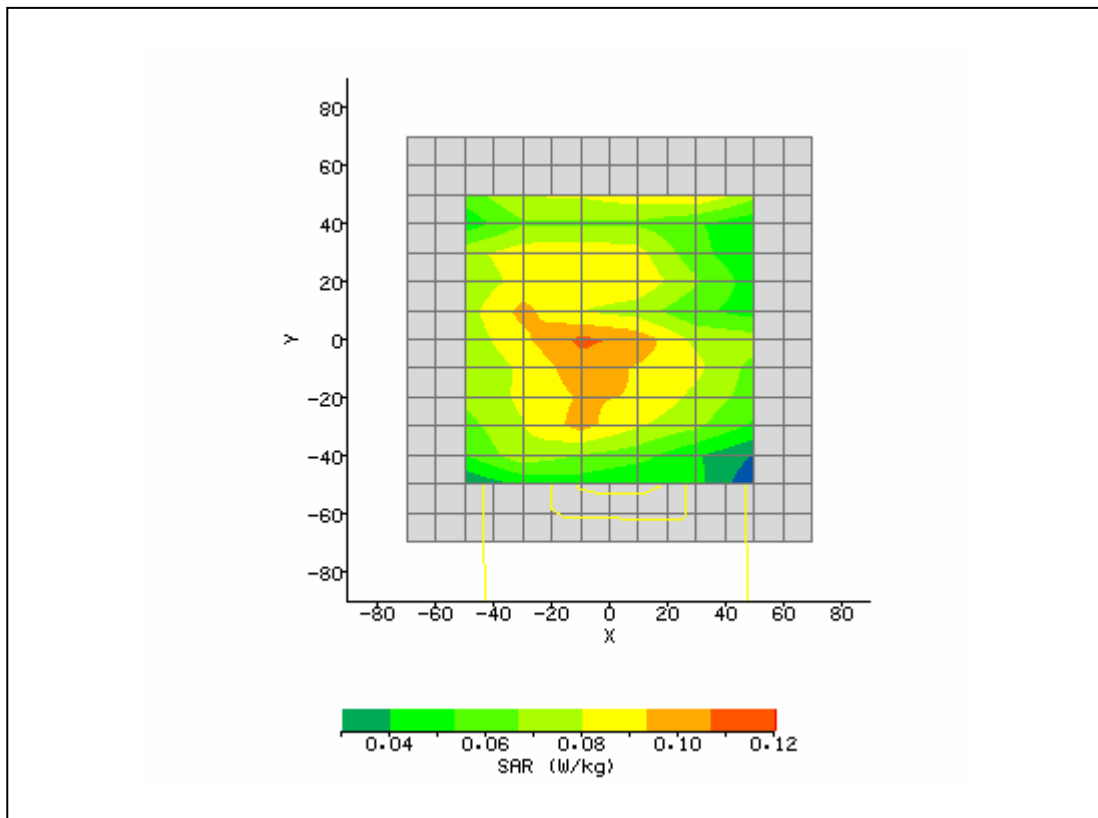


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 3:59:07 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.3°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	51.30
<b>Relative Humidity:</b>	38.1%	<b>Conductivity:</b>	1.555
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	13.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	9.23 V/m
<b>Test Frequency:</b>	1852.4MHz	<b>SAR 1g:</b>	0.162 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.489 / .489 / .489	<b>SAR Start:</b>	0.035 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.036 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.14 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

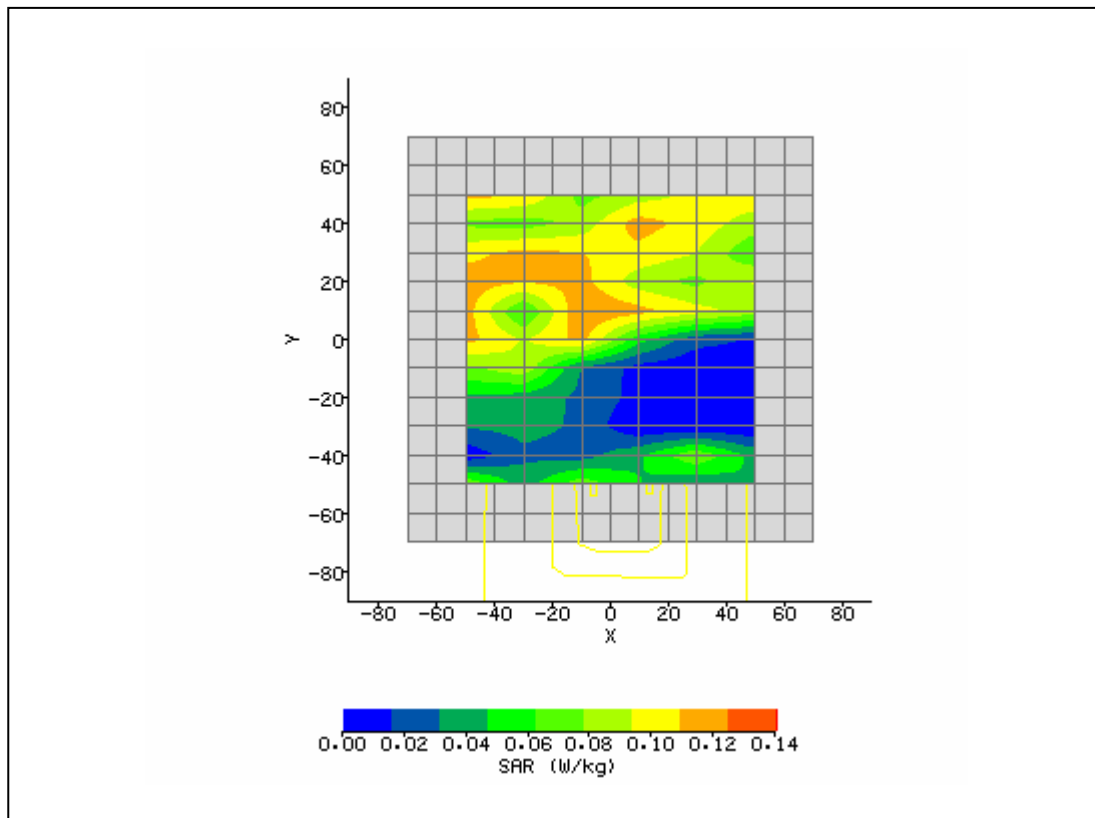


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 4:19:16 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Touch_9400_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.3°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	52.78
<b>Relative Humidity:</b>	38.1%	<b>Conductivity:</b>	1.57
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-40.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	10.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	9.12 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.169 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.489 / .489 / .489	<b>SAR Start:</b>	0.056 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.056 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.79 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

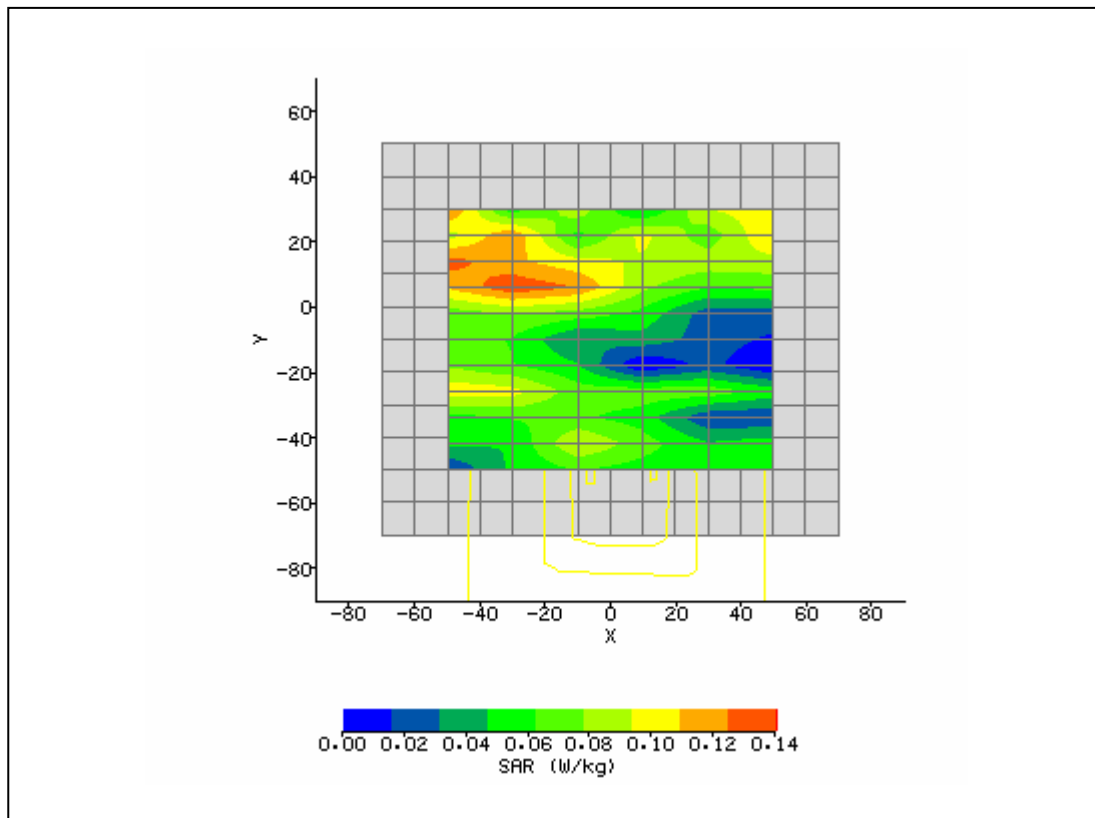


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 4:35:15 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Touch_9400_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.4°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer with HC25	<b>Relative Permittivity:</b>	55.06
<b>Relative Humidity:</b>	39.0%	<b>Conductivity:</b>	1.572
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	-8.40 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	9.76 V/m
<b>Test Frequency:</b>	1907.5MHz	<b>SAR 1g:</b>	0.234 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.489 / .489 / .489	<b>SAR Start:</b>	0.035 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.035 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.75 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/16/07
<b>Input Power Level:</b>	TPC bits all 1's	<b>Extrapolation:</b>	poly4

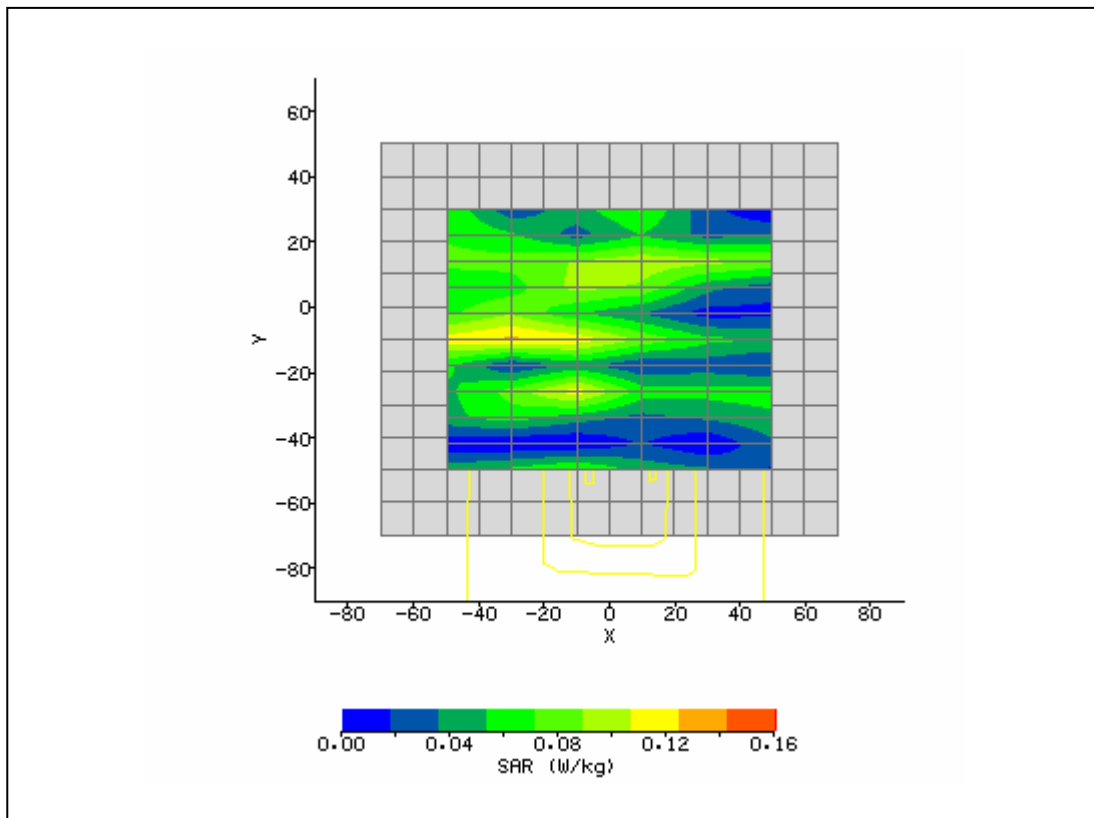


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/29/2007 11:50:32 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	7505 Handheld Computer	<b>Relative Permittivity:</b>	50.98
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.872
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	24.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	39.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.13 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.161 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.087 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.089 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.64 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/29/07
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

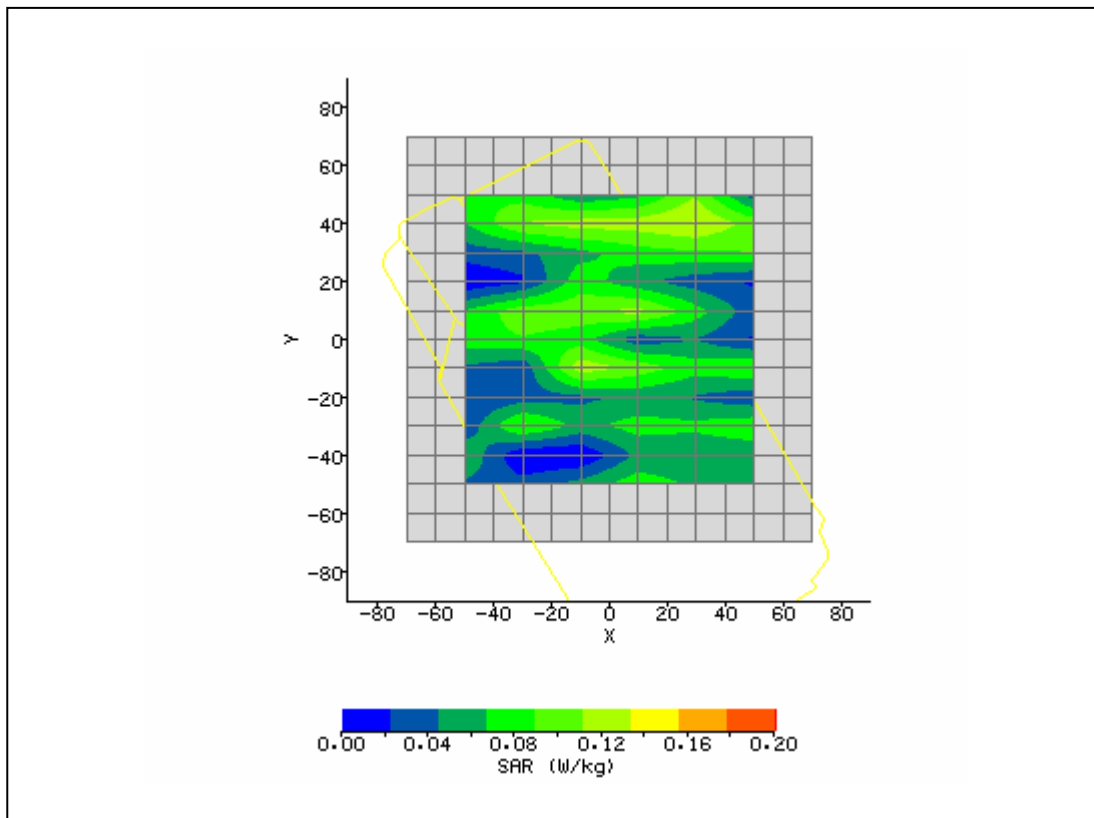


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/29/2007 12:13:10 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	7505 Handheld Computer	<b>Relative Permittivity:</b>	51.07
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.913
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-2.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	15.45 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	9.21 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.185 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.055 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.058 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.37 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/29/07
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

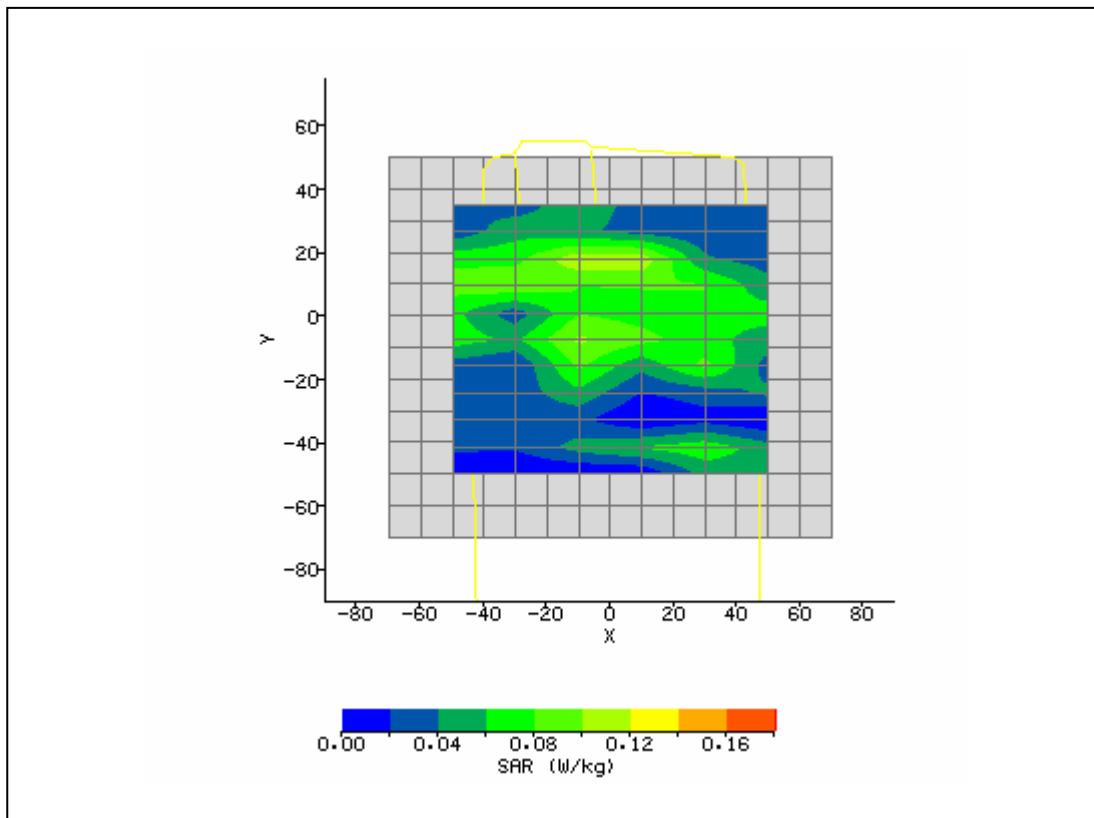

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/29/2007 1:33:01 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	7505 Handheld Computer	<b>Relative Permittivity:</b>	51.12
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.941
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	20.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	12.39 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	0.328 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.179 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.182 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.77 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/29/07
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

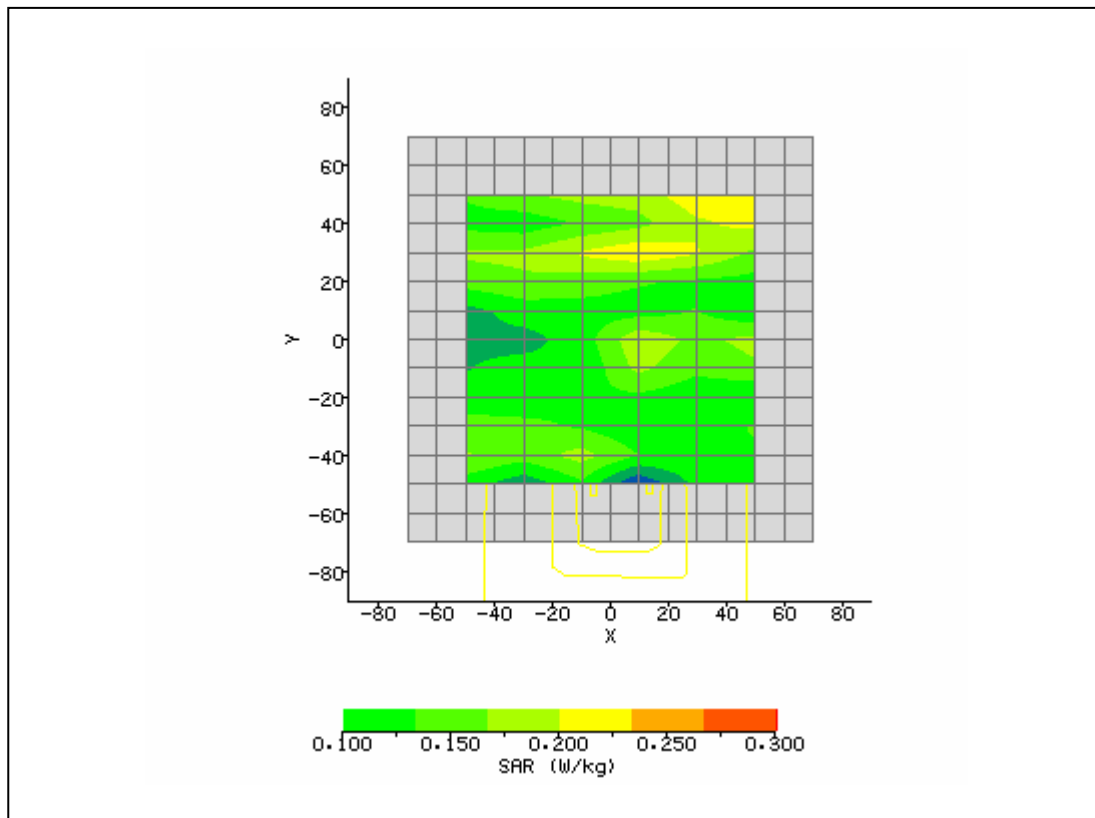


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/29/2007 2:51:10 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	7505 Handheld Computer	<b>Relative Permittivity:</b>	51.12
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.941
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-5.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	9.40 mm
<b>Antenna Configuration:</b>	Integral - Aux	<b>Max E Field:</b>	9.54 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	0.203 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.070 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.073 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.29 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/29/07
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

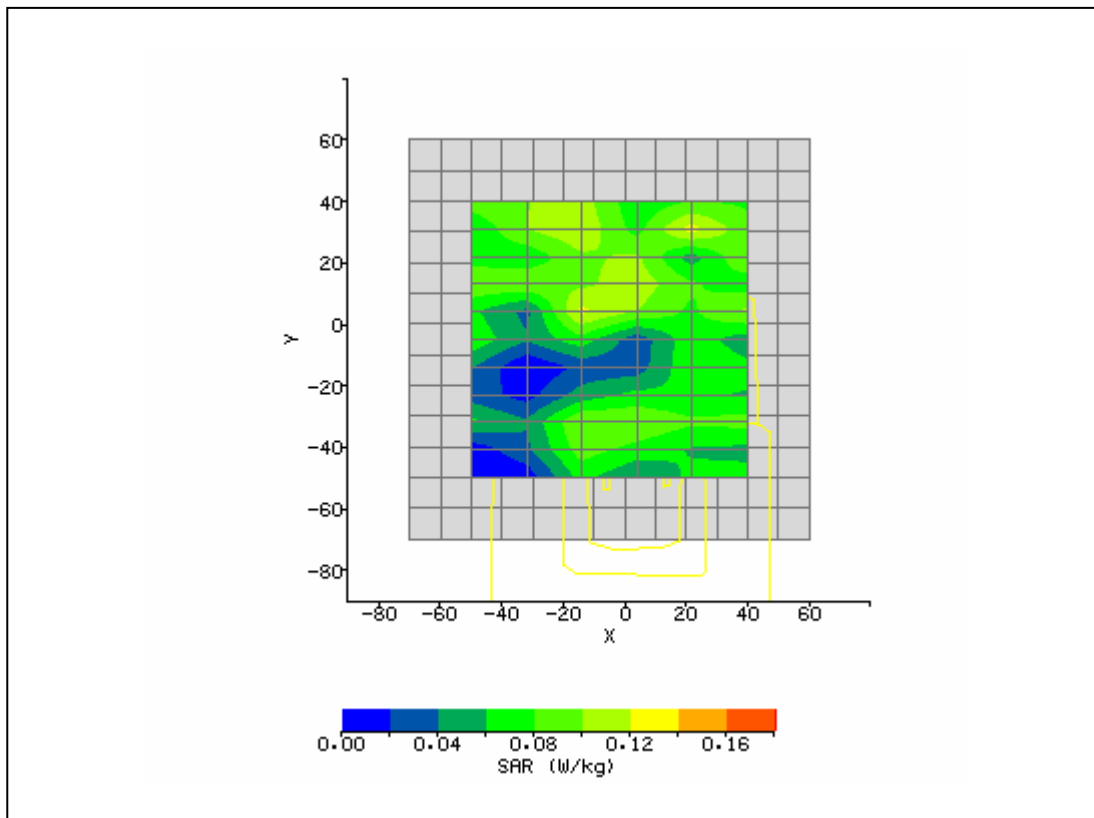





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/29/2007 3:18:28 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	7505 Handheld Computer	<b>Relative Permittivity:</b>	50.98
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.872
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-14.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	10.90 mm
<b>Antenna Configuration:</b>	Integral - Main	<b>Max E Field:</b>	9.00 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.165 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.073 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.074 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.83 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/29/07
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

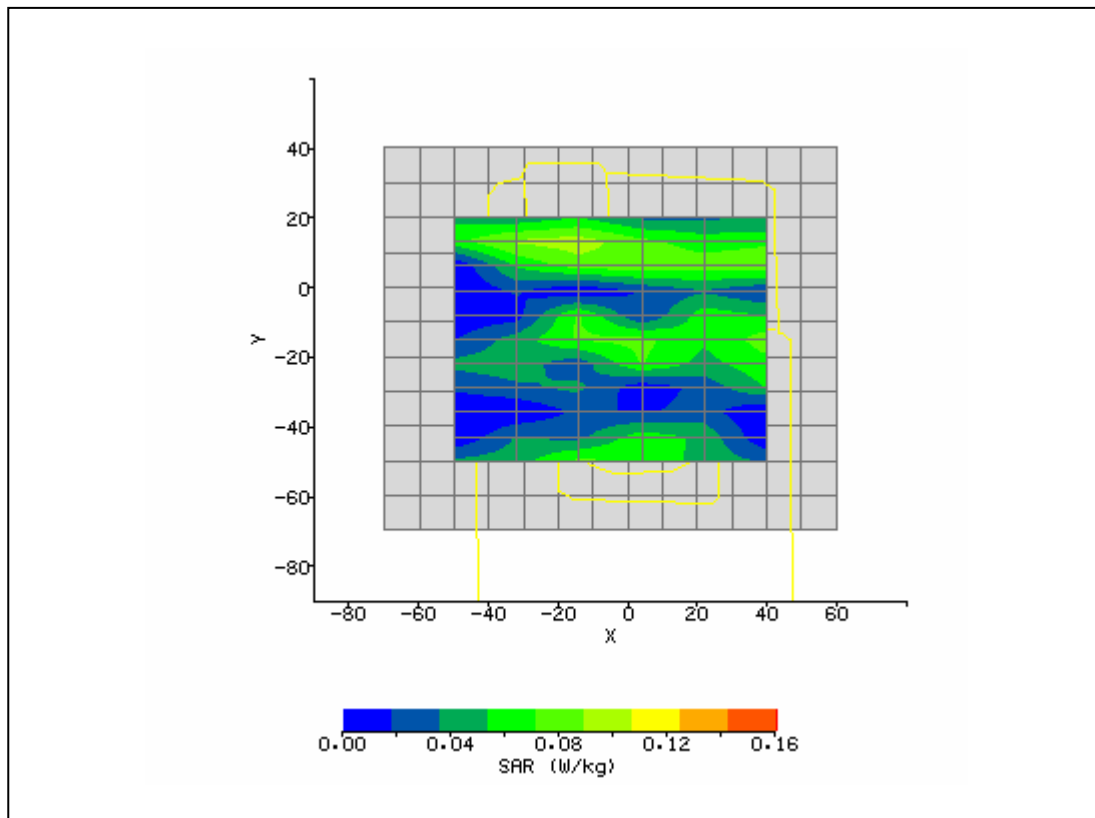


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/29/2007 3:33:06 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	7505 Handheld Computer	<b>Relative Permittivity:</b>	51.07
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.913
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-15.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	-4.10 mm
<b>Antenna Configuration:</b>	Integral - Main	<b>Max E Field:</b>	9.16 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.214 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.075 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.078 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.55 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/29/07
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

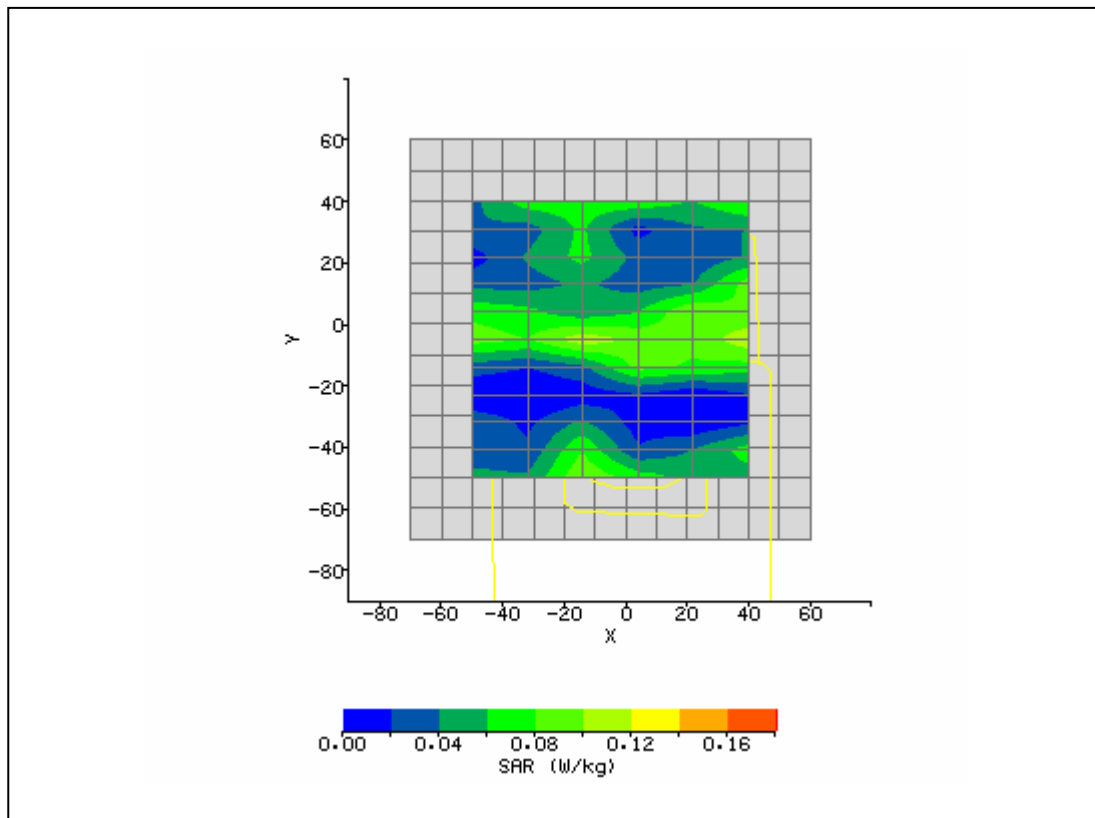


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/29/2007 3:54:11 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	7505 Handheld Computer	<b>Relative Permittivity:</b>	51.12
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.941
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	5.40 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	20.00 mm
<b>Antenna Configuration:</b>	Integral - Main	<b>Max E Field:</b>	8.96 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	0.186 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.065 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.065 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.19 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/29/07
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

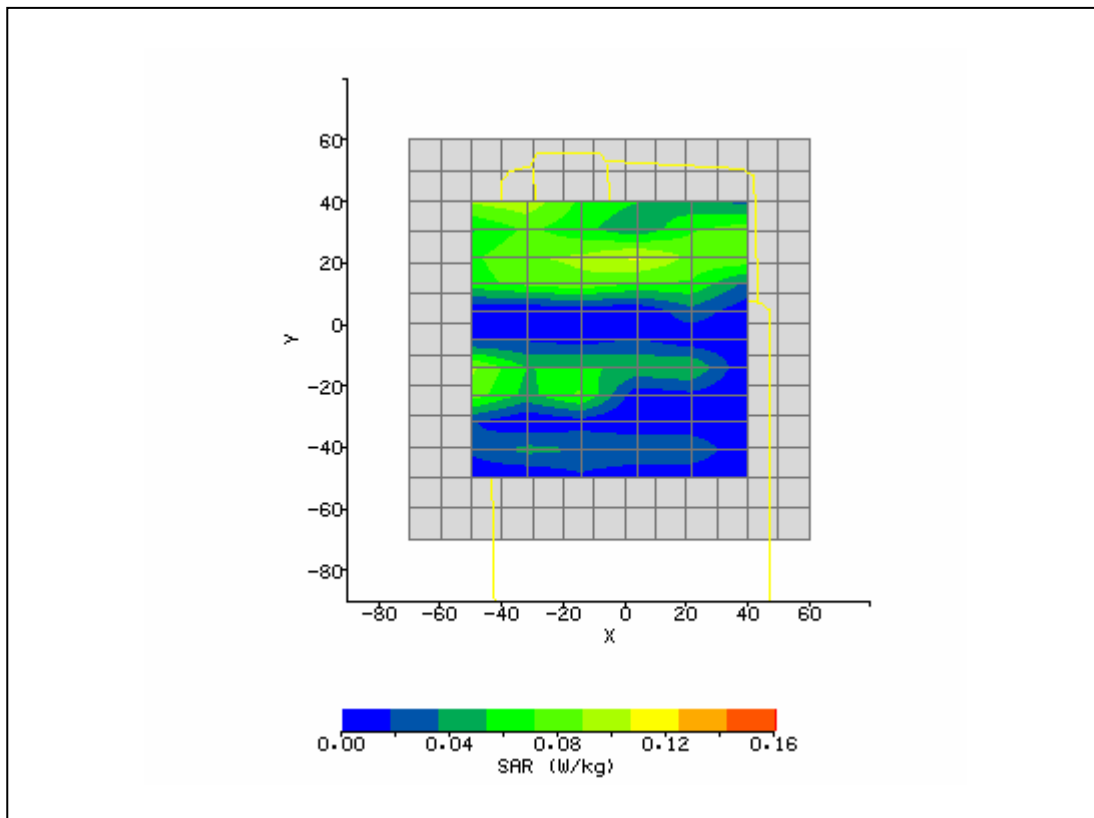


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/30/2007 9:03:54 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	7505 Handheld Computer	<b>Relative Permittivity:</b>	51.07
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.913
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Touch with clip	<b>Max SAR Y-axis Location:</b>	10.30 mm
<b>Antenna Configuration:</b>	Integral - Aux	<b>Max E Field:</b>	9.61 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.175 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.462 / .462 / .462	<b>SAR Start:</b>	0.089 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.085 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-4.25 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/29/07
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

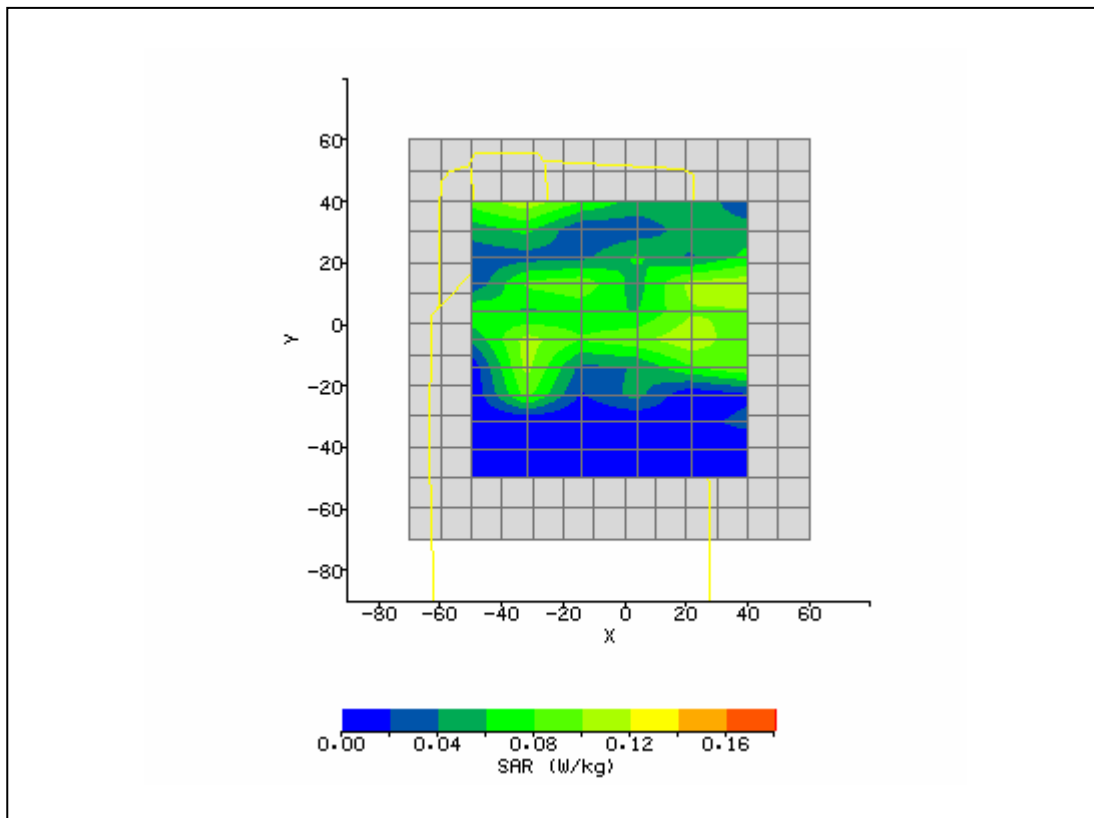


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/30/2007 10:34:00 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Left_Touch_1g_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	7505 Handheld Computer	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	38.4%	<b>Conductivity:</b>	0.908
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.7°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-7.00 mm
<b>DUT Position:</b>	Left Tilt	<b>Max SAR Z-axis Location:</b>	-104.80 mm
<b>Antenna Configuration:</b>	Integral / Main	<b>Max E Field:</b>	33.70 V/m
<b>Test Frequency:</b>	824.2 / 2462MHz	<b>SAR 1g:</b>	1.061 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	0.270 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.273 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.35 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/30/07
<b>Input Power Level:</b>	PCL 5 / Set by SW	<b>Extrapolation:</b>	poly4

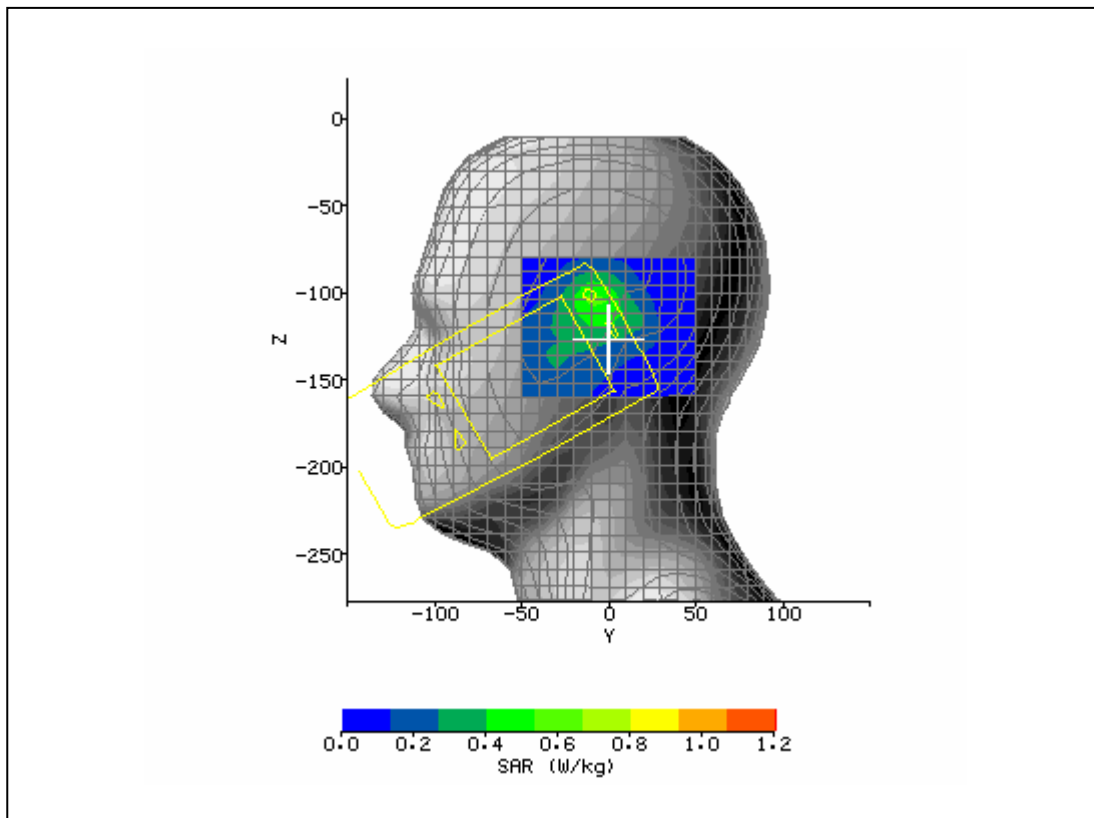


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/30/2007 3:03:07 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	7505 Handheld Computer	<b>Relative Permittivity:</b>	51.28
<b>Relative Humidity:</b>	38.4%	<b>Conductivity:</b>	1.555
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.7°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-32.00 mm
<b>DUT Position:</b>	Body	<b>Max SAR Y-axis Location:</b>	-5.00 mm
<b>Antenna Configuration:</b>	Integral / Main	<b>Max E Field:</b>	6.51 V/m
<b>Test Frequency:</b>	1850.2 / 2462MHz	<b>SAR 1g:</b>	0.259 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.489 / .489 / .489	<b>SAR Start:</b>	0.019 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.020 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.74 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/30/07
<b>Input Power Level:</b>	PCL 5 / Set by SW	<b>Extrapolation:</b>	poly4

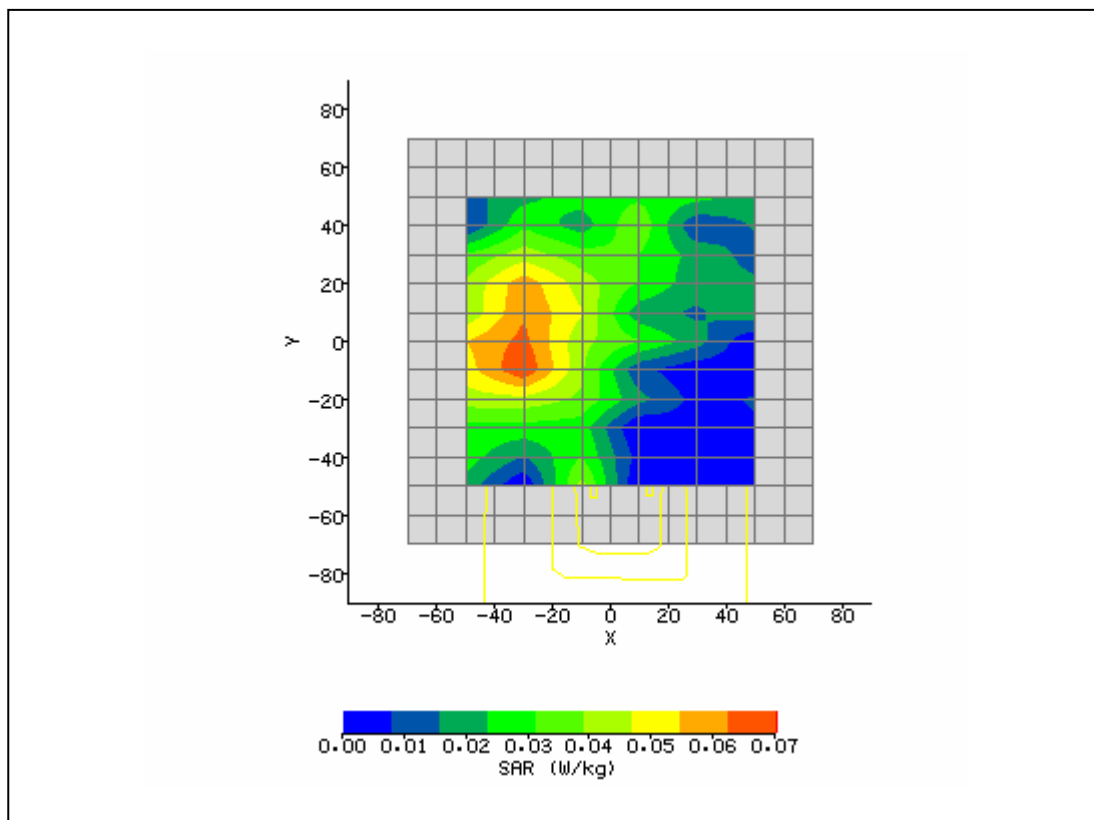

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/30/2007 9:28:43 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	7505 Handheld Computer	<b>Relative Permittivity:</b>	37.57
<b>Relative Humidity:</b>	38.4%	<b>Conductivity:</b>	1.852
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.7°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-40.00 mm
<b>DUT Position:</b>	Left Touch	<b>Max SAR Z-axis Location:</b>	-100.00 mm
<b>Antenna Configuration:</b>	Integral - Main	<b>Max E Field:</b>	1.13 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.000 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	0.000 W/kg
<b>Conversion Factors:</b>	.451 / .451 / .451	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/30/07
<b>Input Power Level:</b>	Set by SW	<b>Extrapolation:</b>	poly4

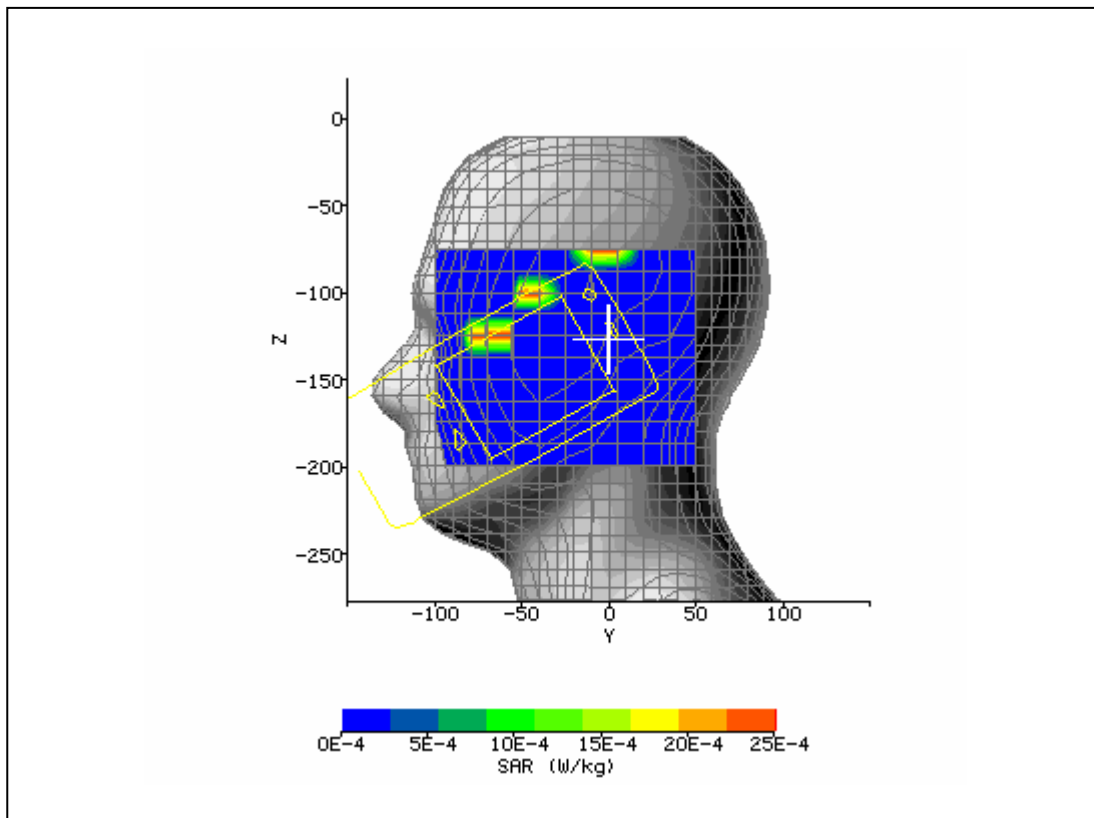


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/14/2007 7:01:09 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.2°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	42.9%	<b>Conductivity:</b>	0.923
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.0°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	8mm	<b>Max SAR Y-axis Location:</b>	0.00 mm
<b>Antenna Configuration:</b>	835 Dipole	<b>Max E Field:</b>	94.47 V/m
<b>Test Frequency:</b>	835MHz	<b>SAR 1g:</b>	10.420 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	6.552 W/kg
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	2.046 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	2.002 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.14 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/14/07
<b>Input Power Level:</b>	1W	<b>Extrapolation:</b>	poly4

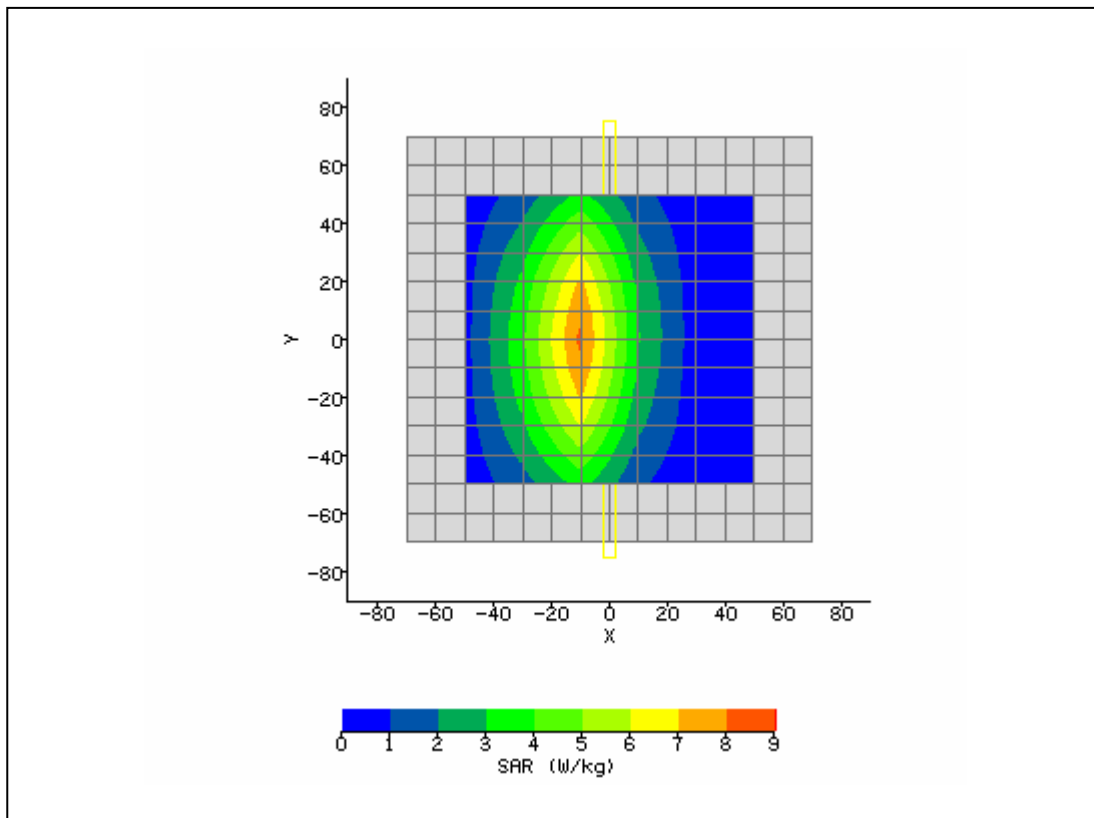





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/16/2007 7:03:22 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	23.4°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	40.73
<b>Relative Humidity:</b>	39.0%	<b>Conductivity:</b>	1.422
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	23.4°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-6.00 mm
<b>DUT Position:</b>	8mm	<b>Max SAR Y-axis Location:</b>	-15.00 mm
<b>Antenna Configuration:</b>	1900 Dipole	<b>Max E Field:</b>	156.75 V/m
<b>Test Frequency:</b>	1900MHz	<b>SAR 1g:</b>	38.373 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	20.169 W/kg
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	5.032 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	5.020 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.24 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/15/07
<b>Input Power Level:</b>	1W	<b>Extrapolation:</b>	poly4

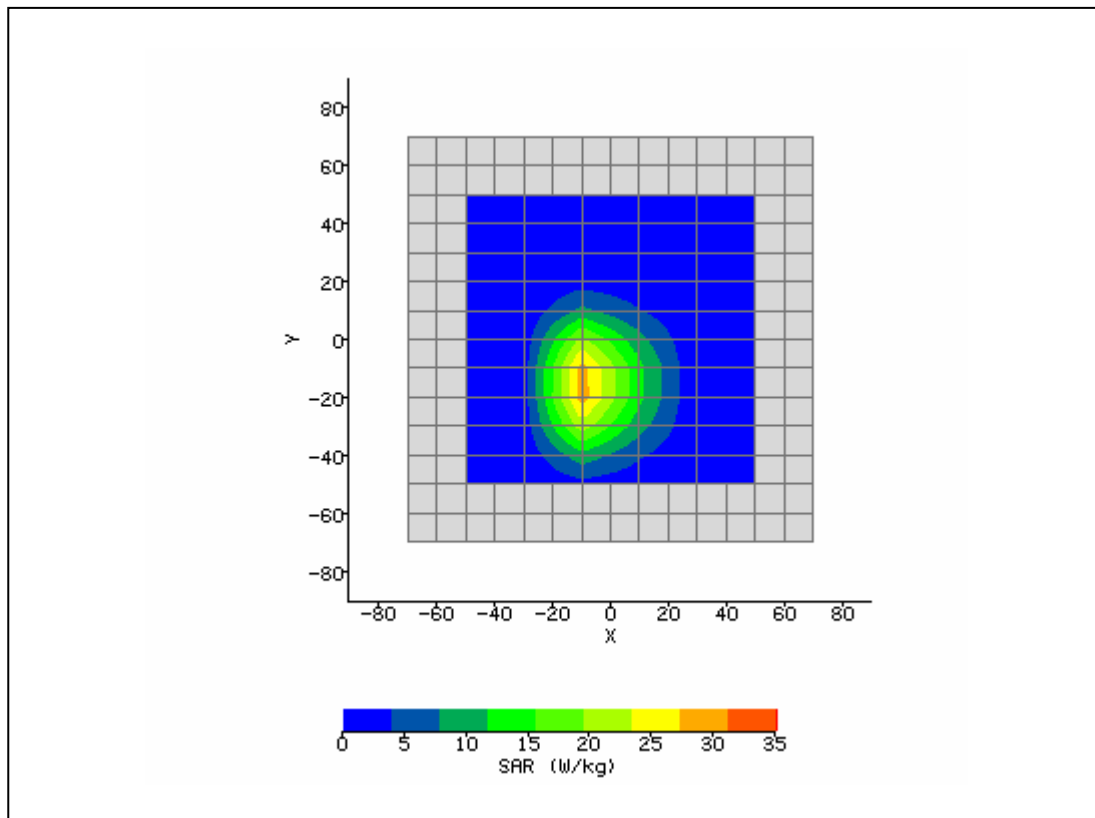


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/29/2007 11:31:41 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	37.52
<b>Relative Humidity:</b>	38.4%	<b>Conductivity:</b>	1.872
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.7°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	8mm	<b>Max SAR Y-axis Location:</b>	-1.00 mm
<b>Antenna Configuration:</b>	Dipole	<b>Max E Field:</b>	138.24 V/m
<b>Test Frequency:</b>	2450MHz	<b>SAR 1g:</b>	51.618 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	23.528 W/kg
<b>Conversion Factors:</b>	.451 / .451 / .451	<b>SAR Start:</b>	2.857 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	2.832 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.87 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/29/07
<b>Input Power Level:</b>	1W	<b>Extrapolation:</b>	poly4

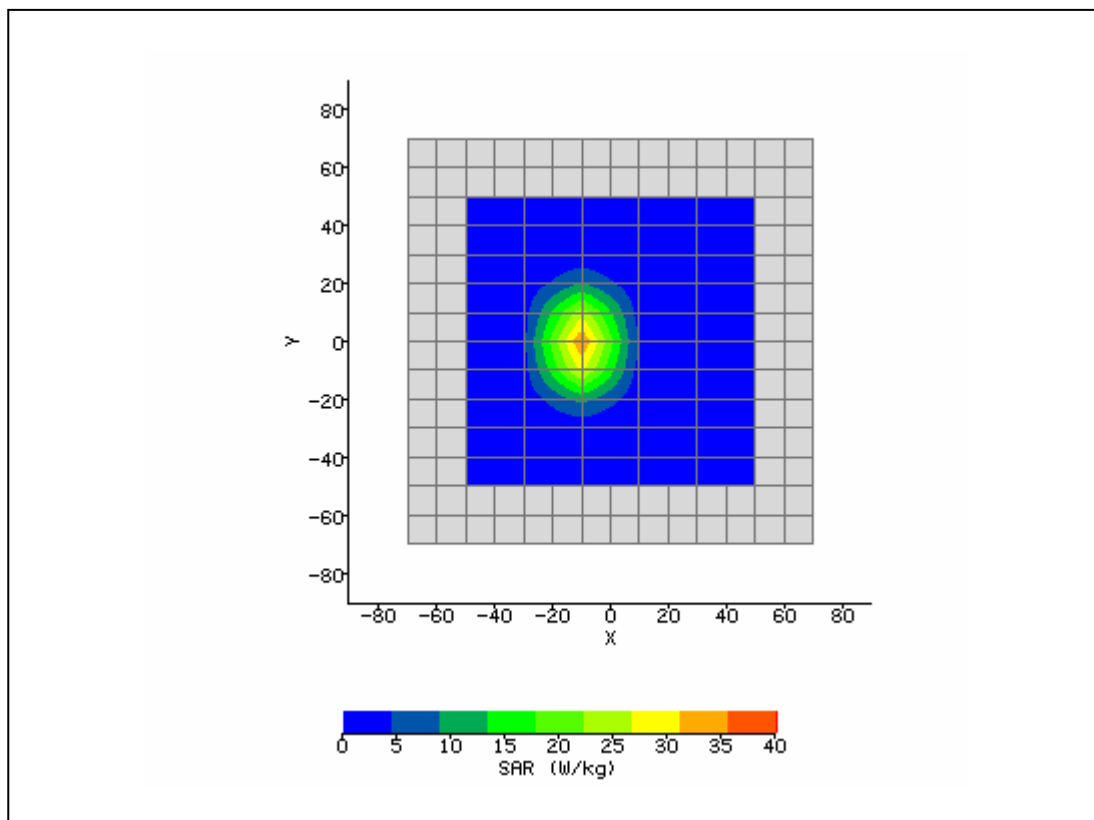

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/30/2007 9:47:58 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	20.4°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	37.51
<b>Relative Humidity:</b>	37.4%	<b>Conductivity:</b>	1.873
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	20.3°C
<b>Phantom Rotation:</b>	180°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	8mm	<b>Max SAR Y-axis Location:</b>	-9.00 mm
<b>Antenna Configuration:</b>	Dipole	<b>Max E Field:</b>	128.61 V/m
<b>Test Frequency:</b>	2450MHz	<b>SAR 1g:</b>	50.500 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	23.110 W/kg
<b>Conversion Factors:</b>	.451 / .451 / .451	<b>SAR Start:</b>	2.469 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	2.473 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.17 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/30/07
<b>Input Power Level:</b>	1 W	<b>Extrapolation:</b>	poly4

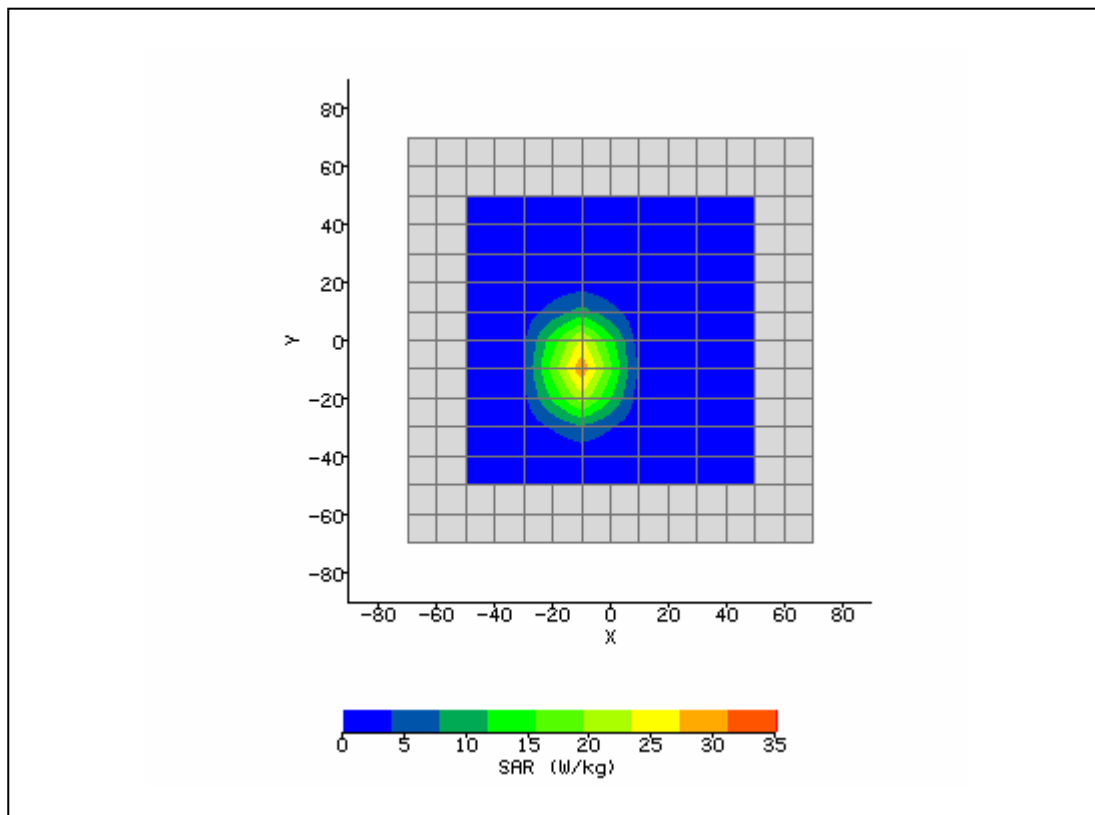

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/30/2007 7:55:02 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	41.57
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	0.924
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	4.80 mm
<b>DUT Position:</b>	8mm	<b>Max SAR Y-axis Location:</b>	5.60 mm
<b>Antenna Configuration:</b>	835 Dipole	<b>Max E Field:</b>	93.75 V/m
<b>Test Frequency:</b>	835MHz	<b>SAR 1g:</b>	9.978 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	6.288 W/kg
<b>Conversion Factors:</b>	.360 / .360 / .360	<b>SAR Start:</b>	2.064 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	2.059 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.21 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/30/2007
<b>Input Power Level:</b>	1W	<b>Extrapolation:</b>	poly4

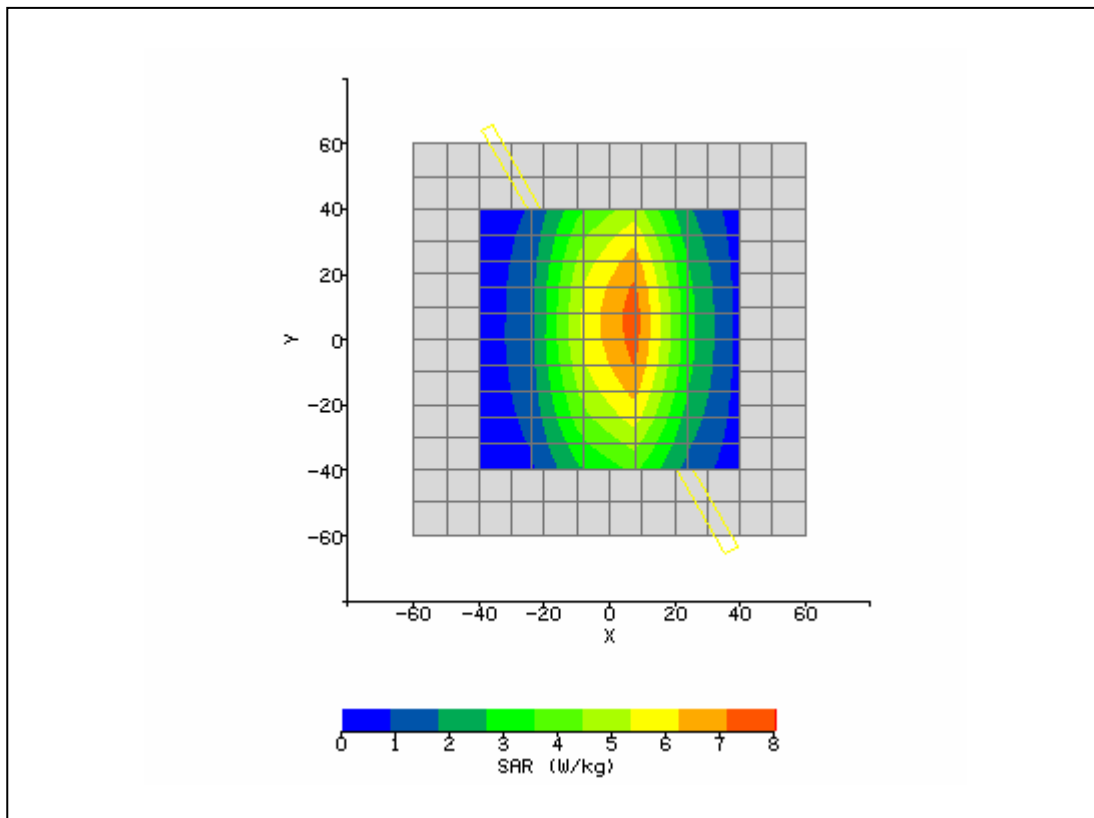

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/30/2007 7:15:03 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	40.72
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.423
<b>Phantom S/No:</b>	HeadBox2.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-11.20 mm
<b>DUT Position:</b>	8 mm	<b>Max SAR Y-axis Location:</b>	-11.20 mm
<b>Antenna Configuration:</b>	Dipole 1900	<b>Max E Field:</b>	162.32 V/m
<b>Test Frequency:</b>	1900MHz	<b>SAR 1g:</b>	43.029 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	22.488 W/kg
<b>Conversion Factors:</b>	.501 / .501 / .501	<b>SAR Start:</b>	5.325 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	5.289 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.68 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/30/07
<b>Input Power Level:</b>	1 W	<b>Extrapolation:</b>	poly4

