




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 3:29:51 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.7°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	41.57
Relative Humidity:	41.6%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.6°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-11.00 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-104.00 mm
Antenna Configuration:	Integral	Max E Field:	30.31 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.787 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.355 W/kg
Type of Modulation:		SAR End:	0.353 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.54 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	PCL 5	Extrapolation:	poly4

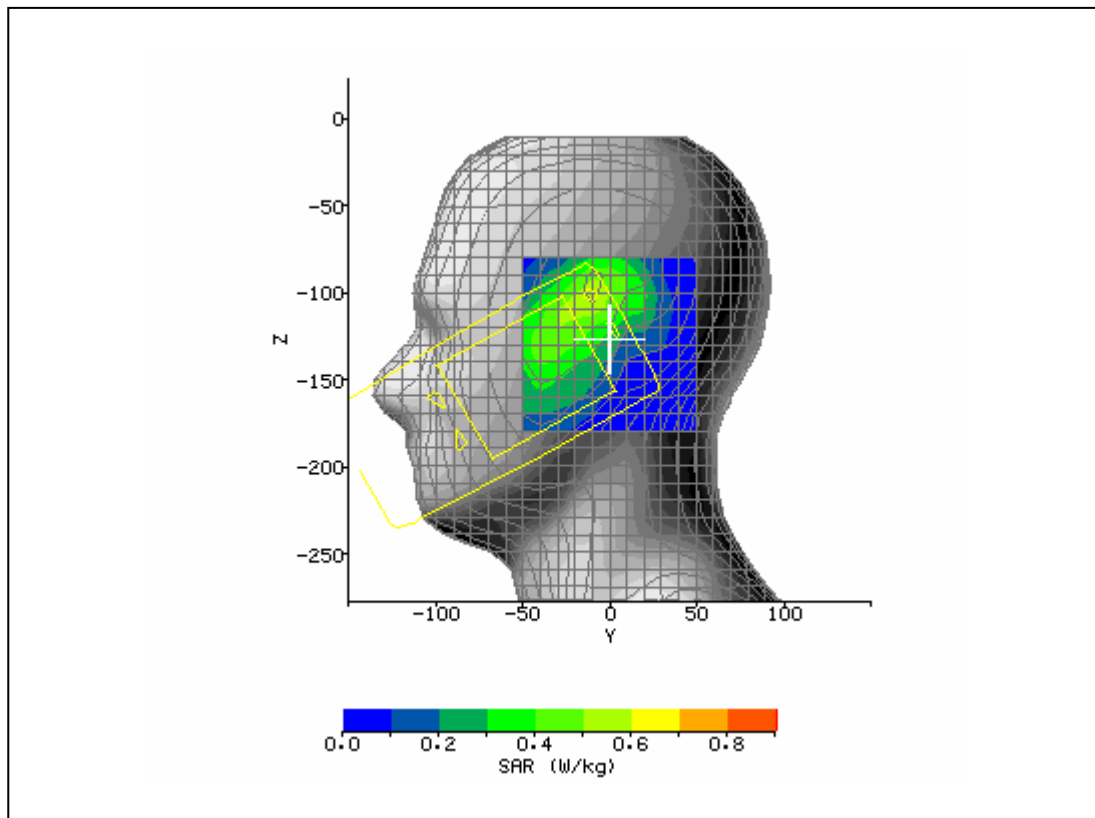


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 3:44:17 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.2°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	41.57
Relative Humidity:	46.0%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.3°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-12.80 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-108.80 mm
Antenna Configuration:	Integral	Max E Field:	38.50 V/m
Test Frequency:	836.6MHz	SAR 1g:	1.177 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.381 W/kg
Type of Modulation:		SAR End:	0.384 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.77 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	PCL 5	Extrapolation:	poly4

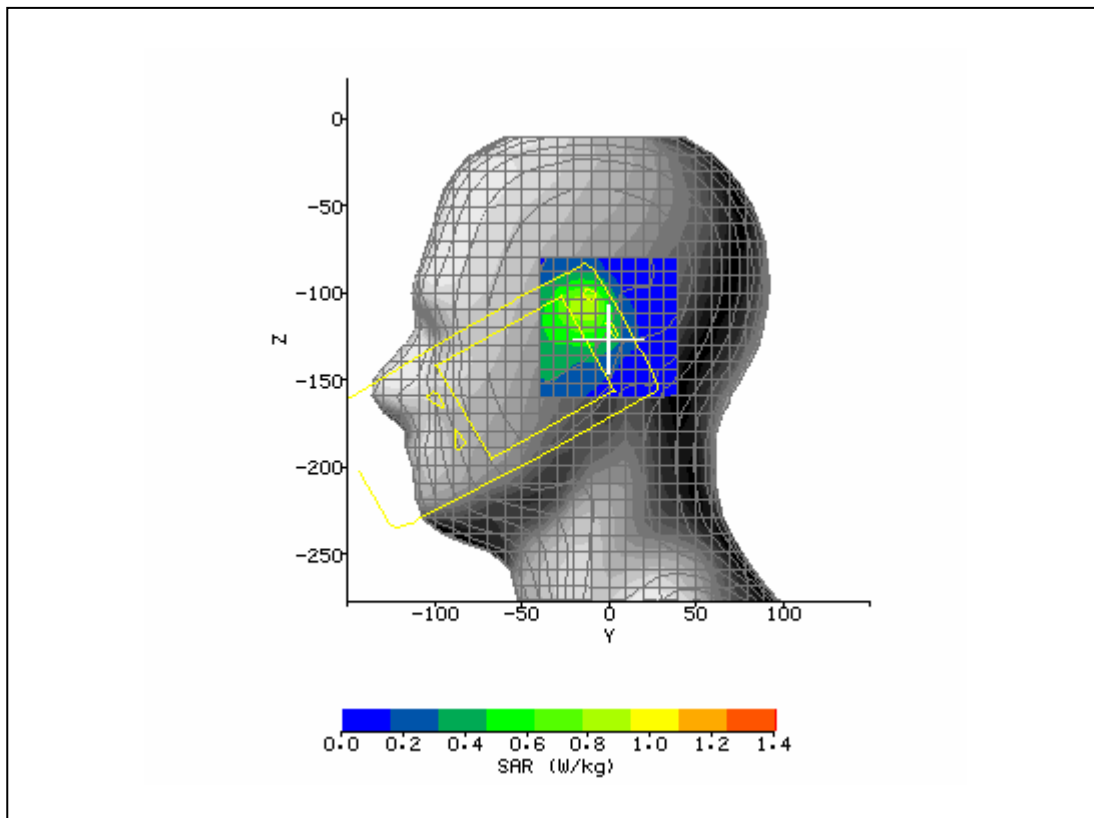


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 3:58:52 PM	DUT Battery Model/No:	
Filename:	Left_Tilt_190_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.6°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	41.57
Relative Humidity:	39.2%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.6°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-26.40 mm
DUT Position:	Right Touch	Max SAR Z-axis Location:	-123.20 mm
Antenna Configuration:	Integral	Max E Field:	24.71 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.453 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.181 W/kg
Type of Modulation:		SAR End:	0.178 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.33 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	PCL 5	Extrapolation:	poly4

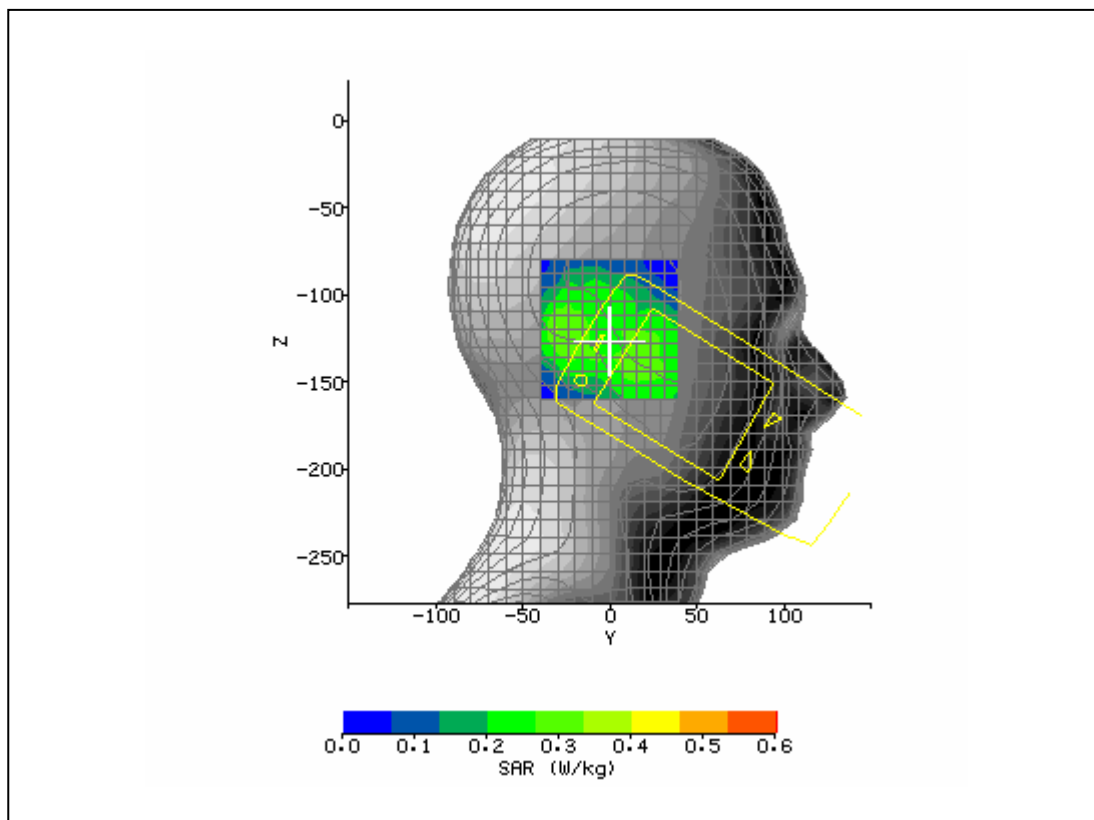


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 4:14:09 PM	DUT Battery Model/No:	
Filename:	Right_Touch_190_3d.tx t	Probe Serial Number:	M0024
Ambient Temperature:	23.7°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	41.57
Relative Humidity:	40.7%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.6°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-26.40 mm
DUT Position:	Right Tilt	Max SAR Z-axis Location:	-120.00 mm
Antenna Configuration:	Integral	Max E Field:	24.11 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.558 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.183 W/kg
Type of Modulation:		SAR End:	0.186 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.80 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	PCL 5	Extrapolation:	poly4

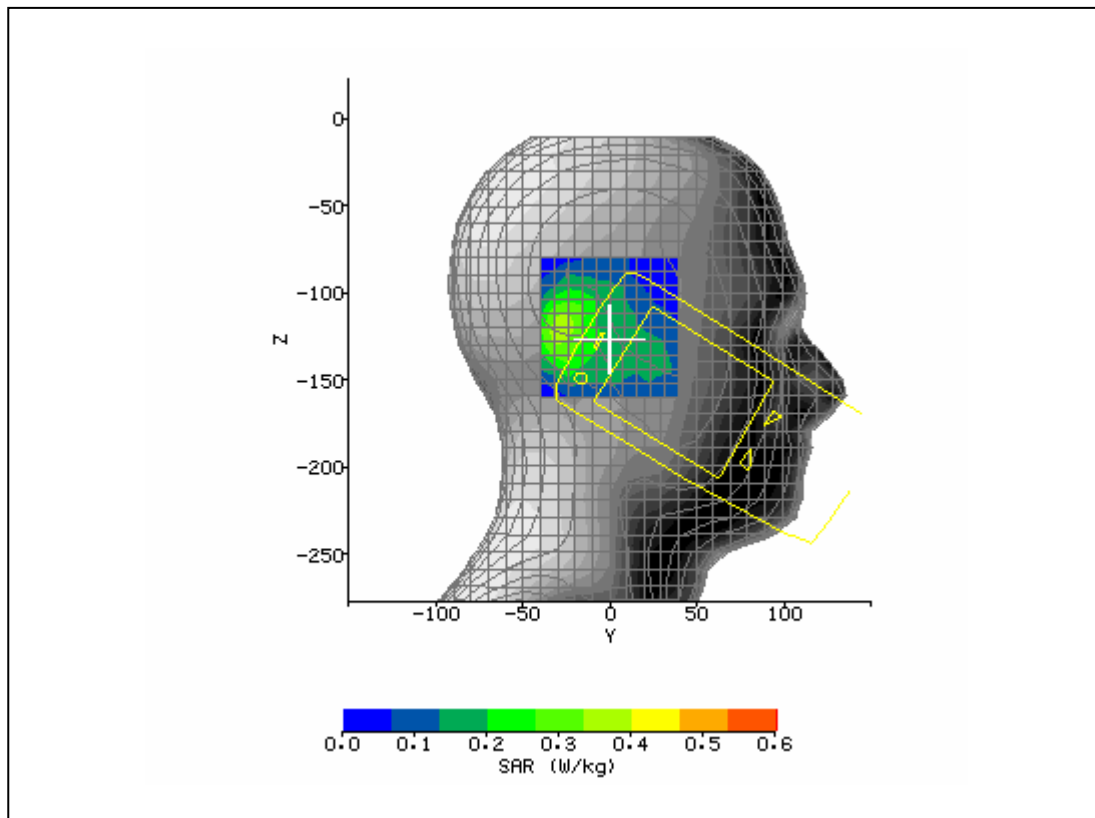


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 4:29:52 PM	DUT Battery Model/No:	
Filename:	Left_Tilt_190_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.5°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	41.58
Relative Humidity:	45.7%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.3°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-12.80 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-110.40 mm
Antenna Configuration:	Integral	Max E Field:	34.29 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.955 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.303 W/kg
Type of Modulation:		SAR End:	0.294 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.93 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	PCL 5	Extrapolation:	poly4

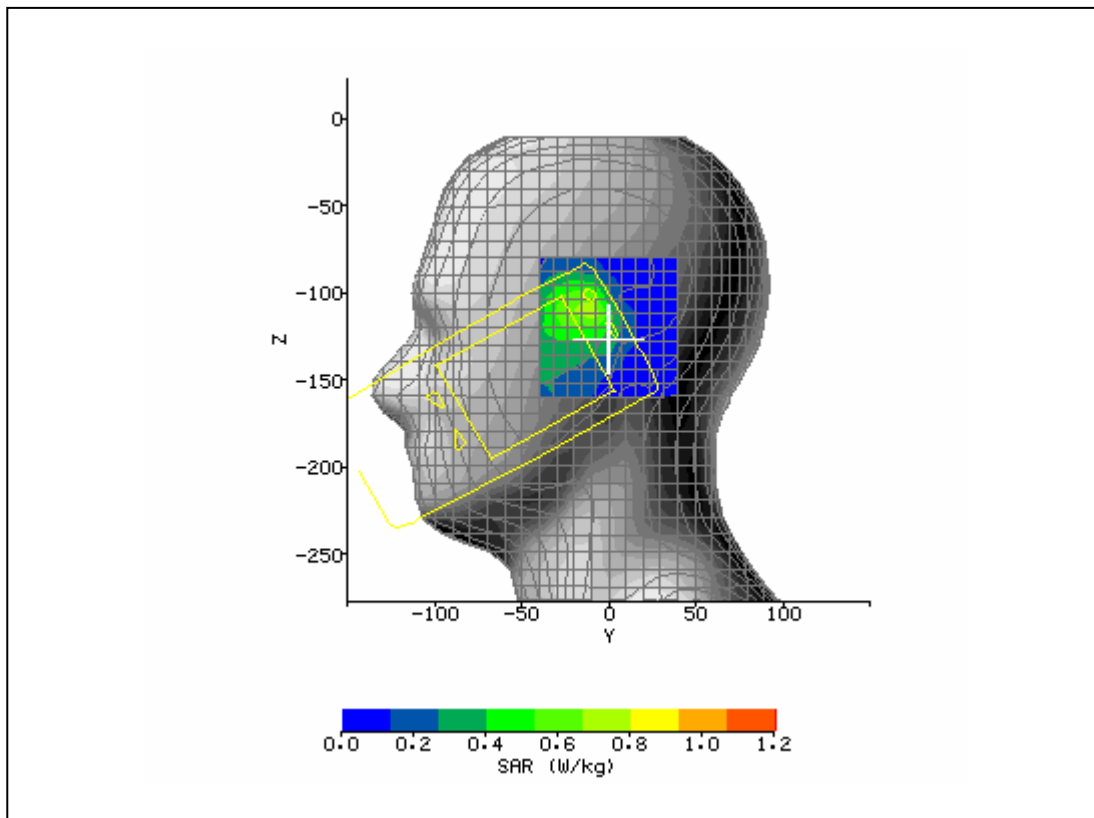


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 4:47:07 PM	DUT Battery Model/No:	
Filename:	Left_Tilt_128_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	41.51
Relative Humidity:	45.4%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-11.20 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-109.60 mm
Antenna Configuration:	Integral	Max E Field:	33.68 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.886 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.272 W/kg
Type of Modulation:		SAR End:	0.276 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.58 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	PCL 5	Extrapolation:	poly4

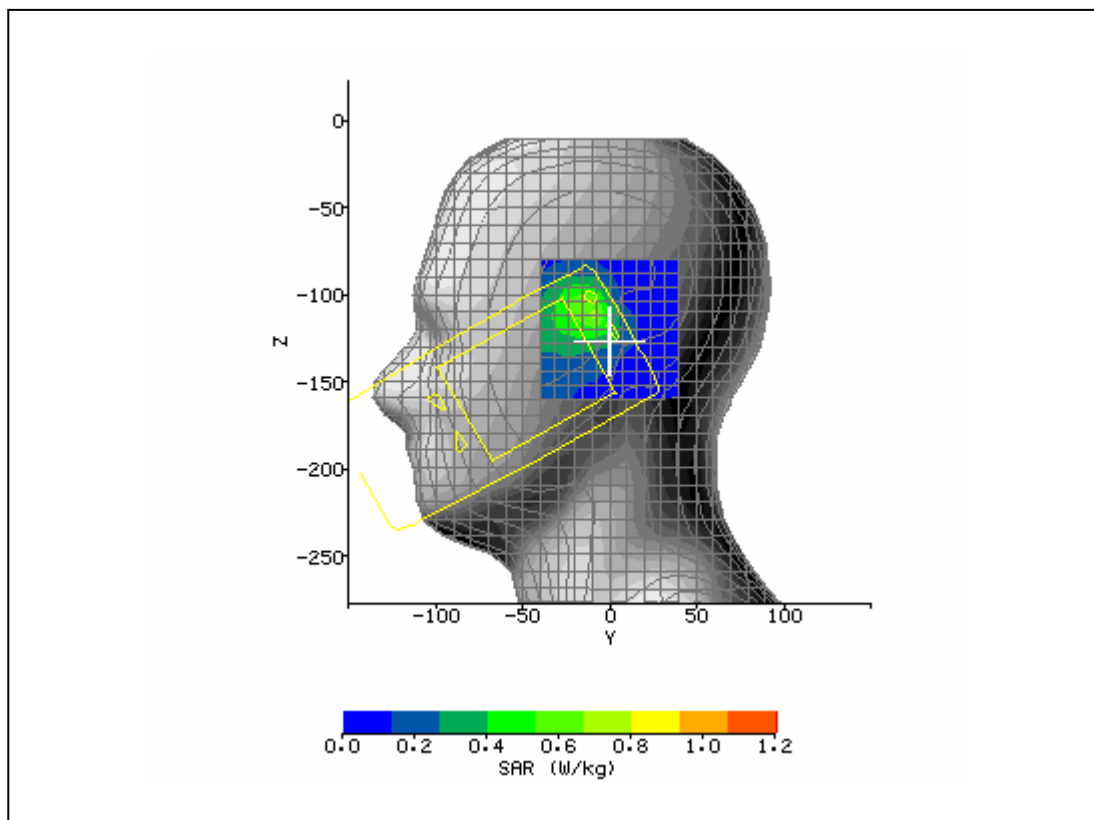


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 9:01:07 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_810_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.6°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	40.83
Relative Humidity:	39.0%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.5°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-32.00 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-114.40 mm
Antenna Configuration:	Integral	Max E Field:	11.80 V/m
Test Frequency:	1880MHz	SAR 1g:	0.177 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.027 W/kg
Type of Modulation:		SAR End:	0.028 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.81 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

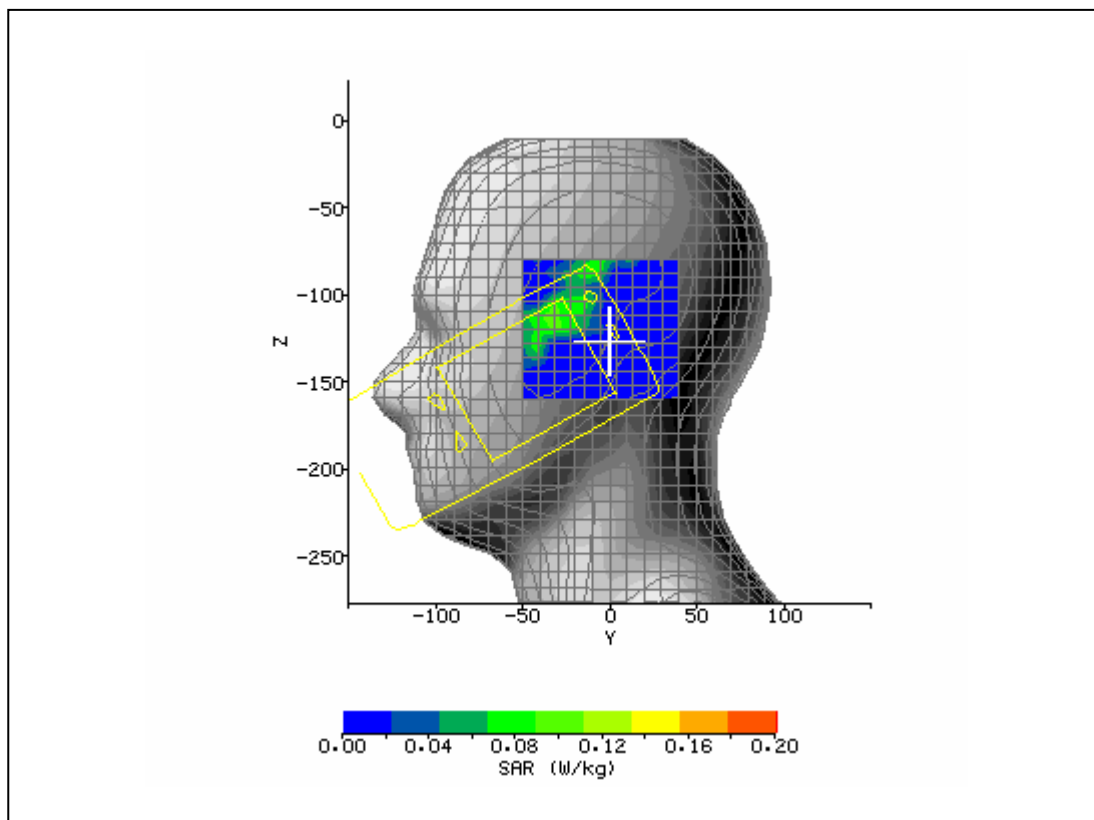


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 9:15:29 AM	DUT Battery Model/No:	
Filename:	Left_Touch_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.6°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	40.83
Relative Humidity:	39.0%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.5°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-17.60 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-98.40 mm
Antenna Configuration:	Integral	Max E Field:	11.96 V/m
Test Frequency:	1880MHz	SAR 1g:	0.137 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.012 W/kg
Type of Modulation:		SAR End:	0.012 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.37 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

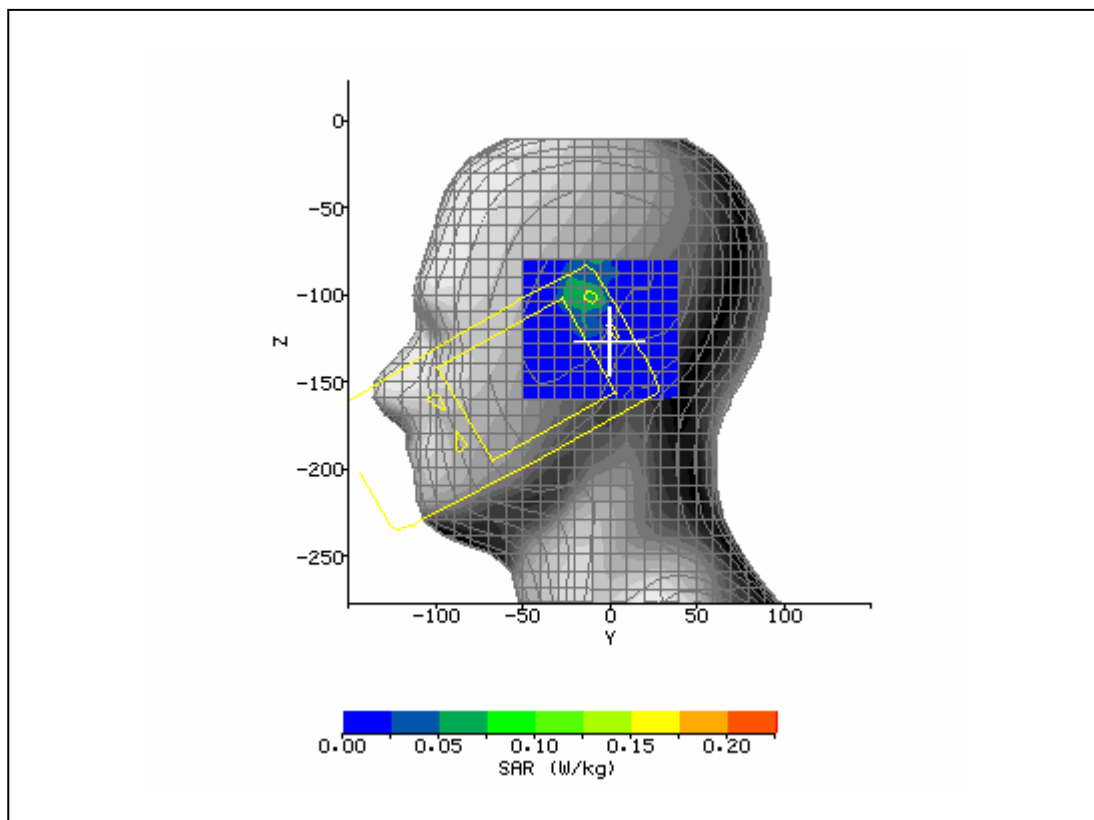


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 9:29:20 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.3°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	40.83
Relative Humidity:	36.3%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.3°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-21.20 mm
DUT Position:	Right Touch	Max SAR Z-axis Location:	-127.60 mm
Antenna Configuration:	Integral	Max E Field:	8.78 V/m
Test Frequency:	1880MHz	SAR 1g:	0.102 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.016 W/kg
Type of Modulation:		SAR End:	0.016 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.86 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

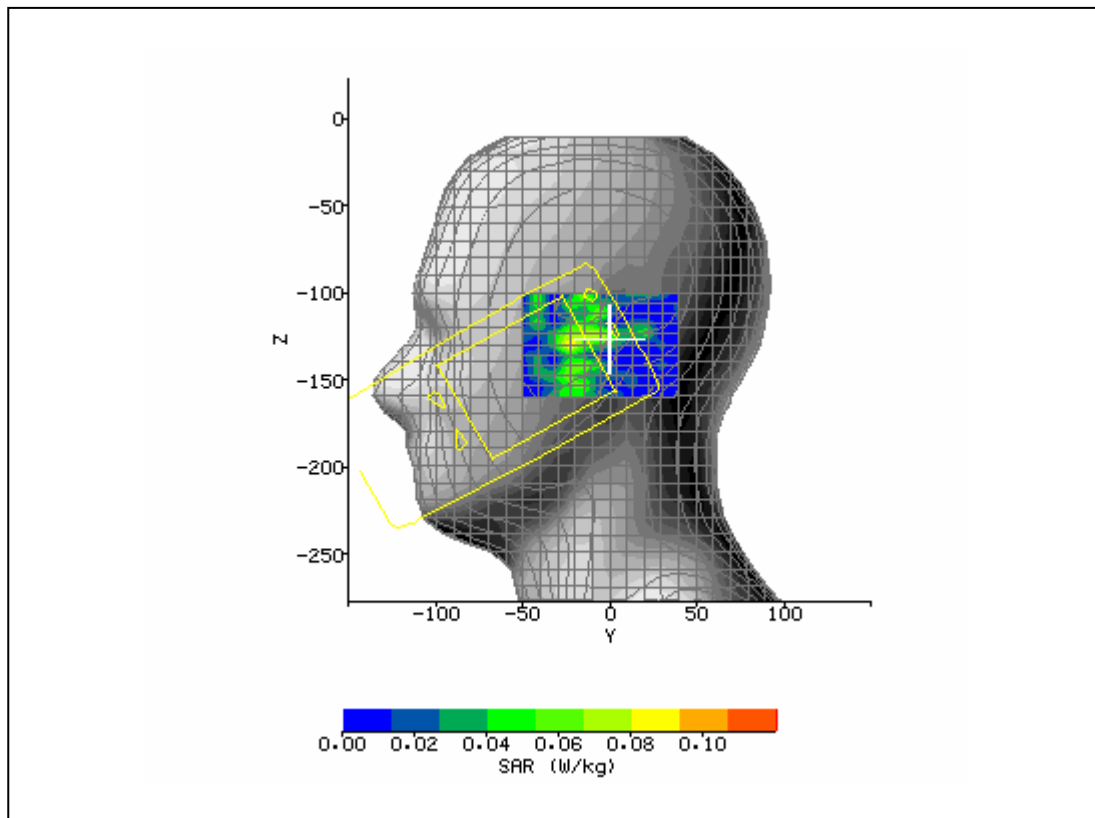


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 9:44:22 AM	DUT Battery Model/No:	
Filename:	Right_Touch_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.3°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	40.83
Relative Humidity:	36.3%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.3°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-17.60 mm
DUT Position:	Right Tilt	Max SAR Z-axis Location:	-142.00 mm
Antenna Configuration:	Integral	Max E Field:	9.09 V/m
Test Frequency:	1880MHz	SAR 1g:	0.093 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.037 W/kg
Type of Modulation:		SAR End:	0.038 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.71 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

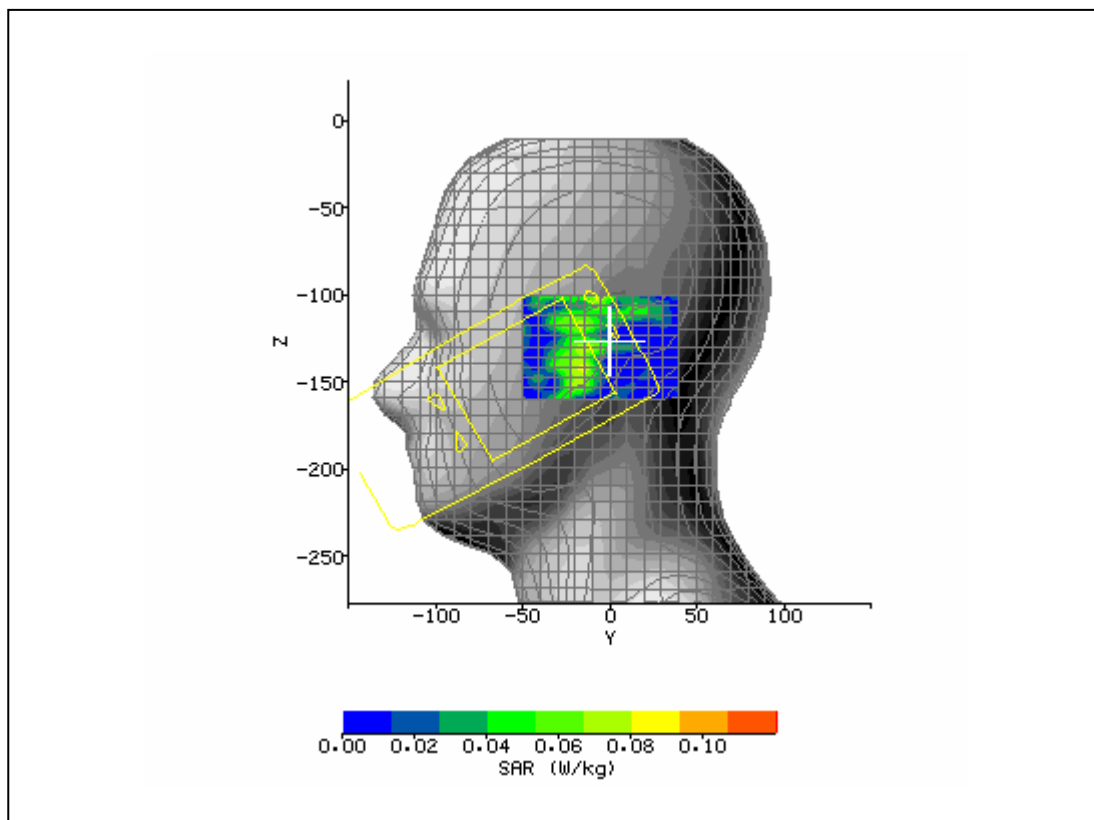


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 10:11:24 AM	DUT Battery Model/No:	
Filename:	Right_Tilt_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.6°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	40.95
Relative Humidity:	38.3%	Conductivity:	1.37
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.5°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	2.20 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-109.60 mm
Antenna Configuration:	Integral	Max E Field:	14.26 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.249 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.084 W/kg
Type of Modulation:		SAR End:	0.085 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.47 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	PCL 5	Extrapolation:	poly4

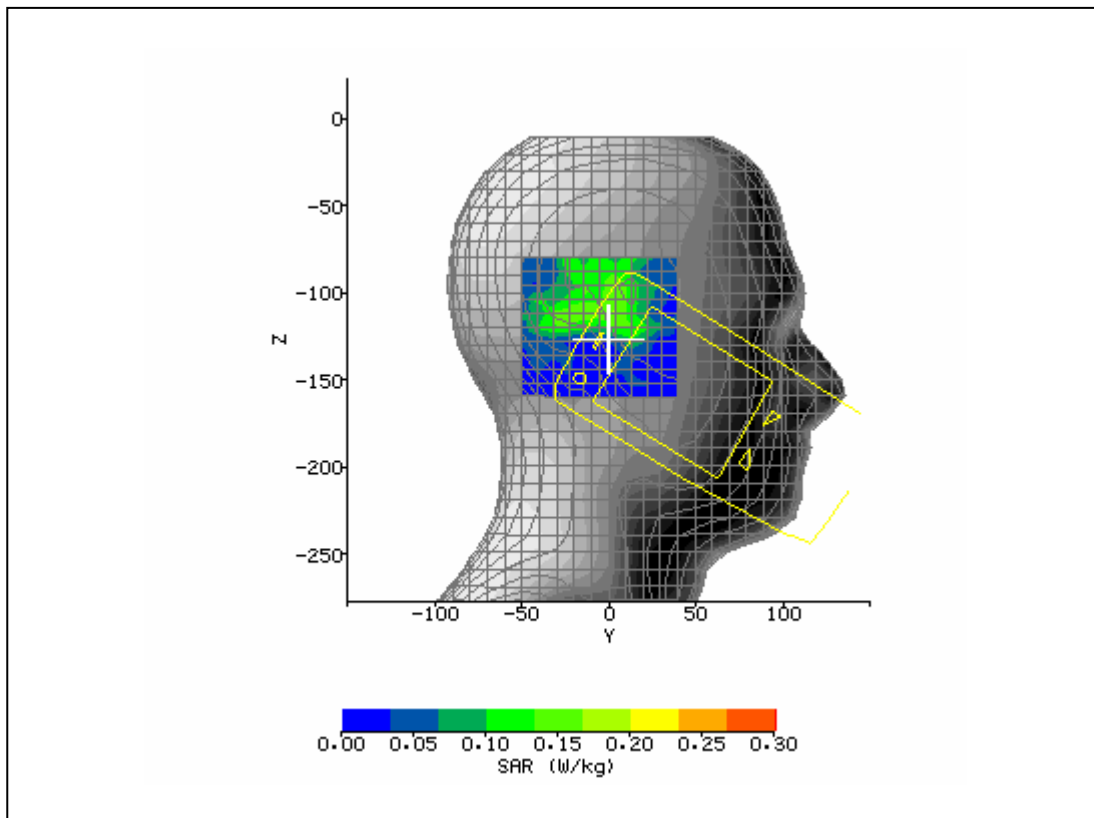


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 10:41:35 AM	DUT Battery Model/No:	
Filename:	Left_Touch_512_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.6°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	40.65
Relative Humidity:	38.3%	Conductivity:	1.43
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.5°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-7.70 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-95.00 mm
Antenna Configuration:	Integral	Max E Field:	10.23 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.204 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.056 W/kg
Type of Modulation:		SAR End:	0.057 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.97 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	PCL 5	Extrapolation:	poly4

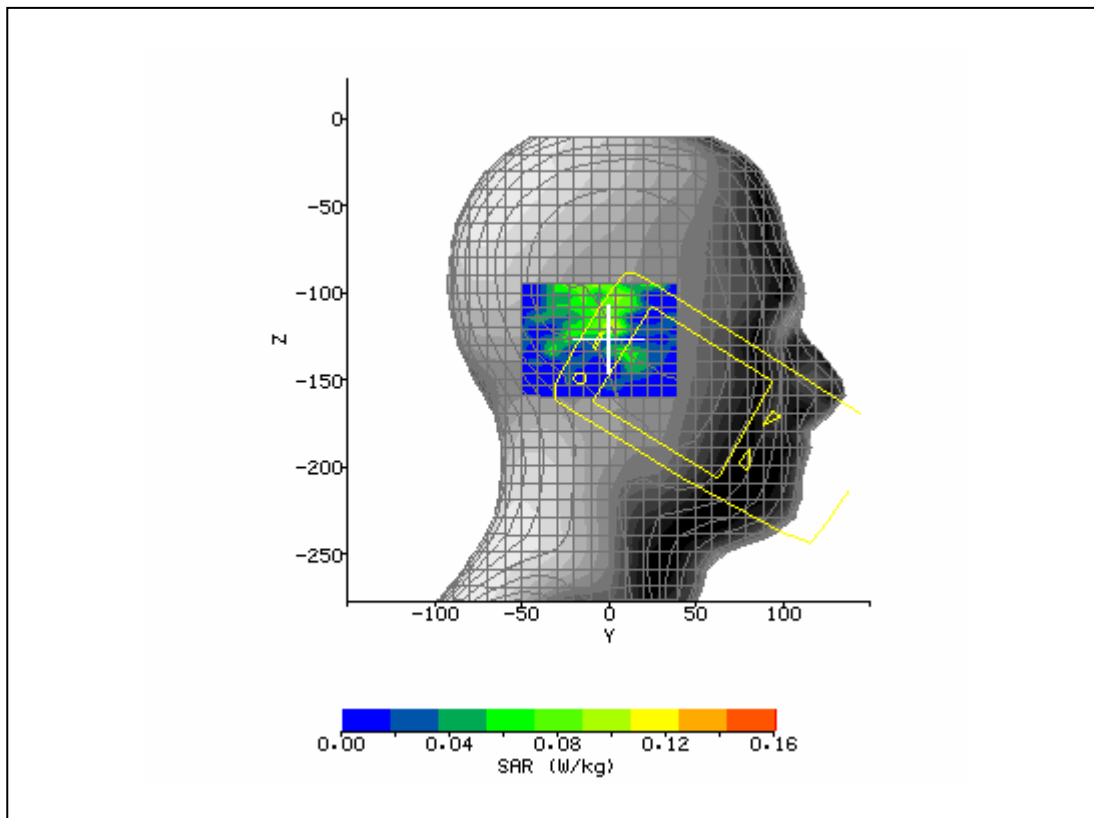


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 11:32:51 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.6°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	56.08
Relative Humidity:	45.2%	Conductivity:	0.972
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	-14.00 mm
Antenna Configuration:	Integral	Max E Field:	14.65 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.257 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.110 W/kg
Type of Modulation:		SAR End:	0.113 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.73 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	3 Timeslots up	Extrapolation:	poly4

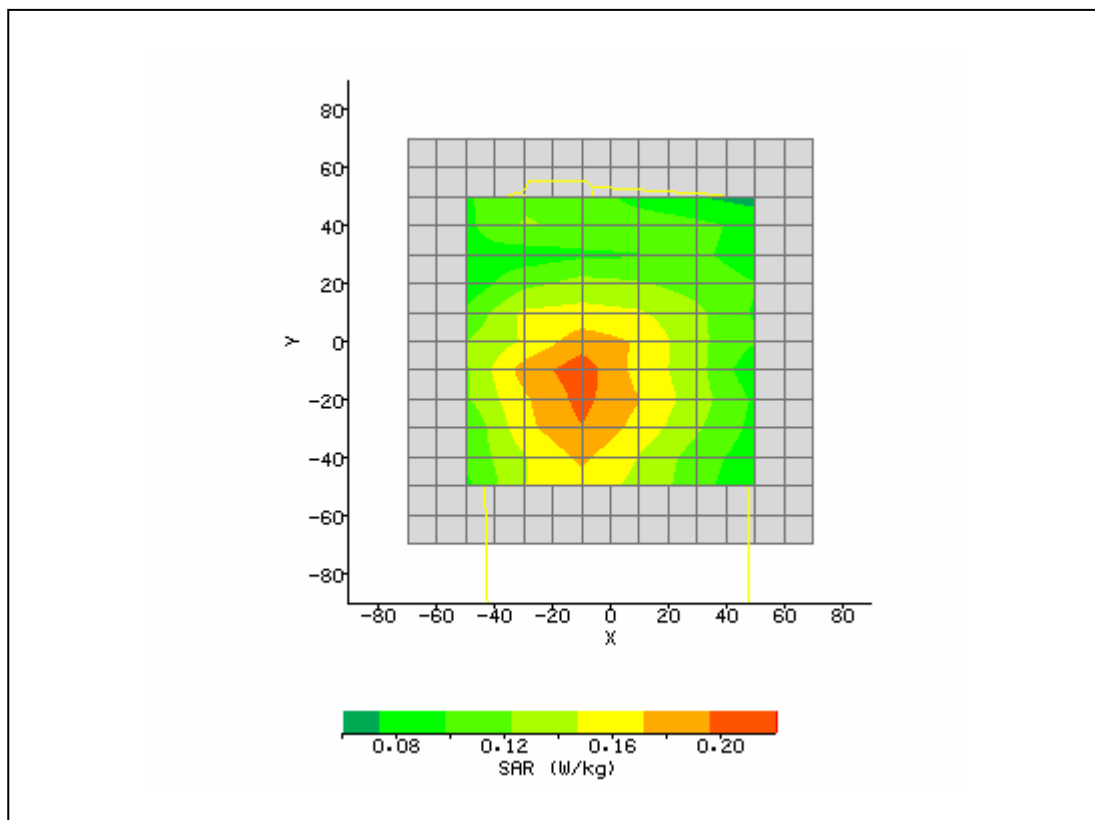


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 11:46:30 AM	DUT Battery Model/No:	
Filename:	Touch_128_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.6°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	55.73
Relative Humidity:	45.2%	Conductivity:	0.987
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-8.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	-24.00 mm
Antenna Configuration:	Integral	Max E Field:	15.51 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.270 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.114 W/kg
Type of Modulation:		SAR End:	0.118 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.54 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	3 Timeslots up	Extrapolation:	poly4

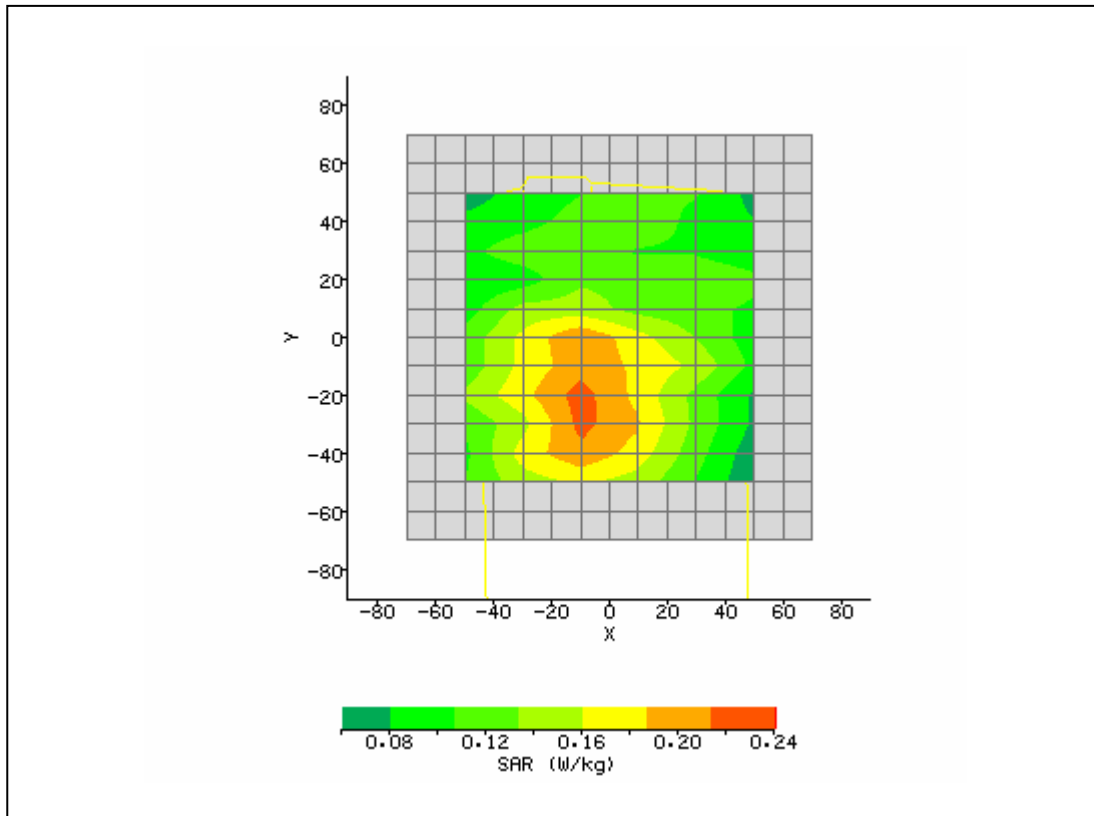


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 11:59:36 AM	DUT Battery Model/No:	
Filename:	Touch_190_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.6°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	55.46
Relative Humidity:	45.2%	Conductivity:	0.982
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-8.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	-35.00 mm
Antenna Configuration:	Integral	Max E Field:	13.28 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.184 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.087 W/kg
Type of Modulation:		SAR End:	0.089 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.29 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	3 Timeslots up	Extrapolation:	poly4

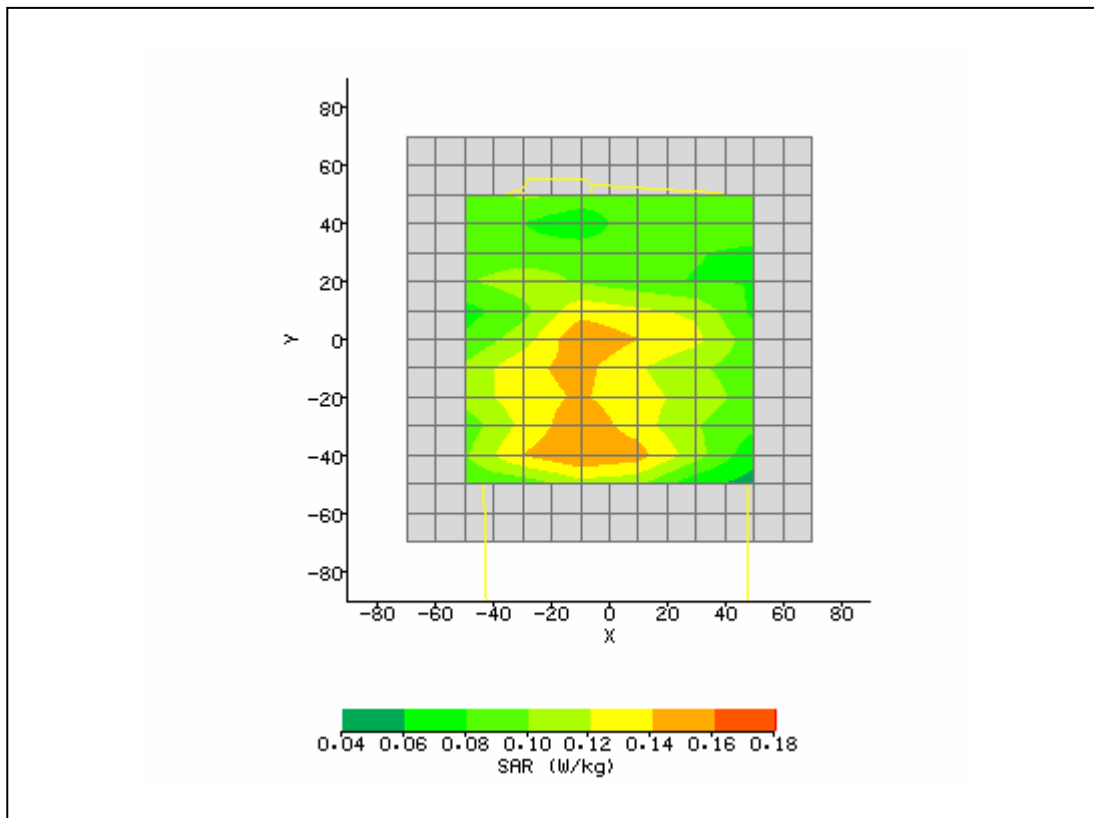


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 3:14:18 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.1°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	51.29
Relative Humidity:	49.4%	Conductivity:	1.554
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.2°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-24.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	40.00 mm
Antenna Configuration:	Integral	Max E Field:	8.54 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.140 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.032 W/kg
Type of Modulation:		SAR End:	0.033 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.98 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	3 Timeslots up	Extrapolation:	poly4

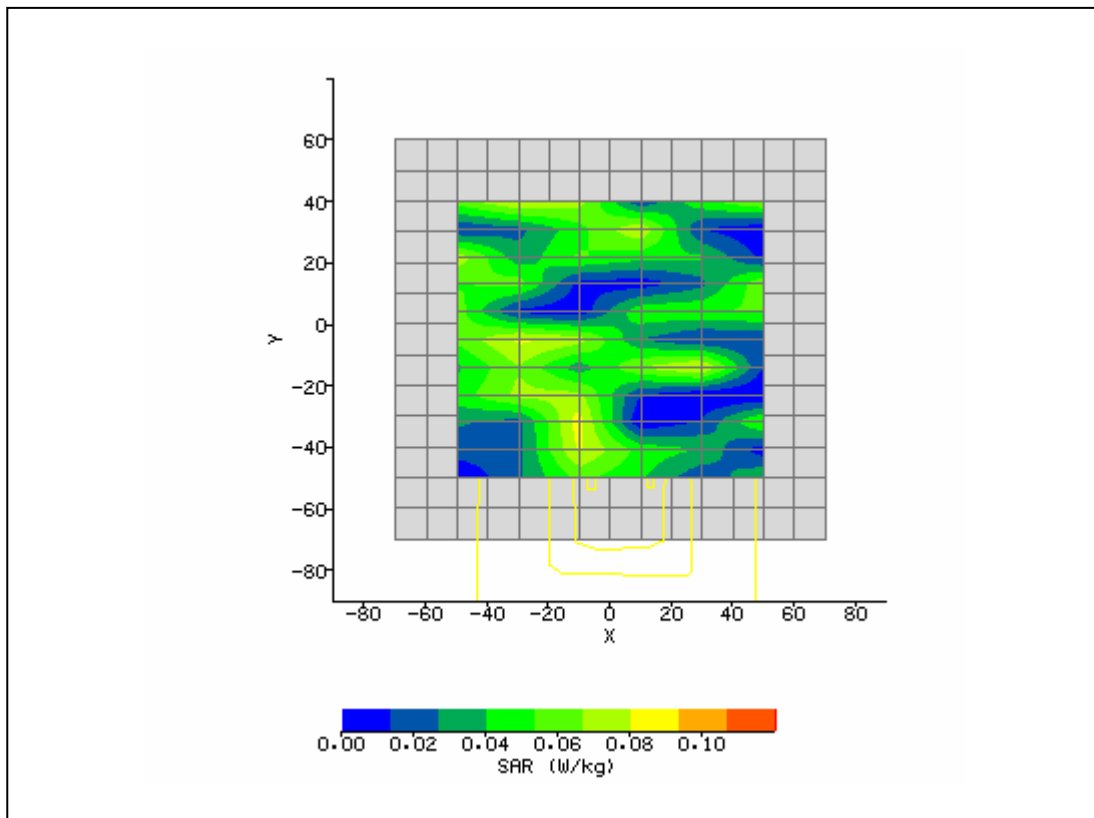


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 3:33:32 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.3°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	52.78
Relative Humidity:	49.7%	Conductivity:	1.57
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.3°C
Phantom Rotation:	180°	Max SAR X-axis Location:	22.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	9.00 mm
Antenna Configuration:	Integral	Max E Field:	10.59 V/m
Test Frequency:	1880MHz	SAR 1g:	0.264 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.093 W/kg
Type of Modulation:		SAR End:	0.096 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	3 Timeslots up	Extrapolation:	poly4

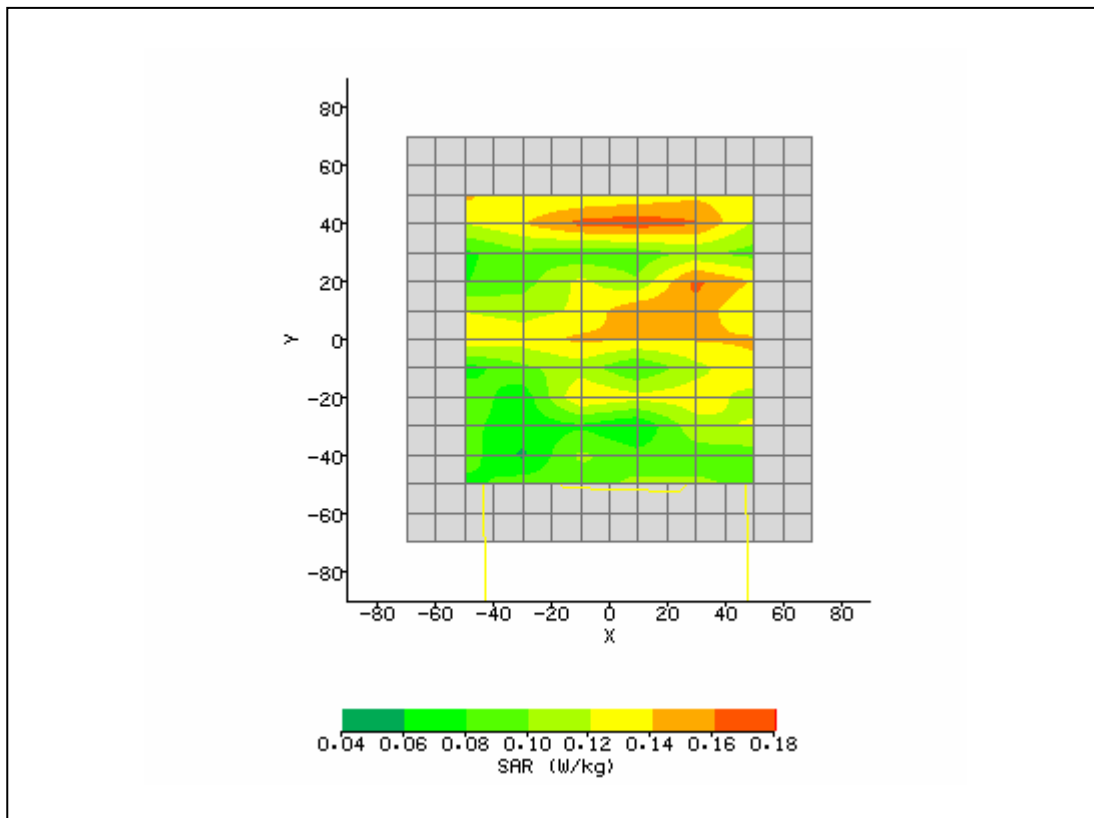


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 3:49:20 PM	DUT Battery Model/No:	
Filename:	Touch_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.5°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	55.07
Relative Humidity:	49.5%	Conductivity:	1.572
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.4°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-16.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	40.00 mm
Antenna Configuration:	Integral	Max E Field:	11.37 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.344 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.100 W/kg
Type of Modulation:		SAR End:	0.103 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.01 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	3 Timeslots up	Extrapolation:	poly4

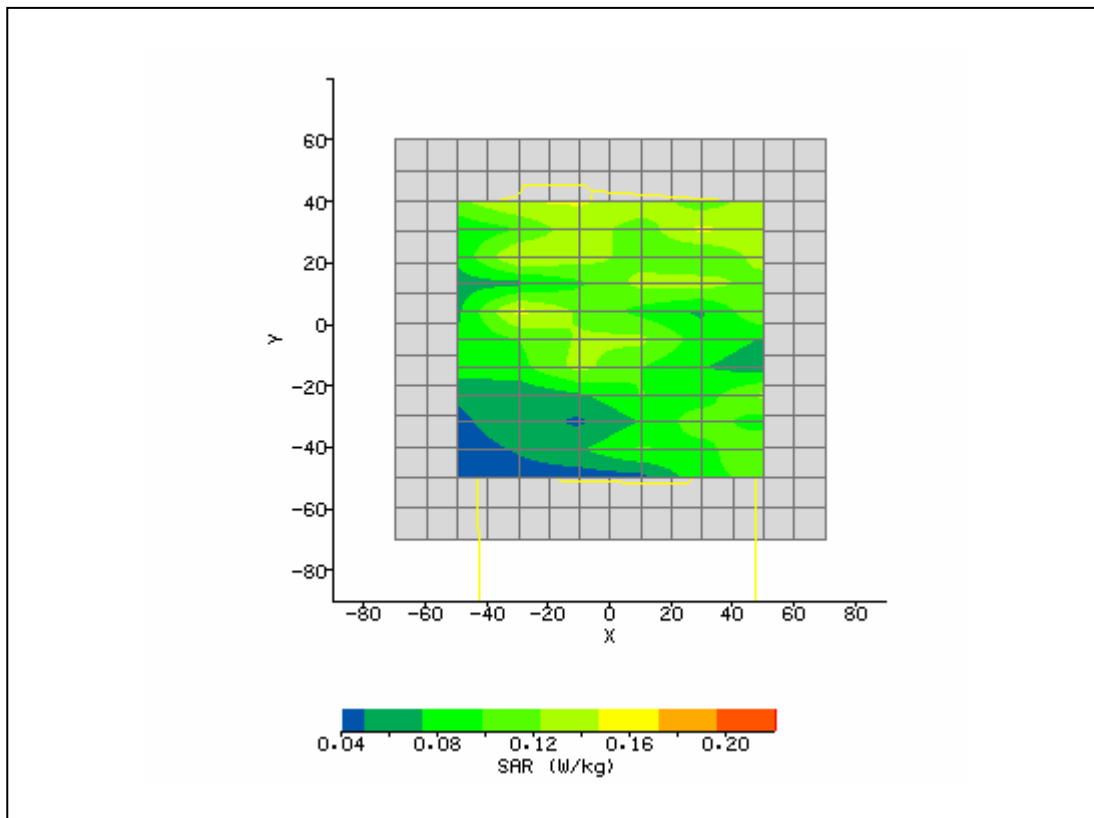


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 12:19:08 PM	DUT Battery Model/No:	
Filename:	Touch_251_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.7°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	55.73
Relative Humidity:	43.3%	Conductivity:	0.987
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	43.00 mm
Antenna Configuration:	Integral	Max E Field:	10.65 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.108 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.072 W/kg
Type of Modulation:		SAR End:	0.075 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.18 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	3 Timeslots up EGPRS	Extrapolation:	poly4

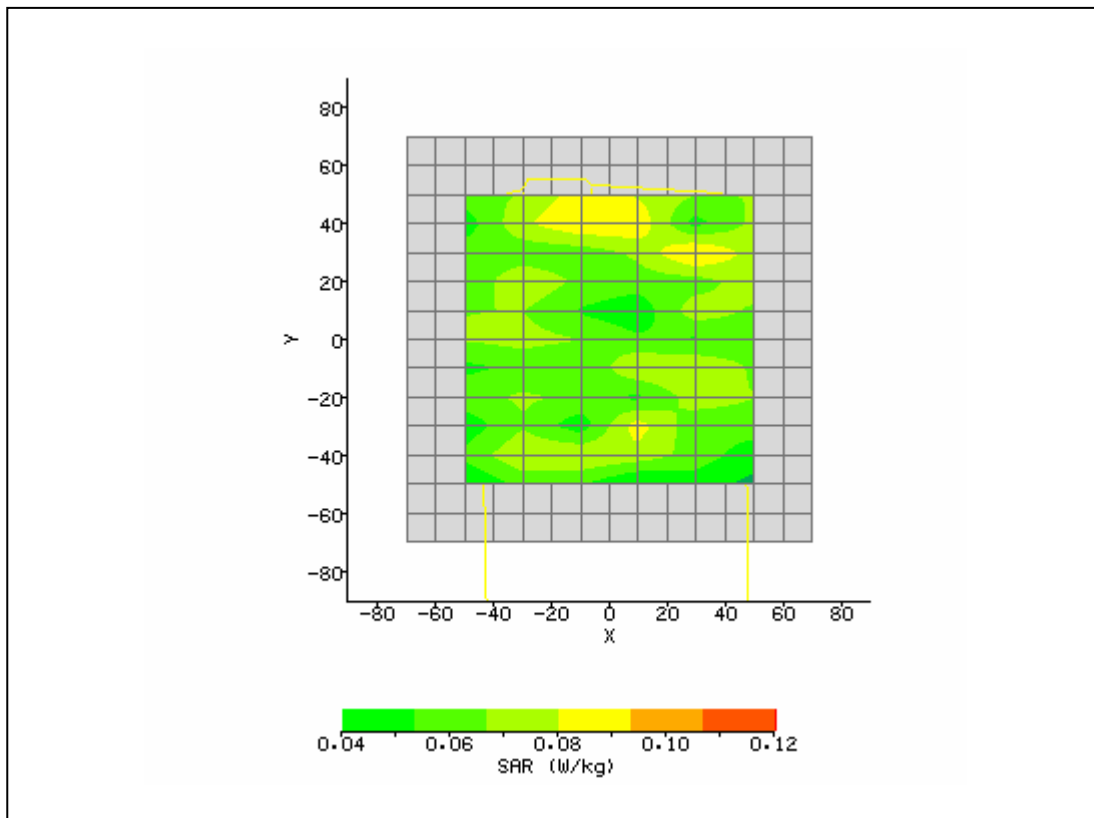


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 5:01:53 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.5°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer with MC75	Relative Permittivity:	55.07
Relative Humidity:	49.5%	Conductivity:	1.572
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.4°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Integral	Max E Field:	10.77 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.177 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.104 W/kg
Type of Modulation:		SAR End:	0.109 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.49 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/16/07
Input Power Level:	3 Timeslots up EGPRS	Extrapolation:	poly4

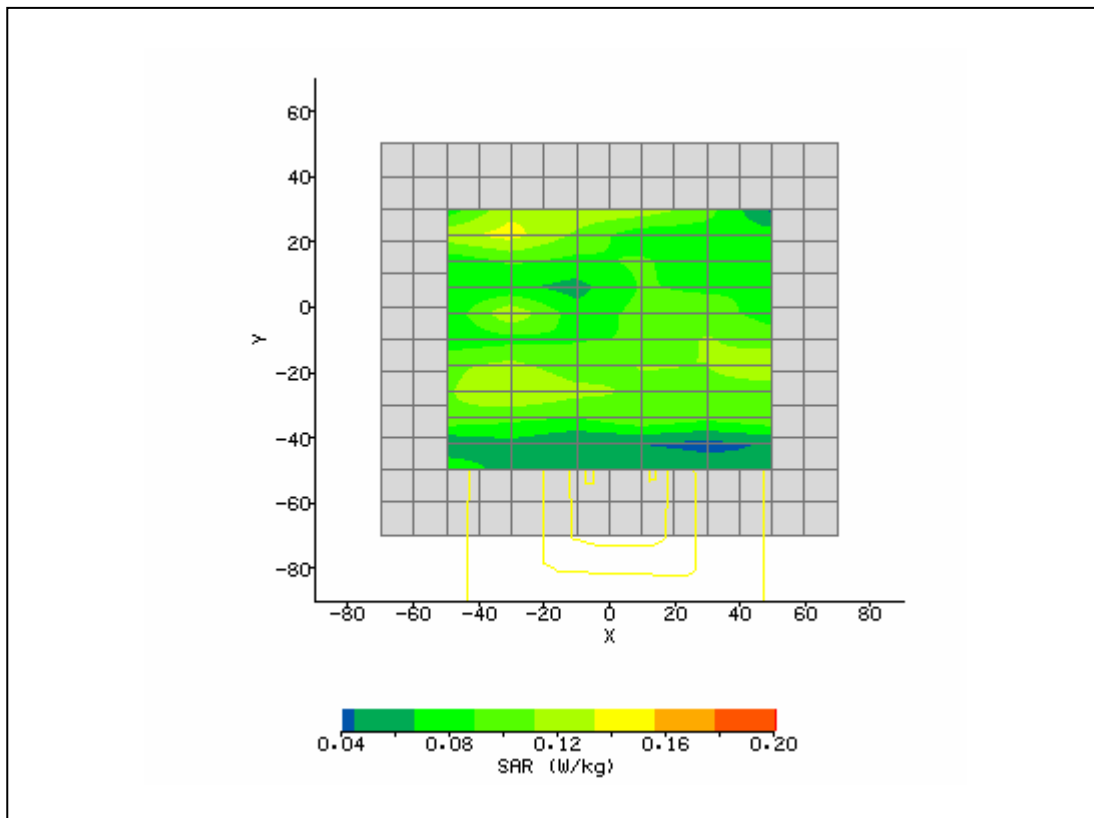


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 11:50:32 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	50.98
Relative Humidity:	30%	Conductivity:	1.872
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	24.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	39.00 mm
Antenna Configuration:	Integral	Max E Field:	10.13 V/m
Test Frequency:	2412MHz	SAR 1g:	0.161 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.087 W/kg
Type of Modulation:		SAR End:	0.089 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.64 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

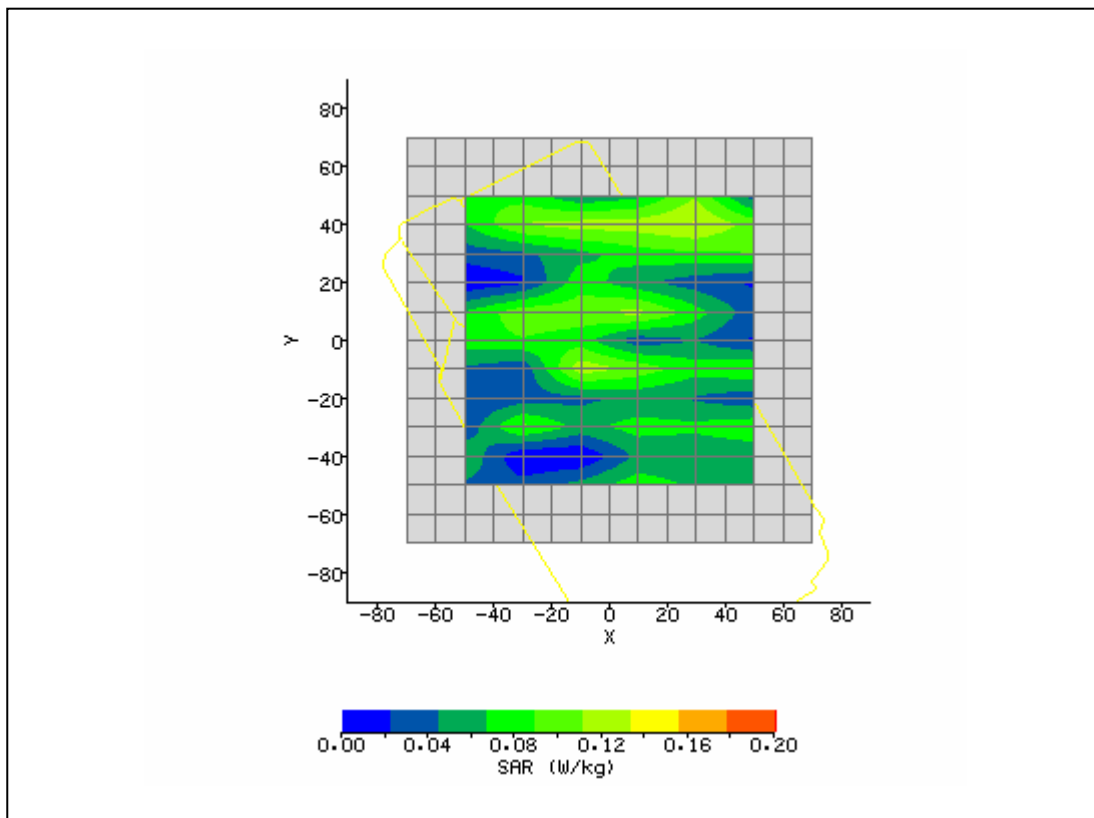


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 12:13:10 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	51.07
Relative Humidity:	30%	Conductivity:	1.913
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-2.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	15.45 mm
Antenna Configuration:	Integral	Max E Field:	9.21 V/m
Test Frequency:	2437MHz	SAR 1g:	0.185 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.055 W/kg
Type of Modulation:		SAR End:	0.058 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.37 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

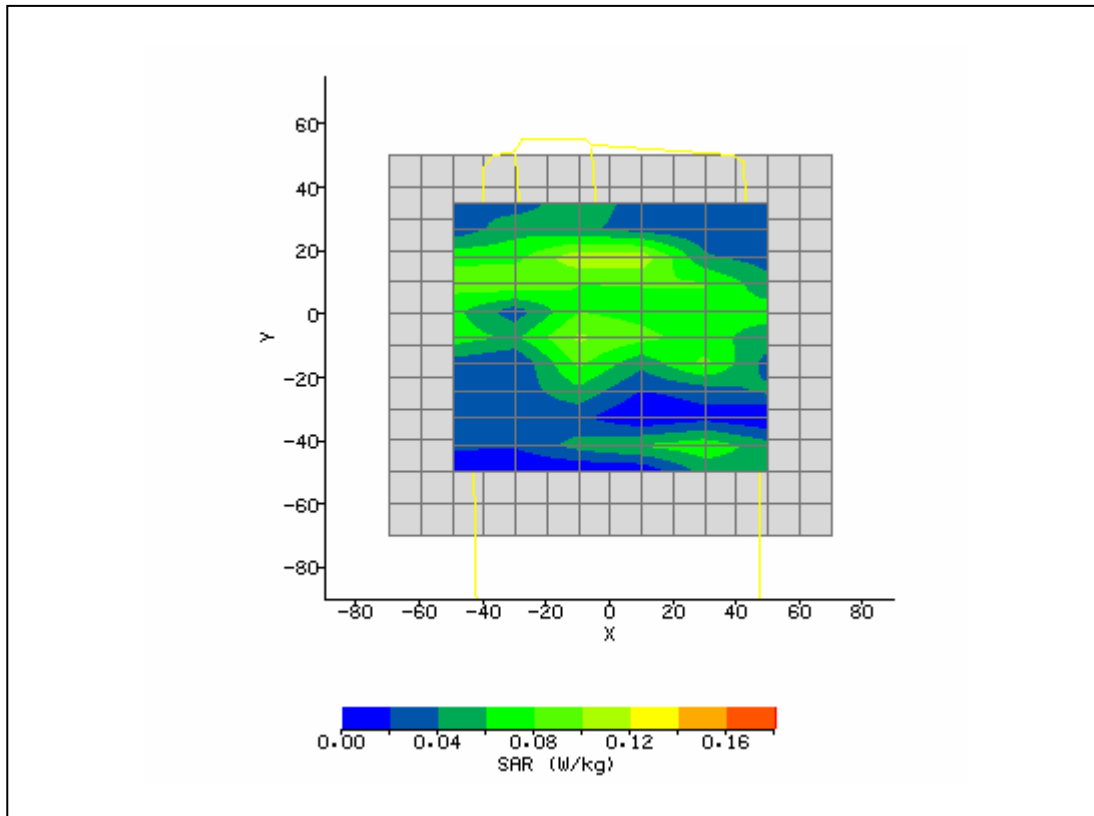


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 1:33:01 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	51.12
Relative Humidity:	30%	Conductivity:	1.941
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	20.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Integral	Max E Field:	12.39 V/m
Test Frequency:	2462MHz	SAR 1g:	0.328 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.179 W/kg
Type of Modulation:		SAR End:	0.182 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.77 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

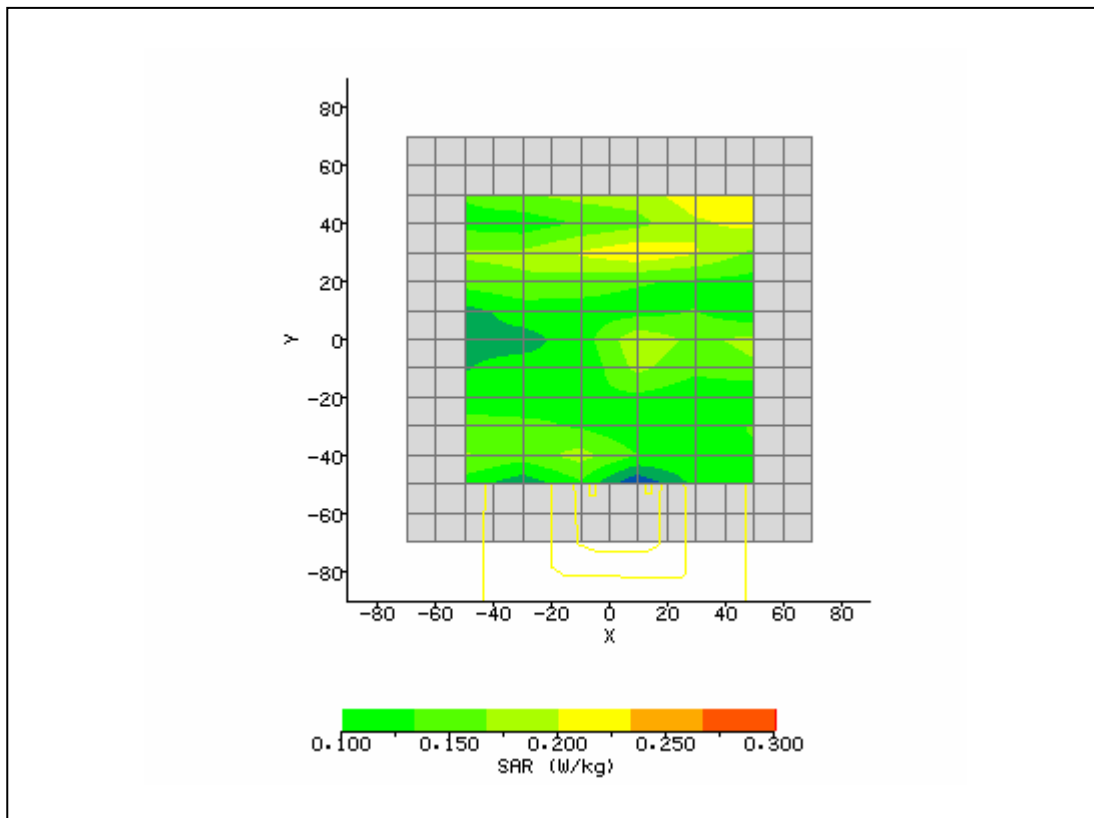


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 2:51:10 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	51.12
Relative Humidity:	30%	Conductivity:	1.941
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-5.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	9.40 mm
Antenna Configuration:	Integral - Aux	Max E Field:	9.54 V/m
Test Frequency:	2462MHz	SAR 1g:	0.203 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.070 W/kg
Type of Modulation:		SAR End:	0.073 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.29 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

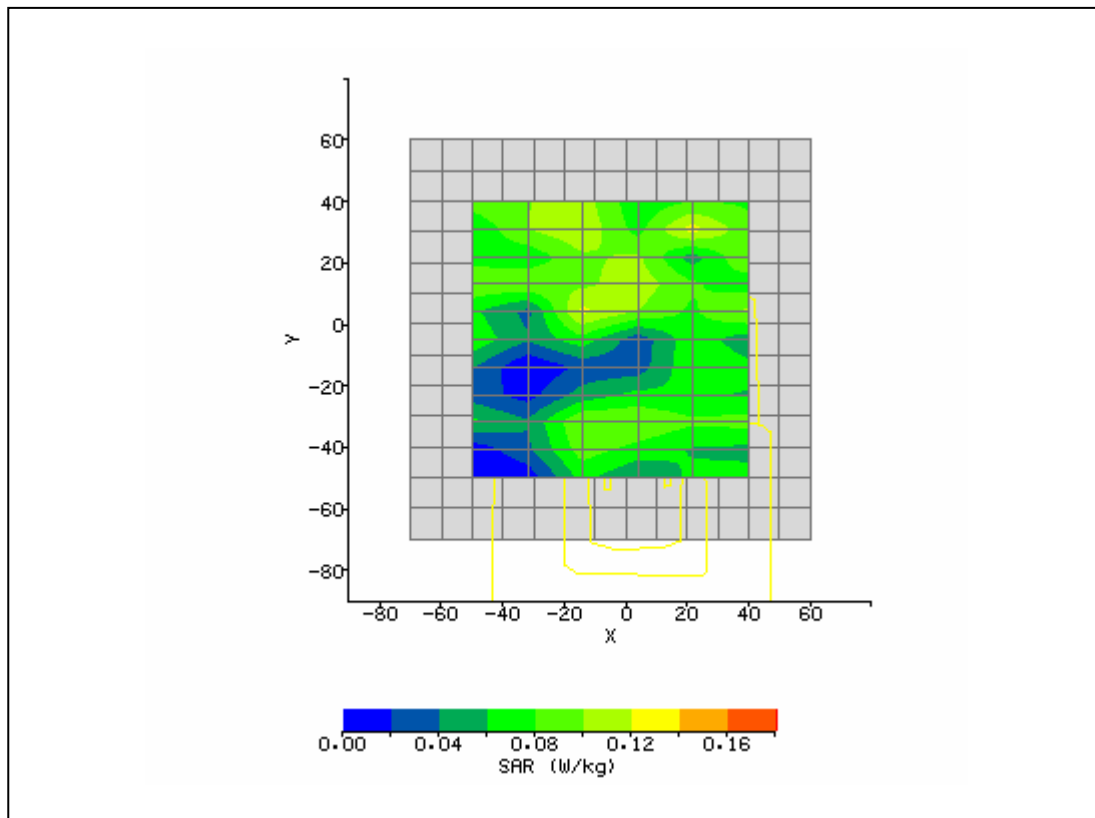


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 3:18:28 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	50.98
Relative Humidity:	30%	Conductivity:	1.872
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	10.90 mm
Antenna Configuration:	Integral - Main	Max E Field:	9.00 V/m
Test Frequency:	2412MHz	SAR 1g:	0.165 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.073 W/kg
Type of Modulation:		SAR End:	0.074 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.83 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

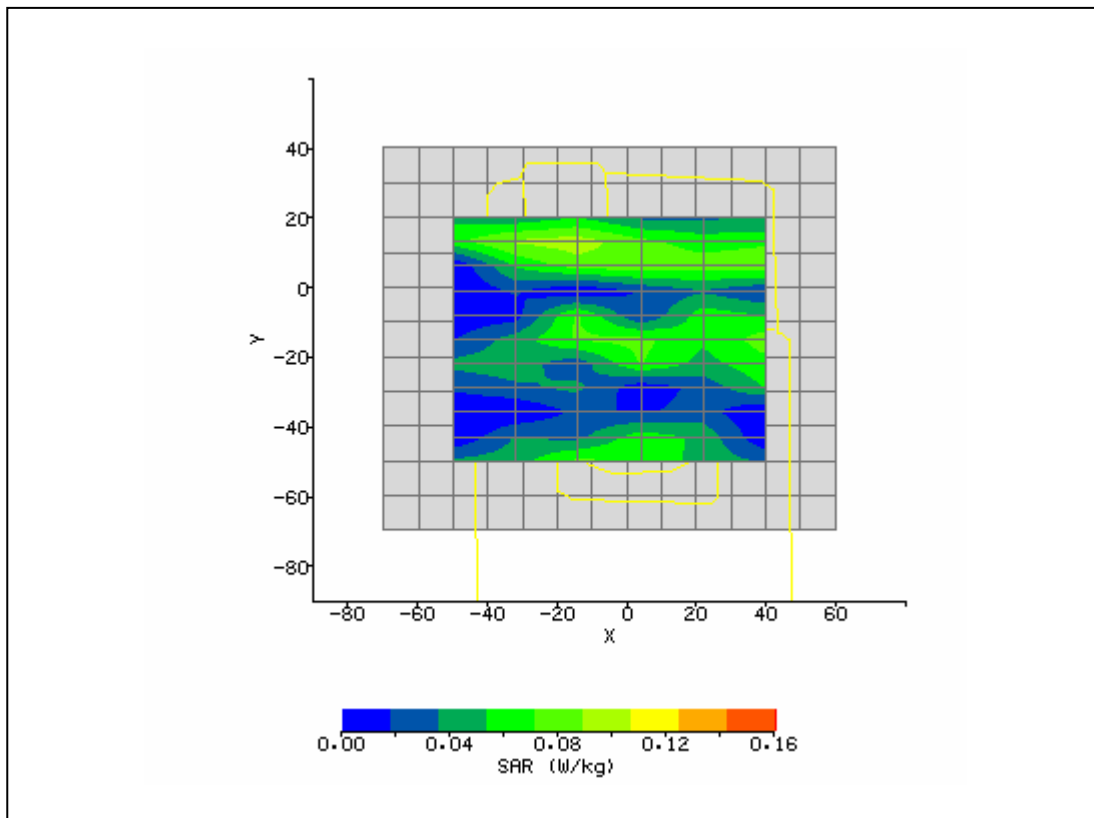


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 3:33:06 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	51.07
Relative Humidity:	30%	Conductivity:	1.913
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-15.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	-4.10 mm
Antenna Configuration:	Integral - Main	Max E Field:	9.16 V/m
Test Frequency:	2437MHz	SAR 1g:	0.214 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.075 W/kg
Type of Modulation:		SAR End:	0.078 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.55 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

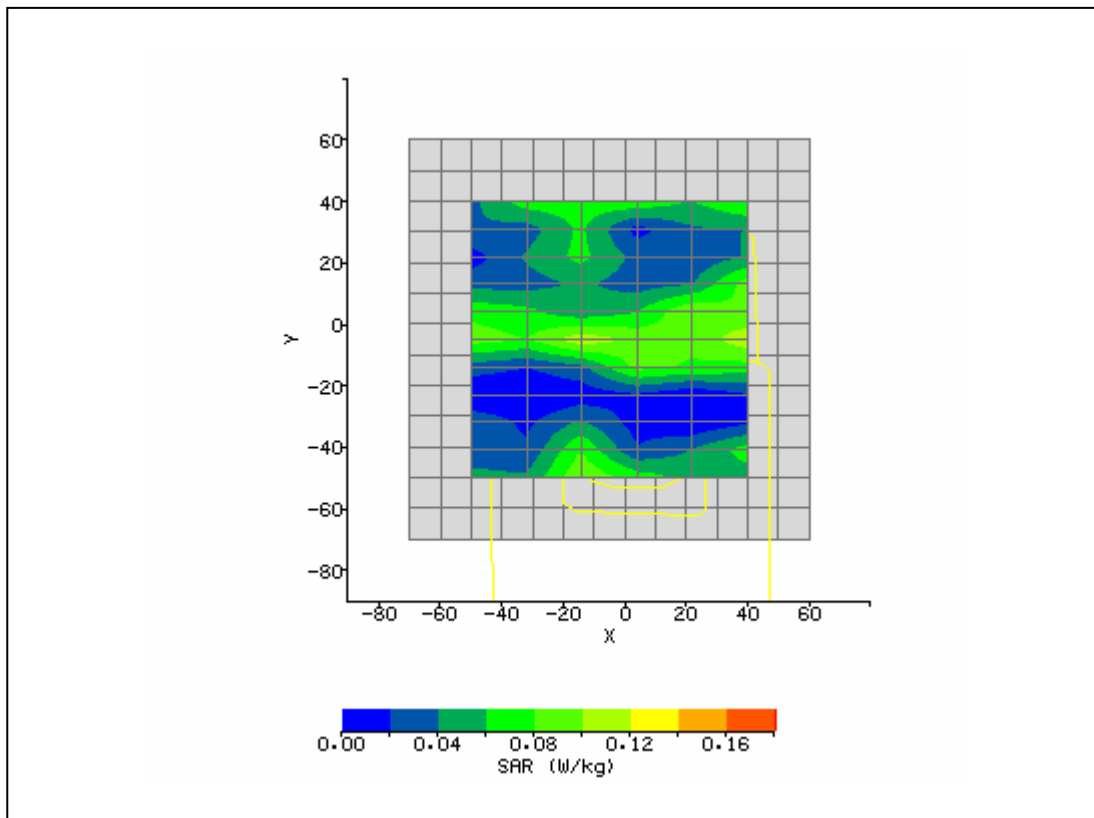


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 3:54:11 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	51.12
Relative Humidity:	30%	Conductivity:	1.941
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	5.40 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	20.00 mm
Antenna Configuration:	Integral - Main	Max E Field:	8.96 V/m
Test Frequency:	2462MHz	SAR 1g:	0.186 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.065 W/kg
Type of Modulation:		SAR End:	0.065 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.19 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

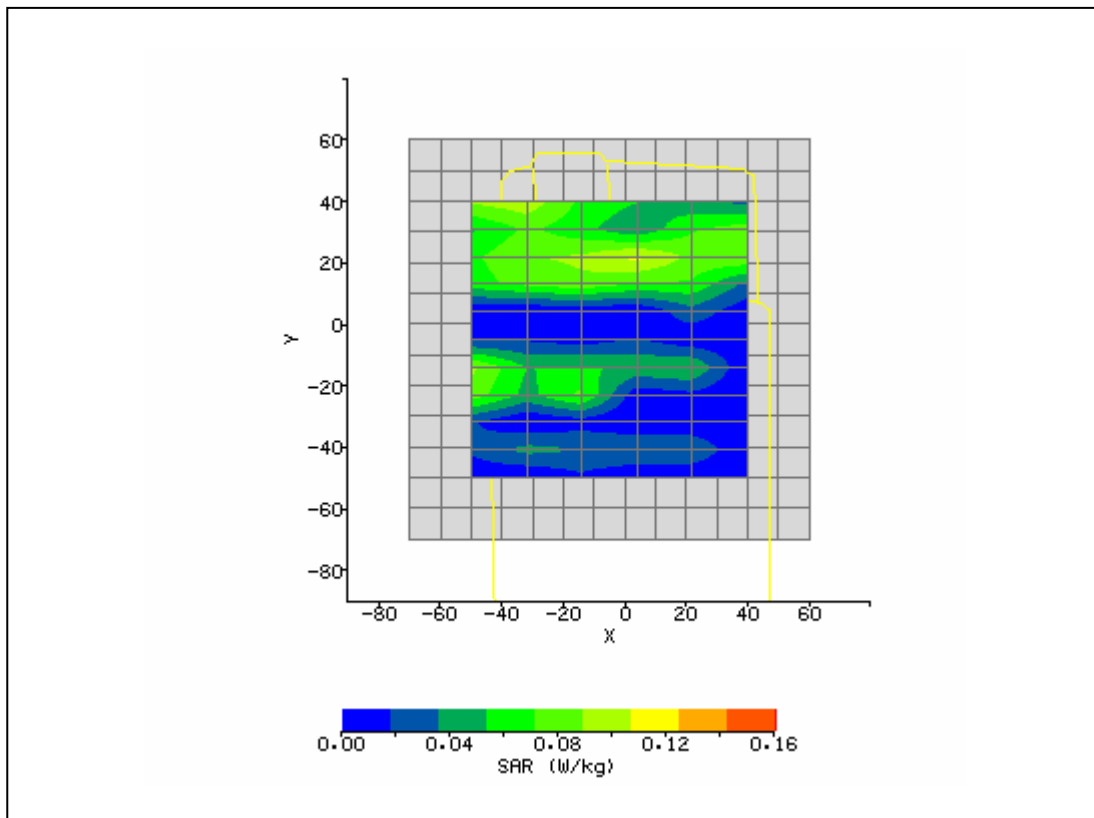


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/30/2007 9:03:54 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	51.07
Relative Humidity:	30%	Conductivity:	1.913
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	10.30 mm
Antenna Configuration:	Integral - Aux	Max E Field:	9.61 V/m
Test Frequency:	2437MHz	SAR 1g:	0.175 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.089 W/kg
Type of Modulation:		SAR End:	0.085 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.25 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	Set by SW	Extrapolation:	poly4

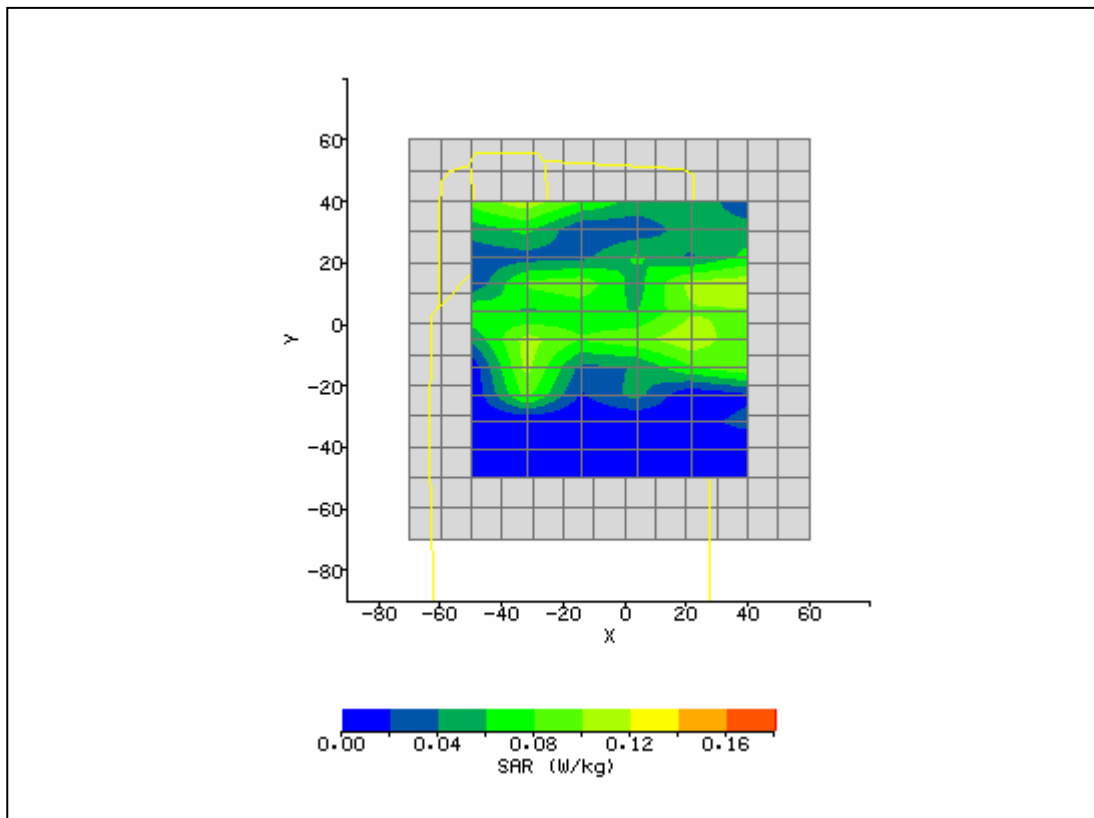


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/30/2007 11:59:11 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_128_11_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	7505 Handheld Computer MC75	Relative Permittivity:	41.55
Relative Humidity:	38.4%	Conductivity:	0.924
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.7°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-9.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-105.60 mm
Antenna Configuration:	Integral / Main	Max E Field:	35.23 V/m
Test Frequency:	836.6 / 2462MHz	SAR 1g:	1.129 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.328 W/kg
Type of Modulation:		SAR End:	0.333 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.76 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/30/07
Input Power Level:	PCL 5 / Set by SW	Extrapolation:	poly4

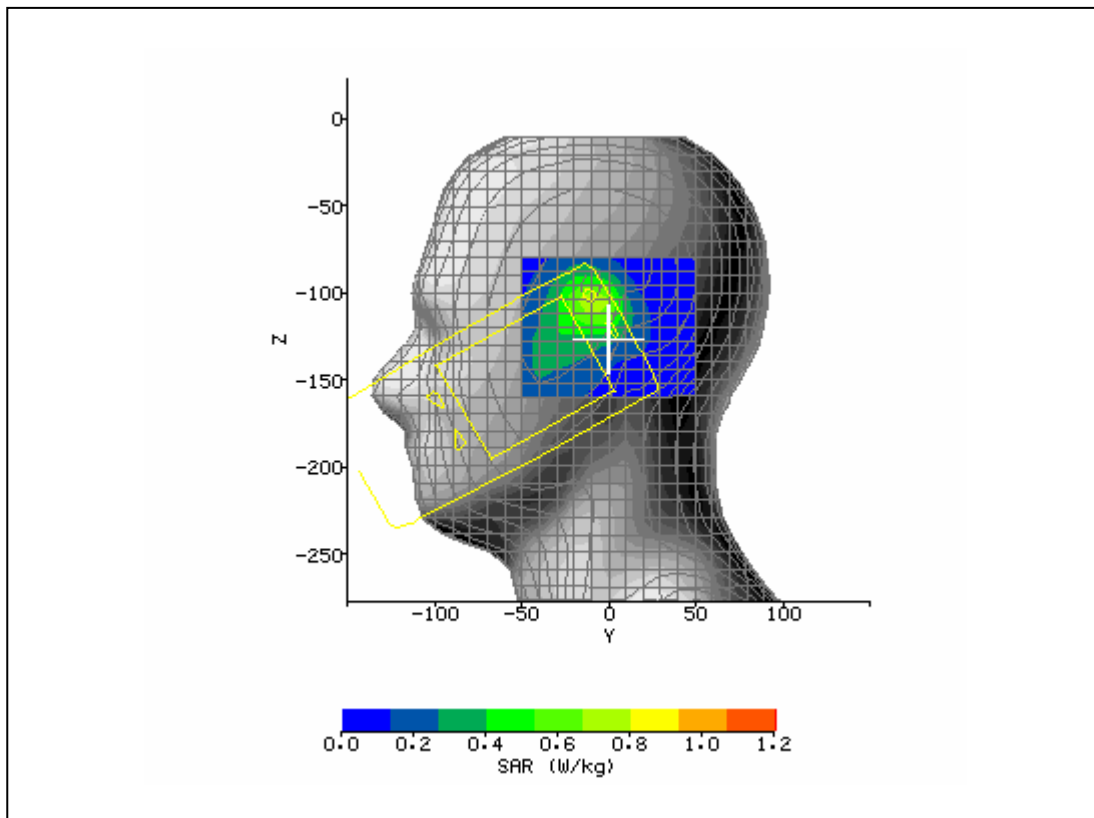


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/30/2007 2:32:34 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	7505 Handheld Computer MC75	Relative Permittivity:	55.06
Relative Humidity:	38.4%	Conductivity:	1.573
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.7°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Left Tilt	Max SAR Y-axis Location:	-38.00 mm
Antenna Configuration:	Integral / Main	Max E Field:	5.62 V/m
Test Frequency:	1909.8 / 2462MHz	SAR 1g:	0.352 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.129 W/kg
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.023 W/kg
Type of Modulation:		SAR End:	0.023 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.37 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/30/07
Input Power Level:	PCL 5 / Set by SW	Extrapolation:	poly4

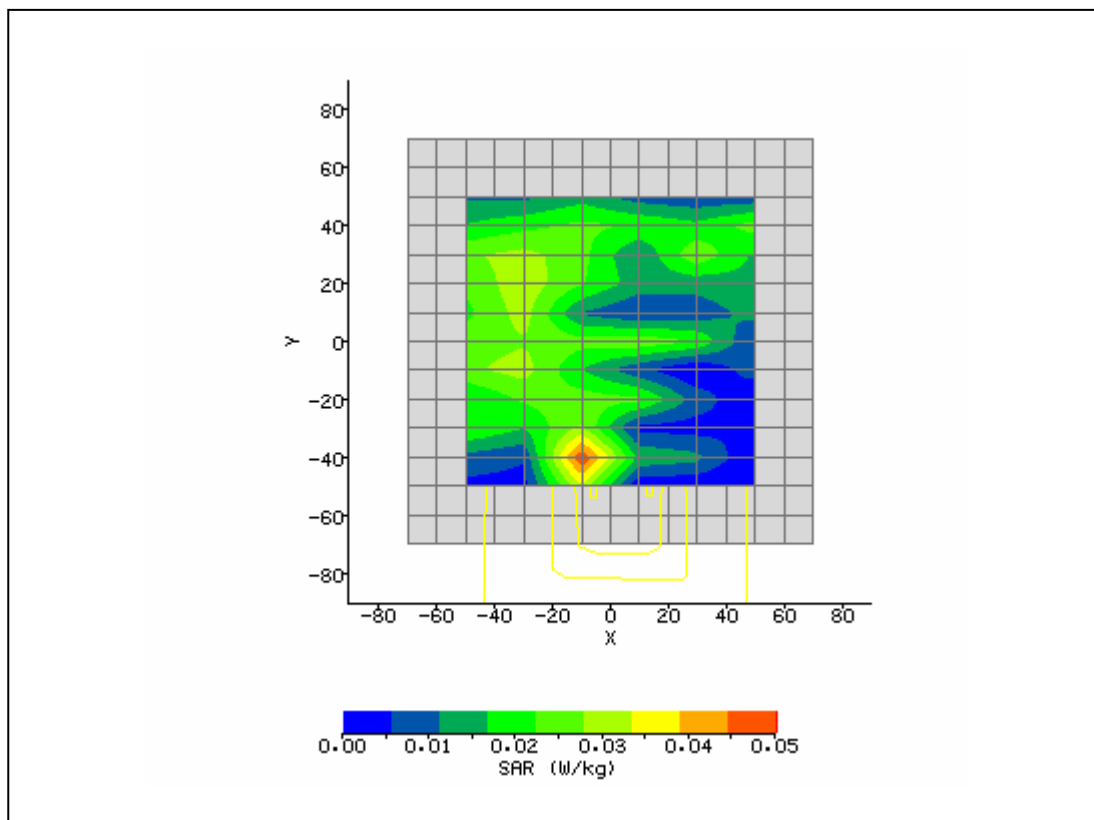


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/30/2007 9:28:43 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	7505 Handheld Computer	Relative Permittivity:	37.57
Relative Humidity:	38.4%	Conductivity:	1.852
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.7°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-40.00 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-100.00 mm
Antenna Configuration:	Integral - Main	Max E Field:	1.13 V/m
Test Frequency:	2412MHz	SAR 1g:	0.000 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.000 W/kg
Conversion Factors:	.451 / .451 / .451	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/30/07
Input Power Level:	Set by SW	Extrapolation:	poly4

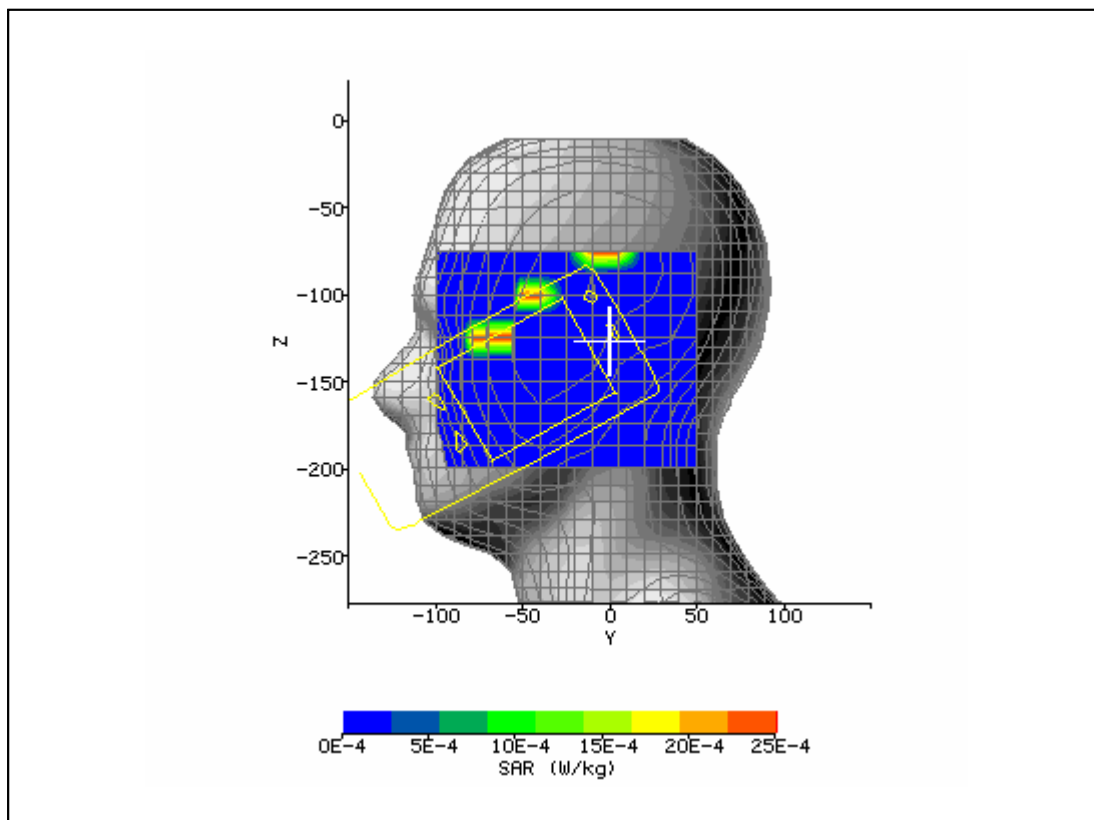


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/14/2007 7:01:09 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.2°C	Liquid Simulant:	850
Device Under Test:	System	Relative Permittivity:	41.57
Relative Humidity:	42.9%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	835 Dipole	Max E Field:	94.47 V/m
Test Frequency:	835MHz	SAR 1g:	10.420 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	6.552 W/kg
Conversion Factors:	.360 / .360 / .360	SAR Start:	2.046 W/kg
Type of Modulation:		SAR End:	2.002 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.14 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/14/07
Input Power Level:	1W	Extrapolation:	poly4

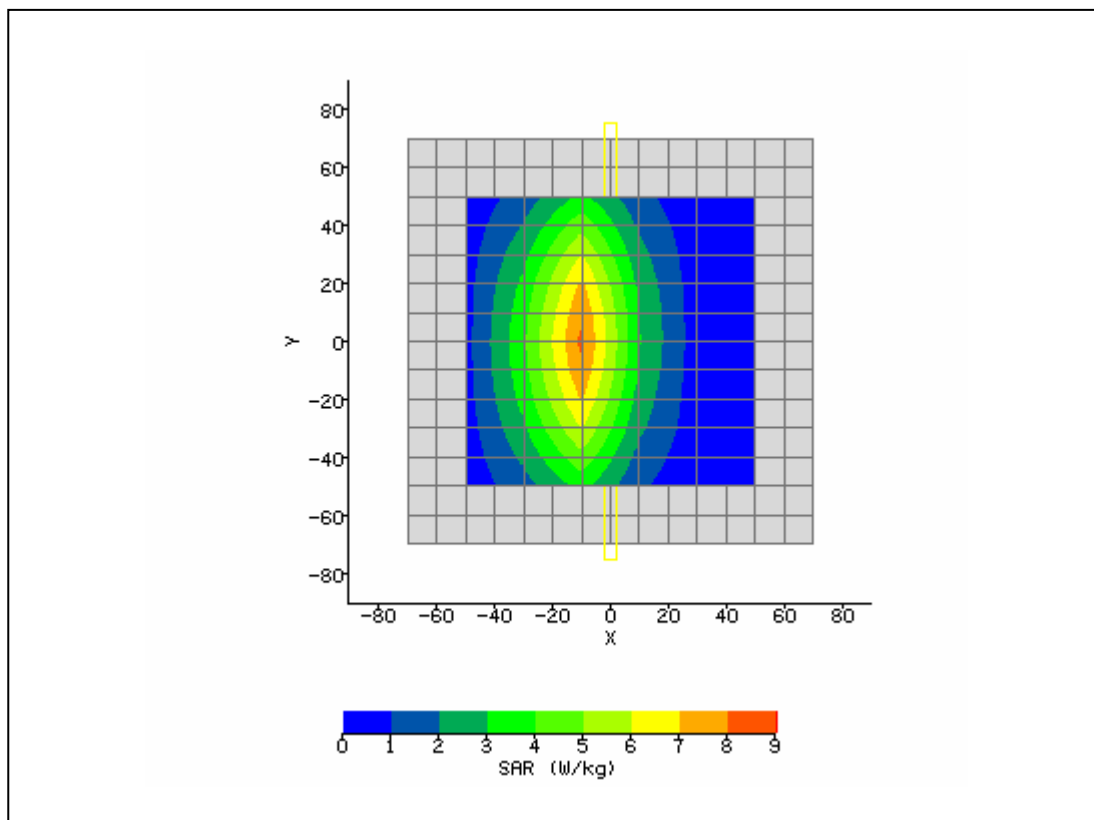


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/16/2007 7:03:22 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.4°C	Liquid Simulant:	1900
Device Under Test:	System	Relative Permittivity:	40.73
Relative Humidity:	39.0%	Conductivity:	1.422
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	-15.00 mm
Antenna Configuration:	1900 Dipole	Max E Field:	156.75 V/m
Test Frequency:	1900MHz	SAR 1g:	38.373 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	20.169 W/kg
Conversion Factors:	.501 / .501 / .501	SAR Start:	5.032 W/kg
Type of Modulation:		SAR End:	5.020 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.24 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/15/07
Input Power Level:	1W	Extrapolation:	poly4

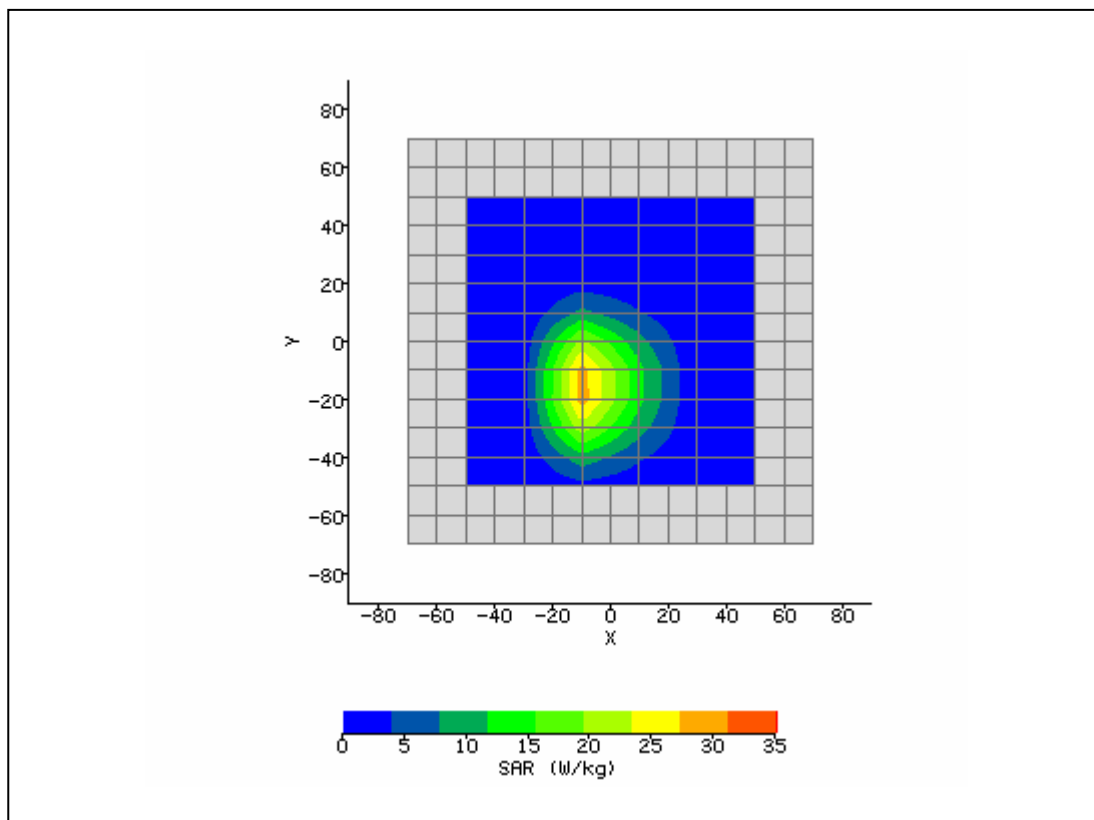


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/29/2007 11:31:41 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	37.52
Relative Humidity:	38.4%	Conductivity:	1.872
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.7°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	-1.00 mm
Antenna Configuration:	Dipole	Max E Field:	138.24 V/m
Test Frequency:	2450MHz	SAR 1g:	51.618 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	23.528 W/kg
Conversion Factors:	.451 / .451 / .451	SAR Start:	2.857 W/kg
Type of Modulation:		SAR End:	2.832 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.87 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/29/07
Input Power Level:	1W	Extrapolation:	poly4

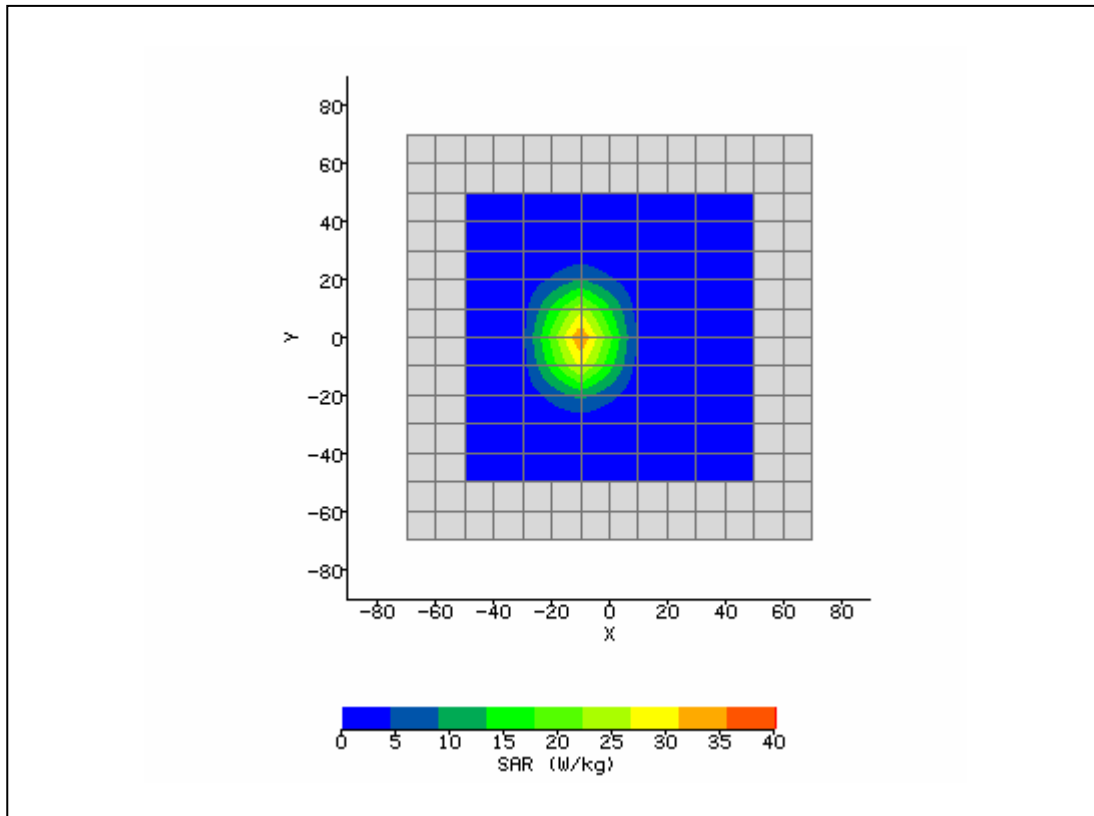

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/30/2007 9:47:58 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.4°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	37.51
Relative Humidity:	37.4%	Conductivity:	1.873
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.3°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	-9.00 mm
Antenna Configuration:	Dipole	Max E Field:	128.61 V/m
Test Frequency:	2450MHz	SAR 1g:	50.500 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	23.110 W/kg
Conversion Factors:	.451 / .451 / .451	SAR Start:	2.469 W/kg
Type of Modulation:		SAR End:	2.473 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.17 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/30/07
Input Power Level:	1 W	Extrapolation:	poly4

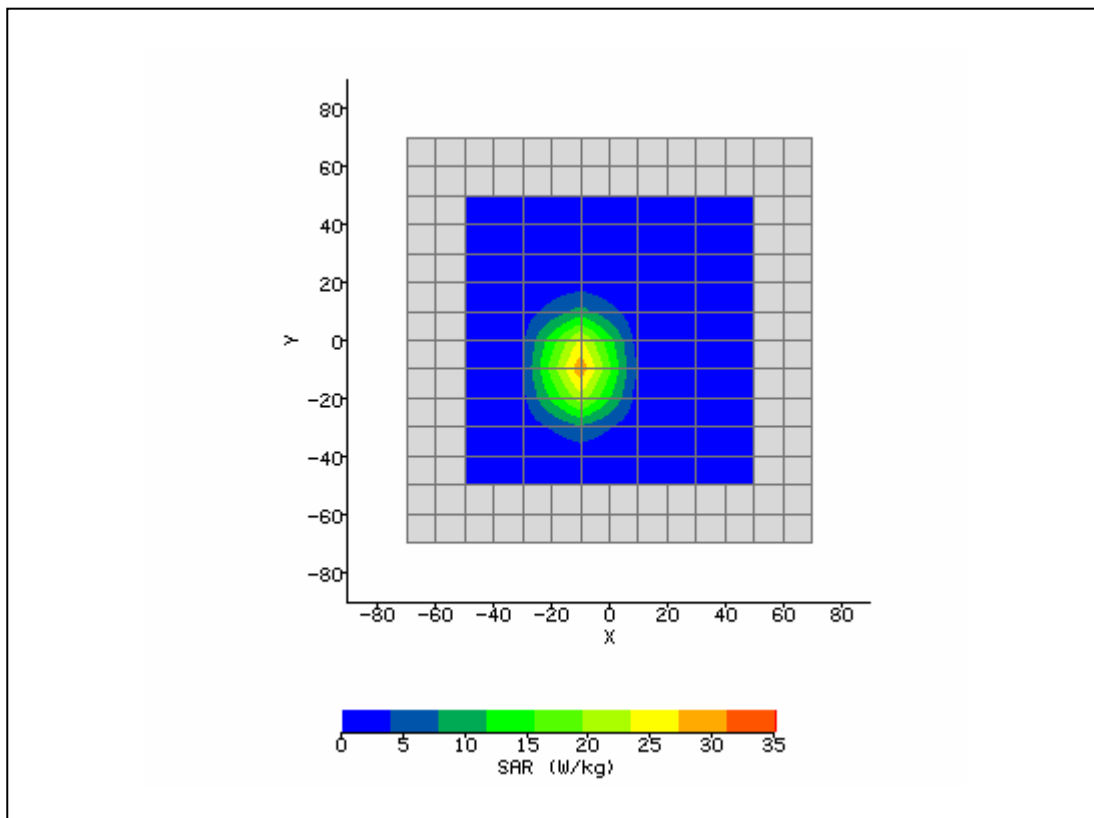

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/30/2007 7:55:02 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	System	Relative Permittivity:	41.57
Relative Humidity:	30%	Conductivity:	0.924
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	4.80 mm
DUT Position:	8mm	Max SAR Y-axis Location:	5.60 mm
Antenna Configuration:	835 Dipole	Max E Field:	93.75 V/m
Test Frequency:	835MHz	SAR 1g:	9.978 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	6.288 W/kg
Conversion Factors:	.360 / .360 / .360	SAR Start:	2.064 W/kg
Type of Modulation:		SAR End:	2.059 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.21 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/30/2007
Input Power Level:	1W	Extrapolation:	poly4

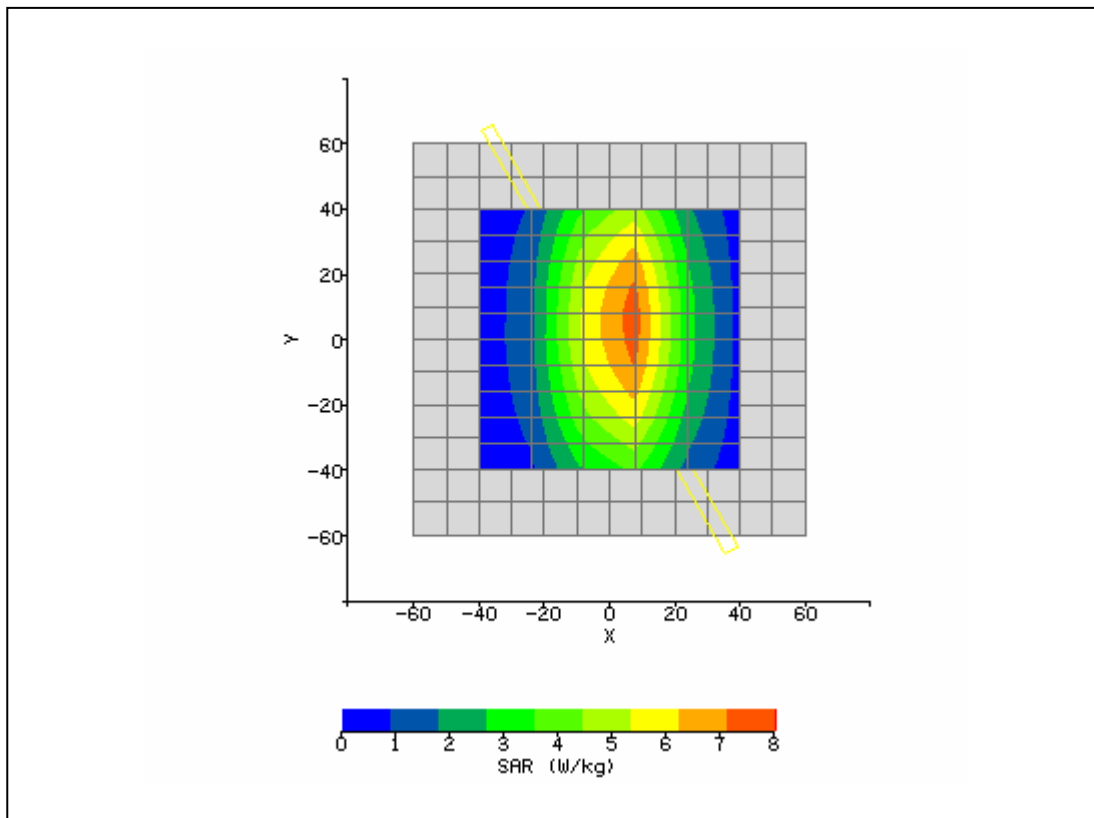

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	11/30/2007 7:15:03 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	System	Relative Permittivity:	40.72
Relative Humidity:	30%	Conductivity:	1.423
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-11.20 mm
DUT Position:	8 mm	Max SAR Y-axis Location:	-11.20 mm
Antenna Configuration:	Dipole 1900	Max E Field:	162.32 V/m
Test Frequency:	1900MHz	SAR 1g:	43.029 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	22.488 W/kg
Conversion Factors:	.501 / .501 / .501	SAR Start:	5.325 W/kg
Type of Modulation:		SAR End:	5.289 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.68 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/30/07
Input Power Level:	1 W	Extrapolation:	poly4

