

SPECIFIC ABSORPTION RATE (SAR) TEST REPORT

**Psion Teklogix
2100 Meadowvale Boulevard
Mississauga, Canada, L5N 7J9**

**Product: WorkAbout Pro
Model Number: 7525S
Product FCCID: GM37525SG1AC860**

**Tested to the SAR Criteria in
FCC OET Bulletin 65, Supplement C (Edition 01-01)**

**Date: 13-Apr-07
Project Number: 3116499
Report Number: 3116499LEX-003**

Prepared By: *Vinay Kutty* Date: 13-Apr-07

Vinay Kutty, Senior Project Engineer

Approved By: *Bryan C. Taylor* Date: 13-Apr-07

Bryan C. Taylor, Team Leader – Engineering



This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TABLE OF CONTENTS

1.0	Document History	3
2.0	References	3
3.0	Introduction	4
	Modifications made to test sample	4
4.0	Test Site Description	5
	Measurement Equipment	6
	Measurement Uncertainty	7
	Measurement Traceability	8
5.0	Job Description	9
	Test Sample Description	10
6.0	System Verification	12
	Dipole System Validation	12
	Tissue Simulating Liquid Description and Validation.....	14
7.0	Evaluation Procedures	16
	Test Positions:.....	16
	Reference Power Measurement:	16
	Coarse Scan:	16
	Zoom Scan:	16
	Data Extrapolation:	17
	Reference Power Measurement:	17
	RF Ambient Activity:	17
8.0	Test Configuration / Test Photographs	18
9.0	Criteria	19
10.0	Engineering Judgments	20
11.0	Tabular Test Results	21
	Conducted Power Measurements.....	21
	Body Mode Tabular Test Results	22
12.0	Graphical SAR Scan Results	26

Evaluation For: Psion Teklogix
 Model: 7525S

FCC ID: GM37525SG1AC860

1.0 Document History

Revision/ Project Number	Writer Initials	Date	Change
1.0 /3116499	VK	13-Apr-07	Original document

2.0 References

- [1] ANSI, *ANSI/IEEE C95.1-1991: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz*, The Institute of electrical and Electronics Engineers, Inc., New York, NY 10017, 1992
- [2] Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields”, OET Bulletin 65, FCC, Washington, D.C. 20554, 1997
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, “Automated E-field scanning system for dosimetric assessments”, *IEEE Transaction on Microwave Theory and Techniques*, vol. 44, pp. 105-113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, “Dosimetric evaluation of mobile communications equipment with know precision”, *IEICE Transactions on Communications*, vol. E80-B, no. 5, pp.645-652, May 1997.
- [5] NIS81, NAMAS, “The treatment of uncertainty in EMC measurement”, Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddinton, Middlesex, England, 1994.
- [6] Barry N. Taylor and Chris E. Kuyatt, “Guidelines for evaluating and expressing the uncertainty of NIST measurement results”, Tech. Rep., National Institute of Standards and Technology, 1994.

Evaluation For: Psion Teklogix
 Model: 7525S

FCC ID: GM37525SG1AC860

3.0 Introduction

The Psion Teklogix WorkAbout Pro, Model 7525S, was evaluated for SAR in accordance with the requirements for RF Exposure compliance testing defined in FCC OET Bulletin 65, Supplement C (Edition 01-01). Testing was performed at the Intertek facility in Lexington, Kentucky.

For the evaluation, the dosimetric assessment system DASY4 was used. The phantom employed was the "SAM Twin Phantom". The total uncertainty for the evaluation of the spatial peak SAR values averaged over a cube of 1g tissue mass had been assessed for this system to be ±21.9%.

The 7525S was tested at the maximum output power measured by Intertek. Maximum output power measurements are tabulated under **Heading 11.0 - Tabular Test Results**.

The maximum spatial peak SAR value for the sample device averaged over 1g was found to be:

Phantom	Mode	Setup Details	Worst Case Extrapolated SAR _{1g} mW/g
Flat Section (Body Mode)	GSM GPRS	Keypad down with belt clip against flat phantom. f = 836.6 MHz	0.206
Flat Section (Body Mode)	WCDMA	Keypad down with belt clip against flat phantom. f = 1880 MHz	0.150
Flat Section (Body Mode)	GSM EDGE	Keypad down with belt clip against flat phantom. f = 1880 MHz	0.190
Flat Section (Body Mode)	Bluetooth Only	Keypad down with belt clip against flat phantom. f = 2441 MHz	0.002

Based on the worst-case data presented above, the Psion Teklogix WorkAbout Pro, Model 7525S was found to be **compliant** with the 1.6 mW/g requirement defined in OET Bulletin 65, Supplement C (Edition 01-01).

Modifications made to test sample

Intertek implemented no modifications.

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

4.0 Test Site Description

The SAR test site located at 731 Enterprise Drive, Lexington KY 40510 is comprised of the SPEAG model DASY 4 automated near-field scanning system, which is a package, optimized for dosimetric evaluation of mobile radios [3]. This system is installed in an ambient-free shielded chamber. The Ambient temperature is controlled to $22.2 \pm 2^{\circ}\text{C}$. Because the HVAC operates as a closed system, the relative humidity remains constant at $50 \pm 5\%$. During the SAR evaluations, the RF ambient conditions are monitored continuously for signals that might interfere with the test results. The tissue simulating liquid is also stored in this area in order to keep it at the same constant ambient temperature as the room.

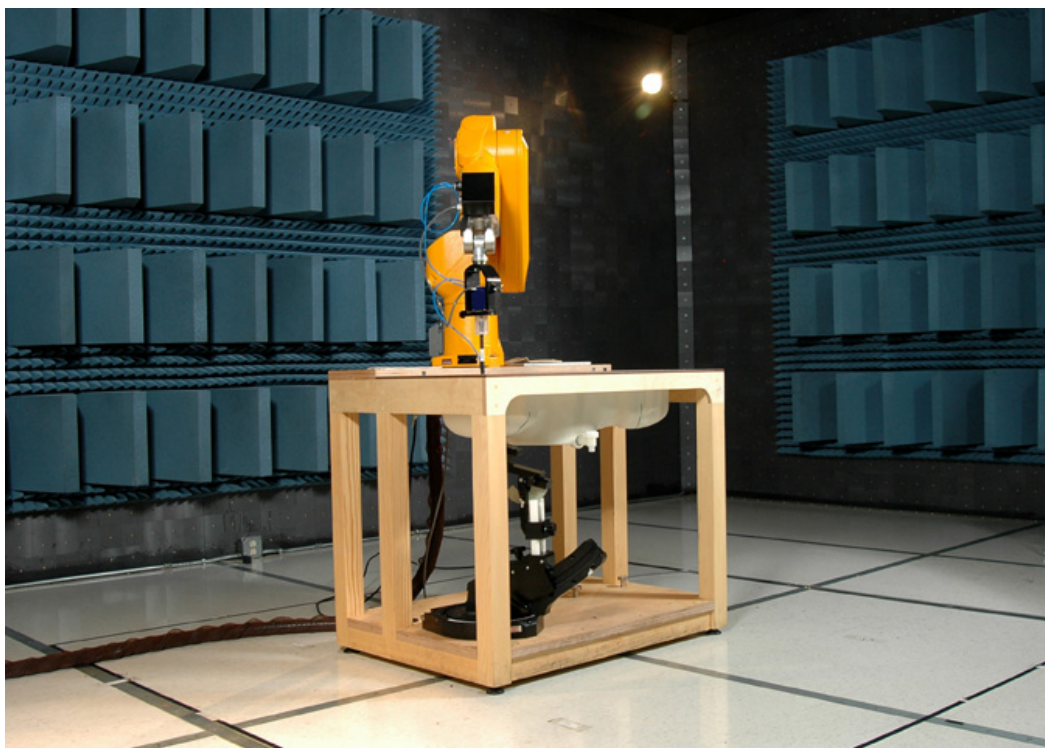


Figure 1: Intertek SAR Test Site

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

Measurement Equipment

The following major equipment/components were used for the SAR evaluations:

SAR Measurement System			
EQUIPMENT	SPECIFICATIONS	S/N #	Cal. Due
Robot	Stäubli RX60L	597412-01	N/A
	Repeatability: ± 0.025mm Accuracy: 0.806x10 ⁻³ degree Number of Axes: 6		
E-Field Probe	EX3DV3	3516	11/23/2007
	Frequency Range: 900MHz to 6GHz Probe Linearity: ± 0.2 dB (30 MHz to 6 GHz) Length: 34.5 cm Distance between the probe tip and the dipole center: 2.7 mm Tip Diameter: 2.4 mm Calibration: 900, 1800, 2450, 5200 and 5800 MHz for head & body tissue simulating liquid		
Data Acquisition	DAE4	358	3/2007
	Measurement Range: 1µV to >200mV Input offset Voltage: < 1µV (with auto zero) Input Resistance: 200 M		
Phantom	SAM Twin V4.0	TP-1243	N/A
Complies with IEEE P1528-2003	Type SAM Twin, Homogenous Shell Material: Fiberglass Thickness: 2 ± 0.2 mm Capacity: 20 liter Size of the flat section: approx. 320 x 230 mm		
Device holder	Non-conductive holder supplied with DASY4, dielectric constant less than 5.0	N/A	N/A
Network Analyzer	Agilent 8753ES	US39173983	8/14/2007
	Frequency Range: 30KHz – 6.0 GHz		
Signal Generator	HP 83620B	2065	8/15/2007
	Frequency Range: 10MHz – 20 GHz		
Spectrum Analyzer	Rohde & Schwarz FSP	1164.4391.07	8/2/2007
	Frequency Range: 9KHz – 7 GHz		
Wireless Communications Test Set	CMU-200	1100.0008.02	11/1/2007

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

Measurement Uncertainty

The Table below includes the uncertainty budget suggested by the IEEE Std 1528-200X and determined by SPEAG for the DASY4 measurement System

Error Description	Uncertainty Value	Prob. Dist.	Div.	c_i (1g)	c_i (10g)	Std.Unc. (1g)	Std.Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±5.9%	N	1	1	1	±5.9%	±5.9%	∞
Axial Isotropy	±4.7%	R	√3	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	√3	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effect	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	√3	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	√3	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	√3	1	1	±1.5%	±1.5%	∞
RF Ambient Conditions	±3.0%	R	√3	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	√3	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	√3	1	1	±1.7%	±1.7%	∞
Max. SAR Eval.	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Test sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	√3	1	1	±2.9%	±2.9%	∞
Phantom and Tissue Parameters								
Phantom Uncertainty	±4.0%	R	√3	1	1	±2.3%	±2.3%	∞
Liquid Conductivity (target)	±5.0%	R	√3	0.64	0.43	±1.8%	±1.2%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.64	0.43	±1.6%	±1.1%	∞
Liquid Permittivity (target)	±5.0%	R	√3	0.6	0.49	±1.7%	±1.4%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.6	0.49	±1.5%	±1.2%	∞
Combined Standard Uncertainty						±10.9%	±10.7%	387
Expanded STD Uncertainty						±21.9%	±21.4%	

Notes.

1. Worst Case uncertainty budget for DASY4 assessed according to IEEE 1528. The budget is valid for the frequency range 300 MHz – 3 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerably smaller.

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

Measurement Traceability

All measurements described in this report are traceable to National Institute of Standards and Technology (NIST) standards or appropriate national standards.

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

5.0 Job Description

The Psion Teklogix WorkAbout Pro, Model 7525S has been tested to the requirements defined in OET Bulletin 65, Supplement C (Edition 01-01) at the request of:

Manufacturer of the device: Psion Teklogix
2100 Meadowvale Boulevard
Mississauga, Canada, L5N 7J9

Model number of the device: 7525S
Name of contact: Sada Dharwarkar
Telephone: 905-812-6200
Fax: 905-812-6301
E-mail: sada.dharwarkar@psionteklogix.com

Manufacturer of the radio: Sierra Wireless Inc.
Model Number of the radio: AC860
Serial Number of the radio: X172656024012

EUT receive date: 22-Feb-07
EUT received condition: Good condition production unit
Test start date: 26-Feb-07
Test end date: 1-Mar-07

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

Test Sample Description

The Psion Teklogix WorkAbout Pro, Model 7525S is a handheld computer which is utilized as a portable data collection terminal.

Test sample						
Model	7525S					
FCC ID	GM37525SG1AC860					
Device Category	Portable					
RF Exposure Category	General Population/Uncontrolled Environment					
System	GSM EDGE 850/1900; GSM GPRS 850/1900; WCDMA Band II and V					
Frequency Band	824.2 MHz – 848.8 MHz (GSM 850) 1850.20 MHz – 1909.8 MHz (GSM 1900) 826.4 MHz – 846.6 MHz (WCDMA Band V) 1852.4 MHz – 1907.6 MHz (WCDMA Band II)					
Mode(s) of Operation	GSM EDGE 850	GSM EDGE 1900	GSM GPRS 850	GSM GPRS 1900	WCDMA Band V	WCDMA Band II
Duty Cycle	1:4	1:4	1:4	1:4	1:1	1:1
Maximum output power	26.7 dBm	25.2 dBm	31.6 dBm	28.2 dBm	26.6 dBm	27.1 dBm
Radio Modules ¹						
Module Description	GSM / WCDMA		Bluetooth		RLAN	
Module Manufacturer	Sierra Wireless		Psion Teklogix		Psion Teklogix	
Module Model Number	AC860		7525BTB		RA80211G	
Module FCCID	N7NAC860		GM37525BTB		GM3RA80211G	

Test sample Accessories	
Battery type	Psion Teklogix WA3006 Li-Ion Rechargeable 3000mAh battery (3.7V)
Belt clip	Yes, for use with supplied case (Model: WA6194-G1)

Test Signal Mode	
Test Commands	
Base Station Simulator	X

¹ SAR testing was not performed on the RLAN module. The 7525S integrates three radio modules listed in this table. The Bluetooth and RLAN modules are both manufactured by Psion Teklogix for specific use in the 7525S. The GSM/WCDMA module is manufactured by Sierra Wireless. These modules have all been certified with limited modular approval and are unmodified from the original granted devices according to Psion Teklogix. While the RLAN module was physically installed in the 7525S during the testing, it was not actually powered or evaluated. According to Psion Teklogix, software on the 7525S does not allow simultaneous operation of the RLAN module and GSM/WCDMA module so they are not considered to be co-located. Considering the modules are unmodified from the original granted devices, and the RLAN and Bluetooth modules were certified specifically for the 7525S, the only tests that were required (and performed) are described in the Engineering Judgments section of this report.

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

Test Sample Pictures:

Internal and external test sample pictures can be found in the following accompanying documents:

Psion Teklogix 7525S Internal Photographs.pdf
Psion Teklogix 7525S External Photographs.pdf

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

6.0 System Verification

Dipole System Validation

Prior to the assessment, the system was verified to be within $\pm 10\%$ of the specifications by using the system validation kit. The validation was performed at 900 MHz and 1800 MHz using head tissue, and at 2450 MHz using muscle tissue.



Figure 2: Photograph of System Verification (900MHz Dipole Positioned at Flat Phantom)²

² A similar positioning of an 1800 MHz and 2450 MHz dipole was used.

Evaluation For: Psion Teklogix
 Model: 7525S

FCC ID: GM37525SG1AC860

Reference Dipole Validation – GSM GPRS 850, EDGE 850 and WCDMA Band V Tests								
Frequency Measure (MHz)	Dipole Type	Dipole Serial Number	Fluid Type	Dipole Power Input	Cal. Lab SAR (1g)	Measured SAR (1g)	% Error SAR (1g)	Date
900	D900V2	13	900 MHz Head	1W	10.6	11.12	4.91	2/26/2007

Dipole dimensions: L=150.2 mm, D=3.6 mm

The following information, regarding the impedance of the D900V2, S/N #: 013 dipole was supplied by SPEAG:

Feed-point impedance at 900 MHz: $Re\{Z\} = 50.3 \text{ Ohm}$; $Im\{Z\} = 0.7 \text{ Ohm}$
 Return Loss at 900 MHz: -41.9 dB

Reference Dipole Validation – GSM GPRS 1900, EDGE 1900 and WCDMA Band II Tests								
Frequency Measure (MHz)	Dipole Type	Dipole Serial Number	Fluid Type	Dipole Power Input	Cal. Lab SAR (1g)	Measured SAR (1g)	% Error SAR (1g)	Date
1800	D1800V2	224	1800 MHz Head	1W	39.7	40.80	2.77	2/27/2007

Dipole dimensions: L=72.7 mm, D=3.6 mm

The following information, regarding the impedance of the D1800V2, S/N #: 224 dipole was supplied by SPEAG:

Feed-point impedance at 1800 MHz: $Re\{Z\} = 50.4 \text{ Ohm}$; $Im\{Z\} = -3.1 \text{ Ohm}$
 Return Loss at 1800 MHz: -30.2 dB

Reference Dipole Validation – Bluetooth Mid Channel Tests								
Frequency Measure (MHz)	Dipole Type	Dipole Serial Number	Fluid Type	Dipole Power Input	Cal. Lab SAR (1g)	Measured SAR (1g)	% Error SAR (1g)	Date
2450	D2450V2	718	2450 MHz Body	1W	51.6	47.30	8.33	3/1/2007

Dipole dimensions: L=52.1 mm, D=3.6 mm

The following information, regarding the impedance of the D2450V2, S/N #: 718 dipole was supplied by SPEAG:

Feed-point impedance at 2450 MHz: $Re\{Z\} = 58.7 \text{ Ohm}$; $Im\{Z\} = 5.6 \text{ Ohm}$
 Return Loss at 2450 MHz: -24.7 dB

Evaluation For: Psion Teklogix
 Model: 7525S

FCC ID: GM37525SG1AC860

Tissue Simulating Liquid Description and Validation

Ingredient (% by weight)	f (MHz)					
	900		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body
Water	41.45	52.40	54.90	70.45	Not Used	73.2
Salt (NaCl)	1.45	1.40	0.18	0.36		0.04
Sugar	56.00	45.00	-	-		-
HEC	1.00	1.00	-	-		-
Bactericide	0.10	0.10	-	-		-
Triton X-100	-	-	-	-		-
DGBE	-	-	44.92	29.18		26.7
DGHE	-	-	-	-		-

Note: The amounts of each ingredient specified in the tables are not the exact amounts of the final test solution. The final test solution was adjusted by adding small amounts of the appropriate ingredient to calibrate the solution to meet the proper dielectric parameters.

The ambient temperature of the test site, as well as the temperature of the tissue simulating fluid, were recorded on each day of testing, as shown in the table below:

Date	Ambient Temperature(°F)	Muscle Simulating Liquid Temperature (°F) f=900MHz	Head Simulating Liquid Temperature (°F) f=900MHz	Muscle Simulating Liquid Temperature (°F) f=1800MHz	Head Simulating Liquid Temperature (°F) f=1800MHz	Muscle Simulating Liquid Temperature (°F) f=2450MHz
2/26/2007	73.4	72.9	73	Not used	Not used	Not used
2/27/2007	74	Not used	Not used	72.4	73.2	Not used
3/1/2007	75.1	Not used	Not used	Not used	Not used	73.7

Evaluation For: Psion Teklogix
 Model: 7525S

FCC ID: GM37525SG1AC860

The dielectric parameters were verified prior to assessment using the HP 8753A Network Analyzer. The dielectric parameters (ϵ_r, σ) on each day of testing were as follows:

Head Tissue Parameters - GSM and WDCMA Tests								
Frequency Measure (MHz)	Dielectric Constant Target	Dielectric Constant Measure	Dielectric % Deviation	Imaginary Part	Conductivity Target	Conductivity Measure	Conductivity % Deviation	Date
900	41.5	39.9	3.86	20.3	0.97	1.0157	4.71	2/26/2007
1800	40	42	5.00	13.4	1.4	1.34	4.22	2/27/2007
Body Tissue Parameters - GSM and WCDMA Tests								
Frequency Measure (MHz)	Dielectric Constant Target	Dielectric Constant Measure	Dielectric % Deviation	Imaginary Part	Conductivity Target	Conductivity Measure	Conductivity % Deviation	Date
900	55	57.1	3.82	20.1	1.05	1.01	4.22	2/26/2007
1800	53.3	52.6	1.31	14.6	1.52	1.46	3.88	2/27/2007
Body Tissue Parameters - Bluetooth Tests								
Frequency Measure (MHz)	Dielectric Constant Target	Dielectric Constant Measure	Dielectric % Deviation	Imaginary Part	Conductivity Target	Conductivity Measure	Conductivity % Deviation	Date
2450	52.5	54.1	3.05	12.6	1.78	1.72	3.58	3/1/2007

Maximum mass density $\rho = 1 \text{ g/cm}^3$

Maximum deviation of the dielectric parameters from the recommended values was 4.71 %.

During the measurements, the liquid level was maintained to a level of 15 cm with a tolerance of ± 0.2 cm.

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

7.0 Evaluation Procedures

Prior to any testing, the appropriate fluid was used to fill the phantom to a depth of 15 cm \pm 0.2cm. The fluid parameters were verified and the dipole validation was performed as described in the previous sections.

Test Positions:

The Device was positioned against the SAM and flat phantom using the exact procedure described in Supplement C Edition 01 – 01 of Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields”, OET Bulletin 65, FCC, Washington, D.C. 20554, 1997.

Reference Power Measurement:

The measurement probe was positioned at a fixed location above the reference point. A power measurement was made with the probe above this reference position so it could be used for assessing the power drift later in the test procedure.

Coarse Scan:

A coarse area scan with a horizontal grid spacing of 15 x 15 mm was performed in order to find the approximate location of the peak SAR value. This scan was performed with the measurement probe at a constant height in the simulating fluid. A two dimensional spline interpolation algorithm was then used to determine the peaks and gradients within the scanned area.

Zoom Scan:

A zoom scan was performed around the approximate location of the peak SAR as determined from the coarse scan. The zoom scan was comprised of a measurement volume of 30 x 30 x 30 mm based on 7 x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

Data Extrapolation:

Since the center of the dipoles in the measurement probe are 2.7 mm away from the tip of the probe, and the distance between the surface and the lowest measurement point is 1.6 mm the data at the surface was extrapolated. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in the Z-axis. This polynomial was then used to evaluate the points between the surface and the probe tip.

The maximum interpolated value was searched with a straightforward sorting algorithm. Around this maximum, the SAR values averaged over the spatial volumes (1g or 10g) were computed using a 3-D spline interpolation algorithm. The 3-D spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y and z directions). The volume was integrated with a trapezoidal algorithm. 1000 points (10 x 10 x 10) were interpolated to calculate the average.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Reference Power Measurement:

The probe was positioned at precisely the same reference point and the reference power measurement was repeated. The difference between the initial reference power and the final one is referred to as the power drift. If the power drift exceeded 5% of the final peak SAR value, the measurement was repeated.

RF Ambient Activity:

During the entire SAR evaluation, the RF ambient activity was monitored using a spectrum analyzer with an antenna connected to it. The spectrum analyzer was tuned to the frequency of measurement and with one trace set to max hold mode. In this way, it was possible to determine if at any point during the SAR measurement there was an interfering ambient signal. If an ambient signal was detected, then the SAR measurement was repeated.

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

8.0 Test Configuration / Test Photographs

For the purpose of this evaluation, the 7525S was considered to be a data collection terminal which operates under the GSM EDGE 850/1900, GSM GPRS 850/1900 and WCDMA Band II and V protocols. It is supplied with a soft case which attaches to a plastic belt clip on the user's body.

The 7525S was configured for testing in WCDMA mode according to the FCC document, "SAR Measurement Procedures for 3G Devices, June 2006". In each WCDMA call, the data rate was set to RMC with TPC set to "All Up". The 7525S was configured for testing in GSM EDGE and GPRS modes according to the CTIA Test Plan for Mobile Stations Over the Air: Method of Measurement for Radiated RF Power and Receiver Performance, Revision 2.2, November 2006. As with the FCC 3G document, the CTIA test plan references the 3GPP standards for transmitter configuration settings. In each GSM EDGE call, the coding scheme was set to MCS5 with 4 downlink and 2 uplink slots activated. The uplink slots were set to transmit at the highest permissible gamma (power level) permitted by the device. The GSM GPRS calls were set up in the same manner, using the CS1 coding scheme.

The Bluetooth transmitter was activated by the use of the "BlueTest" application on the device itself.

Evaluation For: Psion Teklogix
 Model: 7525S

FCC ID: GM37525SG1AC860

A photograph of the 7525S, as configured for testing, is shown below:



Figure 3: Setup for area scans on the 7525S

9.0 Criteria

The following FCC limits for SAR apply to devices operating in General Population/Uncontrolled Exposure environment:

Exposure (General Population/Uncontrolled Exposure environment)	SAR (W/kg)
Average over the whole body	0.08
Spatial Peak (1g)	1.60
Spatial Peak for hands, wrists, feet and ankles (10g)	4.00

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

10.0 Engineering Judgments

Being a data-only device, the 7525S does not have any head-use applications. All tests were therefore performed in Body mode, with the device installed in its case and the belt-clip placed against the flat phantom.

In addition to the SAR measurements in GSM EDGE, GSM GPRS and WCDMA modes, the effect of the co-located Bluetooth transmitter on Body-mode SAR was investigated as follows:

SAR scans were performed with the Bluetooth transmitter turned on, while the device was disconnected from the communications test set. Additionally, the conducted measurements show that the highest output power in all cases was obtained while the 7525S was transmitting in the GSM GPRS 850/1900 modes. Therefore, the GPRS-mode scans were repeated with the Bluetooth transmitter turned on at its 'Mid' operating channel.

11.0 Tabular Test Results

The results on the following page(s) were obtained when the device was tested in the operating conditions described in this report. Detailed measurement data and plots, which reveal information about the location of the maximum SAR with respect to the device, are referenced under **Heading 12.0 - Graphical SAR Scan Results**. The extrapolated SAR results account for the drift measurements using the following formula:

$$\text{Extrapolated SAR} = \text{Measured SAR} * 10^{-(\text{Drift}/10)}$$

For positive drift values, no extrapolation was performed. A dashed line will appear in the table for the extrapolation values in this case.

Conducted Power Measurements

These conducted power measurements for the 7525S were made using a CMU-200 base station simulator. Cable loss was accounted for within the test set by offsetting the readings by the appropriate amounts. Readings were taken at the RF port that was present under the 7525S’s internal radio.

The 7525S was configured for testing in WCDMA mode according to the FCC document, “SAR Measurement Procedures for 3G Devices, June 2006”. In each WCDMA call, the data rate was set to RMC with TPC set to “All Up”. The 7525S was configured for testing in GSM EDGE and GPRS modes according to the CTIA Test Plan for Mobile Stations Over the Air: Method of Measurement for Radiated RF Power and Receiver Performance, Revision 2.2, November 2006. As with the FCC 3G document, the CTIA test plan references the 3GPP standards for transmitter configuration settings. In each GSM EDGE call, the coding scheme was set to MCS5 with 4 downlink and 2 uplink slots activated. The uplink slots were set to transmit at the highest permissible gamma (power level) permitted by the device. The GSM GPRS calls were set up in the same manner, using the CS1 coding scheme.

Transmit Mode		Max Power (dBm)	
Tx Band	Tx Channel	GSM-GPRS	GSM-EDGE
GSM 850 Band	128	31.48	26.46
	190	31.5	26.7
	251	31.6	26.7
GSM 1900 Band	512	28.0	25.1
	661	28.2	25.1
	810	28.1	25.2
Tx Band	Tx Channel	WCDMA Max Power (dBm)	
WCDMA Band V	4132	26.48	
	4183	26.60	
	4233	26.59	
WCDMA Band II	9262	26.65	
	9400	27.1	
	9538	26.0	

Evaluation For: Psion Teklogix
 Model: 7525S

FCC ID: GM37525SG1AC860

Body Mode Tabular Test Results

During the test, the RF output power of the test sample varied by a small amount due to heat and battery output power variations in the device. To take this power drift into account, a reference measurement was performed at a predefined position in the fluid just before and just after each SAR scan. The difference in these values is recorded in the table below as the SAR drift. The 1-g SAR was extrapolated for drift and is shown in the table below.

Flat Phantom; Body / Data Mode; 1:4 Mode; GSM EDGE Bands									
Band	Channel	Freq. (MHz)	Position Information	Attachments or Accessories	SAR Drift (dB)	Measured 1-g SAR (mW/g)	Meas. 10g-SAR (mw/g)	Extrapolated Worst Case 1-g SAR (mW/g)	Extrapolated Worst Case 10-g SAR (mW/g)
GSM EDGE 850	Low/128	824.20	-	-	-	-	-	-	-
GSM EDGE 850	Mid/190	836.60	FULL area of device was scanned with Belt clip against flat phantom	WA6194-G1 case with belt clip	-0.047	0.100	0.072	0.101	0.073
GSM EDGE 850	High/251	848.80	-	-	-	-	-	-	-
GSM EDGE 1900	512	1850.20	-	-	-	-	-	-	-
GSM EDGE 1900	661	1880.00	FULL area of device was scanned with Belt clip against flat phantom	WA6194-G1 case with belt clip	-0.212	0.181	0.091	0.190	0.096
GSM EDGE 1900	810	1909.80	-	-	-	-	-	-	-

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

Flat Phantom; Body / Data Mode; 1:4 Mode; GSM GPRS Bands									
Band	Channel	Freq. (MHz)	Position Information	Attachments or Accessories	SAR Drift (dB)	Measured 1-g SAR (mW/g)	Meas. 10g-SAR (mw/g)	Extrapolated Worst Case 1-g SAR (mW/g)	Extrapolated Worst Case 10-g SAR (mW/g)
GSM GPRS 850	Low/128	824.20	-	-	-	-	-	-	-
GSM GPRS 850	Mid/190	836.60	FULL area of device was scanned with Belt clip against flat phantom	WA6194-G1 case with belt clip	-0.051	0.204	0.148	0.206	0.150
GSM GPRS 850 Bluetooth On	Mid/190	836.60	FULL area of device was scanned with Belt clip against flat phantom	WA6194-G1 case with belt clip	-0.093	0.192	0.139	0.196	0.142
GSM GPRS 850	High/251	848.80	-	-	-	-	-	-	-
GSM GPRS 1900	512	1850.20	-	-	-	-	-	-	-
GSM GPRS 1900	661	1880.00	FULL area of device was scanned with Belt clip against flat phantom	WA6194-G1 case with belt clip	-0.149	0.165	0.083	0.171	0.086
GSM GPRS 1900 Bluetooth On	661	1880.00	FULL area of device was scanned with Belt clip against flat phantom	WA6194-G1 case with belt clip	-0.045	0.108	0.059	0.109	0.060
GSM GPRS 1900	810	1909.80	-	-	-	-	-	-	-

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

Flat Phantom; Body / Data Mode; 1:1 Mode; WCDMA Bands									
Band	Channel	Freq. (MHz)	Position Information	Attachments or Accessories	SAR Drift (dB)	Measured 1-g SAR (mW/g)	Meas. 10g-SAR (mw/g)	Extrapolated Worst Case 1-g SAR (mW/g)	Extrapolated Worst Case 10-g SAR (mW/g)
WCDMA Band V	Low/4132	826.40	-	-	-	-	-	-	-
WCDMA Band V	Mid/4183	836.60	FULL area of device was scanned with Belt clip against flat phantom	WA6194-G1 case with belt clip	0.061	0.117	0.085	-	-
WCDMA Band V	High/4233	846.60	-	-	-	-	-	-	-
WCDMA Band II	Low/9262	1852.40	-	-	-	-	-	-	-
WCDMA Band II	Mid/9400	1880.00	FULL area of device was scanned with Belt clip against flat phantom	WA6194-G1 case with belt clip	0.305	0.150	0.076	-	-
WCDMA Band II	High/9538	1907.60	-	-	-	-	-	-	-

Evaluation For: Psion Teklogix
 Model: 7525S

FCC ID: GM37525SG1AC860

Flat Phantom; Body / Data Mode; 1:1 Mode; Bluetooth Only									
Band	Channel	Freq. (MHz)	Position Information	Attachments or Accessories	SAR Drift (dB)	Measured 1-g SAR (mW/g)	Meas. 10g-SAR (mw/g)	Extrapolated Worst Case 1-g SAR (mW/g)	Extrapolated Worst Case 10-g SAR (mW/g)
Bluetooth	Mid	2441.00	FULL area of device was scanned with Belt clip against flat phantom	WA6194-G1 case with belt clip	-0.200	0.002	0.001	0.002	0.001

Evaluation For: Psion Teklogix
Model: 7525S

FCC ID: GM37525SG1AC860

12.0 Graphical SAR Scan Results

Graphical SAR scan results can be found in the following accompanying document:

Psion Teklogix 7525S Graphical SAR Scan Results.pdf