




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 9:39:18 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	850
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	41.56
Relative Humidity:	46.0%	Conductivity:	0.922
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-5.00 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-104.00 mm
Antenna Configuration:	Integral	Max E Field:	28.73 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.690 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.297 W/kg
Type of Modulation:		SAR End:	0.296 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.19 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	PCL 5	Extrapolation:	poly4

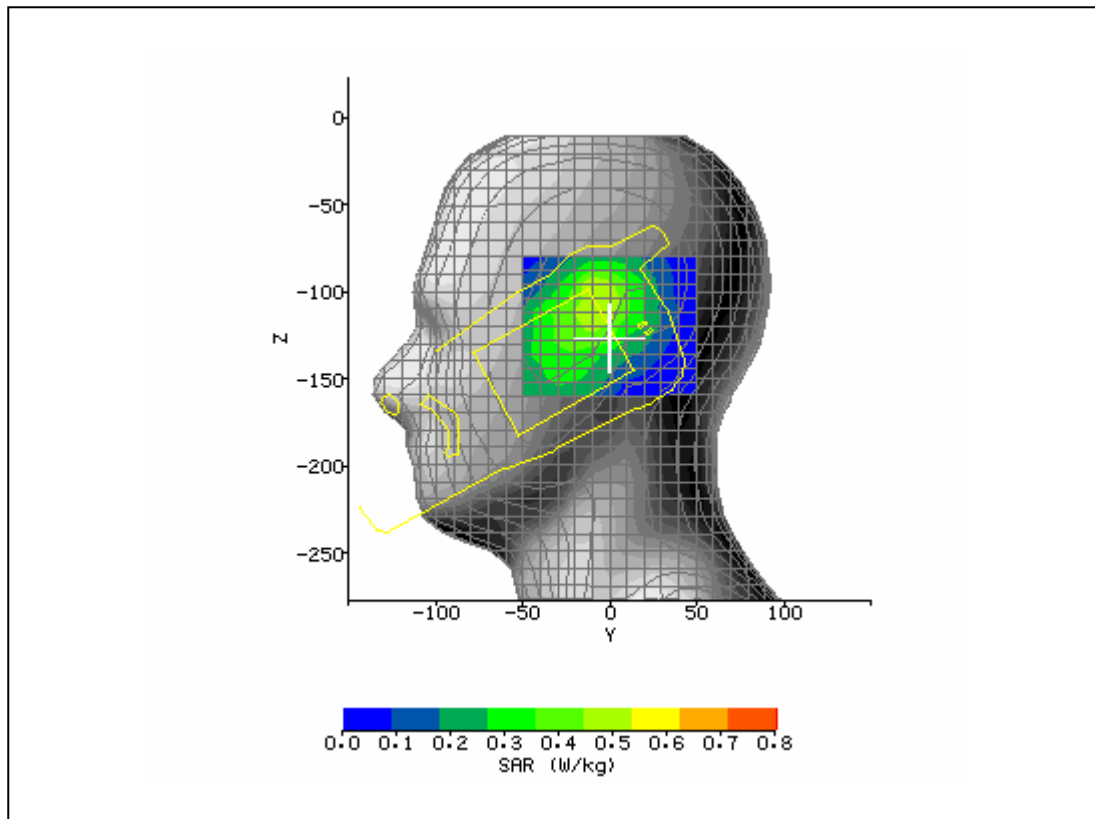


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 9:58:10 AM	DUT Battery Model/No:	
Filename:	Left_Touch_190_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	850
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	41.56
Relative Humidity:	46.0%	Conductivity:	0.922
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-1.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-98.40 mm
Antenna Configuration:	Integral	Max E Field:	32.14 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.840 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.359 W/kg
Type of Modulation:		SAR End:	0.365 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.67 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	PCL 5	Extrapolation:	poly4

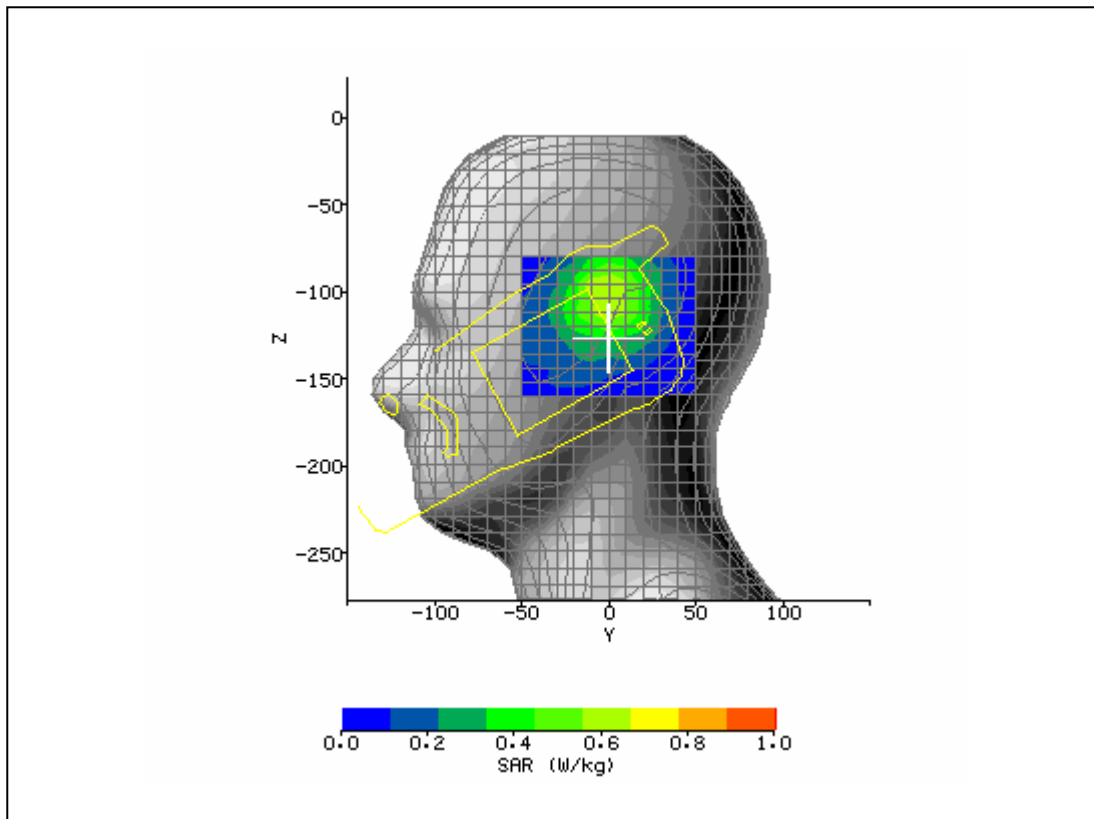


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 10:20:38 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_190_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	850
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	41.56
Relative Humidity:	46.0%	Conductivity:	0.922
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-27.00 mm
DUT Position:	Right Touch	Max SAR Z-axis Location:	-128.80 mm
Antenna Configuration:	Integral	Max E Field:	19.36 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.329 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.163 W/kg
Type of Modulation:		SAR End:	0.166 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.87 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	PCL 5	Extrapolation:	poly4

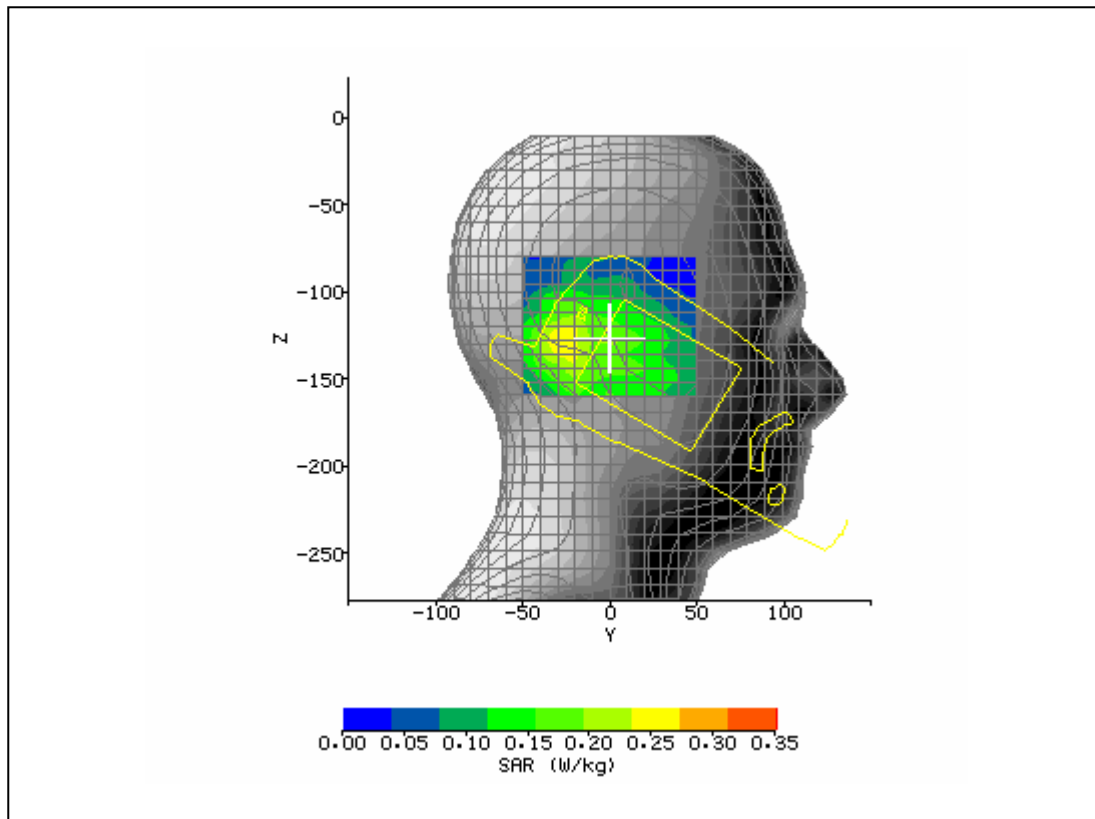


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 10:37:35 AM	DUT Battery Model/No:	
Filename:	Right_Touch_190_3d.tx t	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	850
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	41.56
Relative Humidity:	46.0%	Conductivity:	0.922
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-27.00 mm
DUT Position:	Right Tilt	Max SAR Z-axis Location:	-132.80 mm
Antenna Configuration:	Integral	Max E Field:	22.89 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.453 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.209 W/kg
Type of Modulation:		SAR End:	0.215 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.77 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	PCL 5	Extrapolation:	poly4

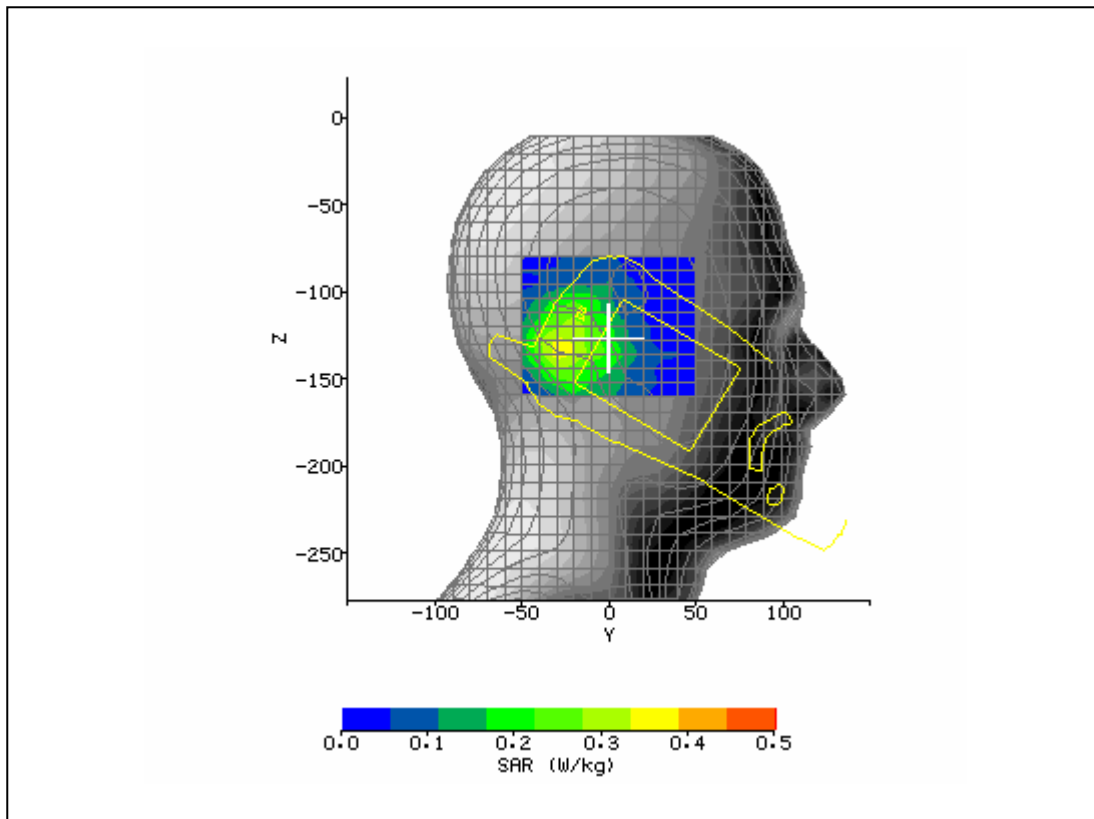


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 10:59:45 AM	DUT Battery Model/No:	
Filename:	Right_Tilt_190_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	850
Device Under Test:	7527C Handheld Computer	Relative Permittivity:	41.56
Relative Humidity:	46.0%	Conductivity:	0.922
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	1.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-94.40 mm
Antenna Configuration:	Integral	Max E Field:	33.87 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.948 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.412 W/kg
Type of Modulation:		SAR End:	0.417 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.31 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	PCL 5	Extrapolation:	poly4

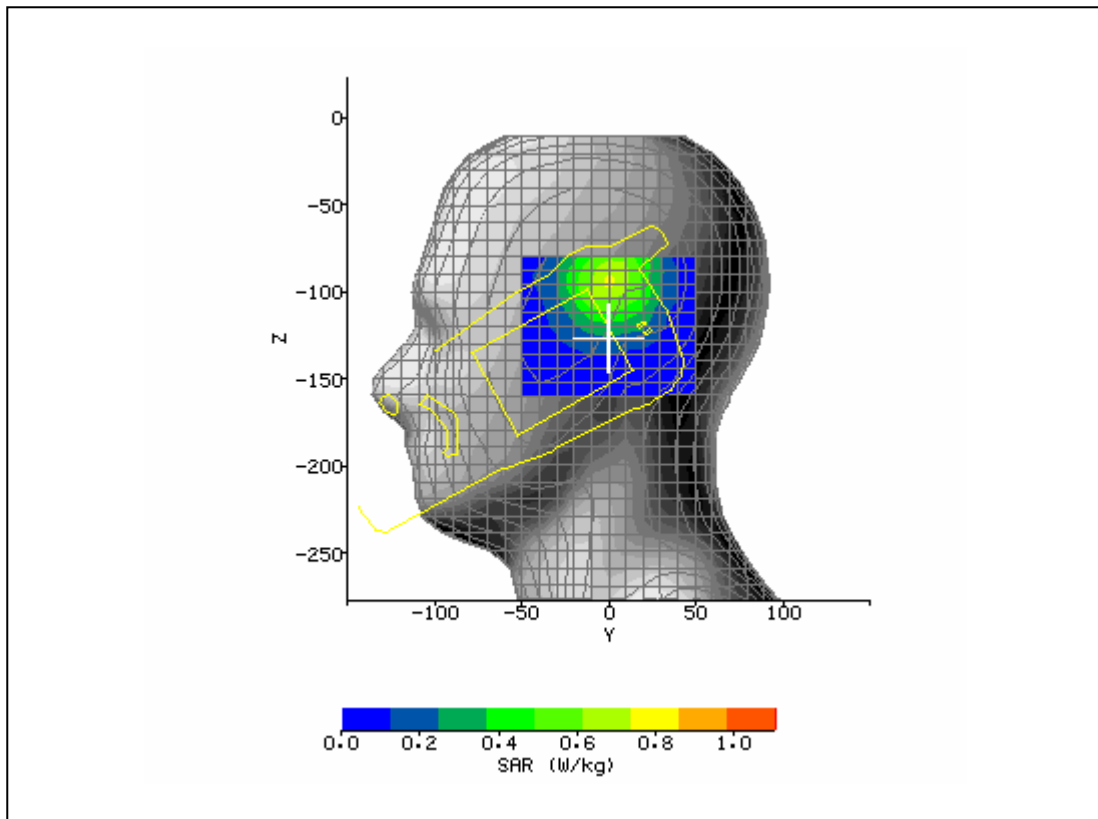


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 8:04:40 AM	DUT Battery Model/No:	
Filename:	Left_Touch_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527 Handheld Computer	Relative Permittivity:	40.98
Relative Humidity:	49.3%	Conductivity:	1.39
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	10.00 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-99.47 mm
Antenna Configuration:	Integral	Max E Field:	17.56 V/m
Test Frequency:	1880MHz	SAR 1g:	0.385 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.205 W/kg
Type of Modulation:		SAR End:	0.209 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.95 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	PCL 0	Extrapolation:	poly4

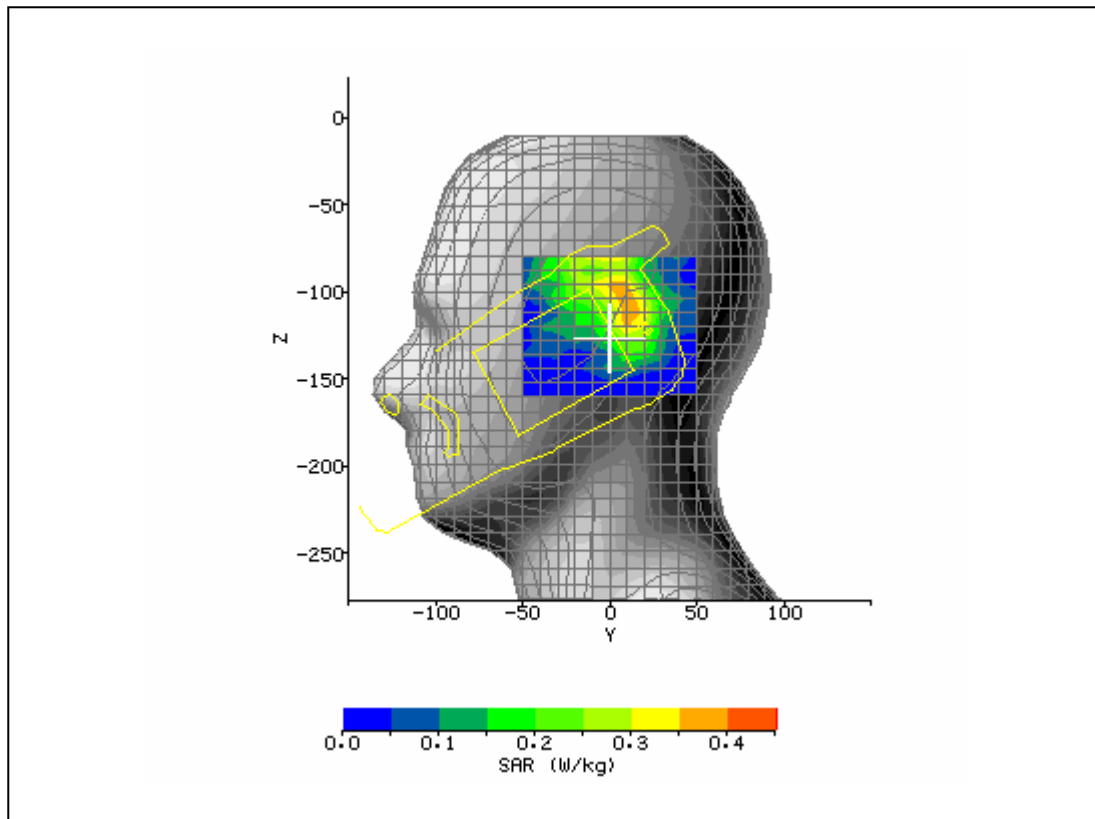


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 8:29:01 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527 Handheld Computer	Relative Permittivity:	40.98
Relative Humidity:	49.3%	Conductivity:	1.39
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	4.67 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-102.13 mm
Antenna Configuration:	Integral	Max E Field:	21.45 V/m
Test Frequency:	1880MHz	SAR 1g:	0.622 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.249 W/kg
Type of Modulation:		SAR End:	0.254 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.07 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	PCL 0	Extrapolation:	poly4

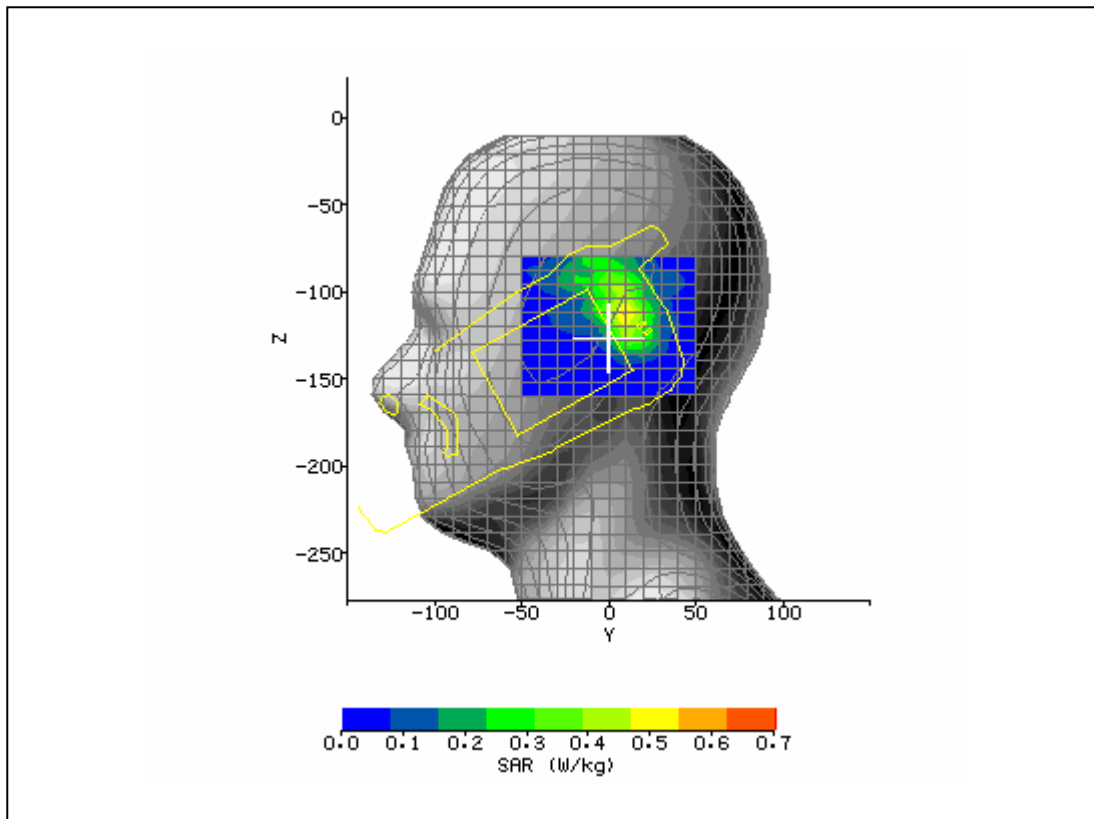


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 8:51:11 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527 Handheld Computer	Relative Permittivity:	40.98
Relative Humidity:	49.3%	Conductivity:	1.39
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-29.00 mm
DUT Position:	Right Touch	Max SAR Z-axis Location:	-114.40 mm
Antenna Configuration:	Integral	Max E Field:	11.97 V/m
Test Frequency:	1880MHz	SAR 1g:	0.218 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.095 W/kg
Type of Modulation:		SAR End:	0.097 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.13 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	PCL 0	Extrapolation:	poly4

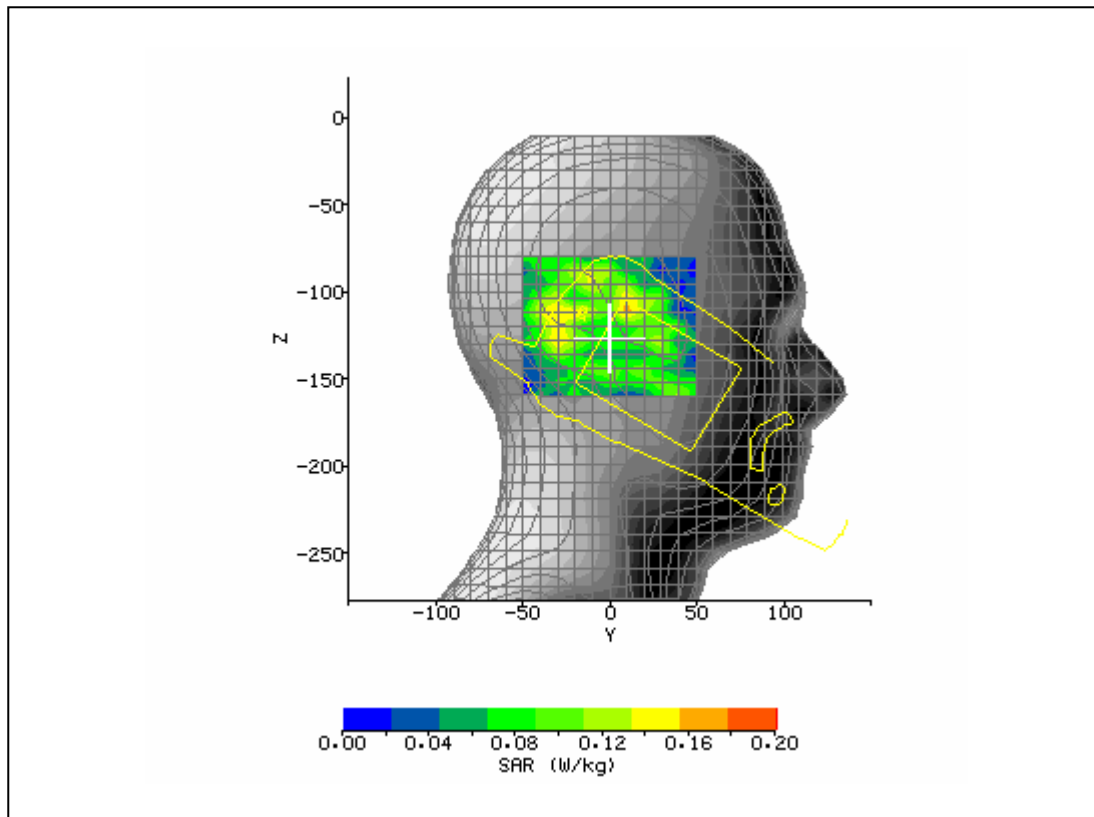


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 9:07:33 AM	DUT Battery Model/No:	
Filename:	Right_Touch_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527 Handheld Computer	Relative Permittivity:	40.98
Relative Humidity:	49.3%	Conductivity:	1.39
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-24.00 mm
DUT Position:	Right Tilt	Max SAR Z-axis Location:	-130.40 mm
Antenna Configuration:	Integral	Max E Field:	14.11 V/m
Test Frequency:	1880MHz	SAR 1g:	0.241 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.101 W/kg
Type of Modulation:		SAR End:	0.104 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.97 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	PCL 0	Extrapolation:	poly4

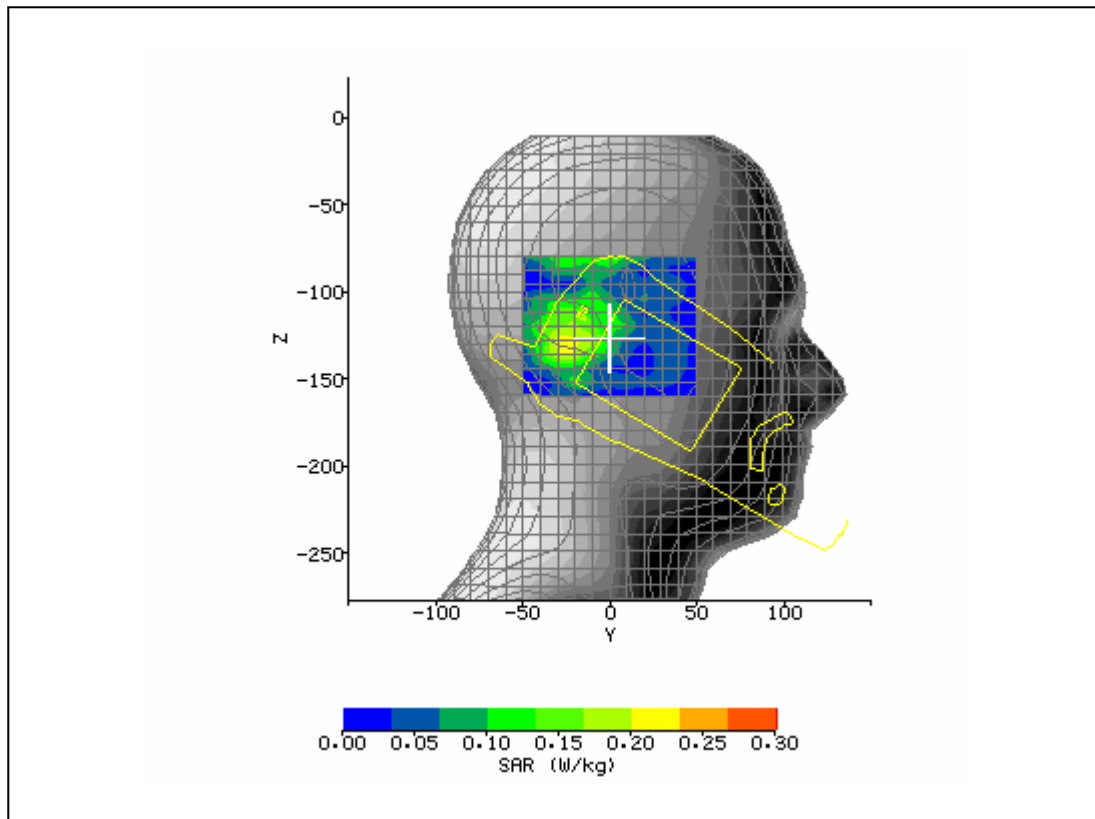


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 9:39:41 AM	DUT Battery Model/No:	
Filename:	Right_Tilt_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527C Handheld Computer	Relative Permittivity:	40.98
Relative Humidity:	49.3%	Conductivity:	1.39
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	1.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-103.20 mm
Antenna Configuration:	Integral	Max E Field:	16.08 V/m
Test Frequency:	1880MHz	SAR 1g:	0.293 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.068 W/kg
Type of Modulation:		SAR End:	0.069 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.47 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	PCL 0	Extrapolation:	poly4

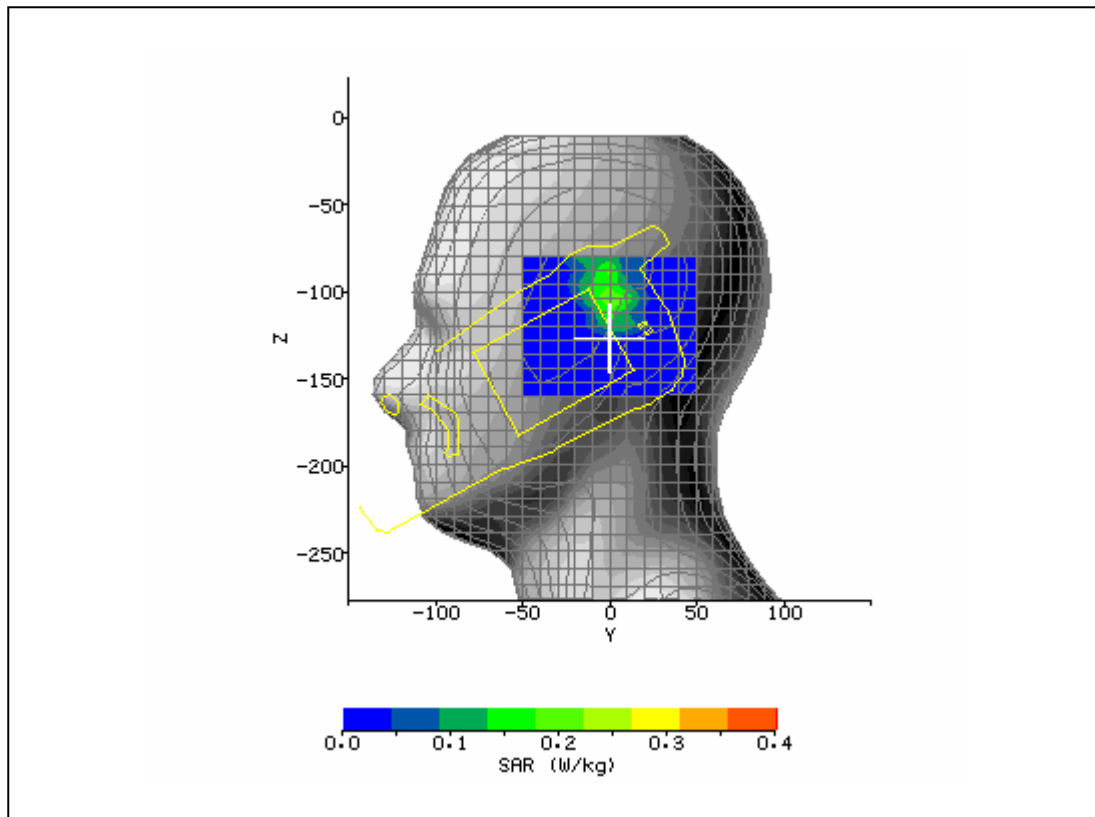


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 11:36:31 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_7427C_190_3 d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.3°C	Liquid Simulant:	850
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	41.56
Relative Humidity:	45.3%	Conductivity:	0.922
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.2°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	0.00 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-100.00 mm
Antenna Configuration:	Integral	Max E Field:	19.19 V/m
Test Frequency:	835MHz	SAR 1g:	0.306 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.139 W/kg
Type of Modulation:		SAR End:	0.142 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.16 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

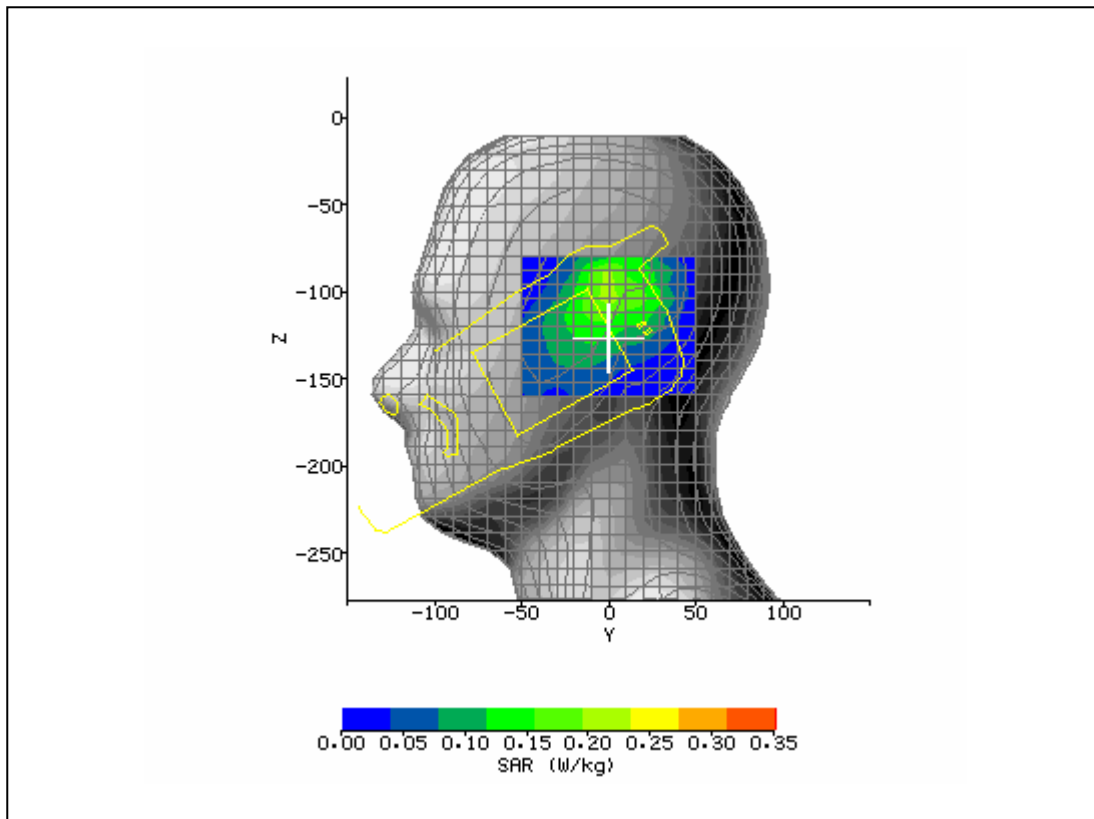


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 11:55:12 AM	DUT Battery Model/No:	
Filename:	Left_Touch_4175_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.3°C	Liquid Simulant:	850
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	41.56
Relative Humidity:	45.3%	Conductivity:	0.922
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.2°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	9.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-95.20 mm
Antenna Configuration:	Integral	Max E Field:	22.66 V/m
Test Frequency:	835MHz	SAR 1g:	0.431 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.209 W/kg
Type of Modulation:		SAR End:	0.213 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.91 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

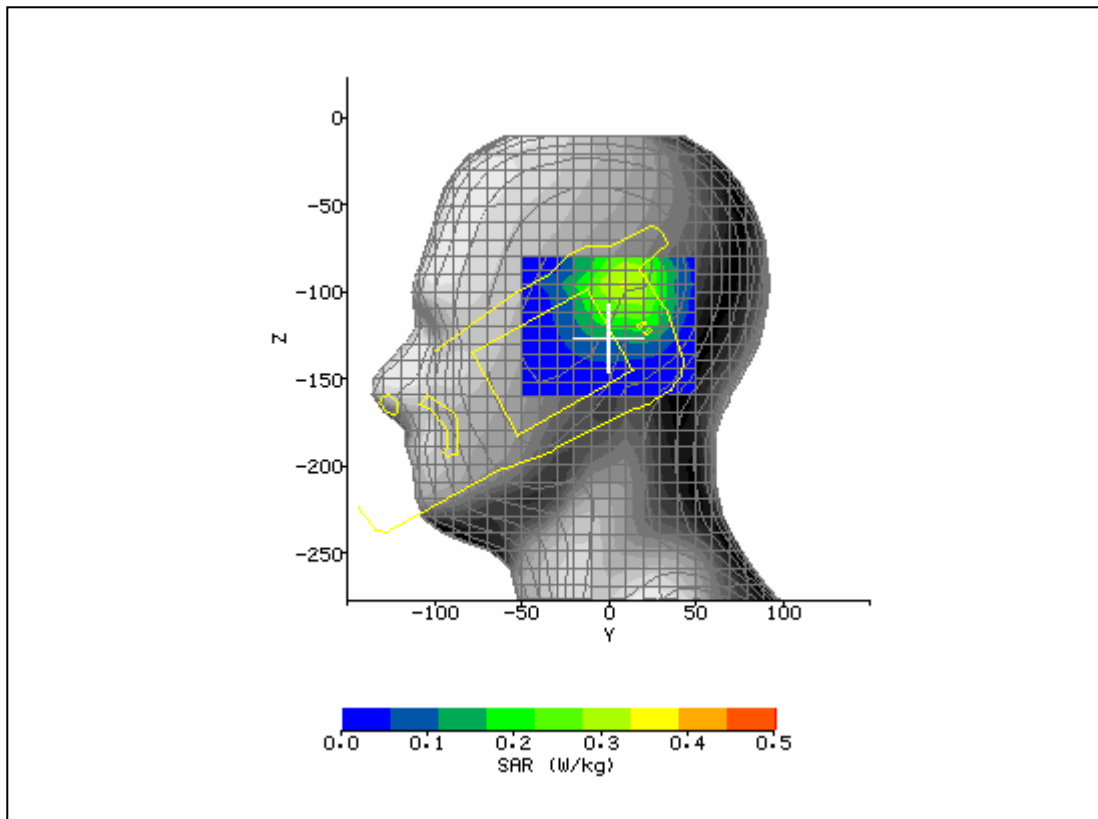


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 12:14:13 PM	DUT Battery Model/No:	
Filename:	Left_Tilt_4175_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.3°C	Liquid Simulant:	850
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	41.56
Relative Humidity:	45.3%	Conductivity:	0.922
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.2°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-26.00 mm
DUT Position:	Right Touch	Max SAR Z-axis Location:	-131.20 mm
Antenna Configuration:	Integral	Max E Field:	13.57 V/m
Test Frequency:	835MHz	SAR 1g:	0.154 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.081 W/kg
Type of Modulation:		SAR End:	0.083 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.47 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

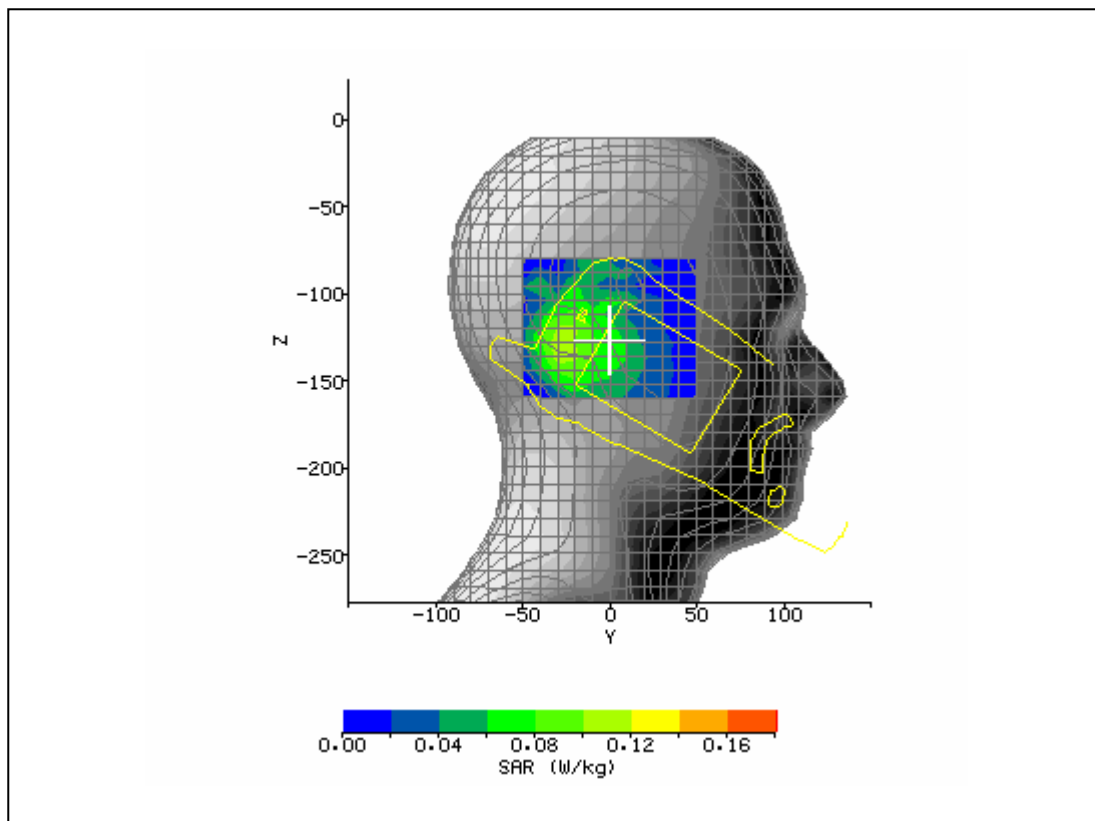


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 12:40:24 PM	DUT Battery Model/No:	
Filename:	Right_Touch_4175_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.3°C	Liquid Simulant:	850
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	41.56
Relative Humidity:	45.3%	Conductivity:	0.922
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.2°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-27.00 mm
DUT Position:	Right Tilt	Max SAR Z-axis Location:	-127.20 mm
Antenna Configuration:	Integral	Max E Field:	15.43 V/m
Test Frequency:	835MHz	SAR 1g:	0.199 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.106 W/kg
Type of Modulation:		SAR End:	0.109 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.83 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

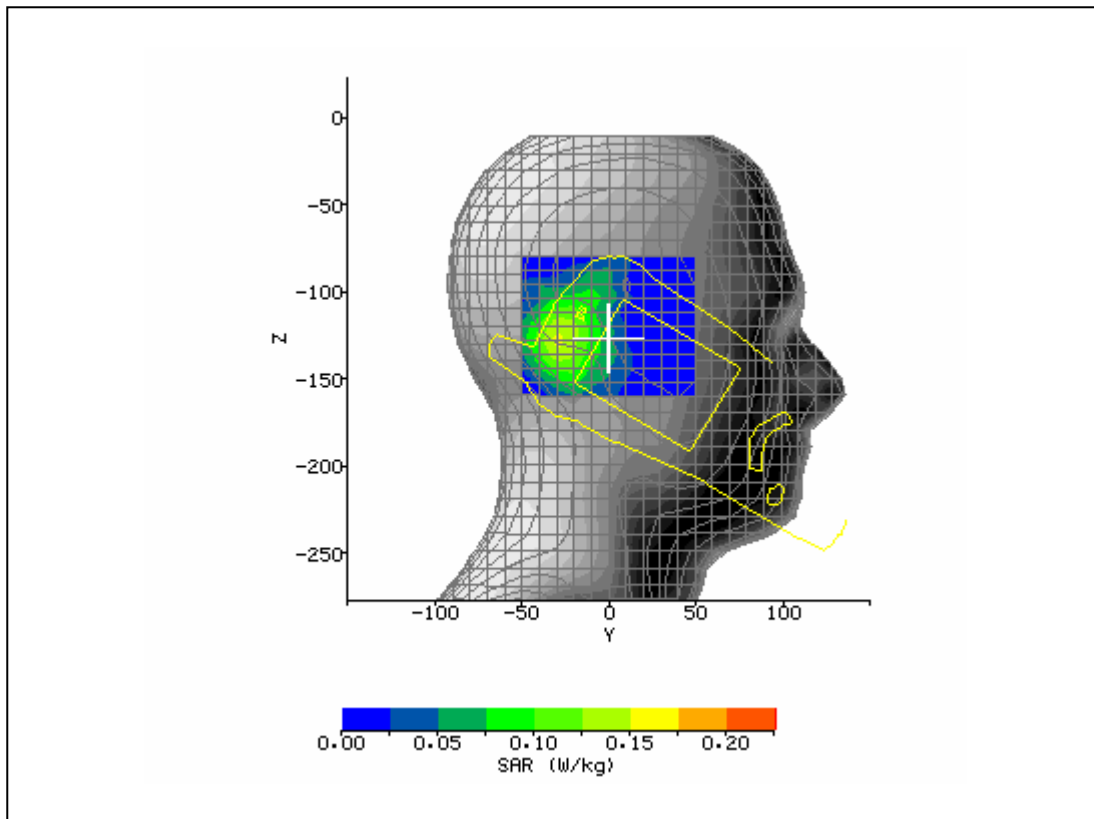


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 1:03:45 PM	DUT Battery Model/No:	
Filename:	Right_Touch_4175_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.3°C	Liquid Simulant:	850
Device Under Test:	7527C Handheld Computer	Relative Permittivity:	41.56
Relative Humidity:	45.3%	Conductivity:	0.922
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.2°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	6.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-93.60 mm
Antenna Configuration:	Integral	Max E Field:	26.18 V/m
Test Frequency:	835MHz	SAR 1g:	0.546 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.360 / .360 / .360	SAR Start:	0.287 W/kg
Type of Modulation:		SAR End:	0.291 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.39 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

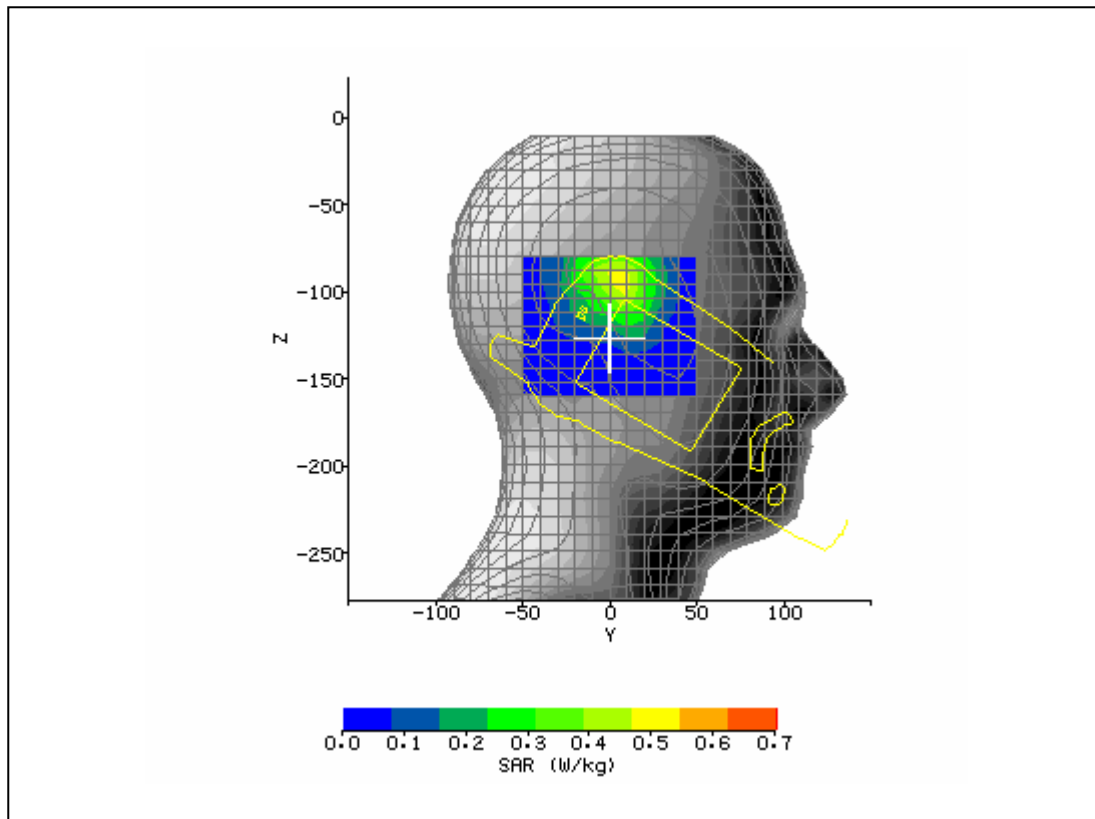


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 10:02:36 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_7527C_661_3 d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	40.98
Relative Humidity:	49.3%	Conductivity:	1.39
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-7.00 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-101.60 mm
Antenna Configuration:	Integral	Max E Field:	18.07 V/m
Test Frequency:	1880MHz	SAR 1g:	0.371 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.087 W/kg
Type of Modulation:		SAR End:	0.089 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.31 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

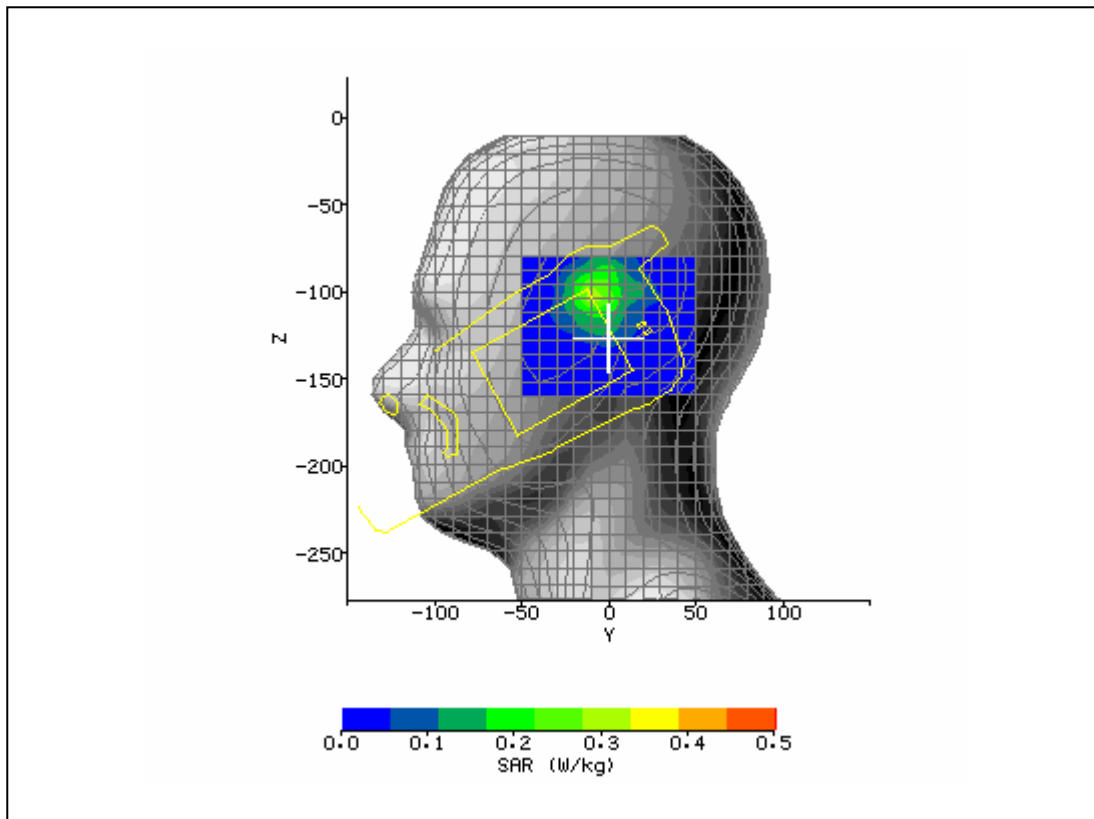


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 10:20:57 AM	DUT Battery Model/No:	
Filename:	Left_Touch_9400_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	40.98
Relative Humidity:	49.3%	Conductivity:	1.39
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	0.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-101.60 mm
Antenna Configuration:	Integral	Max E Field:	20.86 V/m
Test Frequency:	1880MHz	SAR 1g:	0.528 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.144 W/kg
Type of Modulation:		SAR End:	0.138 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.30 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

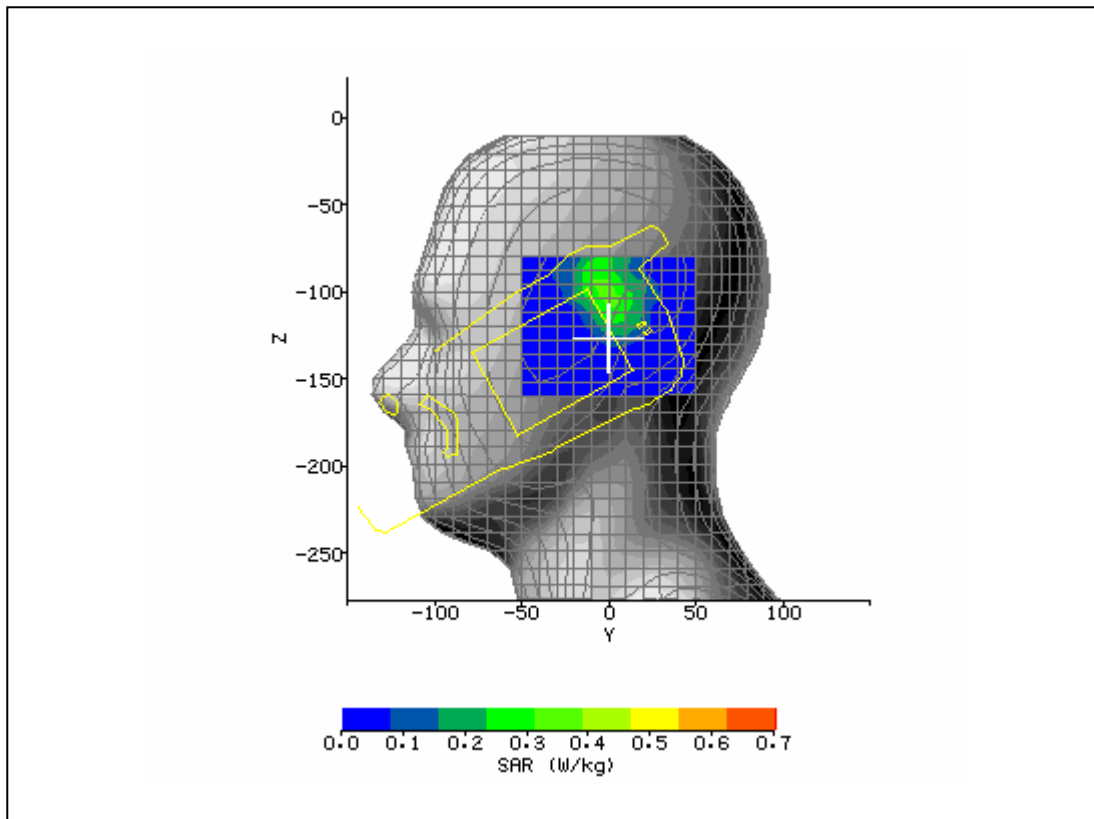


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 10:51:33 AM	DUT Battery Model/No:	
Filename:	Left_Tilt_9400_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	40.98
Relative Humidity:	49.3%	Conductivity:	1.39
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-20.00 mm
DUT Position:	Right Touch	Max SAR Z-axis Location:	-128.80 mm
Antenna Configuration:	Integral	Max E Field:	13.44 V/m
Test Frequency:	1880MHz	SAR 1g:	0.233 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.110 W/kg
Type of Modulation:		SAR End:	0.105 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.77 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

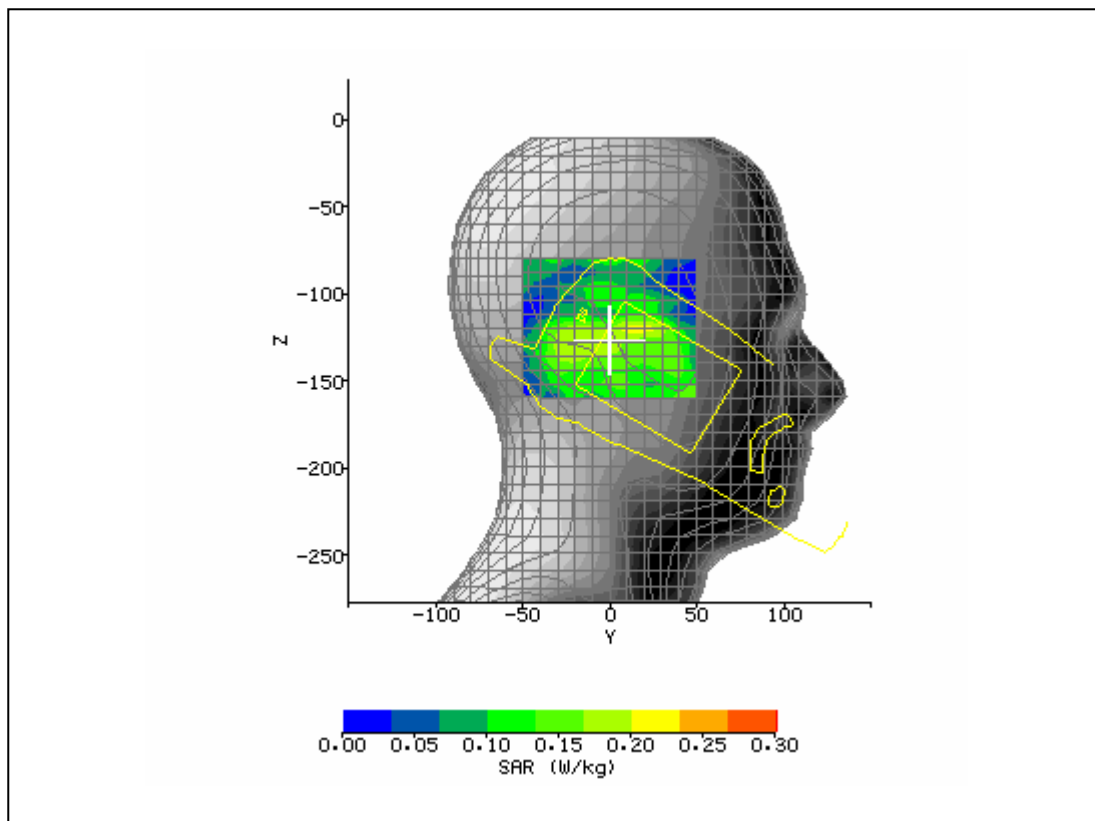


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 11:09:24 AM	DUT Battery Model/No:	
Filename:	Right_Touch_9400_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	40.98
Relative Humidity:	49.3%	Conductivity:	1.39
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-17.00 mm
DUT Position:	Right Tilt	Max SAR Z-axis Location:	-128.00 mm
Antenna Configuration:	Integral	Max E Field:	17.09 V/m
Test Frequency:	1880MHz	SAR 1g:	0.349 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.149 W/kg
Type of Modulation:		SAR End:	0.152 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.07 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

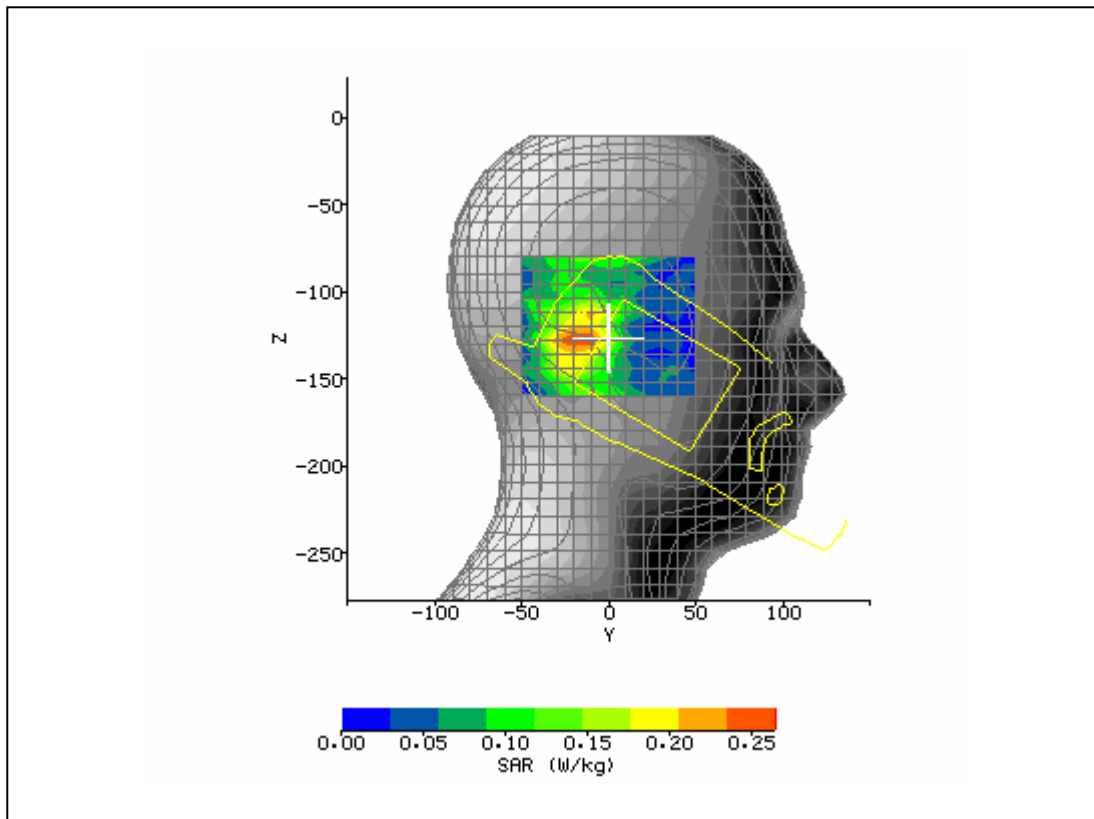


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 11:31:38 AM	DUT Battery Model/No:	
Filename:	Right_Tilt_9400_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527C Handheld Computer	Relative Permittivity:	40.98
Relative Humidity:	49.3%	Conductivity:	1.39
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-2.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-108.80 mm
Antenna Configuration:	Integral	Max E Field:	16.91 V/m
Test Frequency:	1880MHz	SAR 1g:	0.366 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.501 / .501 / .501	SAR Start:	0.135 W/kg
Type of Modulation:		SAR End:	0.139 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.96%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

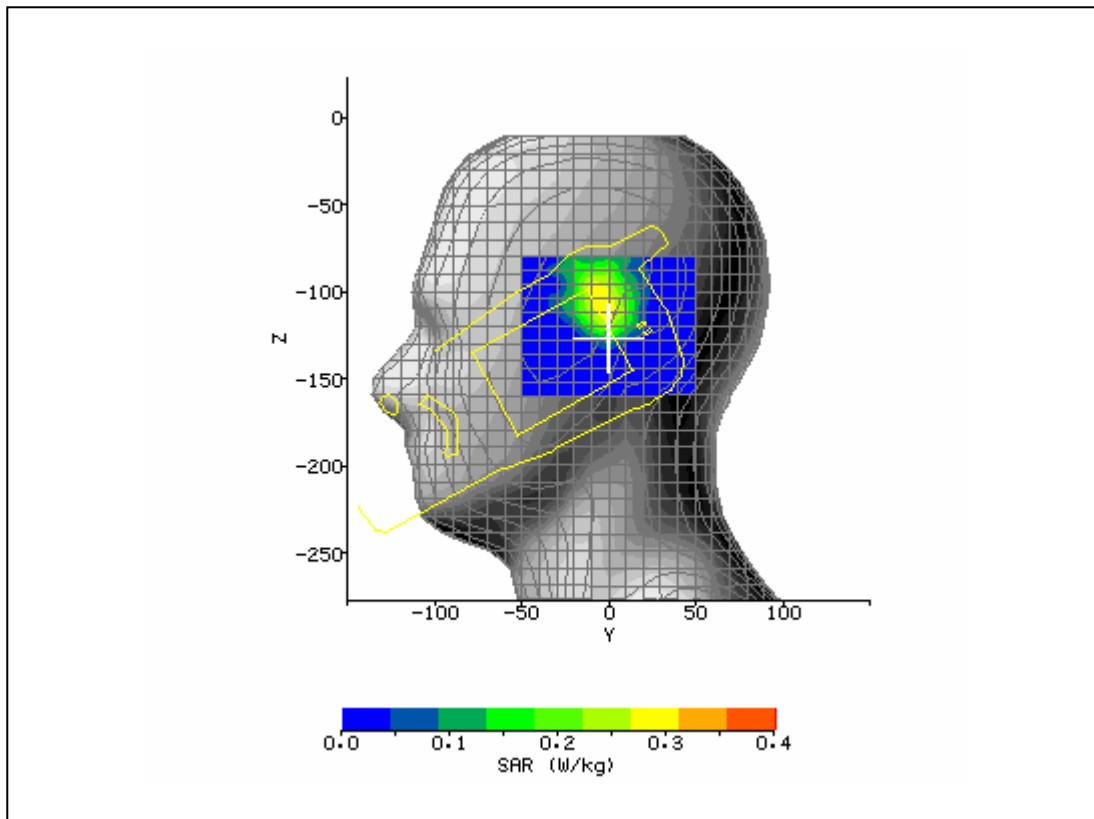


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 1:41:49 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.0°C	Liquid Simulant:	850
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	55.72
Relative Humidity:	44.8%	Conductivity:	0.986
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.9°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-24.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	-2.00 mm
Antenna Configuration:	Integral	Max E Field:	6.87 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.064 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.008 W/kg
Type of Modulation:		SAR End:	0.008 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.61 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	Two uplink timeslots	Extrapolation:	poly4

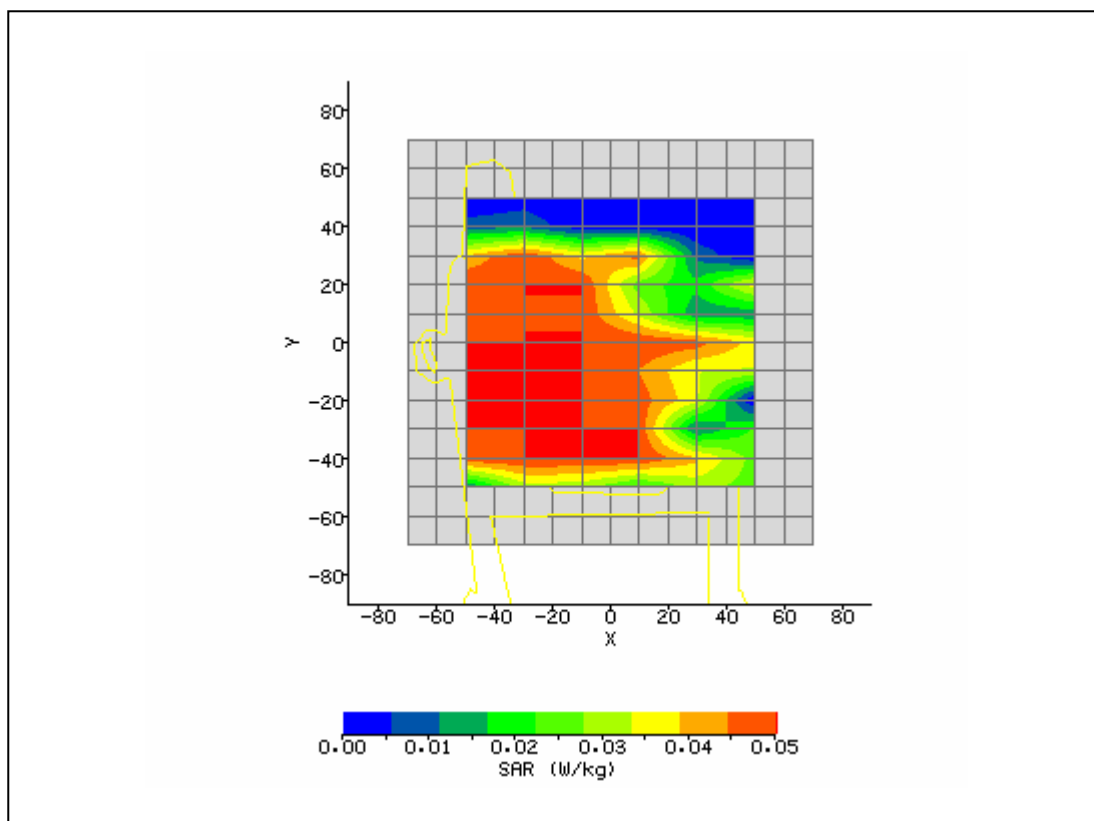


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 2:02:23 PM	DUT Battery Model/No:	
Filename:	Touch_190_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.0°C	Liquid Simulant:	850
Device Under Test:	7527C Handheld Computer	Relative Permittivity:	55.72
Relative Humidity:	44.8%	Conductivity:	0.986
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.9°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-22.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	Integral	Max E Field:	6.82 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.058 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.005 W/kg
Type of Modulation:		SAR End:	0.005 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.52 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	Two uplink timeslots	Extrapolation:	poly4

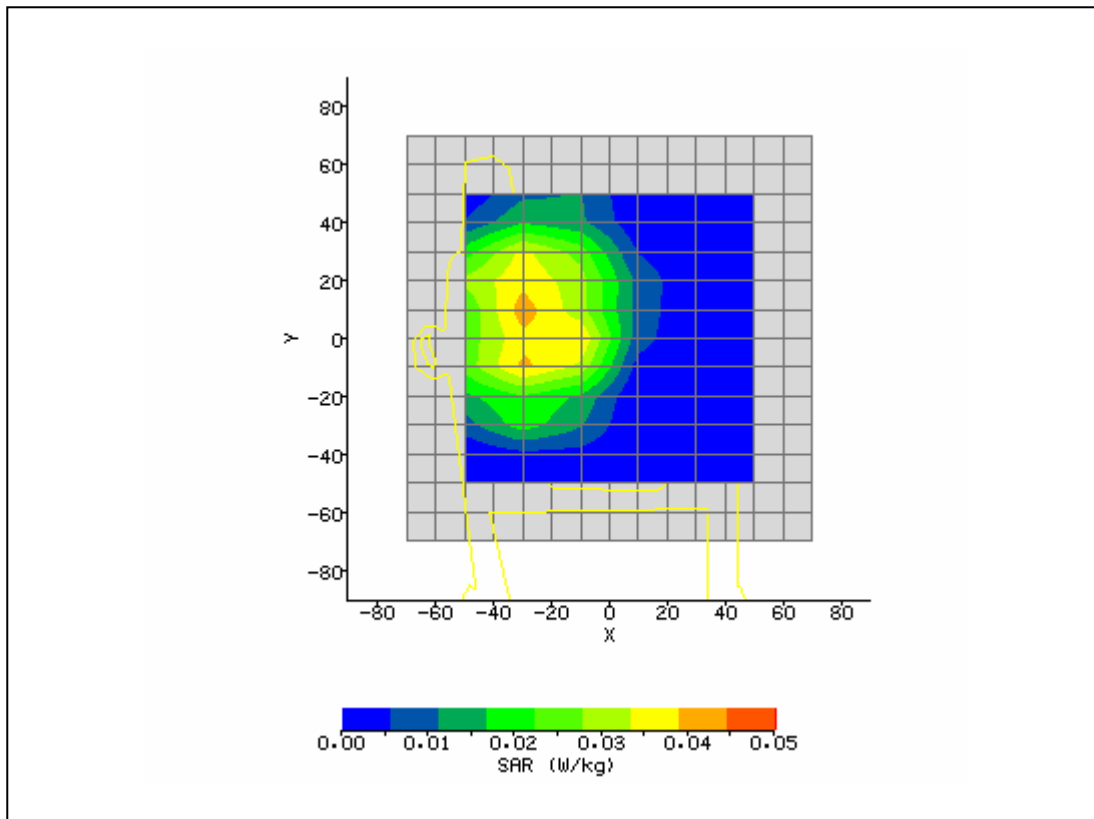


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 12:06:57 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	52.73
Relative Humidity:	49.3%	Conductivity:	1.57
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR X-axis Location:	8.00 mm
DUT Position:	Touch with Clip	Max SAR Y-axis Location:	-28.00 mm
Antenna Configuration:	Integral	Max E Field:	6.07 V/m
Test Frequency:	1880MHz	SAR 1g:	0.072 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.032 W/kg
Type of Modulation:		SAR End:	0.033 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.18 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	Two uplink timeslots	Extrapolation:	poly4

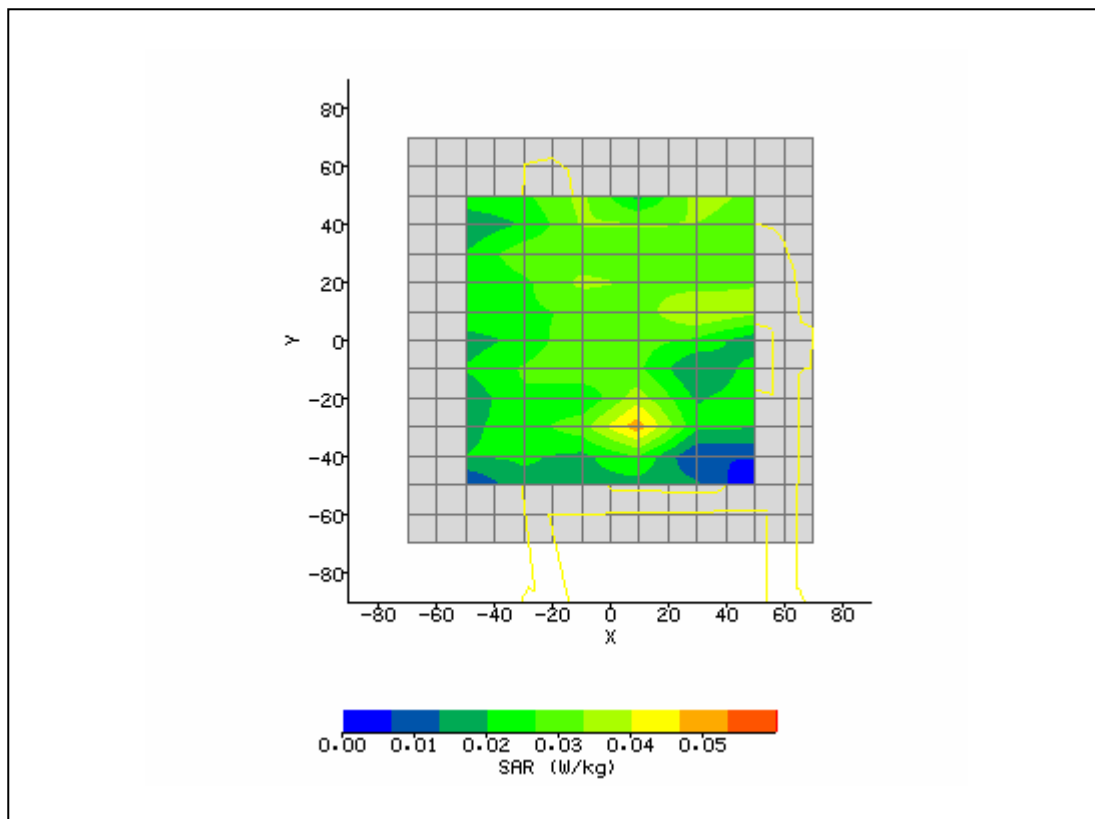


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 1:01:34 PM	DUT Battery Model/No:	
Filename:	Touch_661_EGPRS_3 d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527C Handheld Computer	Relative Permittivity:	52.73
Relative Humidity:	49.3%	Conductivity:	1.57
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR X-axis Location:	30.00 mm
DUT Position:	Touch with Clip	Max SAR Y-axis Location:	21.00 mm
Antenna Configuration:	Integral	Max E Field:	6.72 V/m
Test Frequency:	1880MHz	SAR 1g:	0.057 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.031 W/kg
Type of Modulation:		SAR End:	0.032 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.42 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	Two uplink timeslots	Extrapolation:	poly4

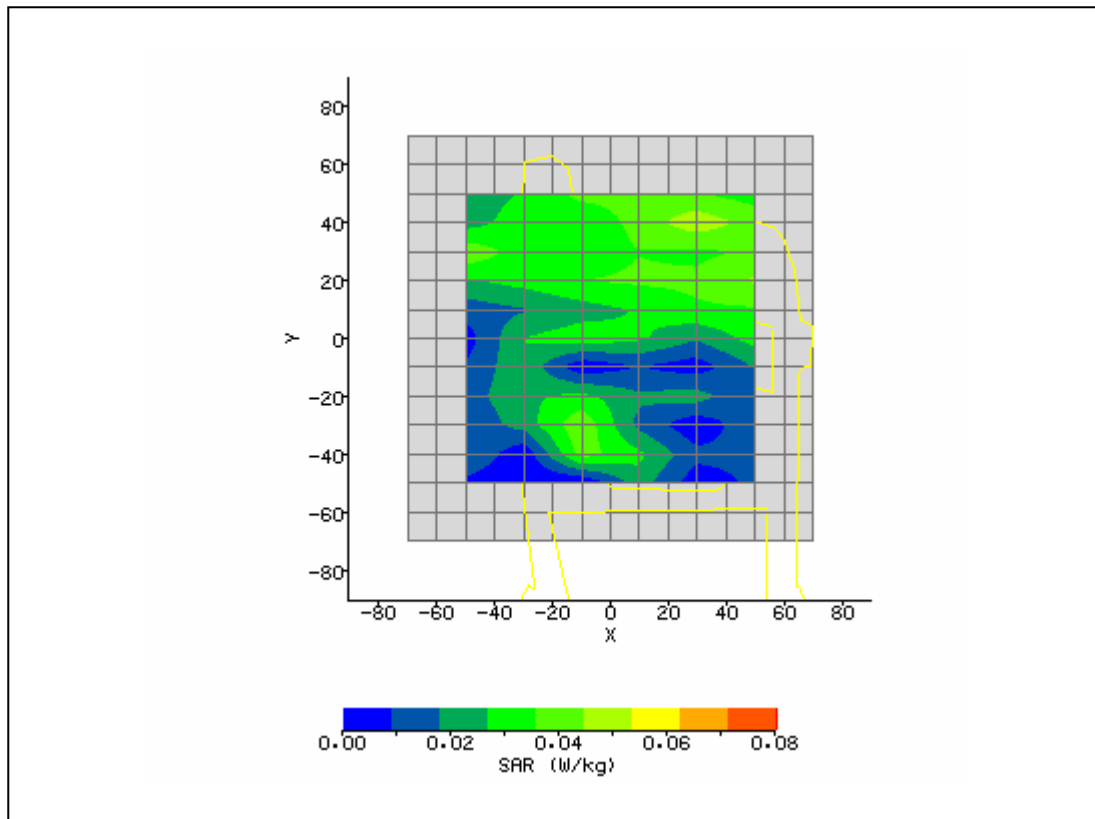


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 2:13:58 PM	DUT Battery Model/No:	
Filename:	Touch_9400_7527C_3 d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	850
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	55.72
Relative Humidity:	49.3%	Conductivity:	0.986
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-16.00 mm
DUT Position:	Touch with Clip	Max SAR Y-axis Location:	21.00 mm
Antenna Configuration:	Integral	Max E Field:	7.41 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.051 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.034 W/kg
Type of Modulation:		SAR End:	0.035 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.97 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	Two uplink timeslots	Extrapolation:	poly4

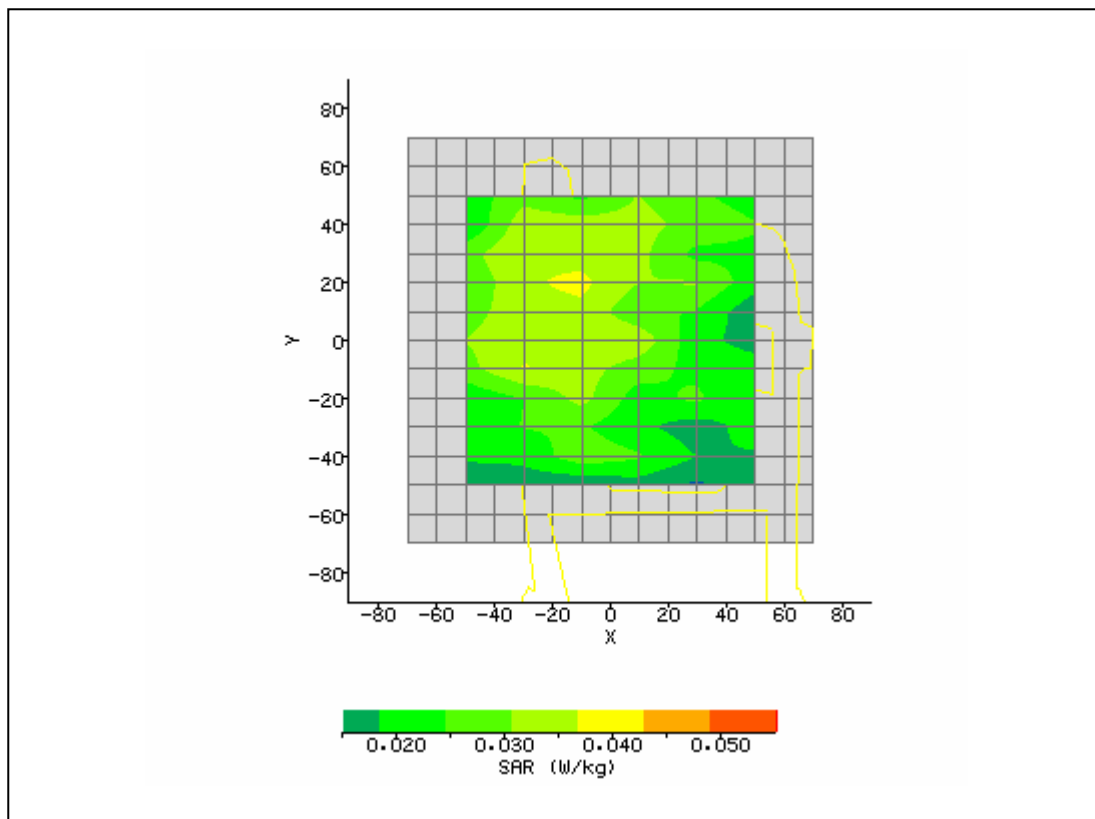


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 12:22:22 PM	DUT Battery Model/No:	
Filename:	Touch_661_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	52.73
Relative Humidity:	49.3%	Conductivity:	1.57
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-24.00 mm
DUT Position:	Touch with Clip	Max SAR Y-axis Location:	42.00 mm
Antenna Configuration:	Integral	Max E Field:	6.86 V/m
Test Frequency:	1880MHz	SAR 1g:	0.049 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.029 W/kg
Type of Modulation:		SAR End:	0.030 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.44 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	Two uplink timeslots	Extrapolation:	poly4

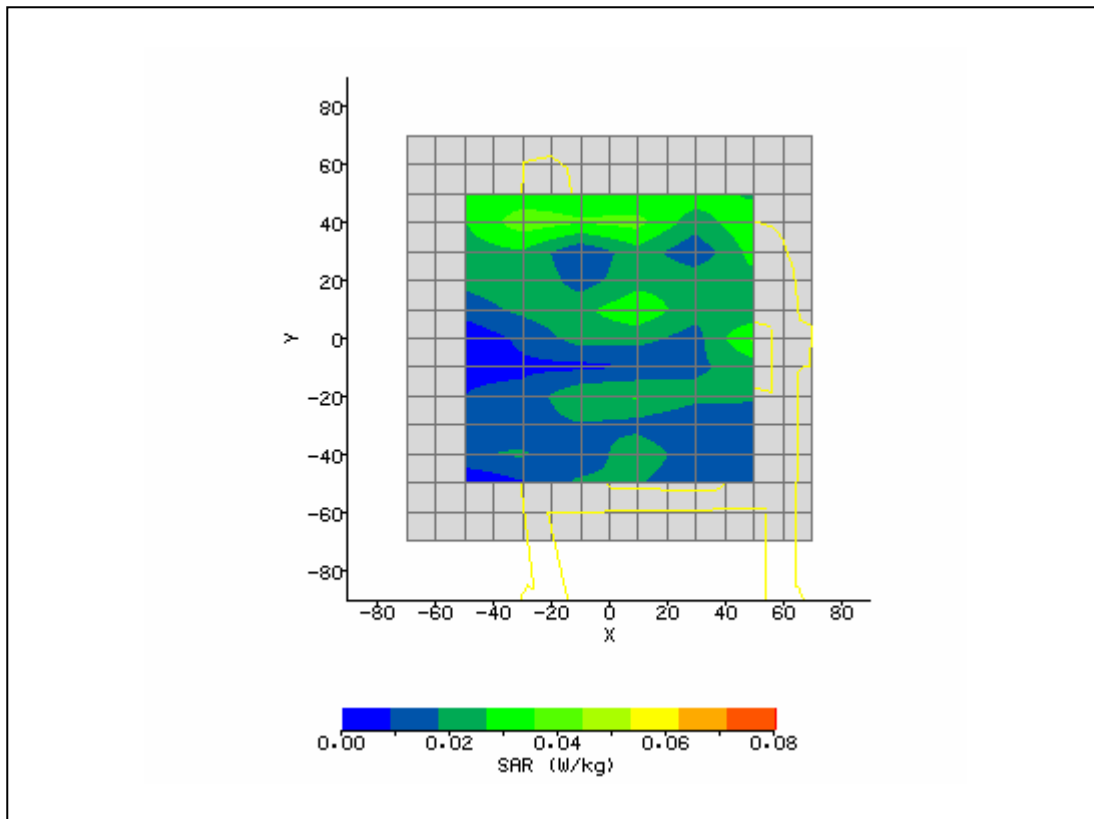


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 2:28:03 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.0°C	Liquid Simulant:	850
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	55.71
Relative Humidity:	44.8%	Conductivity:	0.986
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.9°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-14.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	5.00 mm
Antenna Configuration:	Integral	Max E Field:	7.23 V/m
Test Frequency:	835MHz	SAR 1g:	0.069 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.035 W/kg
Type of Modulation:		SAR End:	0.035 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.03 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

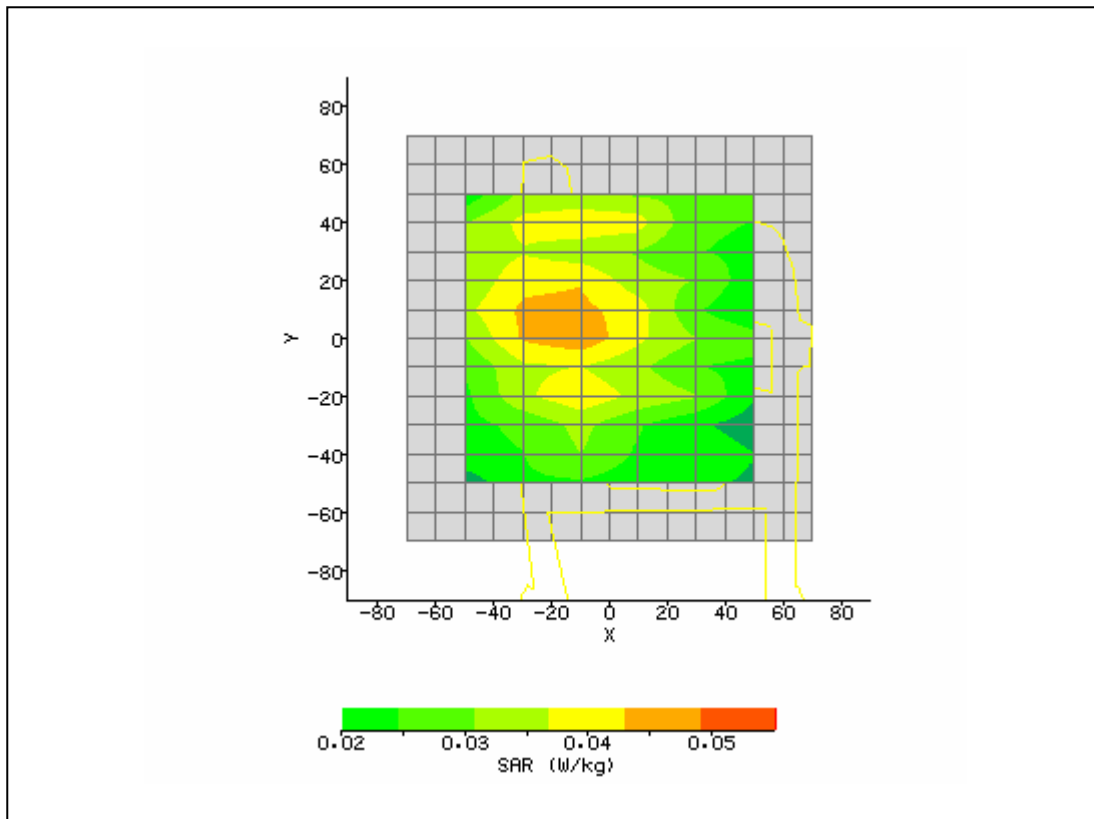


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 2:48:50 PM	DUT Battery Model/No:	
Filename:	Touch_4175-3D.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.0°C	Liquid Simulant:	850
Device Under Test:	7527C Handheld Computer	Relative Permittivity:	55.71
Relative Humidity:	44.8%	Conductivity:	0.986
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.9°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Touch with clip	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	Integral	Max E Field:	7.08 V/m
Test Frequency:	835MHz	SAR 1g:	0.054 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.355 / .355 / .355	SAR Start:	0.026 W/kg
Type of Modulation:		SAR End:	0.027 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.84 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

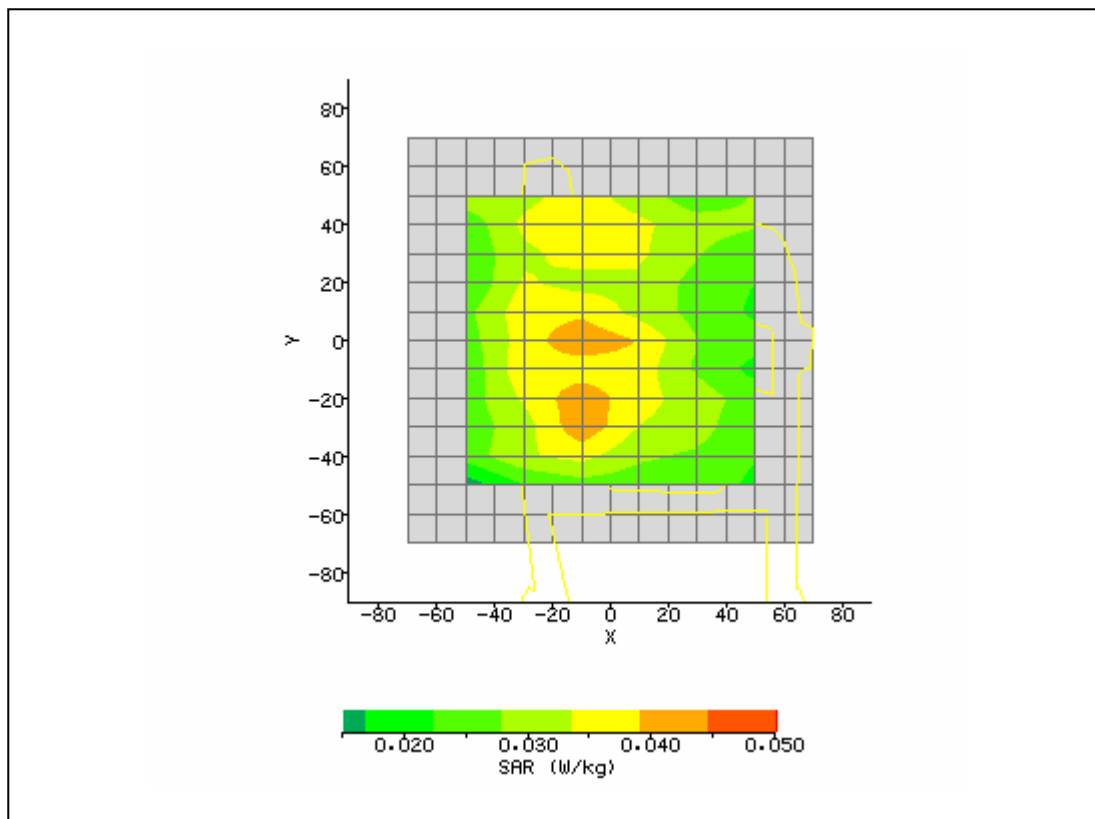


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 1:32:44 PM	DUT Battery Model/No:	
Filename:	Touch_661_7527_3d.tx t	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527S Handheld Computer	Relative Permittivity:	52.73
Relative Humidity:	49.3%	Conductivity:	1.57
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR X-axis Location:	16.00 mm
DUT Position:	Touch with Clip	Max SAR Y-axis Location:	39.00 mm
Antenna Configuration:	Integral	Max E Field:	6.42 V/m
Test Frequency:	1880MHz	SAR 1g:	0.046 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.036 W/kg
Type of Modulation:		SAR End:	0.037 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.87 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

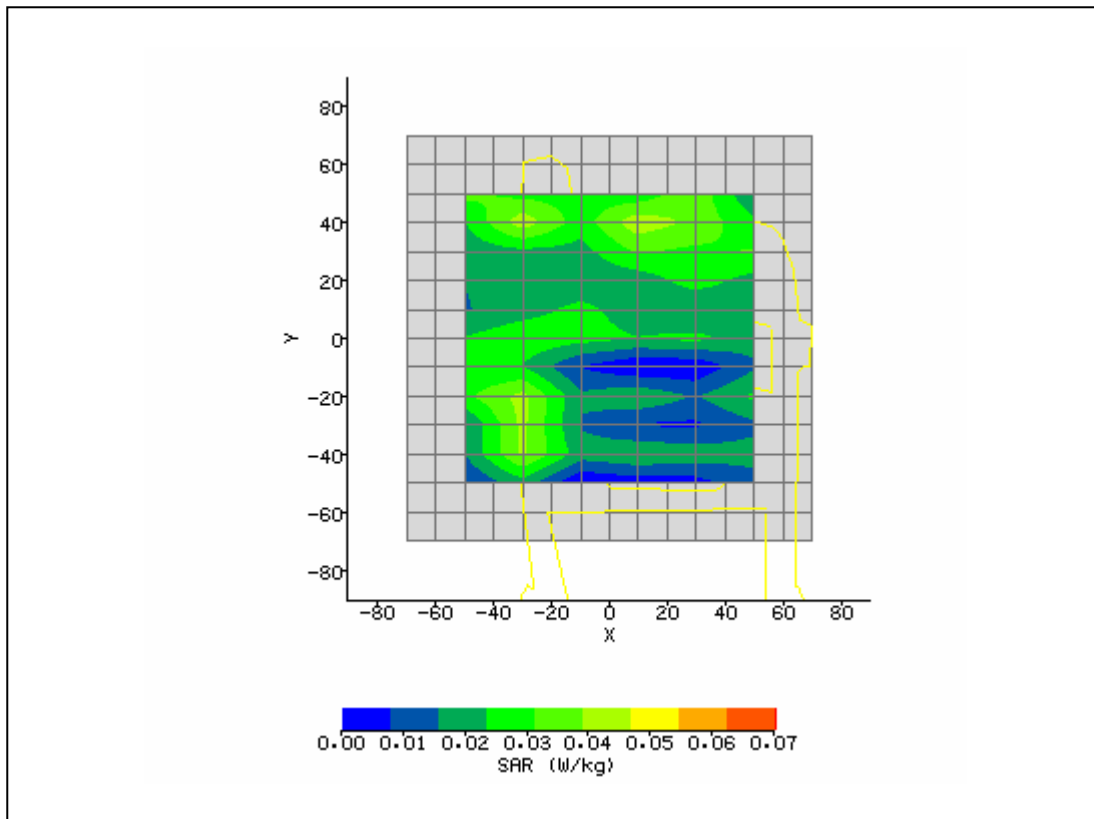

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 1:49:49 PM	DUT Battery Model/No:	
Filename:	Touch_9400_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	1900
Device Under Test:	7527C Handheld Computer	Relative Permittivity:	52.73
Relative Humidity:	49.3%	Conductivity:	1.57
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR X-axis Location:	6.00 mm
DUT Position:	Touch with Clip	Max SAR Y-axis Location:	40.00 mm
Antenna Configuration:	Integral	Max E Field:	6.93 V/m
Test Frequency:	1880MHz	SAR 1g:	0.064 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.037 W/kg
Type of Modulation:		SAR End:	0.038 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.72 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	TPC bits all 1's	Extrapolation:	poly4

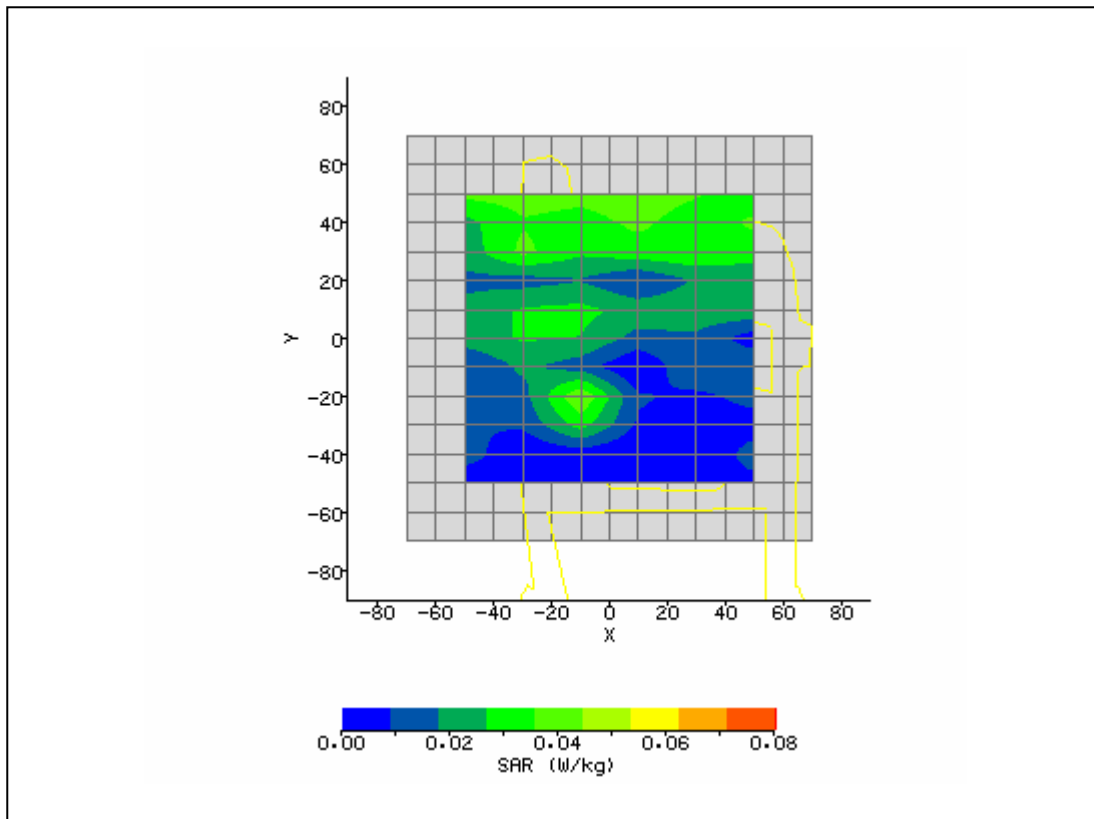

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/6/2007 8:09:14 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	20.8°C	Liquid Simulant:	850
Device Under Test:	System	Relative Permittivity:	41.56
Relative Humidity:	46.0%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.7°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	-6.00 mm
Antenna Configuration:	Dipole	Max E Field:	96.87 V/m
Test Frequency:	835MHz	SAR 1g:	10.089 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	6.229 W/kg
Conversion Factors:	.360 / .360 / .360	SAR Start:	1.982 W/kg
Type of Modulation:		SAR End:	1.965 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.87 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	1W	Extrapolation:	poly4

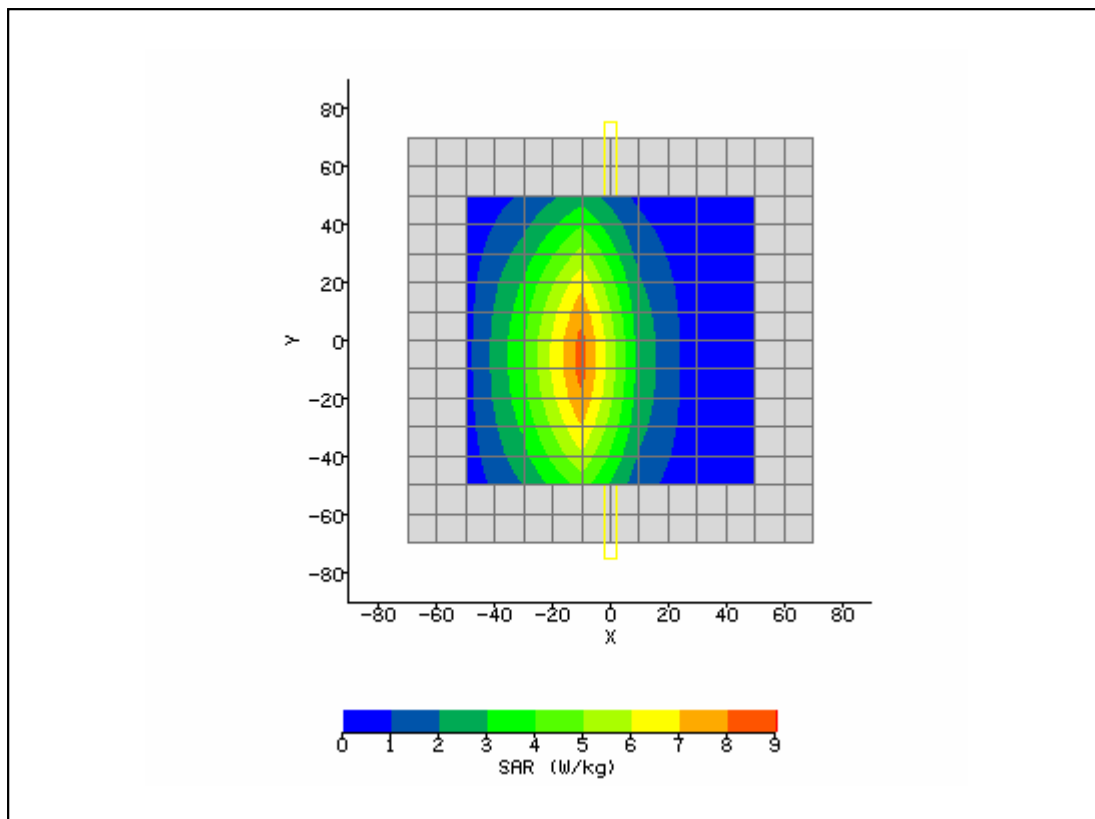

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2007 7:17:39 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	23.0°C	Liquid Simulant:	1900
Device Under Test:	System	Relative Permittivity:	41.05
Relative Humidity:	44.8%	Conductivity:	1.411
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.9°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	-12.00 mm
Antenna Configuration:	Dipole	Max E Field:	154.48 V/m
Test Frequency:	1900MHz	SAR 1g:	41.375 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	21.830 W/kg
Conversion Factors:	.501 / .501 / .501	SAR Start:	4.850 W/kg
Type of Modulation:		SAR End:	4.781 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.42 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/06/07
Input Power Level:	1W	Extrapolation:	poly4

