


ENGINEERING TEST REPORT



**Handheld Computer
Model No.: 7530 G2**

FCC ID: GM37530G2

Applicant:

Psion Teklogix Inc.
2100 Meadowvale Blvd.
Toronto, Ontario
Canada L5N 7J9

In Accordance With

**FEDERAL COMMUNICATIONS COMMISSION (FCC)
PART 15, SUBPART C, SECTION 15.247
Frequency Hopping and Digital Modulation Systems (Bluetooth)
Operating in the Frequency Band 2402-2480 MHz**

UltraTech's File No.: TEK-542F15C247

This Test report is Issued under the Authority of
Tri M. Luu, Professional Engineer,
Vice President of Engineering
UltraTech Group of Labs



Date: June 22, 2006

Report Prepared by: Dan Huynh

Tested by: Hung Trinh, RFI Technologist

Issued Date: June 22, 2006

Test Dates: May 13-14, 2006

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4

Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: www.ultratech-labs.com Email: vic@ultratech-labs.com, Email: tri.luu@sympatico.ca



0685



31040/SIT



C-1376



46390-2049



200093-0



SL2-IN-E-1119R

TABLE OF CONTENTS

EXHIBIT 1.	INTRODUCTION.....	1
1.1.	SCOPE	1
1.2.	RELATED SUBMITTAL(S)/GRANT(S)	1
1.3.	NORMATIVE REFERENCES	1
EXHIBIT 2.	PERFORMANCE ASSESSMENT.....	2
2.1.	CLIENT INFORMATION	2
2.2.	EQUIPMENT UNDER TEST (EUT) INFORMATION	2
2.3.	EUT'S TECHNICAL SPECIFICATIONS.....	3
2.4.	LIST OF EUT'S PORTS.....	3
2.5.	ANCILLARY EQUIPMENT	3
2.6.	TEST SETUP BLOCK DIAGRAM	4
EXHIBIT 3.	EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....	5
3.1.	CLIMATE TEST CONDITIONS.....	5
3.2.	OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS.....	5
EXHIBIT 4.	SUMMARY OF TEST RESULTS.....	6
4.1.	LOCATION OF TESTS	6
4.2.	APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS	6
4.3.	MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....	6
EXHIBIT 5.	MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS.....	7
5.1.	TEST PROCEDURES.....	7
5.2.	MEASUREMENT UNCERTAINTIES	7
5.3.	MEASUREMENT EQUIPMENT USED	7
5.4.	COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS	7
5.5.	6 dB & 20 dB Bandwidth [§15.247(a)(1)&(2)]	11
5.6.	PEAK OUTPUT POWER [§§ 15.247(b)(1)&(3)].....	18
5.7.	SPURIOUS RADIATED EMISSIONS @ 3 METERS [§ 15.247(d)].....	19
5.8.	POWER SPECTRAL DENSITY [§ 15.247(e) & (f)]	30
5.9.	AVERAGE TIME OF OCCUPANCY [§ 15.247(f)].....	31
EXHIBIT 6.	MEASUREMENT UNCERTAINTY.....	39
6.1.	LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY	39
6.2.	RADIATED EMISSION MEASUREMENT UNCERTAINTY	40

EXHIBIT 1 INTRODUCTION

1.1 SCOPE

Reference:	Part 15, Subpart C, Section 15.247
Title:	Telecommunication - Code of Federal Regulations, CFR 47, Part 15
Purpose of Test:	To gain FCC Equipment Authorization for Frequency Hopping and Digital Modulation Systems (Bluetooth) Operating in the Frequency Band 2402-2480 MHz.
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	Commercial, light industry & heavy industry

1.2 RELATED SUBMITTAL(S)/GRANT(S)

None.

1.3 NORMATIVE REFERENCES

Publication	Year	Title
FCC 47CFR Parts 0-19	2005	Code of Federal Regulations, Title 47 – Telecommunication
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 22 +A1 EN 55022	2003-04-10 2004-10-14 2003	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
CISPR 16-1-1	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-2-1	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 2-1: Conducted disturbance measurement
CISPR 16-2-3	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 2-3: Radiated disturbance measurement
FCC Public Notice DA 00-705	2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
KDB Publication No. 558074	2005	Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK-542F15C247
June 22, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 2 PERFORMANCE ASSESSMENT

2.1 CLIENT INFORMATION

APPLICANT:	
Name:	Psion Teklogix Inc.
Address:	2100 Meadowvale Blvd. Mississauga, ON Canada, L5N 7J9
Contact Person:	Mr. Sada Dharwarkar Phone #: 905-812-6200 (3358) Fax #: 905-812-6301 Email Address: Sada.Dharwarkar@psionteklogix.com

MANUFACTURER:	
Name:	Psion Teklogix Inc.
Address:	2100 Meadowvale Blvd. Mississauga, ON Canada, L5N 7J9
Contact Person:	Mr. Sada Dharwarkar Phone #: 905-812-6200 (3358) Fax #: 905-812-6301 Email Address: Sada.Dharwarkar@psionteklogix.com

2.2 EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	Psion Teklogix Inc.
Product Name:	Handheld Computer
Model Name or Number:	7530 G2
Serial Number:	Eng 001
Type of Equipment:	FHSS/DTS (Bluetooth)
Input Power Supply Type:	The 7530 G2 is powered by a lithium-ion rechargeable battery pack. The 7530 G2 can be powered from external power when used with the AC adaptor.
Primary User Functions of EUT:	Transmit and receive data

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK-542F15C247

June 22, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.3 EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	Portable
Intended Operating Environment:	Commercial, light industry & heavy industry
Power Supply Requirement:	lithium-ion rechargeable battery pack or external power from AC adaptor
RF Output Power Rating:	0.002 W
Operating Frequency Range:	2402-2480 MHz
RF Output Impedance:	50 Ω
Channel Spacing:	1 MHz
Duty Cycle:	100%
Modulation Type:	Bluetooth
Oscillator Frequencies:	6.0 MHz, 13 MHz, 48 MHz
Antenna Connector Type:	Integral (the antenna component is soldered onto the radio printed circuit board and located inside the enclosure)
Antenna Description:	Manufacturer: Murata Type: Chip Part No.: LBMA2U2BL2-092 Frequency Range: 2.402 – 2.480 GHz Gain: 2.0 dBi

2.4 LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	Tether Port	1	8 Pin Circular	3', shielded
2	Docking Port	1	12 Pin Custom	Plugs into Docking Module

2.5 ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	Scanner Symbol
Brand name:	Psion Teklogix
Serial Number:	M1J3 7E70W
Connected to EUT's Port:	Mini-DIN 8 Pin

2.6 TEST SETUP BLOCK DIAGRAM

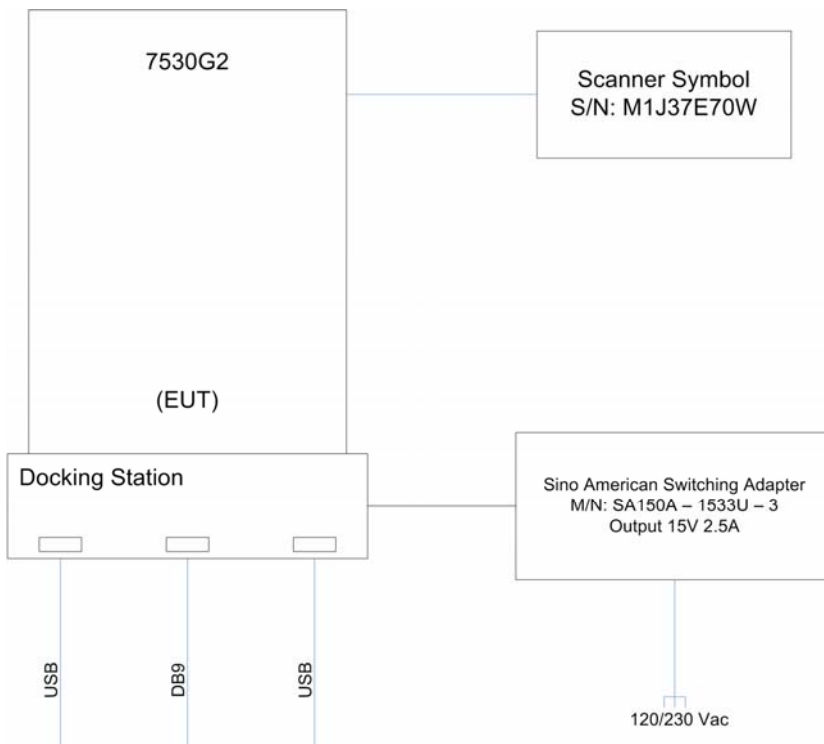


EXHIBIT 3 EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1 CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	11.1 V DC from power adaptor

3.2 OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

Operating Modes:	<ul style="list-style-type: none"> ▪ Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements. ▪ The EUT operates in frequency hopping mode and direct sequence or digital modulation mode.
Special Test Software:	Special software is provided by the applicant to select and operate the EUT at each channel frequency continuously and mode of operation such as frequency hopping and direct sequence or digital modulation for testing purpose.
Special Hardware Used:	N/A
Transmitter Test Antenna:	The EUT is tested with the antenna fitted in a manner typical of normal intended use as integral antenna equipment.

Transmitter Test Signals	
Frequency Band(s):	2402 - 2480 MHz
Frequency(ies) Tested: (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	2402, 2441 & 2480 MHz.
RF Power Output:	0.002 W
Normal Test Modulation:	Bluetooth
Modulating Signal Source:	Internal

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK-542F15C247
June 22, 2006

EXHIBIT 4 SUMMARY OF TEST RESULTS

4.1 LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049-1). Last Date of Site Calibration: June 20, 2005.

4.2 APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Compliance (Yes/No)
15.107(a) /15.207(a)	AC Power Conducted Emissions	Yes
15.109(a)	Class B Radiated Emissions	Yes (Note 1)
15.247(a)(1)&(2)	20dB & 6 dB Bandwidth	Yes
15.247(b)(1) & (3)	Peak Output Power	Yes
15.247(b)(5), 15.247(e)(i) & 1.1307(b)(1)	RF Exposure	Yes (Note 2)
15.247(d), 15.209 & 15.205	Spurious Radiated Emissions	Yes
15.247(e)&(f)	Power Spectral Density	Yes
15.247(f)	Average Time of Occupancy	Yes

Notes:

- (1) A separate engineering test report for compliance with FCC Part 15, Subpart B – Class B Unintentional Radiators will be provided upon request.
- (2) The SAR tests and RF Exposure requirements is exempted, the device operates at substantially low output power level (2 mW), with a low gain antenna (2 dBi).

4.3 MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK-542F15C247
June 22, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5 MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

5.1 TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in ANSI C63.4; KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247); FCC Public Notice DA 00-705: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

5.2 MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document LAB 34 with a confidence level of 95%. Please refer to Exhibit 6 for Measurement Uncertainties.

5.3 MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1.

5.4 COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS

FCC Section	FCC Rules	
15.203	<p>Described how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.</p> <p>The exception is in those cases where EUT must be professionally installed. In order to demonstrate that professional installation is required, the following 3 points must be addressed:</p> <ul style="list-style-type: none"> • The application (or intended use) of the EUT • The installation requirements of the EUT • The method by which the EUT will be marketed 	The integral antenna is permanently mounted on the printed circuit board and located inside the enclosure
15.204	<p>Provided the information for every antenna proposed for use with the EUT:</p> <p>(a) type (e.g. Yagi, patch, grid, dish, etc...), (b) manufacturer and model number (c) gain with reference to an isotropic radiator</p>	Manufacturer: Murata Type: Chip Part No.: LBMA2U2BL2-092 Frequency Range: 2.402 – 2.480 GHz Gain: 2.0 dBi

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK-542F15C247
 June 22, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.5 AC POWER LINE CONDUCTED EMISSIONS [47 CFR § 15.207(a)]

5.5.1. Limits

The equipment shall meet the limits of the following table:

Frequency of emission (MHz)	Conducted Limits (dBµV)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency

5.5.2. Method of Measurements

Refer to Ultratech Test Procedures ULTR-P001-2004 & ANSI C63.4 for method of measurements.

5.5.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Transient Limiter	Hewlett Packard	11947A	310701998	9 kHz – 200 MHz 10 dB attenuation
L.I.S.N.	EMCO	3825/2	89071531	9 kHz – 200 MHz 50 Ohms / 50 µH
24'(L) x 16'(W) x 8'(H) RF Shielded Chamber	Braden Shielding

5.5.4. Test Data

Frequency (MHz)	RF Level (dBµV)	Receiver Detector (P/QP/AVG)	QP Limit (dBuV)	AVG Limit (dBuV)	Margin (dB)	Pass/ Fail	Line Tested (L1/L2)
0.154088	32.6	QP	65.8	55.8	-33.2	Pass	L1
0.154088	7.0	AVG	65.8	55.8	-48.8	Pass	L1
15.780500	23.0	QP	60.0	50.0	-37.0	Pass	L1
15.780500	21.0	AVG	60.0	50.0	-29.0	Pass	L1
0.151988	32.4	QP	65.9	55.9	-33.5	Pass	L2
0.151988	7.1	AVG	65.9	55.9	-48.8	Pass	L2
4.215400	19.5	QP	56.0	46.0	-36.5	Pass	L2
4.215400	11.1	AVG	56.0	46.0	-34.9	Pass	L2

See the following plots for detailed measurements.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK-542F15C247
June 22, 2006


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.5.4.1: Power Line Conducted Emissions
Line Voltage: 120 VAC 60 Hz
Line Tested: 1



Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	AV Δ L2
1	0.154088	39.5	32.6	7.0	-48.8
2	15.780500	25.9	23.0	21.0	-29.0

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 150 kHz
38.78 dB μ V

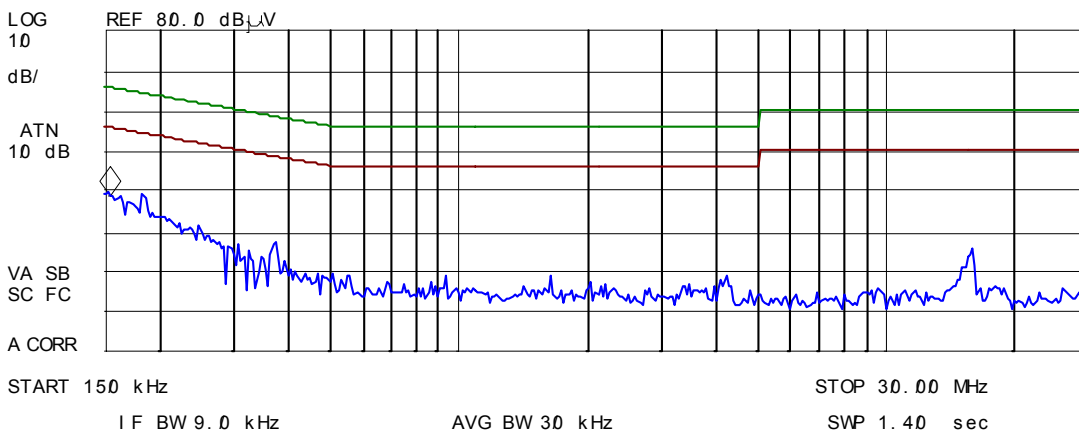


Plot 5.5.4.2: Power Line Conducted Emissions
Line Voltage: 120 VAC 60 Hz
Line Tested: 2



Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	AV Δ L2
1	0.151988	39.4	32.4	7.1	-48.8
2	4.215400	23.3	19.5	11.1	-34.9

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 4.19 MHz
16.21 dB μ V

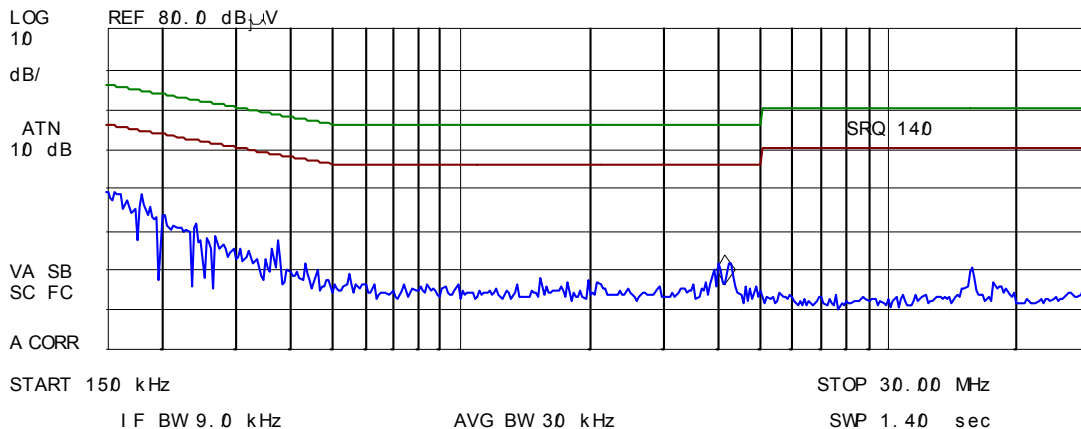

5.6 6 dB & 20 dB Bandwidth [§15.247(a)(1)&(2)]

5.6.1. Limits

- For Frequency Hopping System, minimum of 25 kHz.
- For a Digital Modulation System, the 6 dB bandwidth shall be at least 500 KHz.

5.6.2. Method of Measurements

Refer to FCC Public Notice DA 00-705, KDB Publication No. 558074 and ANSI C63.4 for measurement methods.

5.6.3. Test Arrangement

See Section 2.6 of this test report.

5.6.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz


5.6.5. Test Data

5.6.5.1. For Frequency Hopping Spread Spectrum Mode


Frequency (MHz)	20 dB Bandwidth (kHz)
2402	941.88
2441	941.88
2480	945.89

See the following plots for detailed measurements.


Plot 5.6.5.1.1: 20 dB Bandwidth
Test Frequency: 2402 MHz

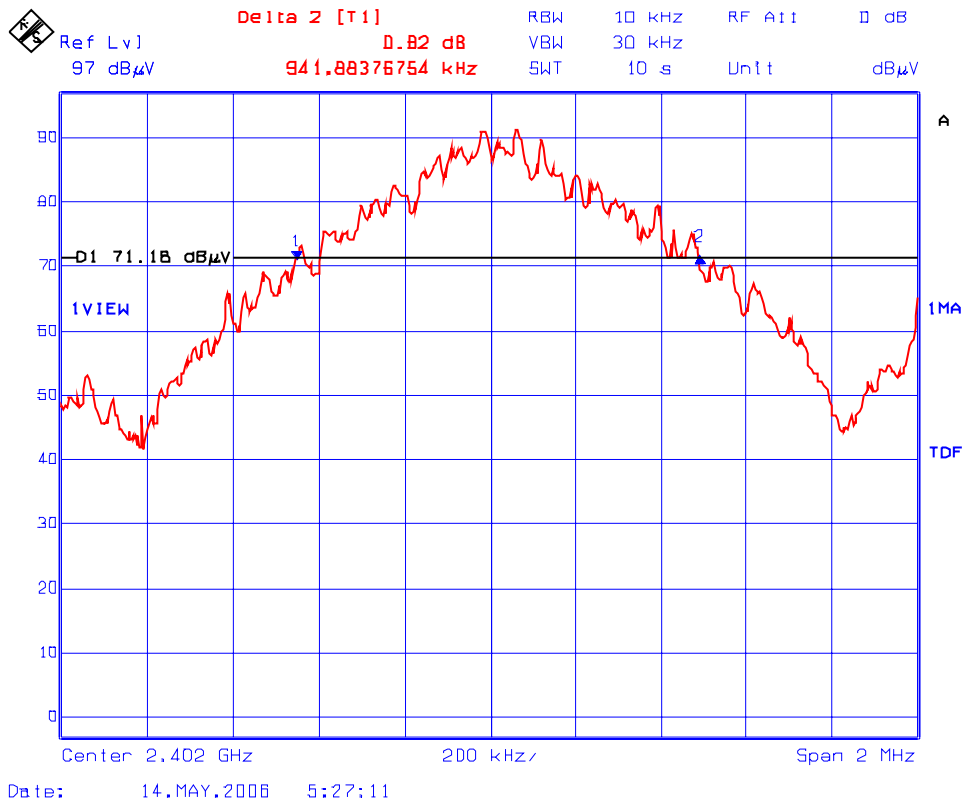

Plot 5.6.5.1.2: 20 dB Bandwidth
Test Frequency: 2441 MHz

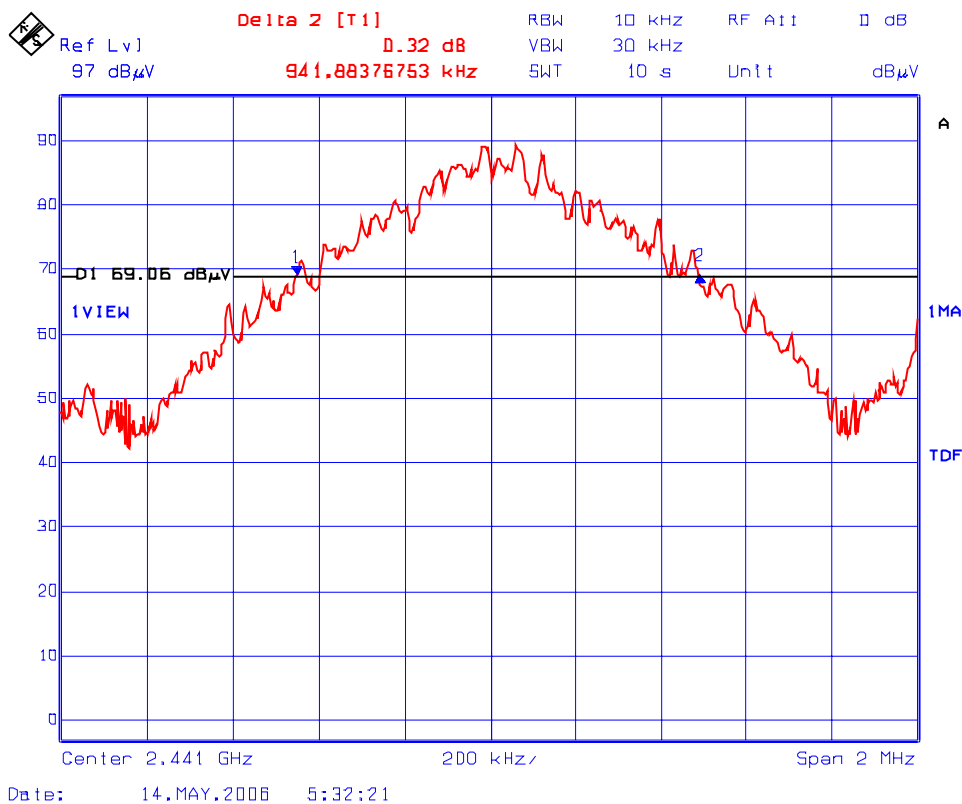

Plot 5.6.5.1.3: 20 dB Bandwidth
Test Frequency: 2480 MHz

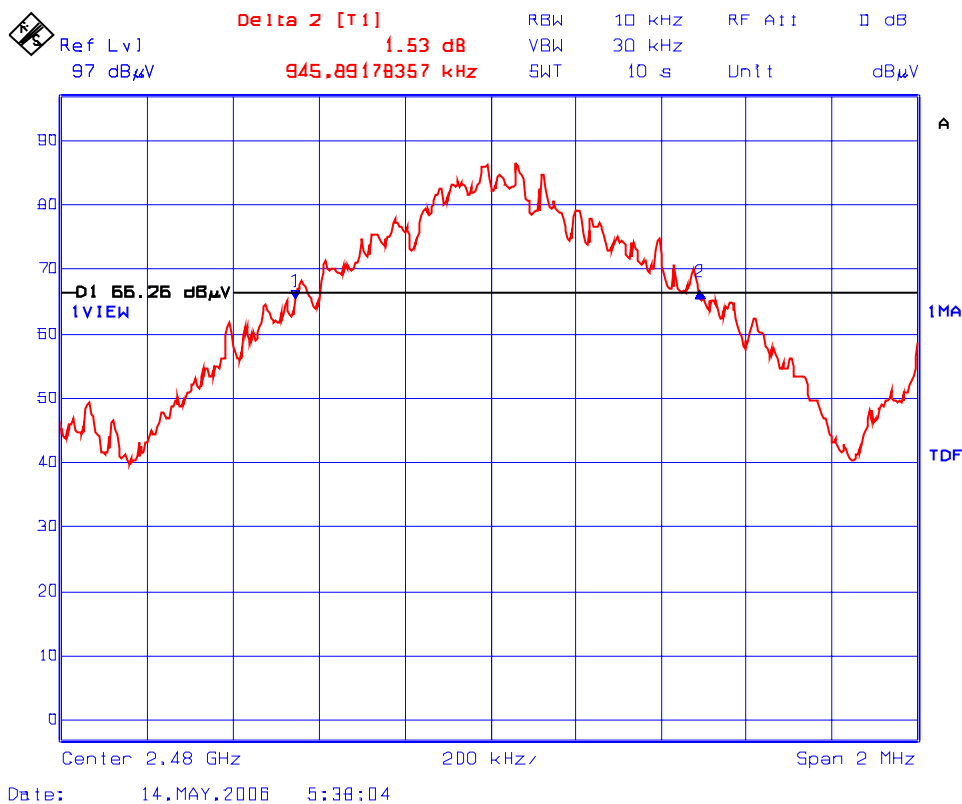


5.6.5.2. For DTS Mode


Frequency (MHz)	6 dB Bandwidth (kHz)
2402	533.07
2441	541.08
2480	541.08

See the following plots for detailed measurements.


Plot 5.6.5.2.1: 6 dB Bandwidth
Test Frequency: 2402 MHz

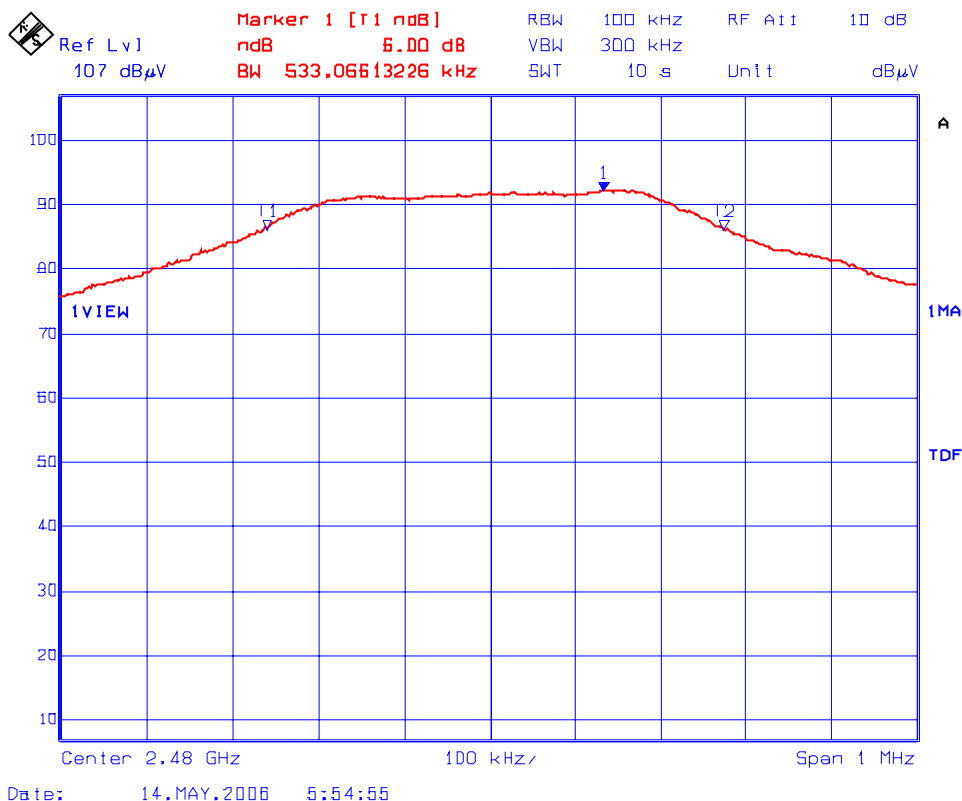

Plot 5.6.5.2.2: 6 dB Bandwidth
Test Frequency: 2441 MHz

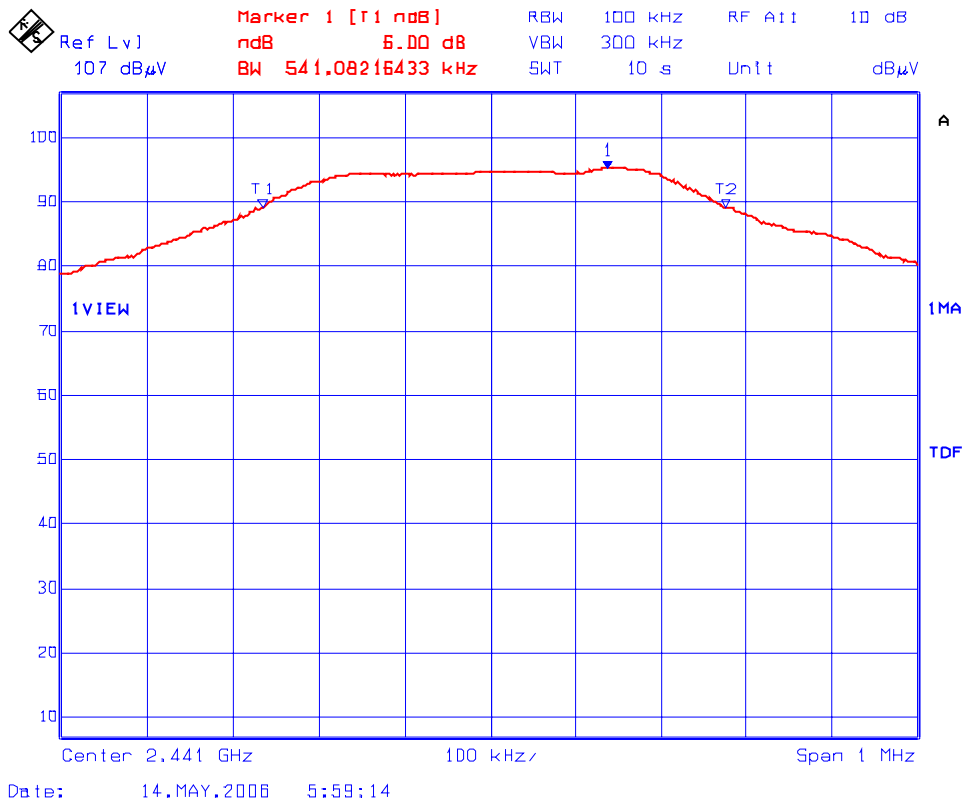

Plot 5.6.5.2.3: 6 dB Bandwidth
Test Frequency: 2480 MHz

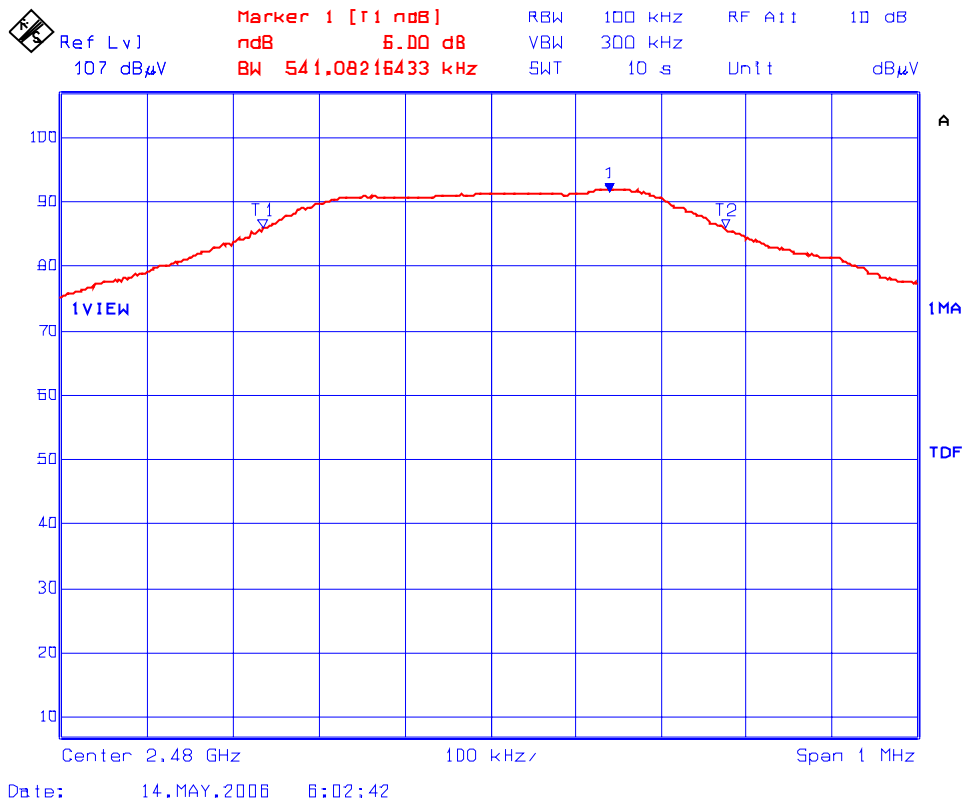

5.7 PEAK OUTPUT POWER [§§ 15.247(b)(1)&(3)]

5.7.1. Limits

- **FCC 15.247(b)(1):** Maximum peak output power of the transmitter shall not exceed 1 Watt.
- **FCC 15.247(b)(4(i)):** If the device is not for fixed point to point radio, the antenna of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.7.2. Method of Measurements

Refer to FCC Public Notice DA 00-705, KDB Publication No. 558074 and ANSI C63.4 for measurement methods.

5.7.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz

5.7.4. Test Data

Frequency (MHz)	E-Field in 1 MHz @ 3m (dBuV/m)	Antenna Polarization (V/H)	*Calculated Peak Power (Watt)
2402	97.23	V	0.0010
2402	99.75	H	0.0018
2441	96.46	V	0.0008
2441	97.99	H	0.0012
2480	94.12	V	0.0005
2480	94.34	H	0.0005

*Peak power is calculated using the following equation:

$$P = (E \times D)^2 / (30 \times G)$$

Where: E = the measured maximum field strength in V/m
 G = the numeric gain of the transmitting antenna over an isotropic radiator.
 D = the distance in meters from which the field strength was measured.
 P = the power in watts

5.8 SPURIOUS RADIATED EMISSIONS @ 3 METERS [§ 15.247(d)]

5.8.1. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

47 CFR 15.205(a) - Restricted Bands of Operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

47 CFR 15.209(a) - Radiated emission limits, general requirements

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

5.8.2. Method of Measurements

Refer to Ultratech Test Procedures, Files # ULTR P002-2004 or ULTR P003-2004 and ANSI C63.4 for measurement methods

5.8.3. Test Arrangement

Refer to Section 2.6 of this test report for test setup.

5.8.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer
Microwave Amplifier	Hewlett Packard	HP 83017A		1 GHz to 26.5 GHz
Biconilog Antenna	EMCO	3143	1029	20 MHz to 2 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna	EMCO	3160-09	..	18 GHz – 26.5 GHz
Horn Antenna	EMCO	3160-10	..	26.5 GHz – 40 GHz
Mixer	Tektronix	118-0098-00	..	18 GHz – 26.5 GHz
Mixer	Tektronix	119-0098-00	..	26.5 GHz – 40 GHz

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: TEK-542F15C247
June 22, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.8.5. Test Data

5.8.5.1. Band-edge Radiated Emissions


Plot 5.8.5.1.1: Band-Edge Radiated Emissions @ 3 meters
Vertical Polarization, Low End of Frequency Band, Single Frequency Mode

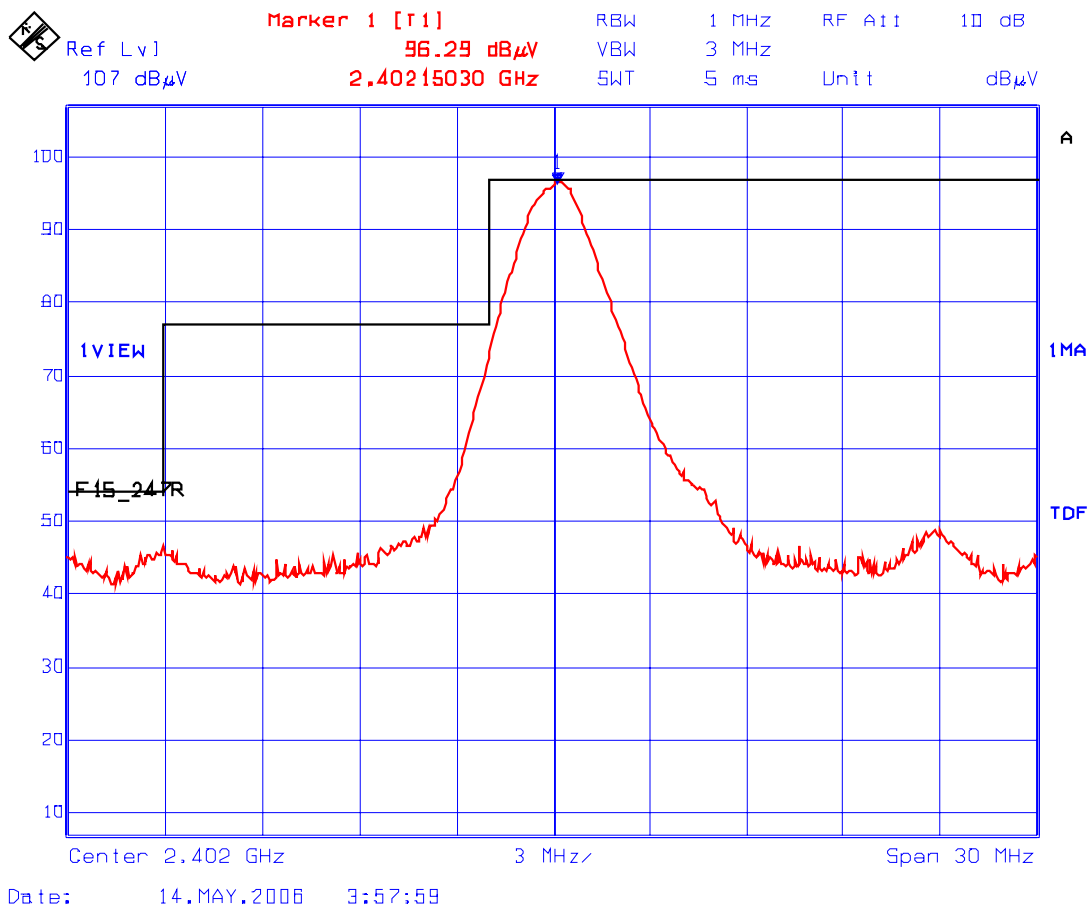


Plot 5.8.5.1.2: Band-Edge Radiated Emissions @ 3 meters
Horizontal Polarization Low End of Frequency Band, Single Frequency Mode

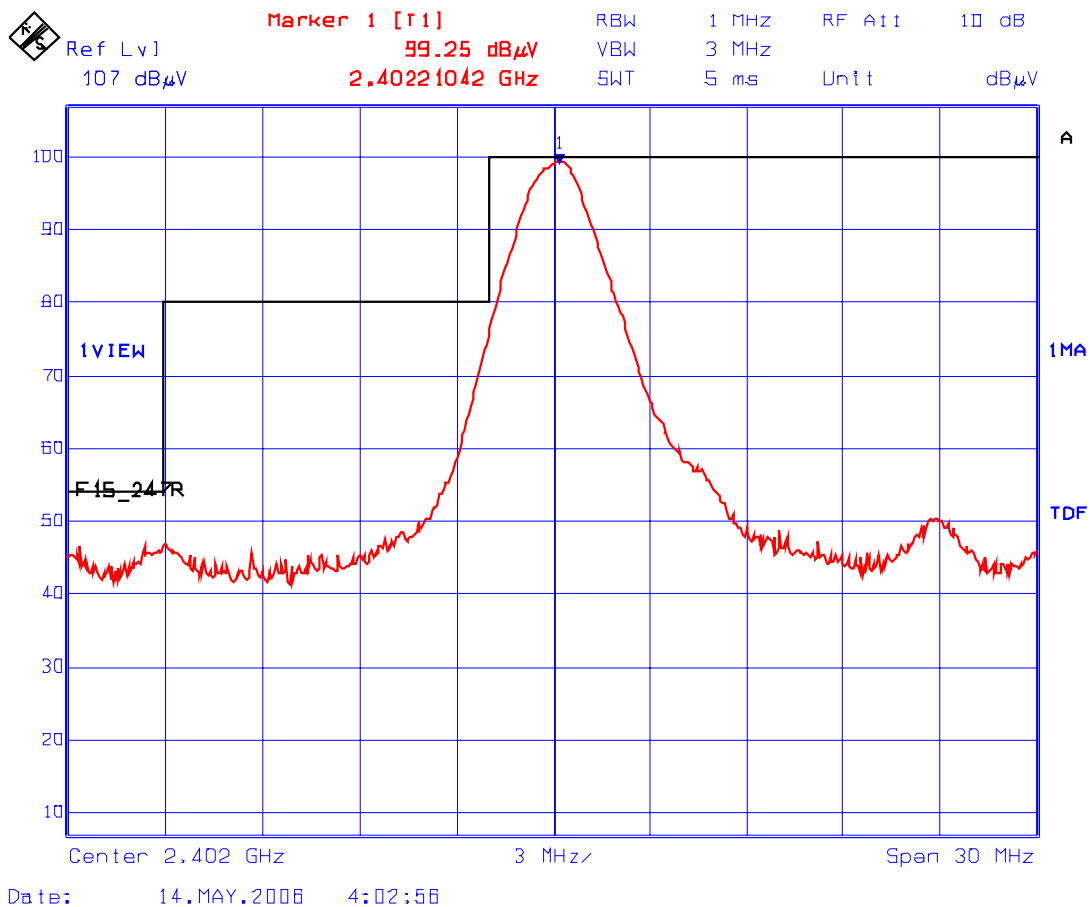


Plot 5.8.5.1.3: Band-Edge Radiated Emissions @ 3 meters,
Vertical Polarization Low End of Frequency Band, Pseudorandom Channel Hopping Mode

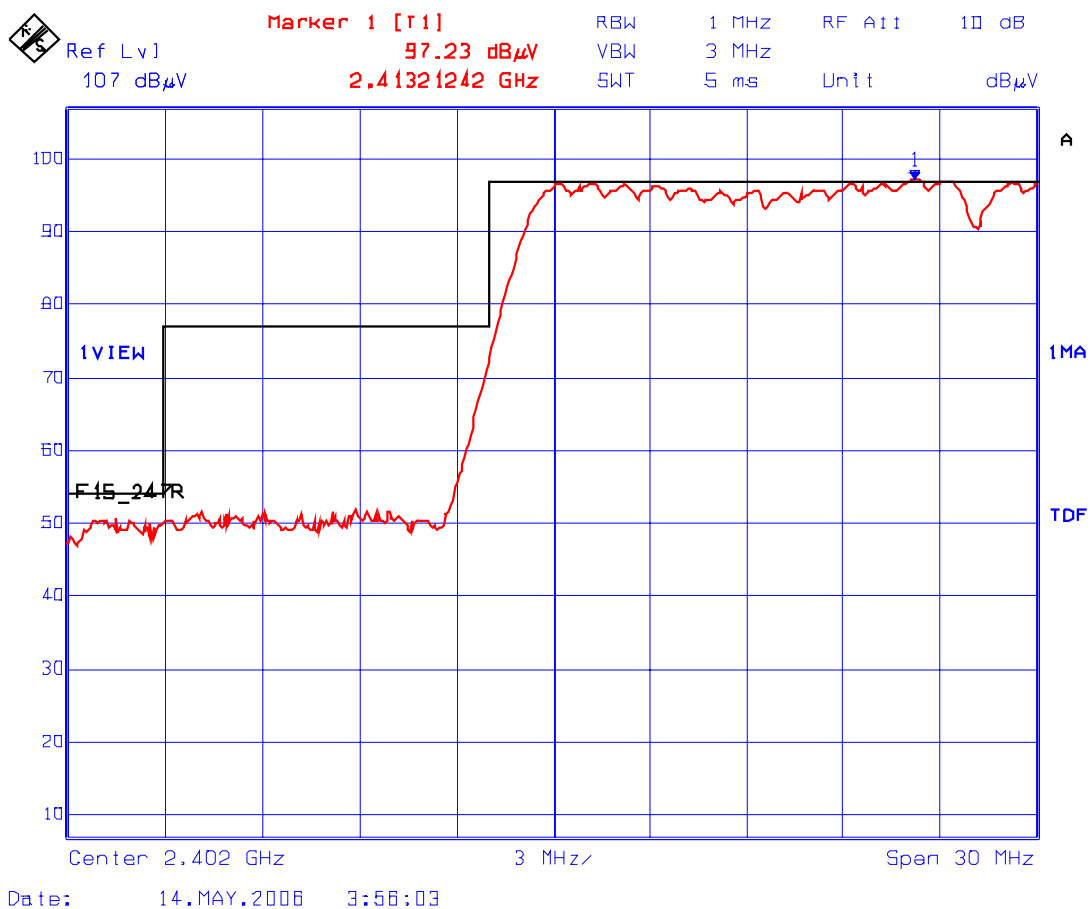

Plot 5.8.5.1.4: Band-Edge Radiated Emissions @ 3 meters
Horizontal Polarization, Low End of Frequency Band, Pseudorandom Channel Hopping Mode

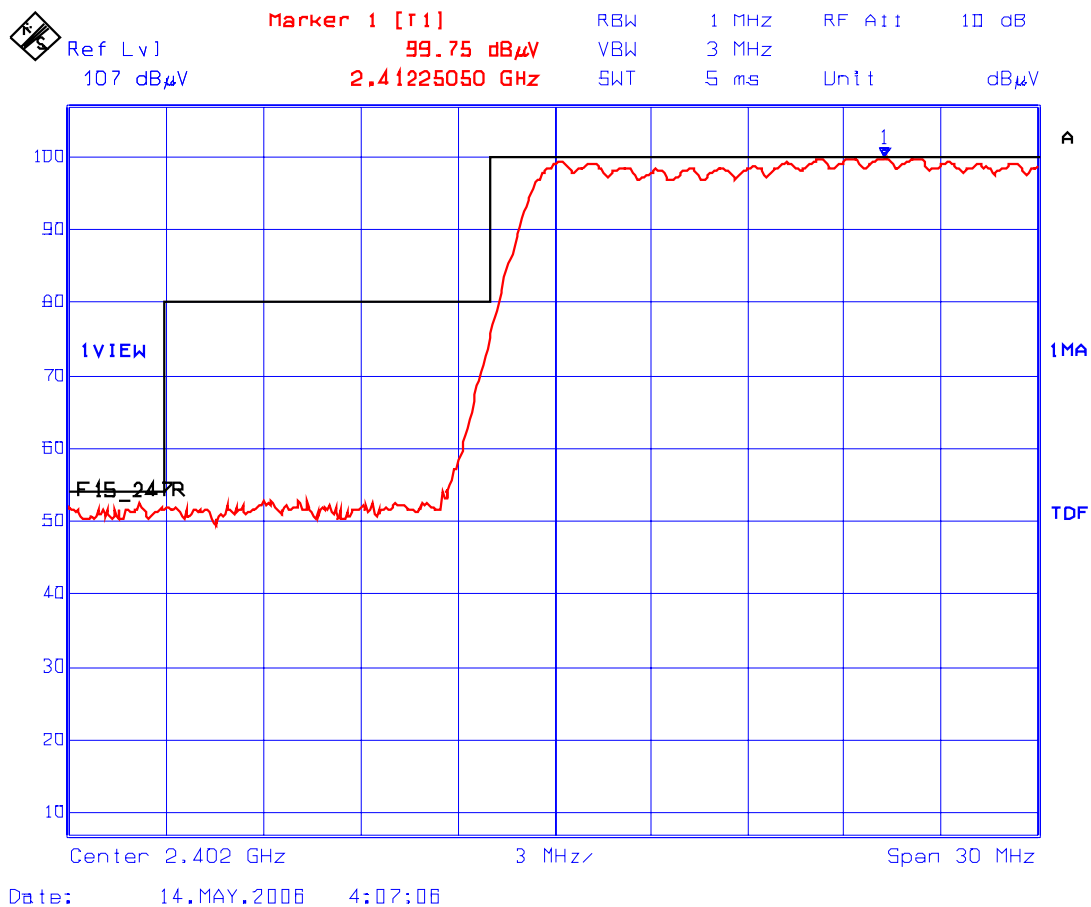


Plot 5.8.5.1.5: Band-Edge Radiated Emissions @ 3 meters
Vertical Polarization, Upper End of Frequency Band, Single Frequency Mode

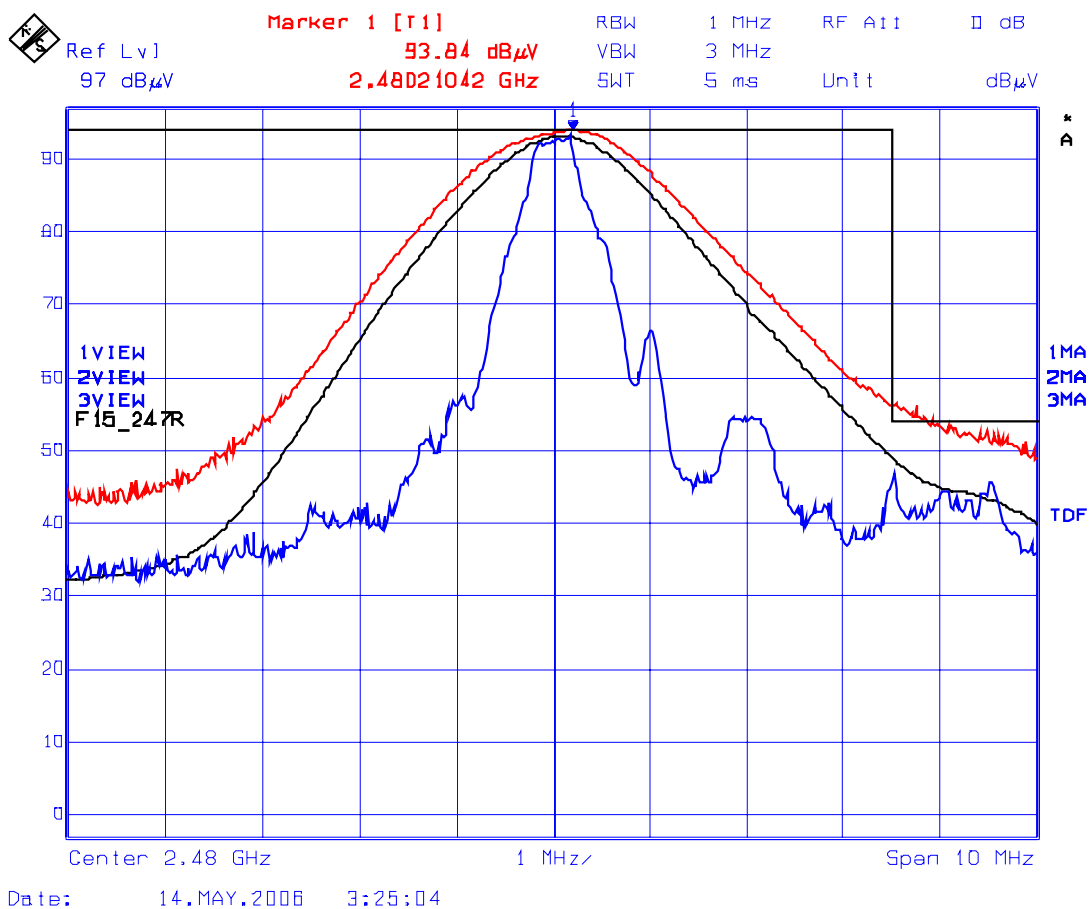


Trace 1: RBW= 1 MHz, VBW= 3 MHz
Trace 2: RBW= 100 kHz, VBW= 300 kHz
Trace 3: RBW= 1 MHz, VBW= 10 Hz

Plot 5.8.5.1.6: Band-Edge Radiated Emissions @ 3 meters
Horizontal Polarization, Upper End of Frequency Band, Single Frequency Mode

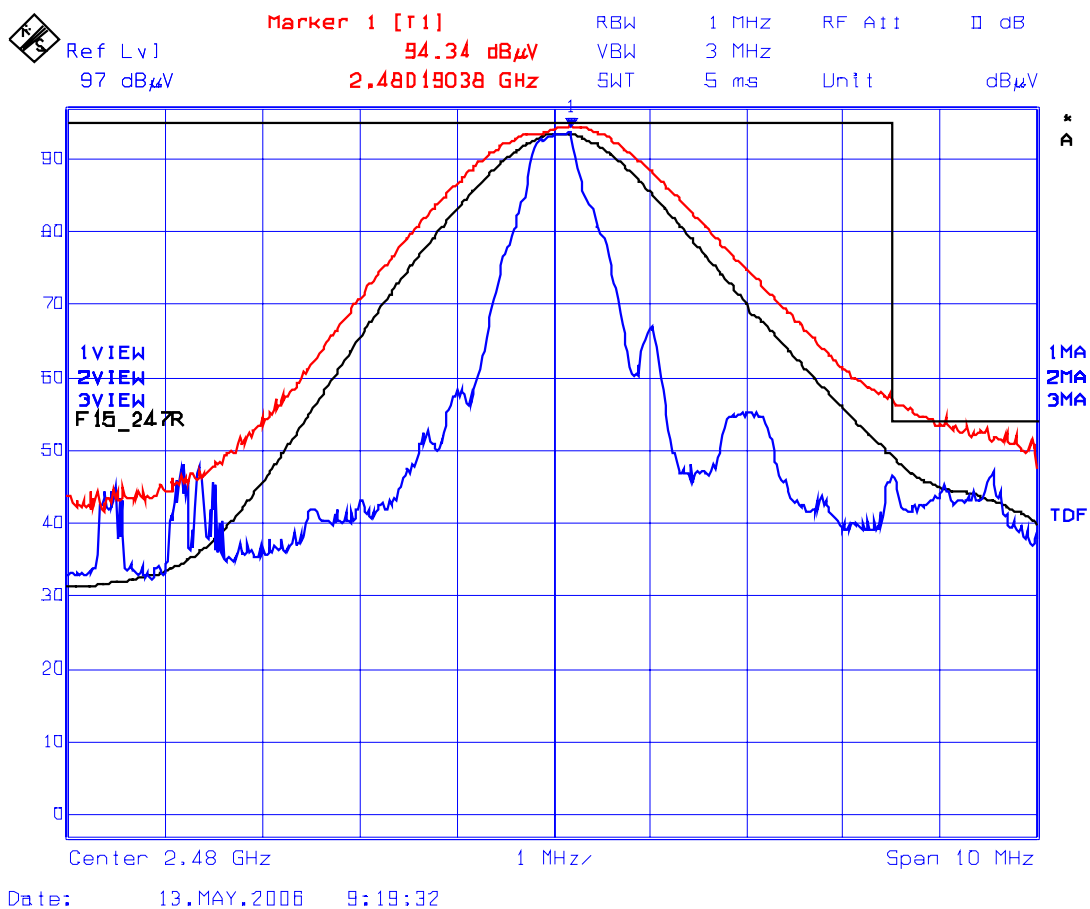


Trace 1: RBW= 1 MHz, VBW= 3 MHz
 Trace 2: RBW= 100 kHz, VBW= 300 kHz
 Trace 3: RBW= 1 MHz, VBW= 10 Hz

Plot 5.8.5.1.7: Band-Edge Radiated Emissions @ 3 meters
Vertical Polarization, Upper End of Frequency Band, Pseudorandom Channel Hopping Mode

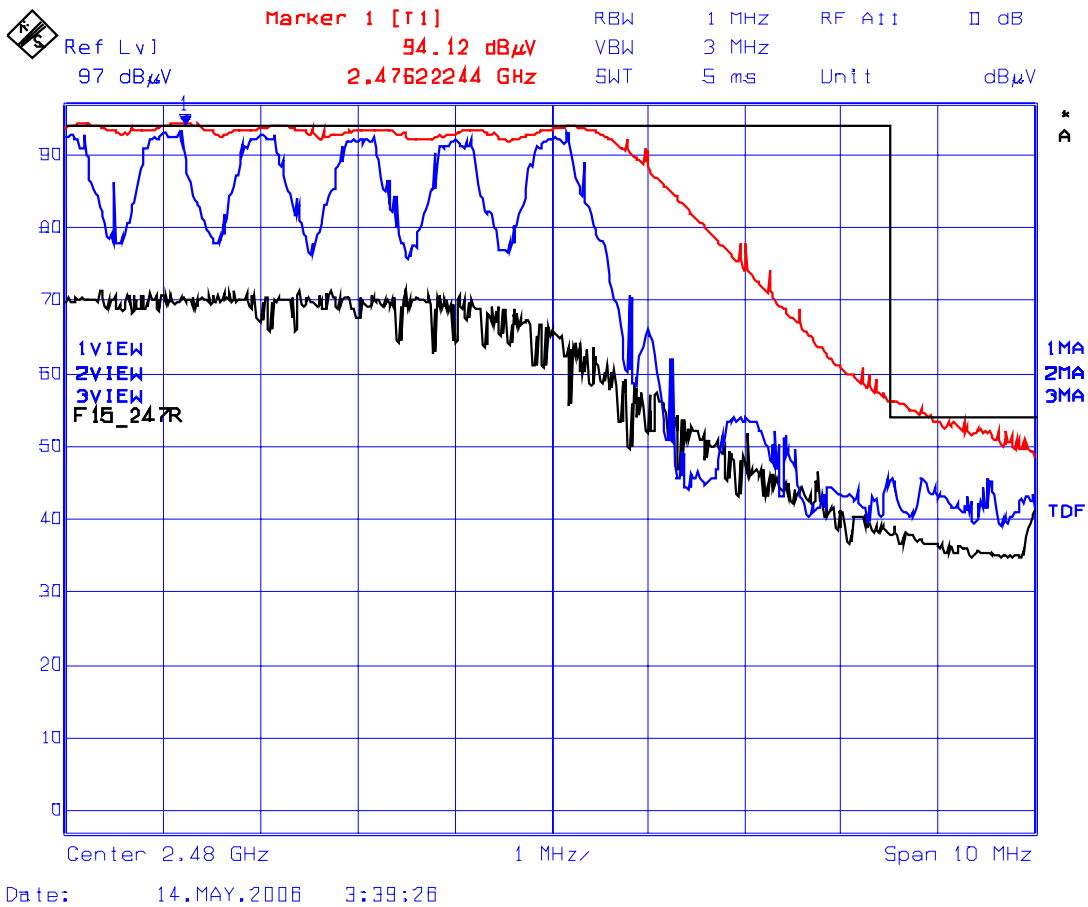

Trace 1: RBW= 1 MHz, VBW= 3 MHz
Trace 2: RBW= 100 kHz, VBW= 300 kHz
Trace 3: RBW= 1 MHz, VBW= 10 Hz

Plot 5.8.5.1.8: Band-Edge Radiated Emissions @ 3 meters
Horizontal Polarization, Upper End of Frequency Band, Pseudorandom Channel Hopping Mode

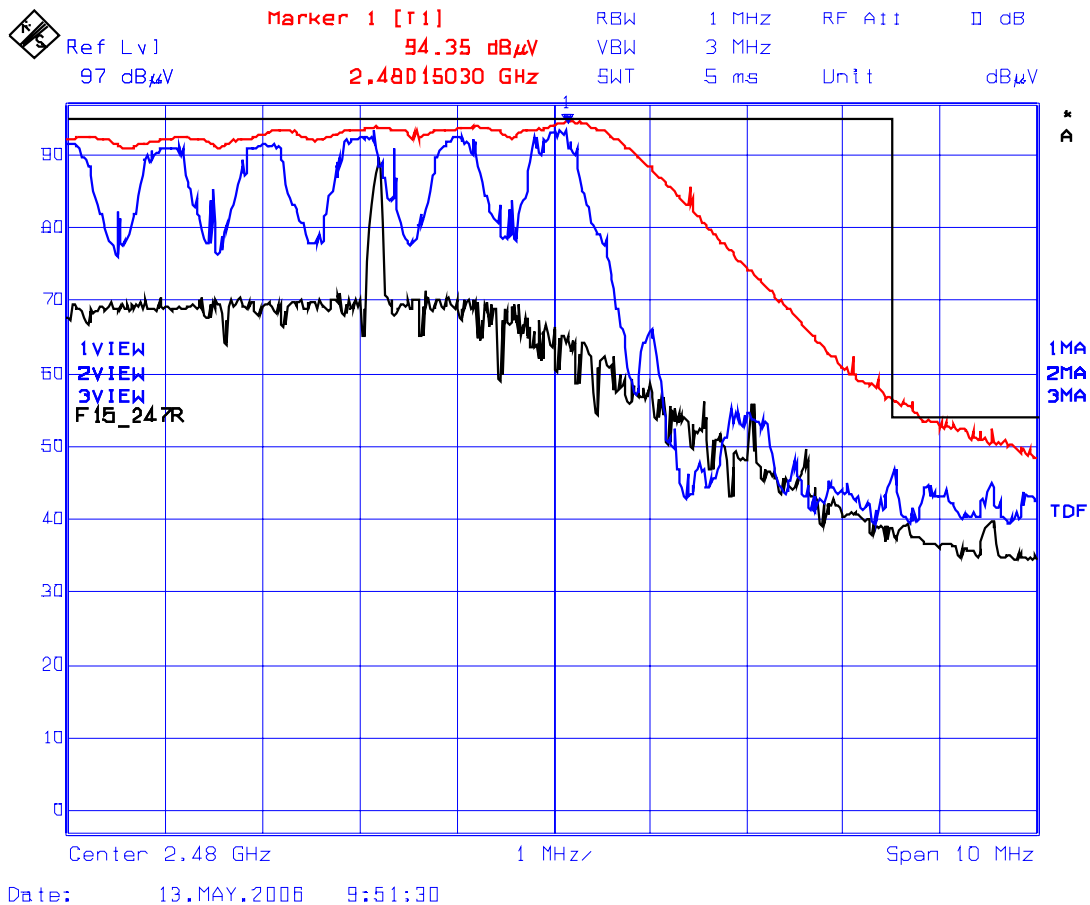

Trace 1: RBW= 1 MHz, VBW= 3 MHz
Trace 2: RBW= 100 kHz, VBW= 300 kHz
Trace 3: RBW= 1 MHz, VBW= 10 Hz

5.8.5.2. Transmitter Radiated Spurious Emissions

The emissions were scanned from 30 MHz to 25 GHz; all signals within 20 dB below the permissible limit were recorded in the table below.

Frequency (MHz)	RF Peak Level (dBµV/m)	RF Avg Level (dBµV/m)	Antenna Plane (H/V)	Limit 15.209 (dBµV/m)	Limit 15.247 (dBµV/m)	Margin (dB)	Pass/Fail
Fundamental Frequency: 2402 MHz							
2402	97.23	-	V	-	-	-	-
2402	99.75	-	H	-	-	-	-
4804	49.46	38.05	V	54.0	79.8	-16.0	Pass*
4804	51.00	39.43	H	54.0	79.8	-14.6	Pass*
Fundamental Frequency: 2441 MHz							
2441	96.46	-	V	-	-	-	-
2441	97.99	-	H	-	-	-	-
4882	49.46	39.66	V	54.0	78.0	-14.3	Pass*
4882	50.00	40.34	H	54.0	78.0	-13.7	Pass*
Fundamental Frequency: 2480 MHz							
2480	94.12	-	V	-	-	-	-
2480	94.34	-	H	-	-	-	-
4960	49.99	37.26	V	54.0	74.3	-16.7	Pass*
4960	50.11	38.34	H	54.0	74.3	-15.7	Pass*

* Emission in restricted bands.

5.9 POWER SPECTRAL DENSITY [§ 15.247(e) & (f)]

5.9.1. Limits

For a digitally modulated system, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz bandwidth within this band during any time interval of continuous transmission.

5.9.2. Method of Measurements

KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247), using Alternative Test Procedures.

5.9.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz

5.9.4. Test Data

Frequency (MHz)	Peak E-Field in 3 kHz BW @ 3m (dBµV/m)	Tx Ant. Gain (dBi)	*Calculated SPD (dBm)	Limit (dBm)	Margin (dBm)
2402	87.18	2.0	-10.0	+8	-18.0
2441	85.57	2.0	-11.7	+8	-19.7
2480	82.81	2.0	-14.4	+8	-22.4

*SPD is calculated using the following equation:

$$P = (E \times D)^2 / (30 \times G)$$

Where: E = the measured maximum field strength in V/m
 G = the numeric gain of the transmitting antenna over an isotropic radiator.
 D = the distance in meters from which the field strength was measured.
 P = the power in watts

5.10 AVERAGE TIME OF OCCUPANCY [§ 15.247(f)]

5.10.1. Limits

The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned off shall have an average time of occupancy on any frequency not to exceed 0.4 seconds with in a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

5.10.2. Method of Measurements

Refer to FCC DA-00-705 and ANSI C63.4 for measurement methods.

5.10.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: TEK-542F15C247
June 22, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.10.4. Test Data

See the following plots for measurement details.

Plot 5.10.4.1: Number of Hopping Frequencies
79 channels

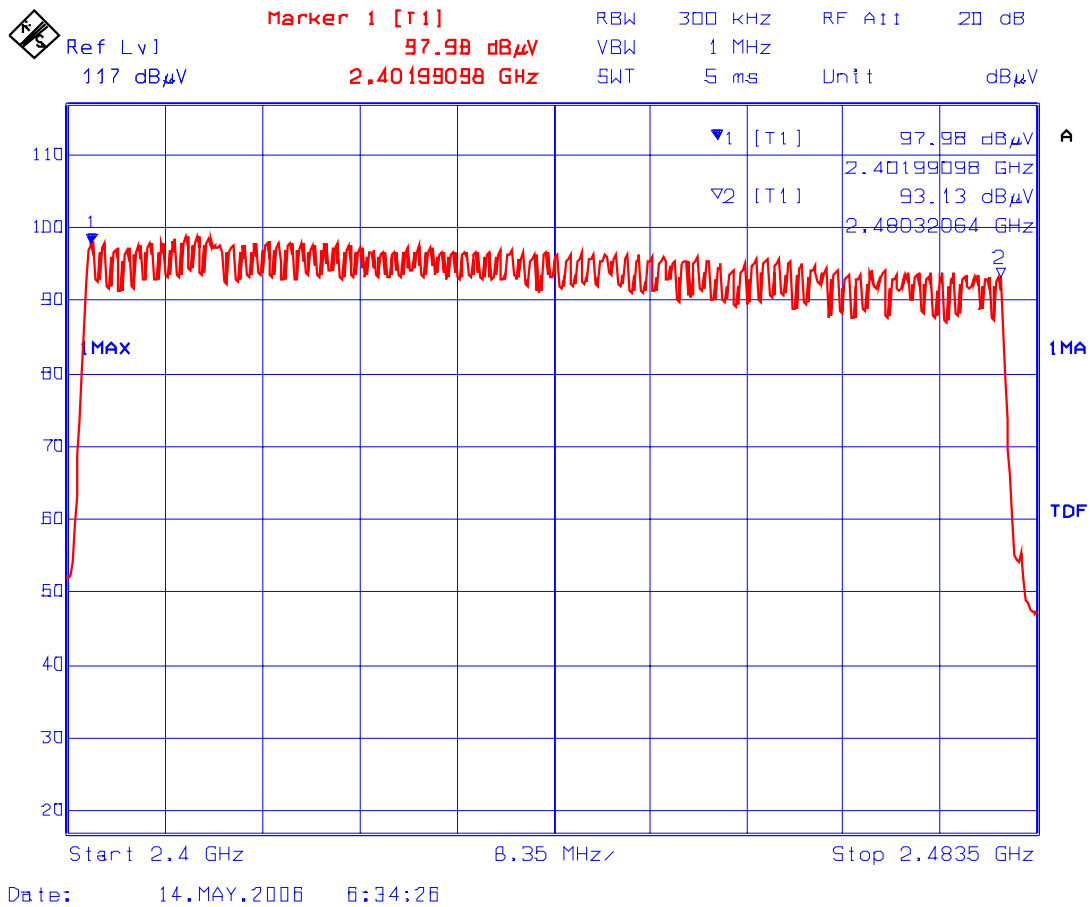

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050 Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK-542F15C247

June 22, 2006


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.10.4.2: Time of Occupancy
Test Frequency: 2402 MHz

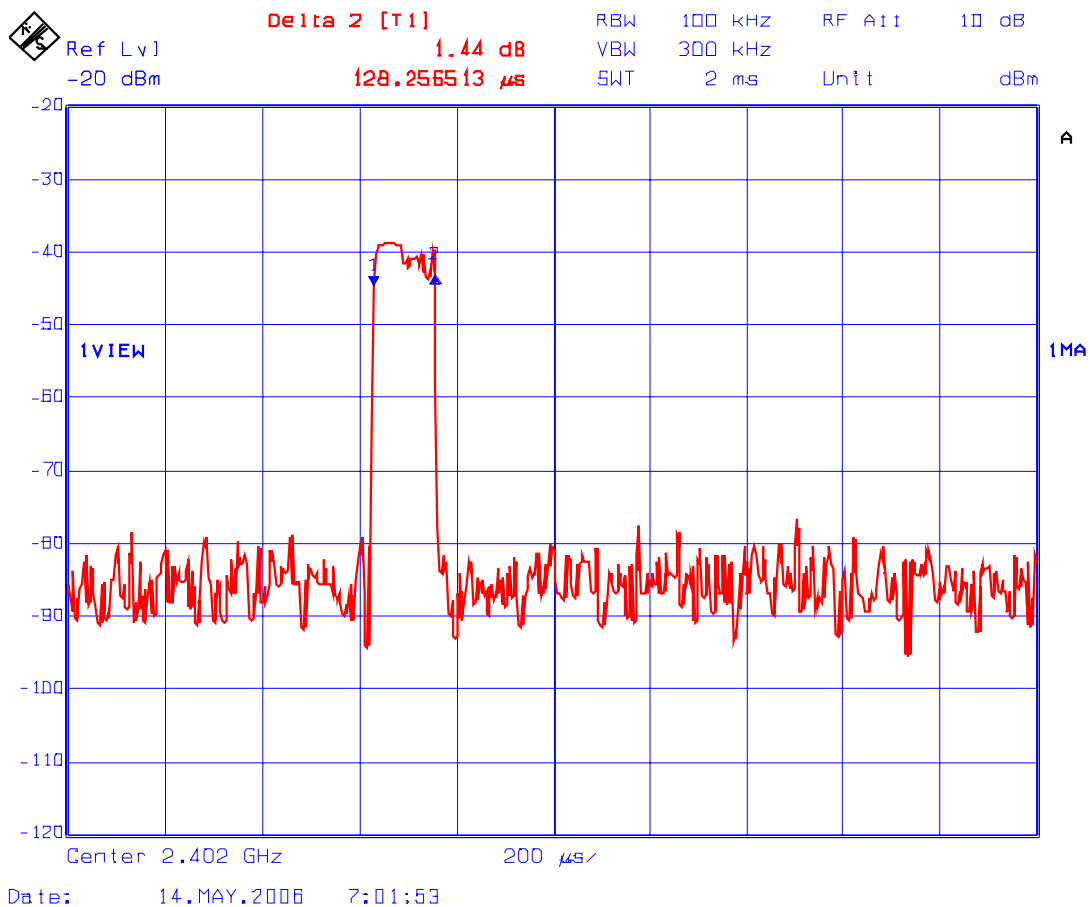


Dwell Time @ 2402 MHz = 128.256513 μs

Plot 5.10.4.3: Time of Occupancy
Test Frequency: 2402 MHz

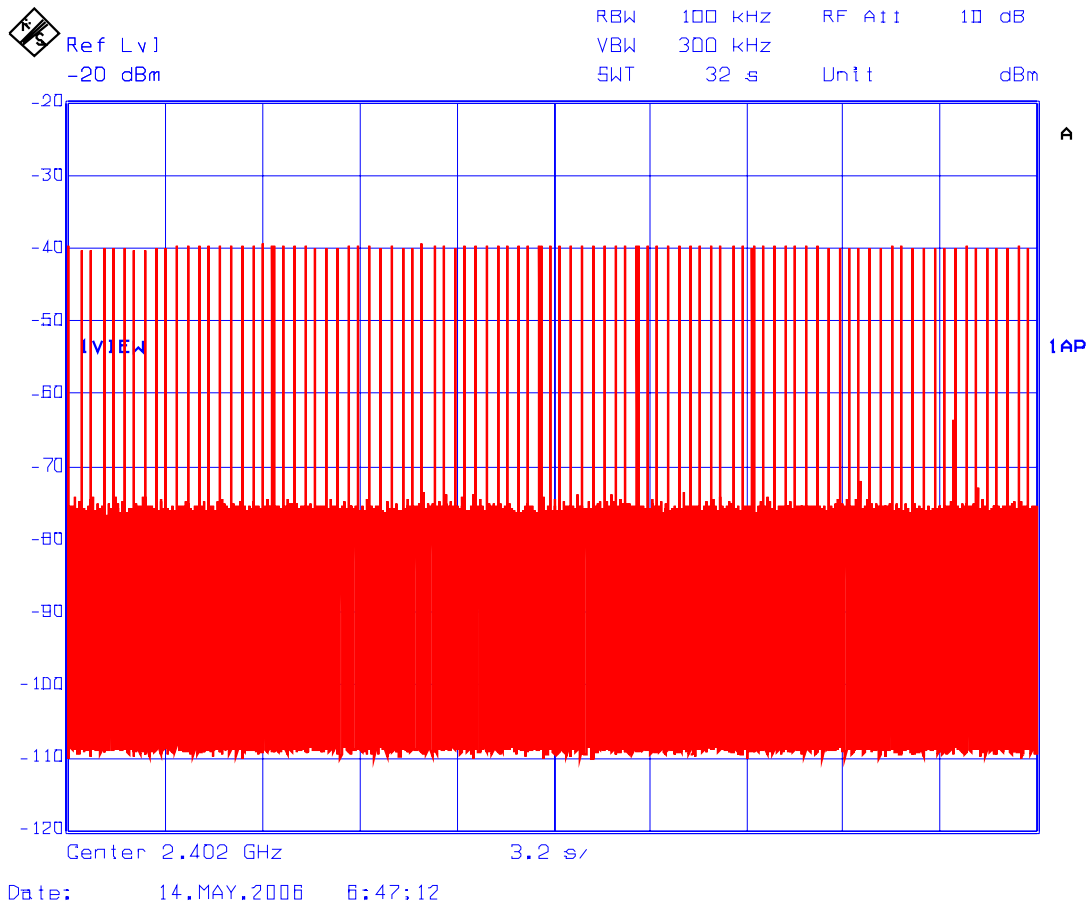


$$\begin{aligned}
 \text{Average time of occupancy in 31.6 s} &= (\text{Dwell Time @ 2402 MHz}) \times (\text{number of hops in 31.6 s}) \\
 &= 128.256513 \mu\text{s} \times 90 \\
 &= 11.54 \text{ ms}
 \end{aligned}$$

Plot 5.10.4.4: Time of Occupancy
Test Frequency: 2441 MHz

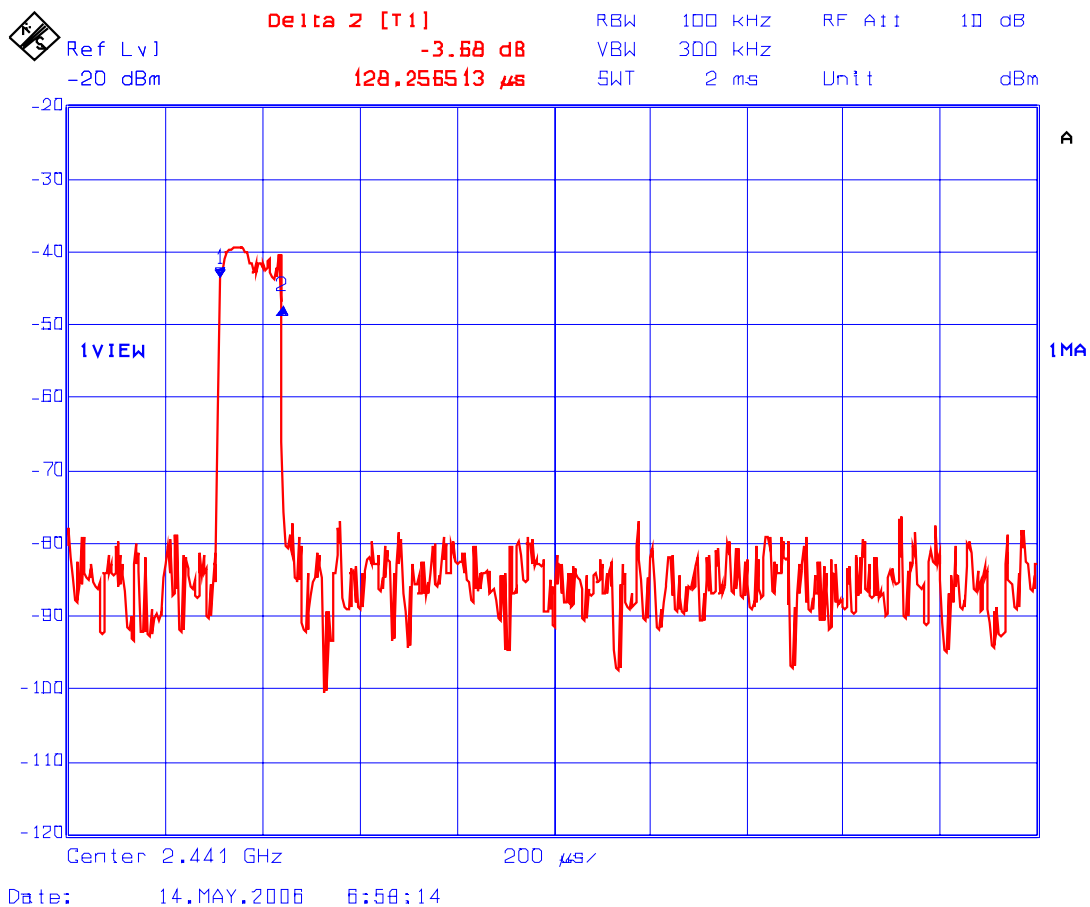


Dwell Time @ 2441 MHz = 128.256513 μs

Plot 5.10.4.5: Time of Occupancy
Test Frequency: 2441 MHz

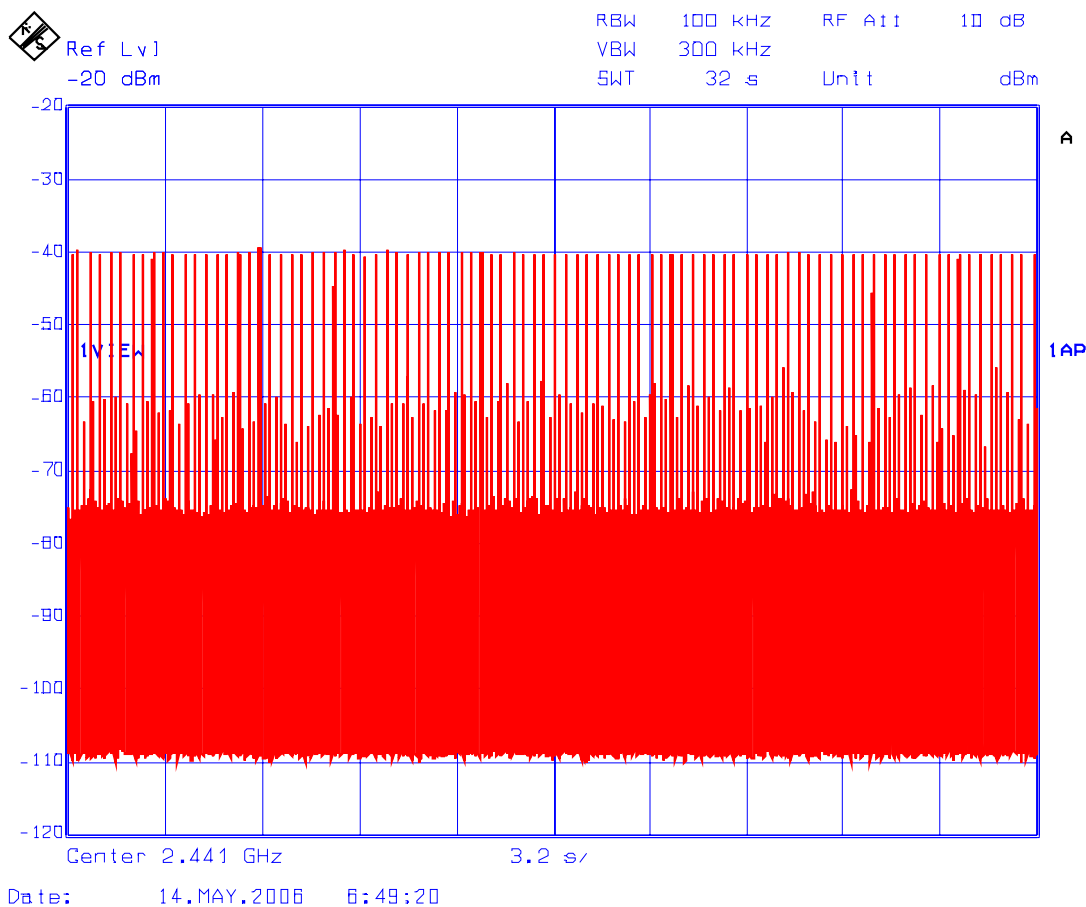


$$\begin{aligned}
 \text{Average time of occupancy in 31.6 s} &= (\text{Dwell Time @ 2441 MHz}) \times (\text{number of hops in 31.6 s}) \\
 &= 128.256513 \mu\text{s} \times 90 \\
 &= 11.54 \text{ ms}
 \end{aligned}$$

Plot 5.10.4.6: Time of Occupancy
Test Frequency: 2480 MHz

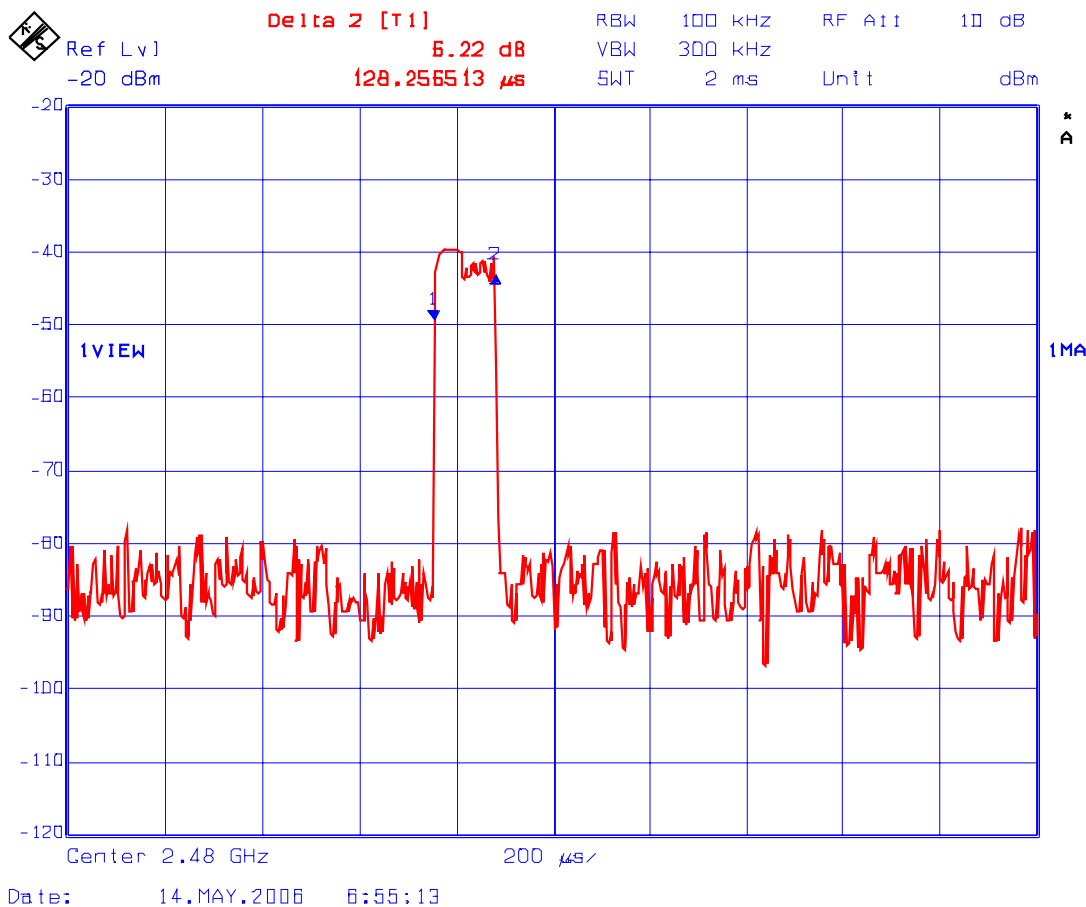

Dwell Time @ 2480 MHz = 128.256513 μs

Plot 5.10.4.7: Time of Occupancy
Test Frequency: 2480 MHz

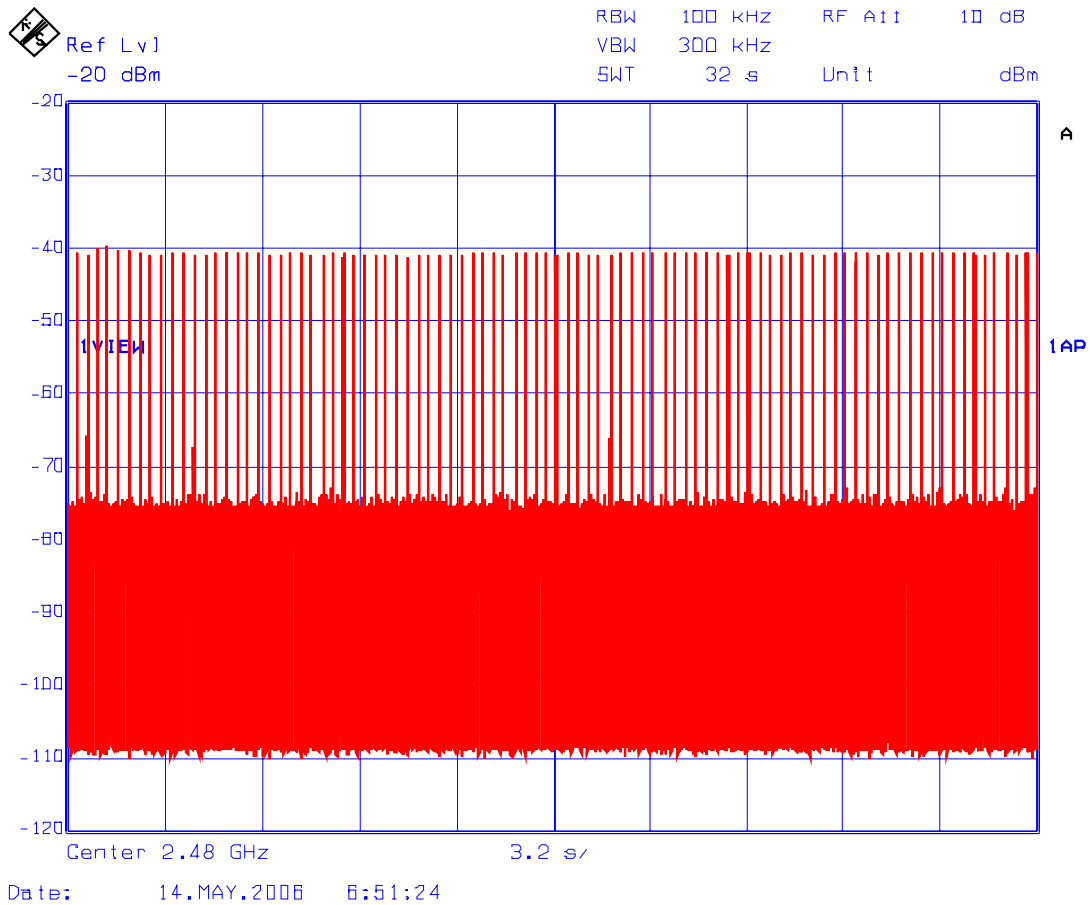

$$\begin{aligned}
 \text{Average time of occupancy in 31.6 s} &= (\text{Dwell Time @ 2480 MHz}) \times (\text{number of hops in 31.6 s}) \\
 &= 128.256513 \mu\text{s} \times 90 \\
 &= 11.54 \text{ ms}
 \end{aligned}$$

EXHIBIT 6 MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

6.1 LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Line Conducted)	PROBABILITY DISTRIBUTION	UNCERTAINTY (dB)	
		9-150 kHz	0.15-30 MHz
EMI Receiver specification	Rectangular	± 1.5	± 1.5
LISN coupling specification	Rectangular	± 1.5	± 1.5
Cable and Input Transient Limiter calibration	Normal (k=2)	± 0.3	± 0.5
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8(9 \text{ kHz}) 0.2 (30 \text{ MHz})$ Uncertainty limits $20\text{Log}(1+\Gamma_1\Gamma_R)$	U-Shaped	± 0.2	± 0.3
System repeatability	Std. deviation	± 0.2	± 0.05
Repeatability of EUT	--	--	--
Combined standard uncertainty	Normal	± 1.25	± 1.30
Expanded uncertainty U	Normal (k=2)	± 2.50	± 2.60

Sample Calculation for Measurement Accuracy in 450 kHz to 30 MHz Band:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{(1.5^2 + 1.5^2)/3 + (0.5/2)^2 + (0.05/2)^2 + 0.35^2} = \pm 1.30 \text{ dB}$$

$$U = 2u_c(y) = \pm 2.6 \text{ dB}$$

6.2 RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY (+ dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	± 1.0	± 1.0
Cable Loss Calibration	Normal (k=2)	± 0.3	± 0.5
EMI Receiver specification	Rectangular	± 1.5	± 1.5
Antenna Directivity	Rectangular	+0.5	+0.5
Antenna factor variation with height	Rectangular	± 2.0	± 0.5
Antenna phase center variation	Rectangular	0.0	± 0.2
Antenna factor frequency interpolation	Rectangular	± 0.25	± 0.25
Measurement distance variation	Rectangular	± 0.6	± 0.4
Site imperfections	Rectangular	± 2.0	± 2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(Bi) 0.3 (Lp)$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+1.1 -1.25	± 0.5
System repeatability	Std. Deviation	± 0.5	± 0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k = 2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: TEK-542F15C247

June 22, 2006

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)