


**Plot 1: Back 2437MHz**

<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/15/2010 3:51:18 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	2437_Back.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	21.5°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Psion 7545	<b>Relative Permittivity:</b>	47.95
<b>Relative Humidity:</b>	37.3%	<b>Conductivity:</b>	1.913
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	20.5°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-24.00 mm
<b>DUT Position:</b>	Back	<b>Max SAR Y-axis Location:</b>	-10.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	5.96 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.091 W/kg
<b>Air Factors:</b>	936.77 / 700.45 / 673.31	<b>SAR 10g:</b>	0.049 W/kg
<b>Conversion Factors:</b>	0.38 / 0.37 / 0.39	<b>SAR Start:</b>	0.008 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.008 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.93 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	03/11/10
<b>Input Power Level:</b>	Set by software (15 dBm)	<b>Extrapolation:</b>	poly4

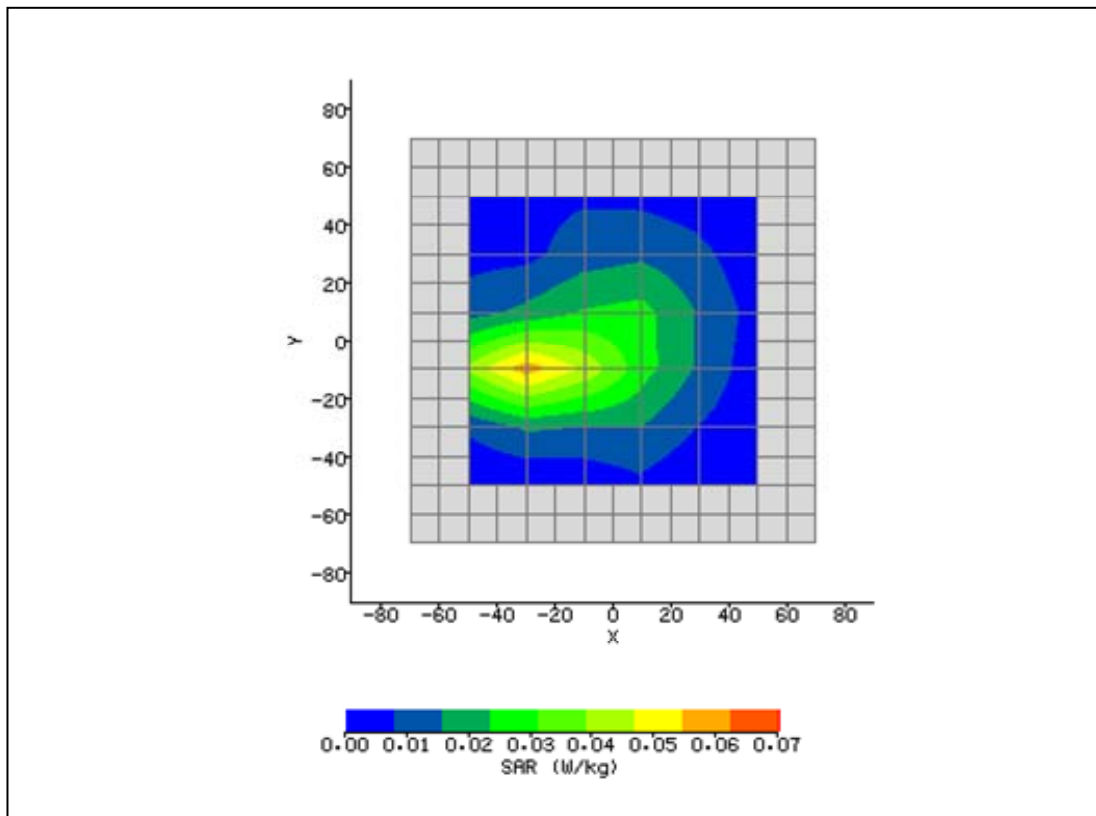

**Plot 2: 2450 Validation**

<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	3/15/2010 1:31:14 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	2437_Back.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	21.5°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	47.74
<b>Relative Humidity:</b>	37.3%	<b>Conductivity:</b>	1.92
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	20.5°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-4.80 mm
<b>DUT Position:</b>	10mm	<b>Max SAR Y-axis Location:</b>	-7.20 mm
<b>Antenna Configuration:</b>	Dipole	<b>Max E Field:</b>	137.35 V/m
<b>Test Frequency:</b>	2450MHz	<b>SAR 1g:</b>	46.845 W/kg
<b>Air Factors:</b>	936.77 / 700.45 / 673.31	<b>SAR 10g:</b>	22.174 W/kg
<b>Conversion Factors:</b>	0.38 / 0.37 / 0.39	<b>SAR Start:</b>	3.949 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	4.130 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.57 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	03/11/10
<b>Input Power Level:</b>	1W	<b>Extrapolation:</b>	poly4

