

Picture no. 8: Netpad 5510 flat rear, distance 15mm



**Picture no. 9: Netpad 5510 flat rear, distance 15mm**



**Picture no. 10: Netpad 5510 flat rear, distance 15mm**



**Picture no. 11: Psion Netpad 5510 front**



Picture no. 12: Psion Netpad 5510 rear without battery



Picture no. 13: Psion Netpad 5510 rear



**Picture no. 14: Psion Netpad 5510 right side with sim interface**



**Picture no. 15: Psion Netpad 5510 top**





**Picture no. 16: Psion Netpad 5510 battery**



**Picture no. 17: Psion Netpad 5510 battery**



**Picture no. 18: Psion Netpad 5510 front with holster**




**Picture no. 19: Psion Netpad 5510 rear with hoster**



**Picture no. 20: Psion Netpad 5510 top with holster**



**Picture no. 21: Liquid depth**

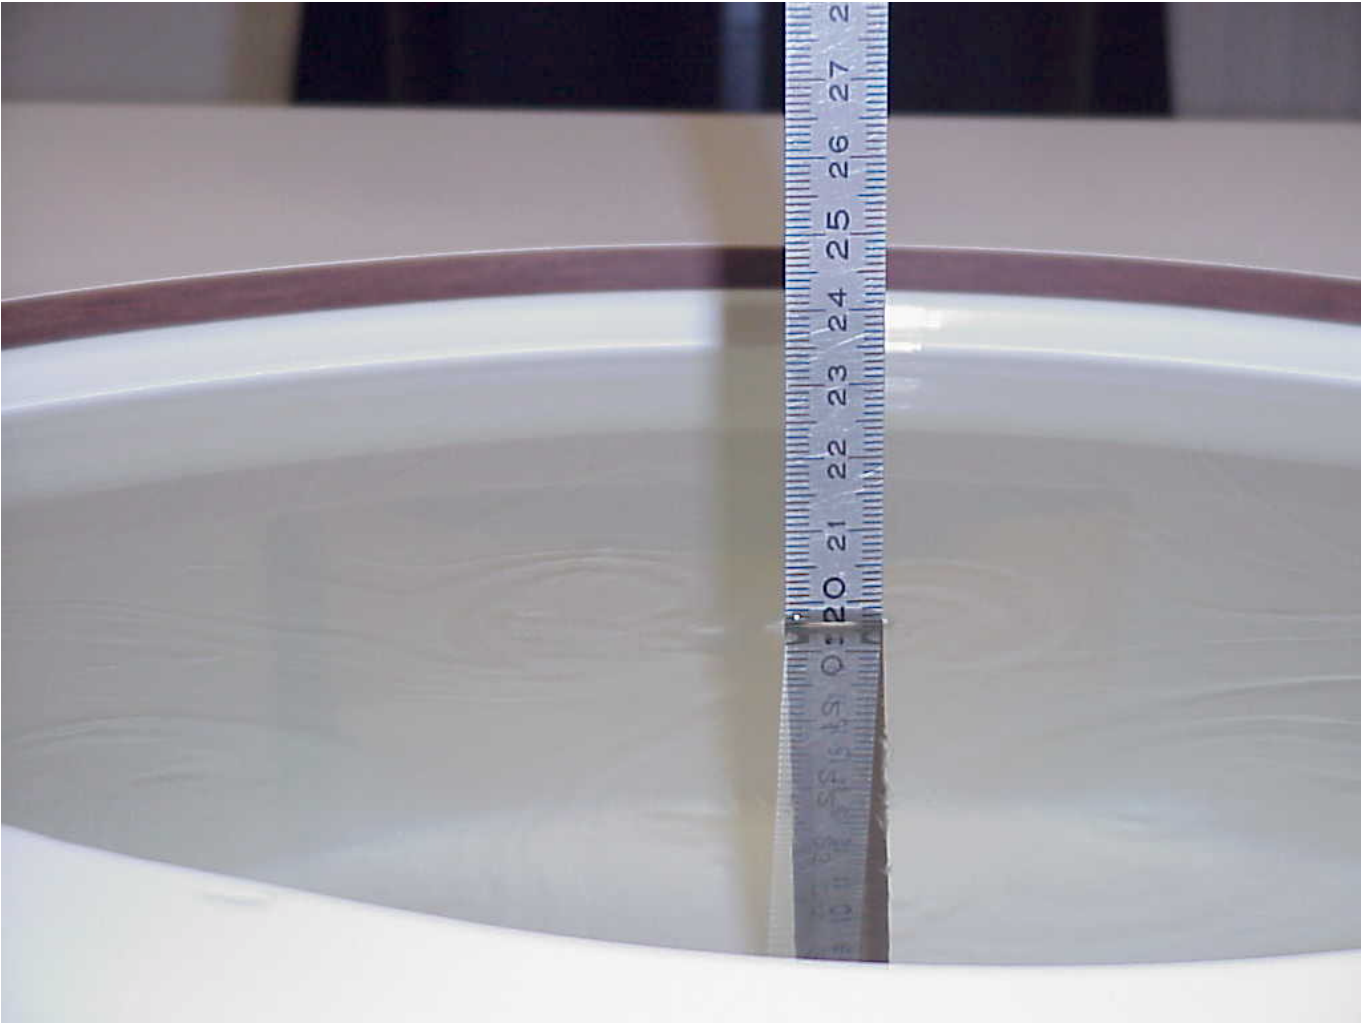

### **Annex 3 Calibration parameters of E-field probe**

**Calibration parameters are described in the additional document**

**‘ Calibration data and Phantom information for test report no. 2-2859\_1\_2/02‘,  
provided together with this document.**