




System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	6/17/2008 3:21:35 PM	DUT Battery Model/No:	
Filename:	6_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.5°C	Liquid Simulant:	2450
Device Under Test:	Psion PX750	Relative Permittivity:	51.78
Relative Humidity:	44.7%	Conductivity:	1.98
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	28.00 mm
DUT Position:	Touch Back	Max SAR Y-axis Location:	-1.00 mm
Antenna Configuration:	Integral	Max E Field:	4.51 V/m
Test Frequency:	2412MHzMHz	SAR 1g:	0.053 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.003 W/kg
Type of Modulation:		SAR End:	0.003 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.69 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/17/08
Input Power Level:	10dBm	Extrapolation:	poly4

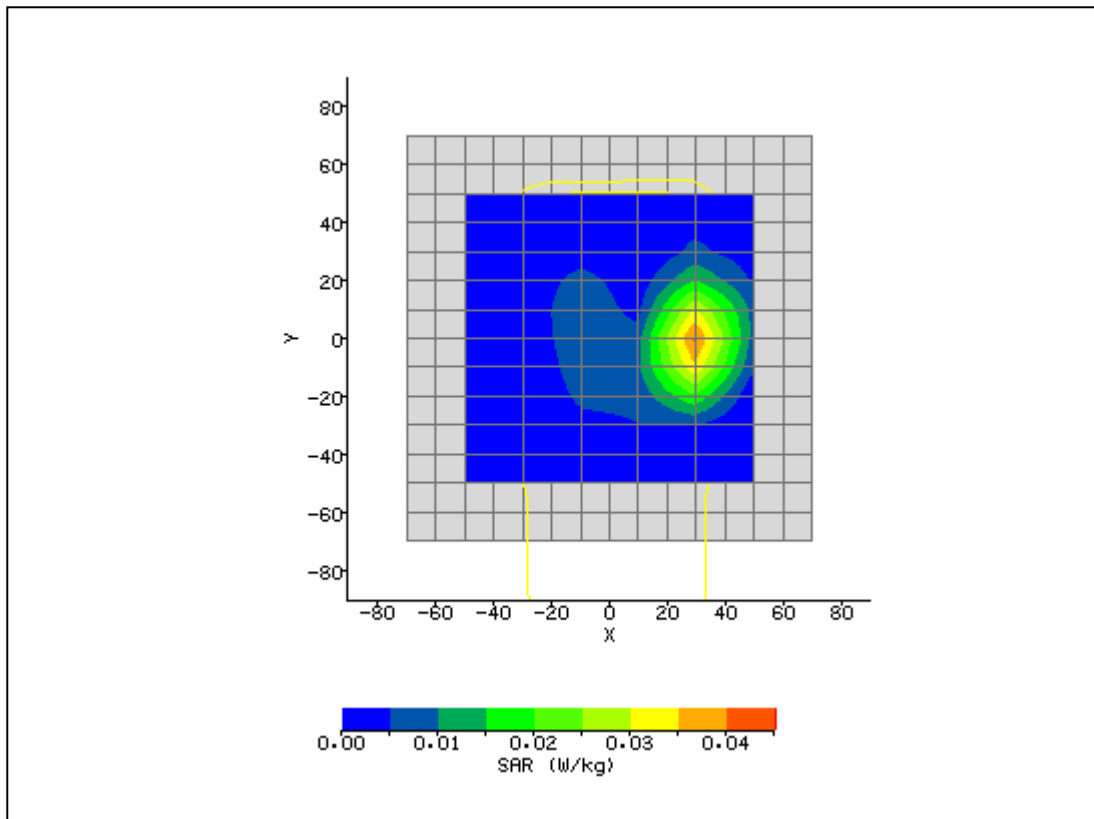


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	6/17/2008 3:02:40 PM	DUT Battery Model/No:	
Filename:	835v_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.5°C	Liquid Simulant:	2450
Device Under Test:	Psion PX750	Relative Permittivity:	51.62
Relative Humidity:	44.7%	Conductivity:	1.992
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	28.00 mm
DUT Position:	Touch Back	Max SAR Y-axis Location:	-1.00 mm
Antenna Configuration:	Integral	Max E Field:	7.50 V/m
Test Frequency:	2437MHzMHz	SAR 1g:	0.143 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.014 W/kg
Type of Modulation:		SAR End:	0.014 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.38 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/17/08
Input Power Level:	10dBm	Extrapolation:	poly4

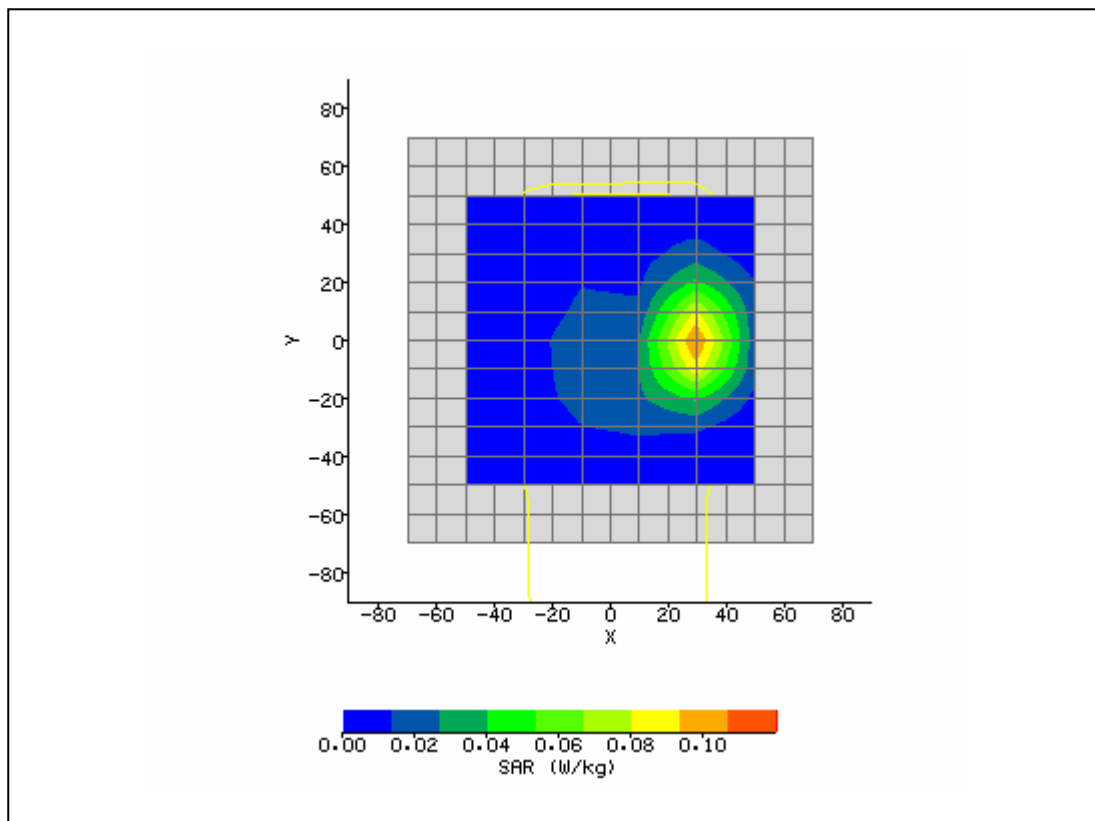


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	6/17/2008 3:40:02 PM	DUT Battery Model/No:	
Filename:	1_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.5°C	Liquid Simulant:	2450
Device Under Test:	Psion PX750	Relative Permittivity:	51.49
Relative Humidity:	44.7%	Conductivity:	1.997
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	28.00 mm
DUT Position:	Touch Back	Max SAR Y-axis Location:	6.00 mm
Antenna Configuration:	Integral	Max E Field:	6.31 V/m
Test Frequency:	2462MHzMHz	SAR 1g:	0.104 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.008 W/kg
Type of Modulation:		SAR End:	0.008 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.01 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/17/08
Input Power Level:	10dBm	Extrapolation:	poly4

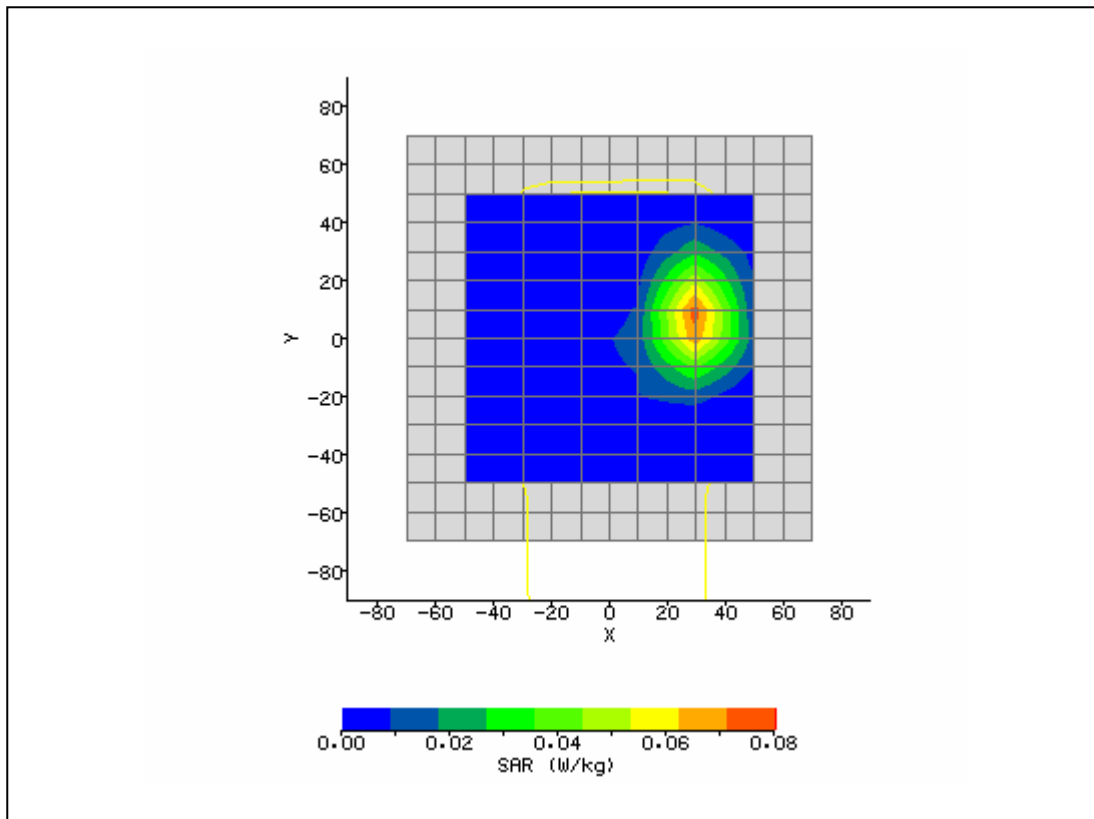

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	6/17/2008 4:00:07 PM	DUT Battery Model/No:	
Filename:	11_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.5°C	Liquid Simulant:	2450
Device Under Test:	Psion PX750	Relative Permittivity:	51.62
Relative Humidity:	44.7%	Conductivity:	1.992
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-43.00 mm
DUT Position:	Touch Front	Max SAR Y-axis Location:	7.00 mm
Antenna Configuration:	Integral	Max E Field:	5.66 V/m
Test Frequency:	2437MHzMHz	SAR 1g:	0.080 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.005 W/kg
Type of Modulation:		SAR End:	0.005 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.61 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/17/08
Input Power Level:	10dBm	Extrapolation:	poly4

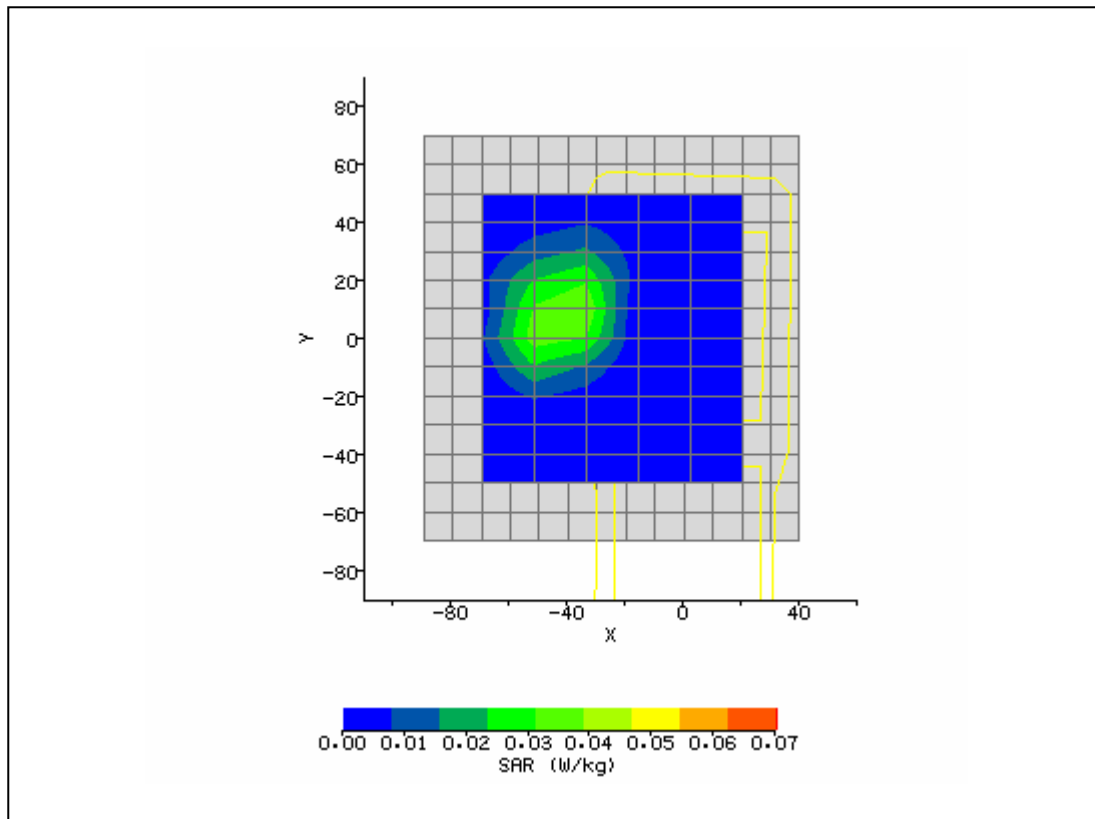

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	6/17/2008 4:18:32 PM	DUT Battery Model/No:	
Filename:	6_Front_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.5°C	Liquid Simulant:	2450
Device Under Test:	Psion PX750	Relative Permittivity:	51.62
Relative Humidity:	44.7%	Conductivity:	1.992
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	30.00 mm
DUT Position:	Touch Back	Max SAR Y-axis Location:	-4.00 mm
Antenna Configuration:	Integral	Max E Field:	3.78 V/m
Test Frequency:	2437MHzMHz	SAR 1g:	0.038 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.001 W/kg
Type of Modulation:		SAR End:	0.001 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.76 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/17/08
Input Power Level:	10dBm	Extrapolation:	poly4

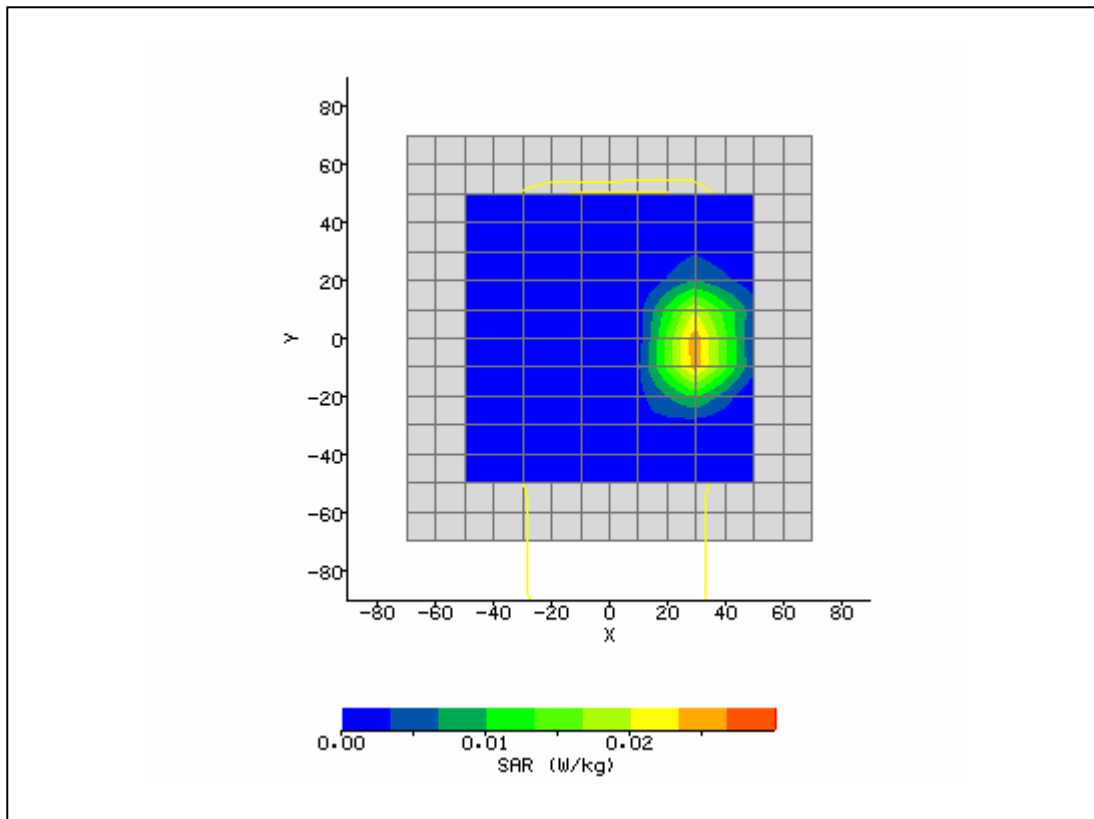

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	6/17/2008 2:06:04 PM	DUT Battery Model/No:	
Filename:	835v_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.5°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	39.95
Relative Humidity:	44.7%	Conductivity:	1.867
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	9.00 mm
Antenna Configuration:	Dipole	Max E Field:	141.44 V/m
Test Frequency:	2450MHzMHz	SAR 1g:	49.754 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	22.934 W/kg
Conversion Factors:	.569 / .569 / .569	SAR Start:	3.519 W/kg
Type of Modulation:		SAR End:	3.582 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.79 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/17/08
Input Power Level:	1W	Extrapolation:	poly4

