


NOTES:

1. Material - .005" thickness, computer imprintable white mylar with mat lamination
2. Graphics & lettering to appear as per a/w on file 20599-086b.pdf (from TEKLOGIX).
3. Labels to be supplied on an 8.5 x 11 release liner.
4. Rear surface to be pressure sensitive V23 acrylic adhesive coated with release paper backing, adhesive to be compatible with polycarbonate/polyester blend plastic (Bayer Makroblend UT403) material over a temperature range of -40 to +125 deg. C.

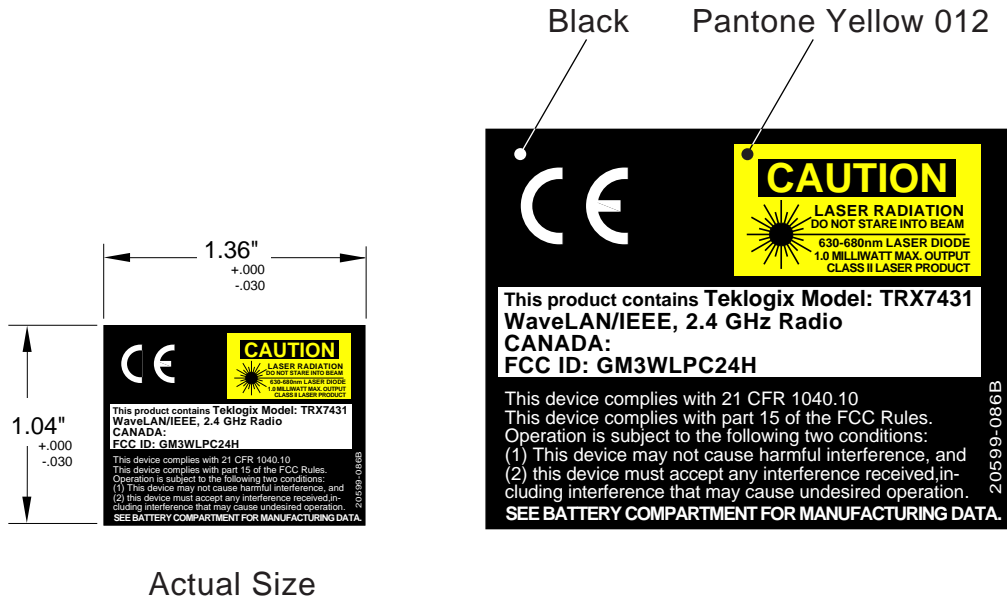

Actual Size

ECO Date	SIGNATURES	DATE	TEKLOGIX Mississauga, Ontario Canada	Dwg No. 20599-086 REV. B Sheet 1 of 1
	DRAWN David Madrick	99.11.12		
	CHKD APPVD		LBL CA/USA 7431 7035 WS	
	PROJ. SPEC./ PROD. ENG.			
	MECH. ENG.			
REGULATORY				

7035 LABEL LOCATION

FCC label P/N: 20599-086

