

# **ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT**

## INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name:	Bluetooth Palm Style Keyboard with Touchpad
Brand Name:	ORtek
Model No.:	PKB-1720BT,M-MCK860BT
Model Differences:	Customer model number
FCC ID:	GM8PKB1720BT
Report No.:	ER/2011/80005
Issue Date:	Aug. 10, 2011
FCC Rule Part:	§15.247, Cat: DSS
Prepared for:	ORtek Technology Inc. 13F,Number 150, Jian-Yi Rd. ,Zhonghe Dist.,New Taipei City,Taiwan,R.O.C.
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan



*Note:* This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms</u>. e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五殿工業區五工路 134 號

**台灣檢驗科技股份有限公司** t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



FCC ID: GM8PKB1720BT

Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 2 of 53

## **VERIFICATION OF COMPLIANCE**

Applicant:	ORtek Technology Inc. 13F,Number 150, Jian-Yi Rd. ,Zhonghe Dist.,New Taipei City,Taiwan,R.O.C.
Product Name:	Bluetooth Palm Style Keyboard with Touchpad
Brand Name:	ORtek
Model No.:	PKB-1720BT,M-MCK860BT
Model Different:	Customer model number
FCC ID:	GM8PKB1720BT
File Number:	ER/2011/80005
Date of test:	Aug. 02, 2011 ~ Aug. 10, 2011
Date of EUT Received:	Aug. 02, 2011

## We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Lion Wang	Date:	Aug. 10, 2011
Prepared By:	Lion Wang / Engineer Chemy Chem	Date:	Aug. 10, 2011
Approved By:	Cherry Chen / Clerk Jim Chang Jim Chang / Supervisor	Date:	Aug. 10, 2011

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taiwan /台北縣五殷工業區五工路 134 號

f (886-2) 2298-0488 www.tw.sgs.com



## Version

Version No.	Date	Description
00 Aug. 10, 2011		Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and ebligations cutted the reaccession document contact contact to preduced or expect is full writtent projection of expecting of the Company on wurpatched organities of a stransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 4 of 53

## **Table of Contents**

1.	GEN	ERAL INFORMATION	6
	1.1.	Related Submittal(s) / Grant (s)	7
	1.2.	Test Methodology	7
	1.3.	Test Facility	7
	1.4.	Special Accessories	7
	1.5.	Equipment Modifications	7
2.	SYST	FEM TEST CONFIGURATION	8
	2.1.	EUT Configuration	8
	2.2.	EUT Exercise	8
	2.3.	Test Procedure	8
	2.4.	Configuration of Tested System	9
3.	SUM	MARY OF TEST RESULTS	10
4.	DES	CRIPTION OF TEST MODES	10
5.	CON	DUCTED EMISSION TEST	11
	5.1.	Standard Applicable	11
	5.2.	EUT Setup	11
	5.3.	Measurement Procedure	11
	5.4.	Measurement Equipment Used:	12
	5.5.	Measurement Result	12
6.	PEA	K OUTPUT POWER MEASUREMENT	13
	6.1.	Standard Applicable	13
	6.2.	Measurement Equipment Used	13
	6.3.	Test Set-up:	13
	6.4.	Measurement Procedure:	14
	6.5.	Measurement Result	14
7.	20dB	BAND WIDTH	17
	7.1.	Standard Applicable	17
	7.2.	Measurement Equipment Used	17
	7.3.	Test Set-up	17
	7.4.	Measurement Procedure:	17
	7.5.	Measurement Result:	18
8.	100K	Hz BANDWIDTH OF BAND EDGES MEASUREMENT	21
	8.1.	Standard Applicable	21
	8.2.	Measurement Equipment Used	21
	8.3.	Test SET-UP:	22
除非	另有說明,此	stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. :報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> a	and conditions htm and
		issued by the onlinearly subject to its General conductions of General mined ordering a variable on request of accessible at www.sgs.com/terms = a add control on the limits at documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms = a</u> ddcorent.htm, Attention is drawn to the limit	



## FCC ID: GM8PKB1720BT

Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 5 of 53

	8.4.	Measurement Procedure	23
	8.5.	Field Strength Calculation	23
	8.6.	Measurement Result	23
9.	SPUR	RIOUS RADIATED EMISSION TEST	27
	9.1.	Standard Applicable	27
	9.2.	Measurement Equipment Used:	27
	9.3.	Test SET-UP:	27
	9.4.	Measurement Procedure:	27
	9.5.	Field Strength Calculation	
	9.6.	Measurement Result:	
10.	FREQ	QUENCY SEPARATION	41
	10.1.	Standard Applicable	41
	10.2.	Measurement Equipment Used:	41
	10.3.	Test Set-up:	41
	10.4.	Measurement Procedure:	41
	10.5.	Measurement Result:	41
11.	NUM	BER OF HOPPING FREQUENCY	43
	11.1.	Standard Applicable	43
	11.2.	Measurement Equipment Used:	43
	11.3.	Test Set-up:	43
	11.4.	Measurement Procedure:	43
	11.5.	Measurement Result:	43
12.	TIME	E OF OCCUPANCY (DWELL TIME)	45
	12.1.	Standard Applicable	45
	12.2.	Measurement Equipment Used:	45
	12.3.	Test Set-up:	45
	12.4.	Measurement Procedure:	45
	12.5.	Measurement Result	46
13.	ANTI	ENNA REQUIREMENT	52
	13.1.	Standard Applicable	52
	13.2.	Antenna Connected Construction	52
14.	RF E	XPOSURE	53
	14.1.	Standard Applicable	53
	14.2.	Measurement Result:	53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and ebligations under the transaction for the document company the preduced opport in full without prior writing approximation of parts and plurgations. rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. an I td. S Taiv



#### **GENERAL INFORMATION** 1.

General:

Product Name:	Bluetooth Palm Style Keyboard with Touchpad
Brand Name:	ORtek
Model No.:	PKB-1720BT,M-MCK860BT
Model Difference:	Customer model number
Hardware Version	Keyboard:1.0
Software Version	Keyboard:1.0
Power Supply:	3Vdc from AA battery*2

Bluetooth:

0	
Frequency Range:	2402 – 2480MHz
Bluetooth Version:	V2.0 (GFSK)
Channel number:	79 channels
Modulation type:	Frequency Hopping Spread Spectrum
Transmit Power:	-2.59 dBm (Peak)
Dwell Time:	<= 0.4s
Operating Mode:	Point-to-Point
Antenna Designation:	Printed antenna, 2.78dBi

This test report applies for Bluetooth function.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and edilizatione under the transaction for expecting of the document compate to compate the provent is full writtent encerting of Company. Any unpatched advecting of the results of the stransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## **1.1.** Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID:** <u>**GM8PKB1720BT**</u> filing to com ply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B is authorized under a Doc procedure.

#### 1.2. Test Methodology

Both conducted and rad iated testing were performed according to the p rocedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with FCC Public Notice DA 00-705

### 1.3. Test Facility

The measurement facilities used to collect the 3m Radiated Em ission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, W u Kung Rd., Wuku Industrial Z one, Taipei Country, Taiwan which are constructed and ca librated to m eet the FCC requirem ents in docum ents ANSI C63.4: 2003. FCC Re gistration N umber ar e: 990257 and 236194, Canada Registration Number: 4620A-4

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-To u-Tsuo Valley Chia-Pau Tsuen, L inkou Hsiang, Taipei county, which is constructe d and calibrated to m eet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

#### 1.4. Special Accessories

Not available for this EUT intended for grant.

#### **1.5. Equipment Modifications**

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



**Report No.: ER/2011/80005** Issue Date: Aug. 10, 2011 Page: 8 of 53

## 2. SYSTEM TEST CONFIGURATION

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a m anner which intends to m aximize its em ission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineer ing mode to fix the Tx f requency that was for the purpose of the measurements.

### 2.3. Test Procedure

### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4: 2003.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and Subclause 8.3.1.2 of ANSI C63.4: 2003.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

an I td.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 2.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Remote

#### **Table 2-1 Equipment Used in Tested System**

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1. N	lotebook	HP	ProBook 4411s	CNU9316V4C	N/A	N/A
2.	Bluetooth Test Set	Anritsu	MT8852B	6k00006107	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



## 3. SUMMARY OF TEST RESULTS

FCC Rules Description Of Test		Result	
§15.207(a) Condu	cted Emission	Compliant	
§15.247(b)(1)	Peak Output Power	Compliant	
§15.247(a)	20dB Bandwidth	No Limit	
§15.247I	100 KHz Bandwidth Of Frequency Band Edges	Compliant	
§15.209(a) (f)	Spurious Emission	Compliant	
§15.247(a)(1) Frequ	ency Separation	Compliant	
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant	
§15.247(a)(1)(iii)	Time of Occupancy	Compliant	
§15.203, §15.247(b)(4)(i)	Antenna Requirement	Compliant	

## 4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz)  $\cdot$  mid (2441MHz) and high (2480MHz) with BDR mode and DH5 highest data rate are chosen for full testing.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for channel Low, Mid and High the worst case E2 position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 5. CONDUCTED EMISSION TEST

## 5.1. Standard Applicable

According to §15.207. frequency within 150KHz to 30MHz shall not exceed the limit table as below.

Frequency range		imits B(uV)			
MHz	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			
Note					
1. The lower limit shall apply at the transition frequencies					
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.					

## 5.2. EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4: 2003.
- 2. The EUT was plug-in the AC/DC Power adapter. The host system was placed on the center of the back edge on the test table. The peripherals was placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host system was connected with 120Vac/60Hz power source.

## 5.3. Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> <u>e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taiwan / 台北縣五股工業區五工路 134 號



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 12 of 53

Site SGS CONDUCTED #1 Limit: CISPR22/11/EN55022 Class B EUT: Mobile Internet Device

5. M/N: M01M002

Note: EDR BT Link mode

d:

Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
ТҮРЕ		NUMBER	NUMBER	CAL.	
EMI Test Receiver	R&S ESC	S30	828985/004	09/23/2010 0	9/22/ 2012
LISN Rolf-Hein	e	NNB-2/16Z	99012	03/31/2011	03/30/2012
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	03/31/2011 0	3/30/ 2012
Coaxial Cables	N/A	WK CE Cable	N/A	11/28/2010 1	1/27/ 2011

### 5.5. Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 6. PEAK OUTPUT POWER MEASUREMENT


### 6.1. Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
ТҮРЕ		NUMBER	NUMBER	CAL.						
Power Sensor	Anritsu	MA2411B 91	70 32	01/21/2010	01/20/2012					
Power Meter	Anritsu	ML2495A	1005007	02/17/2010	02/16/2012					
Spectrum Analyzer	Agilent	E4446A MY	43360 126	04/19/2010	04/18/2012					
Spectrum Analyzer	Agilent	E4440A	MY45304525	01/25/2011 0	1/24/ 2012					
DC Block	Agilent	BLK-18 155	4 52	07/05/2011	07/04/2012					
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2011 0	1/04/ 2012					
Attenuator Mini-	Circuit	BW-S6W5	001	01/05/2011 0	1/04/ 2012					
Attenuator Mini-	Circuit	BW-S10W5	001	01/05/2011 0	1/04/ 2012					
Attenuator Mini-	Circuit	BW-S20W5	001	01/05/2011 0	1/04/ 2012					
Splitter Agilent		11636B	N/A	01/05/2011 0	1/04/ 2012					

#### 6.2. Measurement Equipment Used

#### 6.3. Test Set-up:

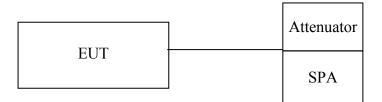

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 6.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max peak function, >20dB bandwidth, >=RBW)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.

## 6.5. Measurement Result

### **BDR mode:**

Frequency (MHz)	Reading Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	-4.32	-4.32	0.00037	1
2441.00	-2.87	-2.87	0.00052	1
2480.00	-2.59	-2.59	0.00055	1

\*Note: offset 6.5dB

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This documents is subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 15 of 53



## Peak Power Output Data Plot (CH Low) (BDR mode)

## Peak Power Output Data Plot (CH Mid) (BDR mode)




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 16 of 53

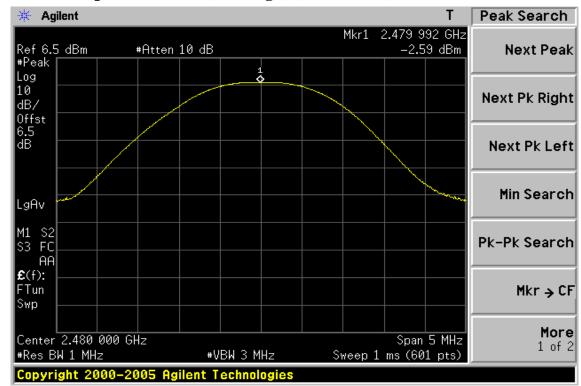

## Peak Power Output Data Plot (CH High) (BDR mode)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 17 of 53

## 7. 20dB BAND WIDTH

## 7.1. Standard Applicable

For frequency hopping system s operating in the 2400MH z-2483.5 MHz no lim it for 20dB bandwidth.

## 7.2. Measurement Equipment Used

Refer to section 6.2 for details.

## 7.3. Test Set-up

Refer to section 6.3 for details.

## 7.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set the spectrum analyzer as RBW=10KHz (1 % of Bandwidth.), VBW = 3\*RBW, Span= 3MHz, Sweep=auto
- 4. Mark the peak frequency and –20dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 18 of 53

#### 7.5. Measurement Result:

#### **BDR mode**


СН	Bandwidth
	(kHz)
Lower	926.367
Mid	926.215
Higher	925.272

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and ebligations cutted the reaccession document contact contact to preduced or expect is full writtent projection of expecting of the Company on wurpatched organities of a stransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 19 of 53

## BDR Mode

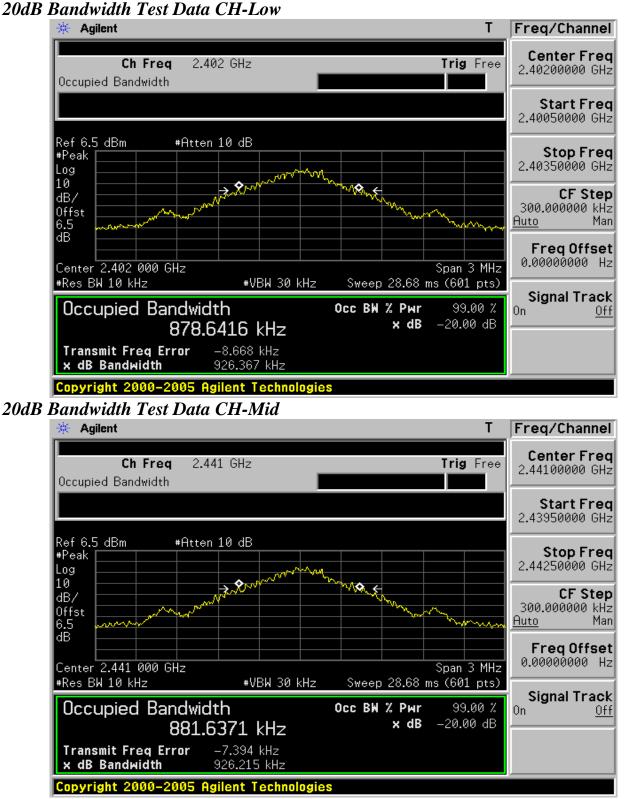


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 20 of 53

## 20dB Bandwidth Test Data CH-High

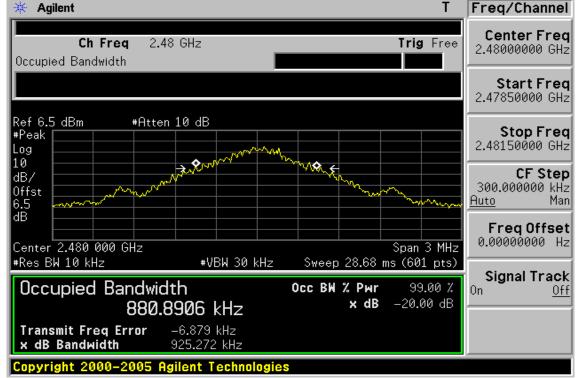

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 21 of 53

## 8. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

## 8.1. Standard Applicable

According to §1 5.247(c), in any 100 KHz bandwidth ou tside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

## 8.2. Measurement Equipment Used

### 8.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

#### 8.2.2. Radiated emission:

966 Chamber										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
Spectrum Analyzer	R&S	FSP 40	100034	03/30/2011 0	3/29/ 2012					
Bilog Antenna	SCHWAZBECK	VULB9160	3136 11/19	/ 2010	11/18/2011					
Horn antenna	Horn antenna SCHWAZBECK Pre-Amplifier Agilent		309/320 01/2	22/ 2010	01/21/2012					
Pre-Amplifier Agiler			1937A02834	11/28/2010 1	1/27/ 2011					
Pre-Amplifier Agiler	nt	8449B	3008A01973	01/05/2012 0	1/04/ 2012					
Turn Table	HD	DT420	N/A	N.C.R	N.C.R					
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R					
Controller	HD	HD100 N/A	N.C.R		N.C.R					
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2011 0	1/04/ 2012					
Low Loss Cable	Low Loss Cable HUBER+SUHNER		3m	01/05/2011 0	1/04/ 2012					
3m Site	SGS	966 chamber	N/A	09/06/2010	09/05/2011					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




### 8.3. Test SET-UP:

## **8.3.1.** Conducted Emission at antenna port:


Refer to section 6.3 for details.

#### 8.3.2. Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

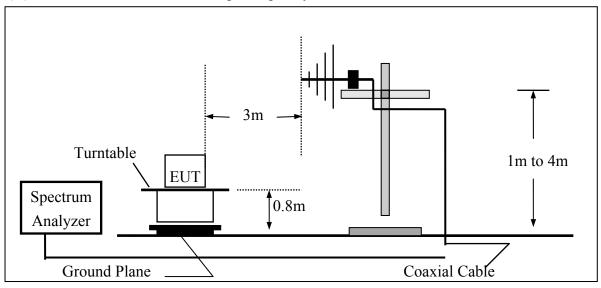

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

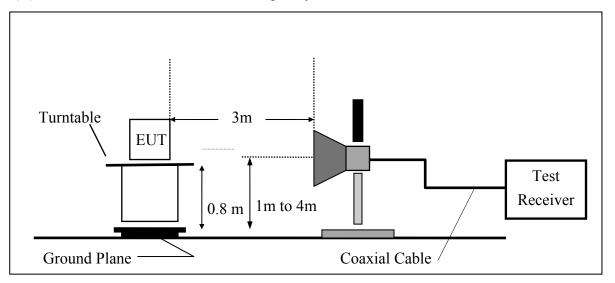

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## 8.4. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=10MHz, Sweep = auto
- 5. Mark Peak, 2.310GHz 2.390GHz and 2.4835GHz 2.500GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.
- 7. Radiated Emission refer to section 9.

## 8.5. Field Strength Calculation

The field strength is calculated by adding the An tenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

## $\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

## 8.6. Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



**Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011** Page: 24 of 53

## **BDR** Mode **Band Edges Test Data CH-Low**

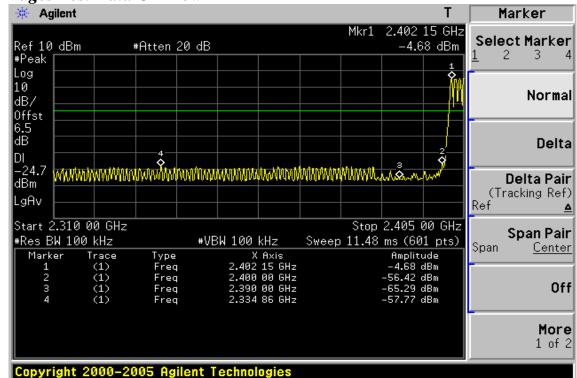

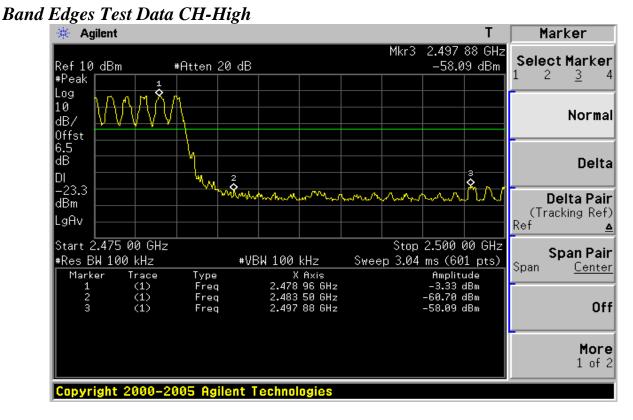

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



FCC ID: GM8PKB1720BT

Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 25 of 53

Operation	Mode tal Freque				Aug. 08, 2 Lion Ver.	011			
	Peak	AV		Actu	ial FS	Peak	AV		
Freq.	-	Reading		Peak	AV	Limit	Limit	0	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	) (dBuV/m	(dBuV/m)	(dBuV/n	n) ( <b>dB</b> )	
2390.00	44.71		-0.67	44.04		74.00	54.00	-9.96	Peak
Operation ModeTX CH LowTest DateAug. 08, 2011Fundamental Frequency2402 MHzTest ByLionTemperature25 °CPol Hor.LionHumidity65 %Pol Hor.Pol Hor.						011			
	Peak	AV		Actu	ıal FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV ) (dBuV/m	Limit ) (dBuV/m)	Limit (dBuV/n	0	Remark

Remark :

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency a bove 1000MHz were made with an instrum ent using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



FCC ID: GM8PKB1720BT

Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 26 of 53

Operation Mode Fundamental Frequency	TX CH High 2480 MHz
Temperature	25 °C
Humidity	65 %

Test Date Aug. 08, 2011 Test By Lion Pol Ver.

	Peak	AV		Actu	al F S	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)(	(dBuV/m)	( <b>dB</b> )	
2483.50	45.55		-0.52	45.03		74.00	54.00	-8.97	Peak
Operation ModeTX CH HighFundamental Frequency2480 MHzTemperature25 °CHumidity65 %					Test Test Pol 1	By I	Aug. 08, 2 Lion	011	
	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)(	(dBuV/m)	( <b>dB</b> )	
2483.50	48.35		-0.52	47.83		74.00	54.00	-6.17	Peak

Remark :

(1) Data of measurement within this frequency range shown "-" in the table abov e means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column<sub>o</sub>

- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 27 of 53

## 9. SPURIOUS RADIATED EMISSION TEST

## 9.1. Standard Applicable

According to \$15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in \$15.209(a). And according to \$15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

## 9.2. Measurement Equipment Used:

# 9.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

9.2.2. Radiated emission:

Refer to section 7.2 for details.

## 9.3. Test SET-UP:

## 9.3.1. Conducted Emission at antenna port:

Refer to section 6.3 for details.

9.3.2. Radiated emission:

Refer to section 7.3 for details.

## 9.4. Measurement Procedure:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報售未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



### 9.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Ca ble Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

#### $\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

#### 9.6. Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

bit is the limit of the limit of the limit and the limit of limit




Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 29 of 53

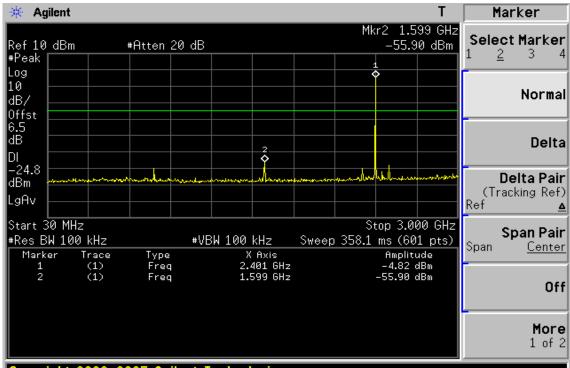

## BDR Mode Conducted Spurious Emission Measurement Result Ch Low 30MHz – 3GHz



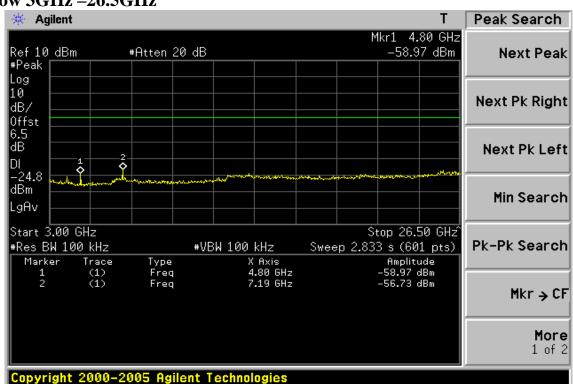

Ch Low 3GHz -26.5GHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 30 of 53

## Ch Mid 30MHz - 3GHz

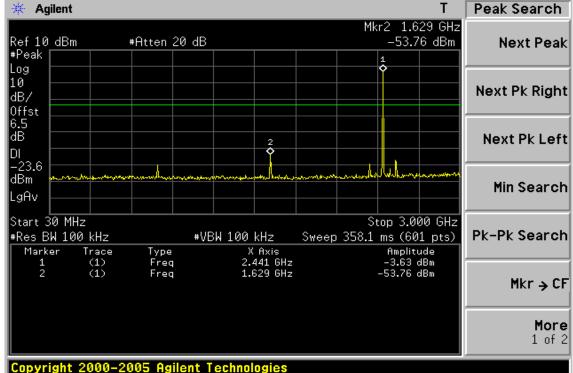

## Ch Mid 3GHz – 26.5GHz

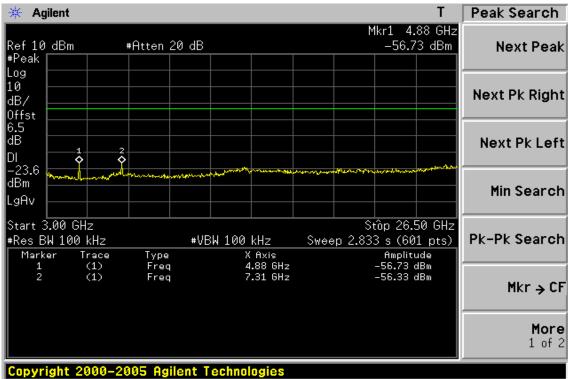

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


 SGS Taiwan Ltd.
 No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

 台灣檢驗科技股份有限公司
 t (886-2) 2299-3279
 f (886-2) 2298-0488
 www.tw.sgs.com




Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 31 of 53

## Ch High 30MHz – 3GHz

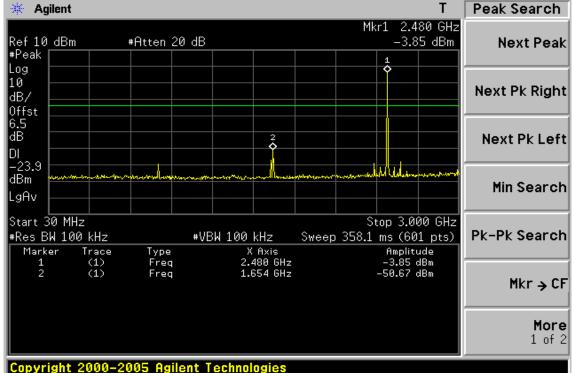



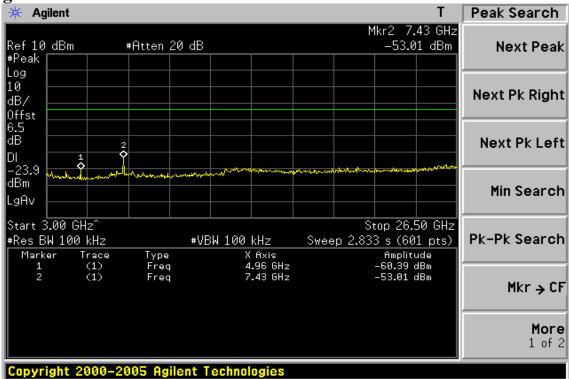

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

 SGS Taiwan Ltd.
 No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

 台灣檢驗科技股份有限公司
 t (886-2) 2299-3279
 f (886-2) 2298-0488
 www.tw.sgs.com



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 32 of 53

### Radiated Spurious Emission Measurement Result (below 1GHz) (BDR mode)

Operation Mode	TX CH Low	Test Date	Aug. 08, 2011
Fundamental Frequency	2402MHz	Test By	Lion
Temperature	25 °C	Pol Ver./Ho	r.
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
	39.70	V	Peak	28.19	-13.38	14.81	40.00	-25.19
	191.99	V	Peak	37.30	-15.57	21.73	43.50	-21.77
	323.91	V	Peak	39.72	-11.95	27.77	46.00	-18.23
	455.83	V	Peak	48.57	-9.73	38.84	46.00	-7.16
	672.14	V	Peak	45.36	-5.65	39.71	46.00	-6.29
	935.98	V	Peak	31.12	-1.70	29.42	46.00	-16.58
	32.91	Н	Peak	29.31	-14.14	15.17	40.00	-24.83
	191.99	Н	Peak	41.97	-15.57	26.40	43.50	-17.10
	323.91	Н	Peak	51.56	-11.95	39.61	46.00	-6.39
	480.08	Н	Peak	45.90	-9.43	36.47	46.00	-9.53
	672.14	Н	Peak	47.02	-5.65	41.37	46.00	-4.63
	828.31	Н	Peak	39.44	-3.39	36.05	46.00	-9.95

## Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### FCC ID: GM8PKB1720BT

Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 33 of 53

Operation Mode	TX CH Mid
Fundamental Frequency	2441MHz
Temperature	25 °C
Humidity	65 %

Test Date	Aug. 08, 2011
Test By	Lion
Pol Ver./Ho	r.

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
43.58	V	Peak	29.58	-13.62	15.96	40.00	-24.04
191.99	V	Peak	37.66	-15.57	22.09	43.50	-21.41
288.02	V	Peak	40.58	-12.77	27.81	46.00	-18.19
455.83	V	Peak	48.56	-9.73	38.83	46.00	-7.17
672.14	V	Peak	44.53	-5.65	38.88	46.00	-7.12
960.23	V	Peak	31.27	-1.54	29.73	54.00	-24.27
45.52	Н	Peak	28.85	-13.75	15.10	40.00	-24.90
191.99	Н	Peak	41.63	-15.57	26.06	43.50	-17.44
323.91	Н	Peak	51.71	-11.95	39.76	46.00	-6.24
480.08	Н	Peak	45.81	-9.43	36.38	46.00	-9.62
672.14	Н	Peak	47.05	-5.65	41.40	46.00	-4.60
839.95	Н	Peak	40.06	-3.34	36.72	46.00	-9.28

## Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



#### FCC ID: GM8PKB1720BT

Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 34 of 53

Operation Mode	TX CH High
Fundamental Frequency	2480MHz
Temperature	25 °C
Humidity	65 %

Test Date	Aug. 08, 2011
Test By	Lion
Pol Ver./Ho	r.

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
53.28	V	Peak	29.33	-14.08	15.25	40.00	-24.75
191.99	V	Peak	39.20	-15.57	23.63	43.50	-19.87
323.91	V	Peak	41.99	-11.95	30.04	46.00	-15.96
455.83	V	Peak	50.58	-9.73	40.85	46.00	-5.15
672.14	V	Peak	46.22	-5.65	40.57	46.00	-5.43
935.98	V	Peak	31.64	-1.70	29.94	46.00	-16.06
32.91	Н	Peak	30.28	-14.14	16.14	40.00	-23.86
191.99	Н	Peak	41.65	-15.57	26.08	43.50	-17.42
323.91	Н	Peak	51.63	-11.95	39.68	46.00	-6.32
480.08	Н	Peak	47.34	-9.43	37.91	46.00	-8.09
672.14	Н	Peak	46.53	-5.65	40.88	46.00	-5.12
828.31	Н	Peak	39.82	-3.39	36.43	46.00	-9.57

## Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 35 of 53

### Radiated Spurious Emission Measurement Result (above 1GHz) (BDR mode)

Operation Mode	TX CH Low	Test Date	Aug. 08, 2011
Fundamental Frequency	2402 MHz	Test By	Lion
Temperature	25 °C	Pol Ver.	
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV	
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin
 (MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
1604.0	42.73		-4.33	38.40		74.00	54.00	-15.60
4804.0	35.59		5.25	40.84		74.00	54.00	-13.16
7206.0						74.00	54.00	
9608.0						74.00	54.00	
12010.0						74.00	54.00	
14412.0						74.00	54.00	
16814.0						74.00	54.00	
19216.0						74.00	54.00	
21618.0						74.00	54.00	
24020.0						74.00	54.00	

#### Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



#### FCC ID: GM8PKB1720BT

Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 36 of 53

Operation Mode	TX CH Low	Test Date	Aug. 08, 2011
Fundamental Frequency	2402 MHz	Test By	Lion
Temperature	25 °C	Pol Hor.	
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV	
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
1604.5	48.38		-4.03	44.35		74.00	54.00	-9.65
4804.0	35.48		5.10	40.58		74.00	54.00	-13.42
7206.0						74.00	54.00	
9608.0						74.00	54.00	
12010.0						74.00	54.00	
14412.0						74.00	54.00	
16814.0						74.00	54.00	
19216.0						74.00	54.00	
21618.0						74.00	54.00	
24020.0						74.00	54.00	

## Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 37 of 53

Operation Mode	TX CH Mid
Fundamental Frequency	2441 MHz
Temperature	25 °C
Humidity	65 %

Test Date	Aug. 08, 2011
Test By	Lion
Pol Ver.	

	Peak	AV		Actu	al FS	Peak	AV	
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
1630.5	40.64		-4.44	36.20		74.00	54.00	-17.80
4882.0	34.64		5.43	40.07		74.00	54.00	-13.93
7323.0						74.00	54.00	
9764.0						74.00	54.00	
12205.0						74.00	54.00	
14646.0						74.00	54.00	
17087.0						74.00	54.00	
19528.0						74.00	54.00	
21969.0						74.00	54.00	
24410.0						74.00	54.00	

## Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 38 of 53

Operation Mode Fundamental Frequency	TX CH Mid 2441 MHz
Temperature	25 °C
Humidity	65 %

Test Date	Aug. 08, 2011
Test By	Lion
Pol Hor.	

	Peak	AV		Actu	al FS	Peak	AV	
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
1630.5	46.13		-4.44	41.69		74.00	54.00	-12.31
4882.0	35.17		5.51	40.68		74.00	54.00	-13.32
7323.0						74.00	54.00	
9764.0						74.00	54.00	
12205.0						74.00	54.00	
14646.0						74.00	54.00	
17087.0						74.00	54.00	
19528.0						74.00	54.00	
21969.0						74.00	54.00	
24410.0						74.00	54.00	

#### Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 39 of 53

Operation Mode Fundamental Freque	TX CH High ncy 2480 MHz	Test Date Test By	Aug. 08, 2011 Lion
Temperature	25 °C	Pol Ver.	
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV	
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
1650.0	42.84		-4.42	38.42		74.00	54.00	-15.58
4960.0	35.19		5.25	40.44		74.00	54.00	-13.56
7440.0						74.00	54.00	
9920.0						74.00	54.00	
12400.0						74.00	54.00	
14880.0						74.00	54.00	
17360.0						74.00	54.00	
19840.0						74.00	54.00	
22320.0						74.00	54.00	
24800.0						74.00	54.00	

#### Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 40 of 53

Operation Mode Fundamental Frequency	TX CH High 2480 MHz	Test Date Test By	Aug. 08, 2011 Lion
Temperature	25 °C	Pol Hor.	
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV	
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
1650.0	46.41		-4.42	41.99		74.00	54.00	-12.01
4960.0	34.45		5.34	39.79		74.00	54.00	-14.21
7440.0						74.00	54.00	
9920.0						74.00	54.00	
12400.0						74.00	54.00	
14880.0						74.00	54.00	
17360.0						74.00	54.00	
19840.0						74.00	54.00	
22320.0						74.00	54.00	
24800.0						74.00	54.00	

## Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



# **10. FREQUENCY SEPARATION**

## **10.1. Standard Applicable**

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3\*20dB bandwidth of the hopping channel, whichever is greater.

# **10.2. Measurement Equipment Used:**

Refer to section 6.2 for details.

# 10.3. Test Set-up:

Refer to section 6.3 for details.

# **10.4. Measurement Procedure:**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Adjust Span to 5 MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

## **10.5. Measurement Result:**

Channel separation (MHz)	Limit Result	
1	>=25KHz or 2/3 times 20dB bandwidth	PASS

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 42 of 53

# **Frequency Separation Test Data**

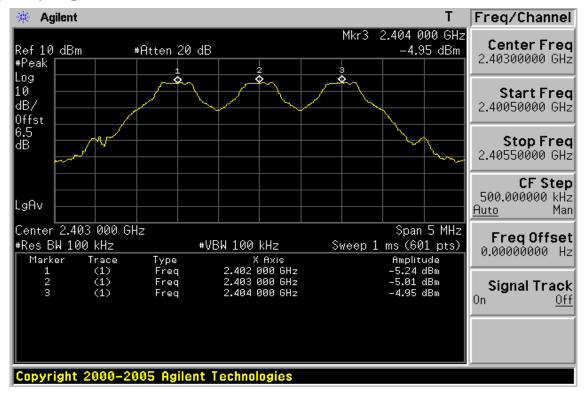

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction document is unawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 43 of 53

# **11. NUMBER OF HOPPING FREQUENCY**

## 11.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

## **11.2. Measurement Equipment Used:**

Refer to section 6.2 for details.

#### 11.3. Test Set-up:

Refer to section 6.3 for details.

## **11.4. Measurement Procedure:**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW=430KHz,, VBW=1.5MHz.
- 5. Max hold, view and count how many channel in the band.


#### **11.5. Measurement Result:**


Note: Refer to next page for plots.




Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 44 of 53

# **Channel Number**



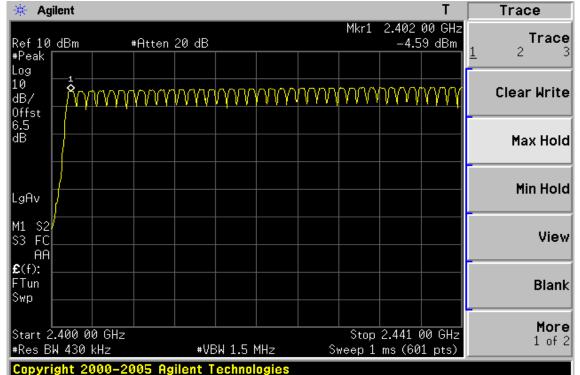

# 2.441 GHz – 2.4835GHz

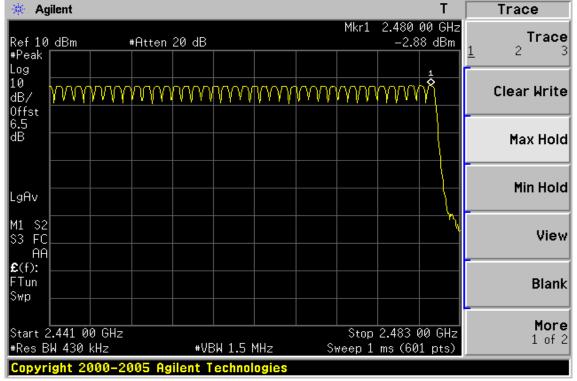

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 45 of 53

# **12. TIME OF OCCUPANCY (DWELL TIME)**

## 12.1. Standard Applicable

According to \$15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

## 12.2. Measurement Equipment Used:

Refer to section 6.2 for details.

## 12.3. Test Set-up:

Refer to section 6.3 for details.

## **12.4. Measurement Procedure:**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span = 0Hz,  $Adjust Sweep = 2 \sim 7ms$ .
- 5. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 46 of 53

## 12.5. Measurement Result

A period time = $0.4 \text{ (ms)} * 79 = 31.6 \text{ (s)}$						
CH Low	DH1 time slot $=$	0.377 (ms) * (1600/2/79)	* 31.6 =	120.64 (ms)		
	DH3 time slot =	1.625 (ms) * (1600/4/79)	* 31.6 =	260.00 (ms)		
	DH5 time slot $=$	2.870 (ms) * (1600/6/79)	* 31.6 =	306.13 (ms)		
CH Mid	DH1 time slot $=$	0.373 (ms) * (1600/2/79)	* 31.6 =	119.36 (ms)		
	DH3 time slot $=$	1.633 (ms) * (1600/4/79)	* 31.6 =	261.28 (ms)		
	DH5 time slot $=$	2.883 (ms) * (1600/6/79)	* 31.6 =	307.52 (ms)		
CH High	DH1 time slot $=$	0.373 (ms) * (1600/2/79)	* 31.6 =	119.36 (ms)		
	DH3 time slot $=$	1.625 (ms) * (1600/4/79)	* 31.6 =	260.00 (ms)		
	DH5 time slot $=$	2.883 (ms) * (1600/6/79)	* 31.6 =	307.52 (ms)		

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemni-fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and ebligations cutted the reaccession document contact contact to preduced or expect is full writtent projection of expecting of the Company on wurpatched organities of a stransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




DH1


Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 47 of 53

# CH-Low

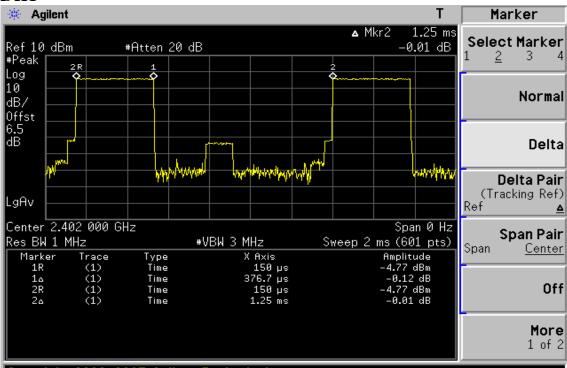





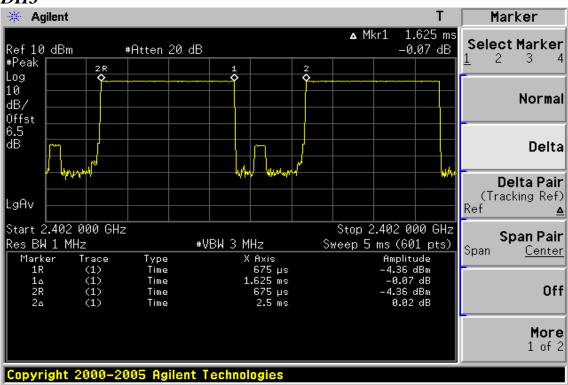


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 48 of 53

#### DH5

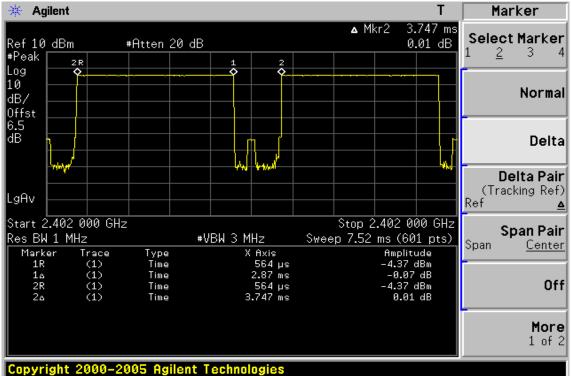

# CH-Mid

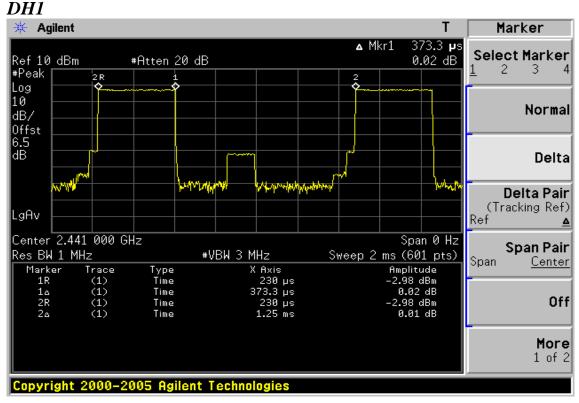


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 49 of 53

#### DH3

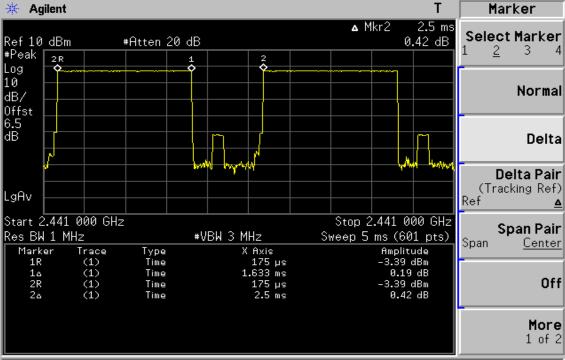

## Copyright 2000-2005 Agilent Technologies

#### DH5

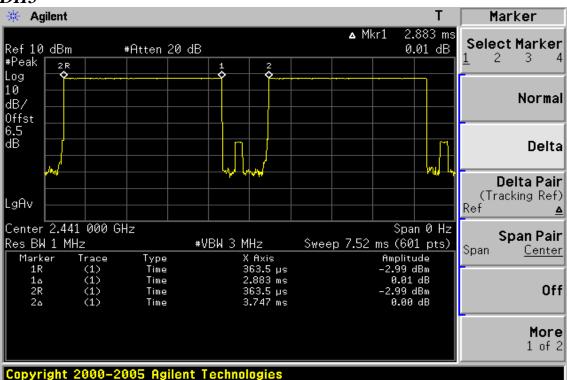


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 50 of 53

CH-High

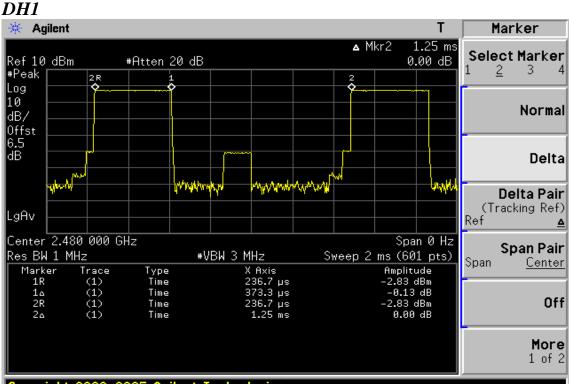





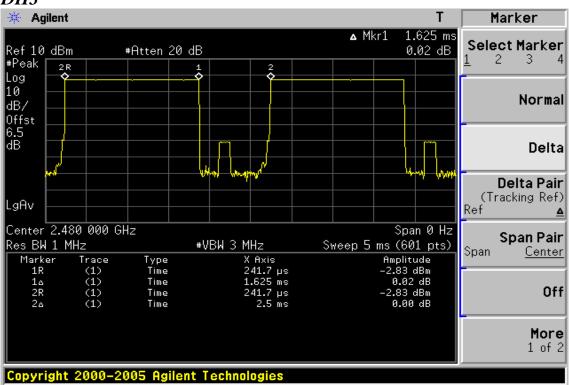


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 51 of 53

DH5

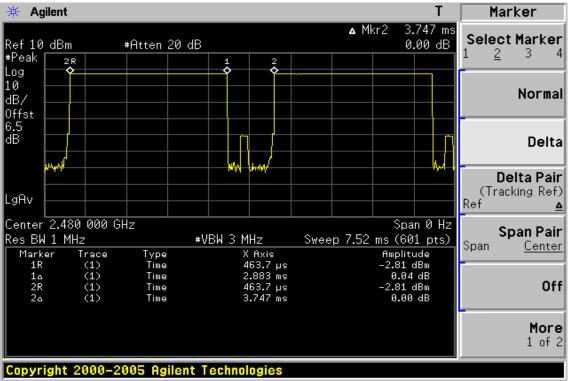

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 52 of 53

# **13. ANTENNA REQUIREMENT**

## 13.1. Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

## 13.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is 2.78 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2011/80005 Issue Date: Aug. 10, 2011 Page: 53 of 53

# **14. RF EXPOSURE**

## 14.1. Standard Applicable

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a portable device.

#### **14.2.** Measurement Result:

This is a portable devi ce and the Max peak outp ut power is -2.59 dBm (0.00055W) lower than low threshold 60/fGHz mW (24.48mW), d<2.5cm in general population category ;

The SAR measurement is not necessary.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。