

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT AND INDUSTRY CANADA RSS 210

0F

Product Name:	Bluetooth Ultra Keyboard for iPad mini
Brand Name:	ORtek
Model No.:	UKB-3060
Model Difference:	N/A
FCC ID:	GM8UKB3060
Report No.:	E2/2013/70024
Issue Date:	Aug. 23, 2013
Prepared for:	ORtek Technology, INC. 13F, Number 150, Jian-Yi Rd., Zhonghe Dist., New Taipei City, Taiwan, R.O.C.
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan 333
TAF Dec-MRA Desting Laboratory 0513	<i>Note:</i> This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



VERIFICATION OF COMPLIANCE

Applicant:	ORtek Technology, INC. 13F, Number 150, Jian-Yi Rd., Zhonghe Dist., New Taipei City, Taiwan, R.O.C.	
Product Name:	Bluetooth Ultra Keyboard for iPad mini	
Brand Name:	ORtek	
Model No.:	UKB-3060	
Model Difference:	N/A	
FCC ID:	GM8UKB3060	
File Number:	E2/2013/70024	
Date of test:	Jul. 31, 2013~Aug. 23, 2013	
Date of EUT Received: Jul. 31, 2013		
We hereby certify that:		

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247. The test results of this report relate only to the tested sample identified in this report.

Test By:	Jazz Huang	Date:	Aug. 23, 2013
Prepared By:	Jazz Huang / Engineer Julia Chang	Date:	Aug. 23, 2013
Approved By:	Julia Chang / Clerk Trun Ch ang	Date:	Aug. 23, 2013

Jim Chang / Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Version

Version No.	Date	Description
E2/2013/70024	Aug. 23, 2013	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that informatic events of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



FCC ID: GM8UKB3060

Table of Contents

1.	GEN	ERAL INFORMATION	7
	1.3.	Test Methodology	
	1.4.	Test Facility	
	1.5.	Special Accessories	
	1.6.	Equipment Modifications	
2.	SYST	FEM TEST CONFIGURATION	9
	2.1.	EUT Configuration	9
	2.2.	EUT Exercise	9
	2.3.	Test Procedure	9
	2.4.	Configuration of Tested System	
3.	SUM	IMARY OF TEST RESULTS	
4.	DES	CRIPTION OF TEST MODES	
5.	MEA	ASUREMENT UNCERTAINTY	
6.	CON	DUCTED EMISSION TEST	
	6.1.	Standard Applicable	14
	6.2.	Measurement Equipment Used:	14
	6.3.	EUT Setup	14
	6.4.	Test SET-UP (Block Diagram of Configuration)	
	6.5.	Measurement Procedure	
	6.6.	Measurement Result	
7.	PEA	K OUTPUT POWER MEASUREMENT	
	7.1.	Standard Applicable	16
	7.2.	Measurement Equipment Used	16
	7.3.	Test Set-up:	16
	7.4.	Measurement Procedure:	
	7.5.	Measurement Result	
8.	20dB	BANDWIDTH	
	8.1.	Standard Applicable	
	8.2.	Measurement Equipment Used	
	8.3.	Test Set-up	21
	8.4.	Measurement Procedure:	21
	8.5.	Measurement Result:	21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



FCC ID: GM8UKB3060

9.	BANI	D EDGES EMISSION MEASUREMENT	
	9.1.	Standard Applicable	24
	9.2.	Measurement Equipment Used	24
	9.3.	Test SET-UP:	25
	9.4.	Measurement Procedure	25
	9.5.	Field Strength Calculation	
	9.6.	Measurement Result -1 Out-Of-Band EMISSION:	
10.	SPUR	NOUS RADIATED EMISSION TEST	
	10.1.	Standard Applicable	31
	10.2.	Measurement Equipment Used:	
	10.3.	Test SET-UP:	
	10.4.	Measurement Procedure:	
	10.5.	Field Strength Calculation	35
	10.6.	Measurement Result:	35
11.	FRE(QUENCY SEPARATION	44
	11.1.	Standard Applicable	
	11.2.	Measurement Equipment Used:	44
	11.3.	Test Set-up:	44
	11.4.	Measurement Procedure:	45
	11.5.	Measurement Result:	45
12.	NUM	BER OF HOPPING FREQUENCY	47
	12.1.	Standard Applicable	47
	12.2.	Measurement Equipment Used:	47
	12.3.	Test Set-up:	
	12.4.	Measurement Procedure:	
	12.5.	Measurement Result:	
13.	TIME	E OF OCCUPANCY (DWELL TIME)	50
	13.1.	Standard Applicable	
	13.2.	Measurement Equipment Used:	
	13.3.	Test Set-up:	
	13.4.	Measurement Procedure:	51
	13.5.	Tabular Result of the Measurement:	
	13.6.	Measurement Result:	53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or apperson of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



FCC ID: GM8UKB3060

Report No.: E2/2013/70024 Issue Date: Aug. 23, 2013 Page: 6 of 59

14.	ANTE	ENNA REQUIREMENT	59
		Standard Applicable	
	14.2.	Antenna Connected Construction	59
15.	RF EX	XPOSURE	59
		Standard Applicable	
		Measurement Result:	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or apperson of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



GENERAL INFORMATION 1.

1.1. Product description

General:

Product Name:	Bluetooth Ultra Keyboard for iPad mini	
Brand Name:	ORtek	
Model No.:	UKB-3060	
Model Difference:	N/A	
Hardware Version:	Keyboard:1.1	
Software Version:	Keyboard:1.0	
Data Cable:	Model No.: N/A, Supplier: N/A	
Power Supply:	3.7Vdc from re-chargeable battery	

Bluetooth:

Bluetooth Version:	V3.0
Channel number:	79 channels
Modulation type:	Frequency Hopping Spread Spectrum
Transmit Power:	-3.859dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	<= 0.4s
Antenna Designation:	PIFA Antenna, 2.78dBi

The report applied for Bluetooth.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID**: <u>GM8UKB3060</u> filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with FCC part 15; Subpart B is authorized under Doc procedure.

1.3. Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4:2009. Radiated testing was performed at an antenna to EUT distance 3 meters. Tested in accordance with FCC Public Notice DA 00-705 – Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan 333which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009. FCC Registration Number is: 990257. Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

1.5. Special Accessories

There is no special accessory used while test was conducted.

1.6. Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna according to the requirements in Section 8 and 13 and of ANSI C63.4:2009 and DA 00-705.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



2.4. Configuration of Tested System

Fig. 2-1 Radiated Emission and AC Power Line Conducted Emission



Remote Side



Table 2-1 Equipment Used in Tested System

Ite m	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	BT Software	Broadcom	BlueTool	N/A	N/A	N/A
2.	Bluetooth Test Set	Anritsu	MT8852B	6k00006107	N/A	N/A
3.	DC Power Supply	HP	E3640A	KR93300208	shielding	Un-shielding
4.	Notebook	Lenovo	L420	7829A54	shielding	Un-shielding

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(d)	100 kHz Bandwidth Of Frequency Band Edges	Compliant
\$15.247(d) \$15.209(a) (f)	Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.203	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that informatic events of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel Low, Mid and High with highest rated data rate were chosen as worst case for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth Transmitter for channel Low, Mid and High the worst case E2 position was reported.

Channel Low: channel 1 at 2402MHz Channel Mid: channel 39 at 2441MHz Channel High: channel 78 at 2480MHz

Emission carried out by BR is chosen as the most representative measurement to perform measurement of radiated spurious emission pursuant to Part 15C.Modulation, BR, is selected to be performed for 100 kHz Bandwidth Band Edge, Conducted Spurious Emission, Frequency Separation, Number of hopping frequency due to its characteristics of wider bandwidth.

Data type being used to conduct the measurement: DH1/DH3/DH5 (GFSK) with 1Mbps

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



5. **MEASUREMENT UNCERTAINTY**

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 1.55 dB
20dB Bandwidth	+/- 123.36 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 1.55 dB
Frequency Separation	+/- 123.36 Hz
Number of hopping frequency	+/- 123.36 Hz
Time of Occupancy	+/- 123.36 Hz
Temperature	+/- 0.8 °C
Humidity	+/- 4.7 %
DC / AC Power Source	DC= +/- 1%, AC= +/- 0.2%

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB			
	180MHz -417MHz: +/- 3.19dB			
Measurement uncertainty (Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB			
	1GHz - 18GHz: +/- 4.04dB			
	18GHz - 40GHz: +/- 4.04dB			

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the

95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that informatic extent of the Law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6. CONDUCTED EMISSION TEST

6.1. Standard Applicable

According to §15.207, frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

	Limits			
Frequency range	dB(uV)			
MHz	Quasi-peak Average			
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2. Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Spectrum Analyzer	Agilent	N9010A	MY51440121	02/13/2012	02/12/2014			
Power Meter	Anritsu	ML2496A	1326001	06/28/2013	06/27/2014			
Power Sensor	Anritsu	MA2411B	917032	02/08/2012	02/07/2014			
DC Power Supply	HOLA	DP-3003	001	N.C.R.	N.C.R.			
Coaxial Cable	WOKEN	conducted #2	001	12/21/2012	12/20/2013			
DC Block	Mini-Circuits	BLK-18-S+	002	12/21/2012	12/20/2013			
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412-01 8	12/21/2012	12/20/2013			
Attenuator	Mini-Circuits	BW-S10W2+	002	12/21/2012	12/20/2013			
Temperature Chamber	TERCHY	MHK-120LK	1020582	06/20/2013	06/19/2014			

6.3. EUT Setup


1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4:2009.

2.The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.

3. The LISN was connected with 120Vac/60Hz power source.



6.4. Test SET-UP (Block Diagram of Configuration)

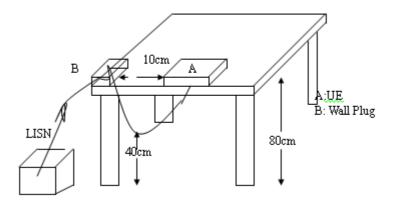

6.5. Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6. Measurement Result

N/A, the device is powered by battery.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7. PEAK OUTPUT POWER MEASUREMENT


7.1. Standard Applicable

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 - 2483.5MHz band: The Limit: 0.125 Watts.

7.2. Measurement Equipment Used

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Spectrum Analyzer	Agilent	N9010A	MY51440121	02/13/2012	02/12/2014			
Power Meter	Anritsu	ML2496A	1326001	06/28/2013	06/27/2014			
Power Sensor	Anritsu	MA2411B	917032	02/08/2012	02/07/2014			
DC Power Supply	HOLA	DP-3003	001	N.C.R.	N.C.R.			
Coaxial Cable	WOKEN	conducted #2	001	12/21/2012	12/20/2013			
DC Block	Mini-Circuits	BLK-18-S+	002	12/21/2012	12/20/2013			
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412-01 8	12/21/2012	12/20/2013			
Attenuator	Mini-Circuits	BW-S10W2+	002	12/21/2012	12/20/2013			
Temperature Chamber	TERCHY	MHK-120LK	1020582	06/20/2013	06/19/2014			

7.3. Test Set-up:

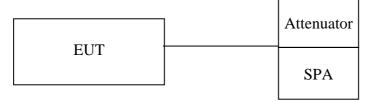

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gines of the model of the data summarian to construct the provide the data summer of t tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 3. Record the max. reading.
- 4. Repeat above procedures until all default test channel is completed.

NOTE: cable loss as 5.2dB that offsets in the spectrum

7.5. Measurement Result

BR mode

Frequency (MHz)	Reading Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	-3.859	-3.859	0.00041	1
2441.00	-4.715	-4.715	0.00034	1
2480.00	-5.547	-5.547	0.00028	1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gines of the model of the data summarian to construct the provide the data summer of t tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Peak Power Output Data Plot (CH Low) (BR mode)



Peak Power Output Data Plot (CH Mid) (BR mode)

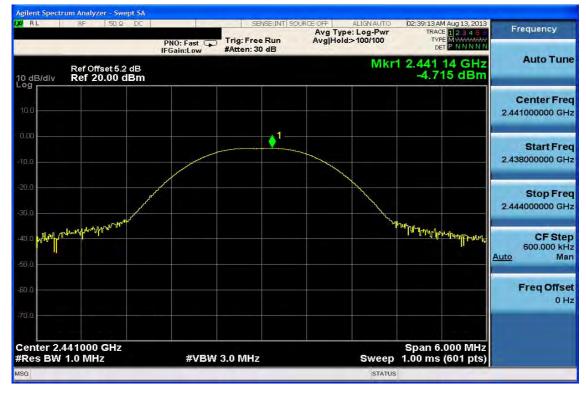

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Peak Power Output Data Plot (CH High) (BR mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 GS Taiwan Ltd.



8. 20dB BANDWIDTH

8.1. Standard Applicable

For 20dB Bandwidth

According to §15.247(a)(1) for frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

8.2. Measurement Equipment Used


Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.	CAL DUE.			
Spectrum Analyzer	Agilent	N9010A	MY51440121	02/13/2012	02/12/2014			
Power Meter	Anritsu	ML2496A	1326001	06/28/2013	06/27/2014			
Power Sensor	Anritsu	MA2411B	917032	02/08/2012	02/07/2014			
DC Power Supply	HOLA	DP-3003	001	N.C.R.	N.C.R.			
Coaxial Cable	WOKEN	conducted #2	001	12/21/2012	12/20/2013			
DC Block	Mini-Circuits	BLK-18-S+	002	12/21/2012	12/20/2013			
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412-01 8	12/21/2012	12/20/2013			
Attenuator	Mini-Circuits	BW-S10W2+	002	12/21/2012	12/20/2013			
Temperature Chamber	TERCHY	MHK-120LK	1020582	06/20/2013	06/19/2014			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



8.3. Test Set-up

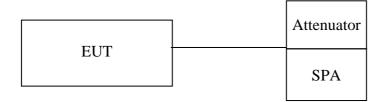

8.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 4. Mark the peak frequency and -20dB (upper and lower) frequency a
- 5. Repeat above procedures until all test default channel is completed

NOTE: cable loss as 5.2dB that offsets in the spectrum

8.5. Measurement Result:

20dB Bandwidth:

1M BR mode:

СН	Bandwidth
	(MHz)
Low	0.9363
Mid	0.9322
High	0.9229

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gines of the model of the data summarian to construct the provide the data summer of t tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is arrawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



20dB Band Width Test Data CH-Low (BR mode)



20dB Band Width Test Data CH-Mid (BR mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



20dB Width Test Data CH-High (BR mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 GS Taiwan Ltd.



9. BAND EDGES EMISSION MEASUREMENT

9.1. Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2. Measurement Equipment Used

9.2.1. Conducted Emission at antenna port:

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	N9010A	MY51440121	02/13/2012	02/12/2014			
Power Meter	Anritsu	ML2496A	1326001	06/28/2013	06/27/2014			
Power Sensor	Anritsu	MA2411B	917032	02/08/2012	02/07/2014			
DC Power Supply	HOLA	DP-3003	001	N.C.R.	N.C.R.			
Coaxial Cable	WOKEN	conducted #2	001	12/21/2012	12/20/2013			
DC Block	Mini-Circuits	BLK-18-S+	002	12/21/2012	12/20/2013			
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412-01 8	12/21/2012	12/20/2013			
Attenuator	Mini-Circuits	BW-S10W2+	002	12/21/2012	12/20/2013			
Temperature Chamber	TERCHY	MHK-120LK	1020582	06/20/2013	06/19/2014			


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9.3. Test SET-UP:

9.3.1. Conducted Emission at antenna port:



9.4. Measurement Procedure

100 kHz BANDWIDTH OF BAND EDGES:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=300 kHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.

Out-Of-Band EMISSION

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. Set RBW = 100K & VBW = 300K on Spectrum.
- 3. Sweep the frequency to determine spurious emission as seen on spectrum from span of 30MHz to 3G, 3G to 8G, 8G to 13G, 13G to 18G and 18G to 26.5GHz
- 4. Via Software, combine 5 spans of frequency range into two plots containing the range of 30MHz to 3GHz, and 3GHz to 26.5GHz.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



9.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.6. Measurement Result -1 Out-Of-Band EMISSION:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

NOTE: cable loss as 5.2dB that offsets in the spectrum

NOTE: the occurrence of the spike on the conducted emission is the signal of the fundamental emission.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有说明,此報告結果僅對測試之樣品負責,「同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unavful and offenders may be prosecuted to the fullest extent of the law.



9.7 Measurement Result -1 Conducted Spurious Emission Measurement Result (BR mode) Ch Low 30MHz – 3GHz

RL RF 50Ω DC	PNO: Fast G			ALIGNAUTO Type: Log-Pwr fold:>100/100	TRACI	1 Aug 13, 2013 1 2 3 4 5 5 E M WWWWWW T P N N N N N	Frequency
Ref Offset 5.2 dB dB/div Ref 20.00 dBm	IFGain:Low	#Atten: 30 dB		Mkr	1 2.401		Auto Tune
9					1		Center Fre 1.515000000 GH
						-24.16 dBm	Start Fre 30.000000 MH
]]]	erten wurdtestenster of na	and a second second second second	ant for the second state of the	_ส ารให้การกิจสารสารสารสารสาร	And the second	noone, , ,	Stop Fre 3.000000000 GH
art 30 MHz es BW 100 kHz	#VBW	300 kHz		Sweep	Stop 3. 284 ms	000 GHz (601 pts)	CF Ste
	1 05 GHz	∨ -4.012 dBm	FUNCTION	FUNCTION WIDTH	FUNCTIO	N VALUE	<u>Auto</u> Ma
							Freq Offs 01
				STATUS			

Ch Low 3GHz – 26.5GHz

RL	RF 50 Ω	DC	SENSE;INT	SOURCE OFF	ALIGN AUTO	03:14:31 AM Aug 13, 2013	Frequency
		PNO: Fast (IFGain:Low	Trig: Free Run #Atten: 30 dB		Type: Log-Pwr Hold: 14/100	TRACE 1 2 3 4 5 5 TYPE M WWWWW DET P N N N N N	
dB/div g	Ref Offset 5.2 Ref 20.00 d				N	kr1 26.11 GHz -46.972 dBm	Auto Tune
9 .0 10 .0							Center Freq 14.750000000 GHz
.0 .0 .0						-24.16 dem	Start Freq 3.000000000 GHz
.0 <mark>.0 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - </mark>	Artolan Calledon Calledon	Anton and the second live	en the fact the and free of	ĸĨŊĨġſĨĿĔĸĊĬĊĬĊĸĊĸĊĬ		and rain a port more all with	Stop Freq 26.50000000 GHz
art 3.00 les BW	GHz 100 kHz	#VB	W 300 kHz		Swee	Stop 26.50 GHz p 2.25 s (601 pts)	CF Step 2.35000000 GHz
R MODE T		× 26.11 GHz	Y -46.972 dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	<u>Auto</u> Man
							Freq Offset 0 Hz
1							


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Ch Mid 30MHz – 3GHz

RL	RF	50 Q DC		SENSE:IN	IT SOURCE OFF	ALIGNAUTO	03:15:43 AM Aug 13, 2013	Parameters	
			PNO: Fast G	Trig: Free Run #Atten: 30 dB		Type: Log-Pwr Hold:>100/100	TRACE 12345 TYPE MWWWWWW DET PNNNN	Frequency Auto Tune	
0 dB/div		set 5.2 dB .00 dBm		Mkr1 2.440 65 GHz -5.079 dBm					
0.0 10.0 10.0							¢ ¹	Center Freq 1.515000000 GHz	
20.0 80.0 40.0							-25.08 dBm	Start Freq 30.000000 MHz	
50.0 60.0 70.0	haller to be defined to the second	LAND BILLING - MAR	mandupantipat	proved at the second		to performent	where an and a superior	Stop Freq 3.000000000 GHz	
tart 30 M Res BW	MHz 100 kHz	2	#VBV	V 300 kHz		Sweep	Stop 3.000 GHz 284 ms (601 pts)		
	RC SCL	× 2.4	40 65 GHz	∀ -5.079 dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	Auto Man	
23456								Freq Offset 0 Hz	
7 8 9 10 11 12									
SG						STATUS			

Ch Mid 3GHz – 26.5GHz

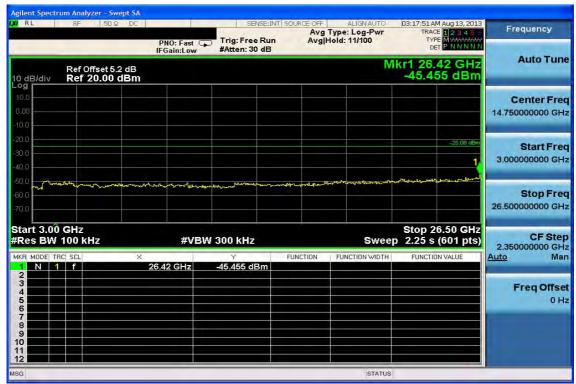

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Ch High 30MHz – 3GHz

Agilent Spectrum Analyzer - Swept SA						
IXI RL RF 50Ω DC				ALIGNAUTO	03:18:59 AM Aug 13, 2013 TRACE 1 2 3 4 5	Frequency
	PNO: Fast 😱 IFGain:Low	Trig: Free Run #Atten: 30 dB	Avg H	old:>100/100		
Ref Offset 5.2 dB 10 dB/div Ref 20.00 dBm				Mkr	2.480 25 GHz -5.926 dBm	Auto Tune
10.0 0.00 -10.0					¢ ¹	Center Fred 1.515000000 GHz
-20.0					-25,93 dBm	Start Free 30.000000 MH:
-50.0 -80.0	n thank and a stand of the stan	n er manel an sine fall he	analatar an takala		under and the second	Stop Free 3.000000000 GHz
Start 30 MHz #Res BW 100 kHz	#VBW	300 kHz		Sweep	Stop 3.000 GHz 284 ms (601 pts)	
	80 25 GHz	Y -5.926 dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	<u>Auto</u> Mar
2 3 4 5 6						Freq Offse 0 Hz
7 8 9 10 11 12 12 12 12 12 12 12 12 12						
MSG				STATUS		

Ch High 3GHz - 26.5GHz

Frequency	03:20:01 AM Aug 13, 2013 TRACE 1 2 3 4 5 5 TYPE M WWWWWW	ALIGNAUTO ype: Log-Pwr old: 13/100		SENSE:IN	PNO: Fast C	50 Ω DC	RF	
Auto Tuno	r1 24.11 GHz -47.478 dBm			#Atten: 30 dB	IFGain:Low	et 5.2 dB .00 dBm		ldiv
Center Free 14.750000000 GH								
Start Free 3.000000000 GH	-25.93 dBm							
Stop Free 26.500000000 GH	man paper and a function of the second	موجه مربع مربع معرف المربع معرف المربع مربع مربع مربع مربع مربع مربع مربع	and the state of t	www.maser Whorestow waterday	ngantantantanta	لورداليمور والمريان	ndo-later and a	n n n
CF Step 2.350000000 GH	Stop 26.50 GHz 2.25 s (601 pts)	Sweep		300 kHz	#VBI		GHz 100 kHz	3.00 BW
<u>Auto</u> Mar	FUNCTION VALUE	FUNCTION WIDTH	FUNCTION	⊻ -47.478 dBm	24.11 GHz	×	C SCL	ODE TR
Freq Offse 0 H								

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



9.7 Measurement Result -2 100 kHz BANDWIDTH OF BAND EDGE: Band Edges Test Data CH-Low (BR mode)

	Offset 5.2 dB					DE	PNNNN	4
	f 20.00 dBm				Mkr	1 2.406	00 GHz 62 dBm	Auto Tui
								Center Fro 2,360000000 Gi
						^ ² ∧	-23.86 dBm	Start Fre 2.310000000 GI
	ᡣ᠆᠊᠊᠊ᡧᠬᡄᡒᡀᡗ᠆᠂ᢣ᠆ᡮ᠆᠆᠆᠆᠆᠆᠆	nhour mana		n Aan ha		an an an an and a second and		Stop Fro 2.410000000 Gi
t 2.31000 s BW 100		#VB\	N 300 kHz			Stop 2.41 9.56 ms	1000 GHz (601 pts)	CF Ste 10.000000 MI
MODE TRC SCL	×	11	Y	FUNCTION	FUNCTION WIDTH	FUNCTIO	IN VALUE	Auto M
N 1 f		06 00 GHz	-3.862 dBm					
N 1 f N 1 f		90 00 GHz 99 00 GHz	-53.611 dBm -54.255 dBm					Freq Offs

Band Edges Test Data CH-High

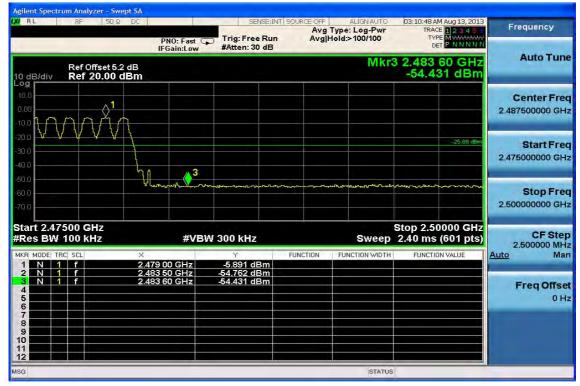

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2013/70024 Issue Date: Aug. 23, 2013 Page: 31 of 59

10. SPURIOUS RADIATED EMISSION TEST

10.1. Standard Applicable

According to §15.247(d),

Emission at antenna port:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Radiated Spurious Emission

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.2. Measurement Equipment Used:

10.2.1. Radiated emission:

SGS SAC Chamber No.C								
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due			
EMI Test Receiver	R&S	ESU 40	100363	01/30/2013	01/29/2014			
Broadband Antenna	TESEQ	CBL 6112D	35240	02/04/2013	02/03/2014			
Horn Antenna	ETS-Lindgren	3117	00143272	01/16/2013	01/15/2014			
Horn Antenna	ETS-Lindgren	3160-09	00117911	02/14/2013	02/13/2014			
Pre-Amplifier	R&S	SCU-18	10203	01/21/2013	01/20/2014			
Pre-Amplifier	EM Electronics Corp.	EMC330	980096	01/04/2013	01/03/2014			
Pre-Amplifier	EM Electronics Corp.	EMC184045	980135	01/28/2013	01/27/2014			
Coaxial Cable	Huber+Suhner	SAC-C TX-30M-1GHz	TX1	04/22/2013	04/21/2014			
Coaxial Cable	Huber+Suhner	SAC-C TX-1-26.5GHz	TX2	04/22/2013	04/21/2014			
Coaxial Cable	Huber+Suhner	SAC-C RX-150k-30MH z	RX1	04/22/2013	04/21/2014			
Coaxial Cable	Huber+Suhner	SAC-C RX-30M-1GHz	RX2	04/22/2013	04/21/2014			
Coaxial Cable	Huber+Suhner	SAC-C RX-1-26.5GHz	RX3	04/22/2013	04/21/2014			
Controller	Chance Most	886	N/A	N.C.R.	N.C.R.			
Antenna Master	Chance Most	N/A	N/A	N.C.R.	N.C.R.			
Turn Table	Chance Most	N/A	N/A	N.C.R.	N.C.R.			
Filter Bank	R&S	TS8996	SCIN.EMC.1023.12	04/22/2013	04/21/2014			
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.			

NOTE: N.C.R refers to Not Calibrated Required.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




10.3. Test SET-UP:

10.3.1. Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

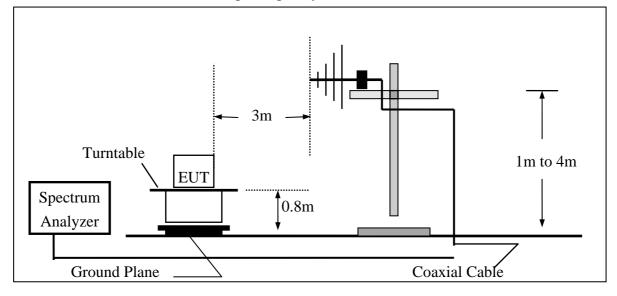

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

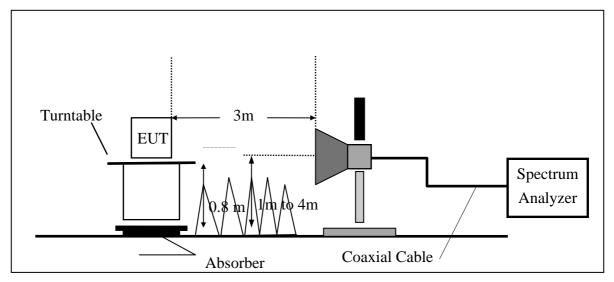

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 GS Taiwan Ltd.



10.4. Measurement Procedure:

Radiated Emission:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency of the interest measured were complete.

Auxiliary Procedure (Setting on Spectrum to capture the reading of emission level):

Span = wide enough to fully capture the emission being measured RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz VBW \ge RBW Sweep = auto Detector function = peak Trace = max hold

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Remark:

- 1. The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)
- 2. Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) Pre Amplifier Gain(dB)

10.6. Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Note: For the tabular table as presents below, "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. "E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10.6.1 Radiated Emission - Band Edge: (BR mode) **Operation Band** :BR Test Date :2013-08-09 Fundamental Frequency :2402 MHz Temp./Humi. :27deg_C/52RH **Operation Mode** :Bandedge LOW Engineer :Vito Measurement Antenna Pol. EUT Pol. :E2 Plan :VERTICAL Detector Spectrum Actual Limit Margin Freq. Note Factor Reading Level FS Mode @3m dBµV dBµV/m dBµV/m MHz F/H/E/S PK/QP/AV dB dB 2390 56.84 -5.06 51.78 74.00 -22.22 Ε Peak 2390 Е Average 40.98 -5.06 35.92 54.00 -18.08 **Operation Band** :BR Test Date :2013-08-09 **Fundamental Frequency** :2402 MHz Temp./Humi. :27deg_C/52RH **Operation Mode** :Bandedge LOW Engineer :Vito EUT Pol. :E2 Plan Measurement Antenna Pol. :HORIZONTAL ът

	Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin	
			Mode	Reading Level		FS	@3m		
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
	2390	Е	Peak	55.92	-5.06	50.86	74.00	-23.14	
	2390	Е	Average	40.95	-5.06	35.89	54.00	-18.11	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is arrawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2013/70024 Issue Date: Aug. 23, 2013 Page: 37 of 59

Operation Ba Fundamental Operation M EUT Pol.	l Frequency	:BR :2480 MHz :Bandedge I :E2 Plan		Test Date Temp./Humi. Engineer Measurement A	ntenna Pol.	:2013-08-09 :27deg_C/52 :Vito :VERTICAL	
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Lev	vel	FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.5	Е	Peak	59.57	-4.76	54.81	74.00	-19.19
2483.5	E	Average	48.53	-4.76	43.77	54.00	-10.23
Operation Ba Fundamental Operation M EUT Pol.	I Frequency	:BR :2480 MHz :Bandedge I :E2 Plan		Test Date Temp./Humi. Engineer Measurement A	ntenna Pol.	:2013-08-09 :27deg_C/52 :Vito :HORIZONT	
Freq.	Note	Detector Mode	Spectrum Reading Lev		Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.5	Е	Peak	58.32	-4.76	53.56	74.00	-20.44
2483.5	Е	Average	52.09	-4.76	47.33	54.00	-6.67



	-		leasurement Res		ode)		
Operation Ba Fundamental		:BR :2402 MHz	z Test Date Temp./Humi.			:2013-08-12 : 27deg_C/52RH	
Operation Mo	1 2	:TX LOW		gineer		:Vito	
EUT Pol.		:E2 Plan		•	Antenna Pol.	:VERTICAL	4
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
41.64	S	Peak	52.80	-22.28	30.52	40.00	-9.48
95.96	S	Peak	51.68	-23.80	27.89	43.50	-15.61
143.49	S	Peak	52.96	-22.29	30.66	43.50	-12.84
167.74	S	Peak	47.59	-23.57	24.02	43.50	-19.48
191.99	S	Peak	50.61	-24.06	26.55	43.50	-16.95
263.77	S	Peak	42.39	-19.33	23.06	46.00	-22.94
3195.00	S	Peak	48.80	-2.87	45.94	74.00	-28.06
3195.00	S	Average	30.05	-2.87	27.18	54.00	-26.82
4804.00	Н	Peak	56.14	0.37	56.52	74.00	-17.48
4804.00	Н	Average	48.74	0.37	49.11	54.00	-4.89
7206.00	Н	Peak	55.37	4.69	60.06	74.00	-13.94
7206.00	Н	Average	48.03	4.69	52.72	54.00	-1.28
9608.00	Н	Peak	32.57	7.11	39.68	74.00	-34.32
9608.00	Н	Average	37.71	7.11	44.82	54.00	-9.18
12010.00	Н	Peak	30.61	10.84	41.45	74.00	-32.55
12010.00	Н	Average	33.36	10.84	44.20	54.00	-9.80
14412.00	Н	Peak					
16814.00	Н	Peak					
19216.00	Н	Peak					
21618.00	Н	Peak					
24020.00	Н	Peak					

10.6.2 Radiated Spurious Emission Measurement Result (RR mode)



Report No.: E2/2013/70024 Issue Date: Aug. 23, 2013 Page: 39 of 59

Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:BR :2402 MHz :TX LOW :E2 Plan	Test Date Temp./Humi. Engineer Measurement Antenna Pol.			:2013-08-12 : 27deg_C/52RH :Vito :HORIZONTAL	
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
95.96	S	Peak	47.04	-23.80	23.24	43.50	-20.26
143.49	S	Peak	59.33	-22.29	37.04	43.50	-6.46
191.99	S	Peak	53.74	-24.06	29.68	43.50	-13.82
239.52	S	Peak	51.20	-21.66	29.55	46.00	-16.45
263.77	S	Peak	53.36	-19.33	34.03	46.00	-11.97
312.27	S	Peak	50.20	-18.62	31.58	46.00	-14.42
4804.00	Н	Peak	51.95	0.37	52.32	74.00	-21.68
4804.00	Н	Average	46.61	0.37	46.98	54.00	-7.02
7206.00	Н	Peak	57.70	4.69	62.39	74.00	-11.61
7206.00	Н	Average	49.20	4.69	53.89	54.00	-0.11
9608.00	Н	Peak	28.03	7.12	35.15	74.00	-38.85
9608.00	Н	Average	29.01	7.12	36.13	54.00	-17.87
12010.00	Н	Peak	32.59	10.84	43.43	74.00	-30.57
12010.00	Н	Average	37.73	10.84	48.57	54.00	-5.43
14412.00	Н	Peak					
16814.00	Н	Peak					
19216.00	Н	Peak					
21618.00	Н	Peak					
24020.00	Н	Peak					



Report No.: E2/2013/70024 Issue Date: Aug. 23, 2013 Page: 40 of 59

Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:BR :2441 MHz :TX MID :E2 Plan	Ter En	st Date mp./Humi. gineer easurement A	ntenna Pol.	:2013-08-12 : 27deg_C/52 :Vito :VERTICAL	
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
33.96	S	Peak	46.83	-17.87	28.96	40.00	-11.04
41.64	S	Peak	52.68	-22.28	30.40	40.00	-9.60
95.96	S	Peak	50.86	-23.80	27.06	43.50	-16.44
143.49	S	Peak	52.65	-22.29	30.35	43.50	-13.15
191.99	S	Peak	50.85	-24.06	26.79	43.50	-16.71
263.77	S	Peak	42.39	-19.33	23.06	46.00	-22.94
3190.00	S	Peak	48.45	-2.89	45.56	74.00	-28.44
3190.00	S	Average	30.54	-2.89	27.65	54.00	-26.35
4882.00	Н	Peak	50.04	0.41	50.45	74.00	-23.55
4882.00	Н	Average	43.95	0.41	44.36	54.00	-9.64
7323.00	Н	Peak	56.12	4.86	60.98	74.00	-13.02
7323.00	Н	Average	48.93	4.86	53.79	54.00	-0.21
9764.00	Н	Peak	30.68	7.46	38.14	74.00	-35.86
9764.00	Н	Average	35.42	7.46	42.88	54.00	-11.12
12205.00	Н	Peak	27.86	11.39	39.25	74.00	-34.75
12205.00	Н	Average	32.14	11.39	43.53	54.00	-10.47
14646.00	Н	Peak					
17087.00	Н	Peak					
19528.00	Н	Peak					
21969.00	Н	Peak					
24410.00	Н	Peak					



Report No.: E2/2013/70024 Issue Date: Aug. 23, 2013 Page: 41 of 59

Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:BR :2441 MHz :TX MID :E2 Plan	Ter Eng	t Date np./Humi. gineer asurement A	ntenna Pol.	:2013-08-12 : 27deg_C/52 :Vito :HORIZONT	
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
95.96	S	Peak	47.12	-23.80	23.32	43.50	-20.18
143.49	S	Peak	59.58	-22.29	37.29	43.50	-6.21
191.99	S	Peak	53.91	-24.06	29.86	43.50	-13.64
239.52	S	Peak	51.28	-21.66	29.62	46.00	-16.38
263.77	S	Peak	53.39	-19.33	34.06	46.00	-11.94
312.27	S	Peak	50.42	-18.62	31.80	46.00	-14.20
4882.00	Н	Peak	48.41	0.41	48.82	74.00	-25.18
4882.00	Н	Average	40.66	0.41	41.07	54.00	-12.93
7323.00	Н	Peak	56.75	4.86	61.62	74.00	-12.38
7323.00	Н	Average	49.03	4.86	53.89	54.00	-0.11
12205.00	Н	Peak	31.88	11.38	43.26	74.00	-30.74
12205.00	Н	Average	35.76	11.38	47.14	54.00	-6.86
14646.00	Н	Peak					
17087.00	Н	Peak					
19528.00	Н	Peak					
21969.00	Н	Peak					
24410.00	Н	Peak					



Report No.: E2/2013/70024 Issue Date: Aug. 23, 2013 Page: 42 of 59

Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:BR :2480 MHz :TX HIGH :E2 Plan	Ter En	st Date mp./Humi. gineer easurement A	antenna Pol.	:2013-08-12 : 27deg_C/52 :Vito :VERTICAL	2RH
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
33.30	S	Peak	47.35	-17.54	29.81	40.00	-10.19
41.64	S	Peak	52.59	-22.28	30.30	40.00	-9.70
95.96	S	Peak	50.46	-23.80	26.66	43.50	-16.84
139.61	S	Peak	53.40	-22.04	31.36	43.50	-12.14
143.49	S	Peak	52.45	-22.29	30.15	43.50	-13.35
191.99	S	Peak	51.05	-24.06	26.99	43.50	-16.51
4960.00	Н	Peak	49.69	0.61	50.30	74.00	-23.70
4960.00	Н	Average	42.61	0.61	43.22	54.00	-10.78
7440.00	Н	Peak	52.40	5.00	57.40	74.00	-16.60
7440.00	Н	Average	46.11	5.00	51.11	54.00	-2.89
9920.00	Н	Peak	30.16	7.59	37.75	74.00	-36.25
9920.00	Н	Average	35.82	7.59	43.41	54.00	-10.59
12400.00	Н	Peak					
14880.00	Н	Peak					
17360.00	Н	Peak					
19840.00	Н	Peak					
22320.00	Н	Peak					
24800.00	Н	Peak					



Report No.: E2/2013/70024 Issue Date: Aug. 23, 2013 Page: 43 of 59

Operation Ba Fundamental Operation Me EUT Pol.	Frequency	:BR :2480 MHz :TX HIGH :E2 Plan	Ter Eng	st Date np./Humi. gineer easurement A	ntenna Pol.	:2013-08-12 : 27deg_C/52 :Vito :HORIZONT	
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
95.96	S	Peak	46.72	-23.80	22.93	43.50	-20.57
143.49	S	Peak	59.44	-22.29	37.15	43.50	-6.35
191.99	S	Peak	53.65	-24.06	29.59	43.50	-13.91
239.52	S	Peak	51.14	-21.66	29.48	46.00	-16.52
263.77	S	Peak	53.60	-19.33	34.27	46.00	-11.73
312.27	S	Peak	50.37	-18.62	31.76	46.00	-14.24
4960.00	Н	Peak	49.65	0.61	50.26	74.00	-23.74
4960.00	Н	Average	43.31	0.61	43.92	54.00	-10.08
7445.00	Н	Peak	52.90	5.00	57.90	74.00	-16.10
7445.00	Н	Average	45.12	5.00	50.12	54.00	-3.88
9920.00	Н	Peak	29.20	7.59	36.79	74.00	-37.21
9920.00	Н	Average	35.67	7.59	43.26	54.00	-10.74
12400.00	Н	Peak	29.38	11.56	40.94	74.00	-33.06
12400.00	Н	Average	34.30	11.56	45.86	54.00	-8.14
14880.00	Н	Peak					
17360.00	Н	Peak					
19840.00	Н	Peak					
22320.00	Н	Peak					
24800.00	Н	Peak					



11. FREQUENCY SEPARATION


11.1. Standard Applicable

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

11.2. Measurement Equipment Used:

	Conducted Emission Test Site							
EQUIPMENT	MED	MODEL	SERIAL	LAST				
ТҮРЕ	MFR	NUMBER	NUMBER	CAL.	CAL DUE.			
Spectrum Analyzer	Agilent	N9010A	MY51440121	02/13/2012	02/12/2014			
Power Meter	Anritsu	ML2496A	1326001	06/28/2013	06/27/2014			
Power Sensor	Anritsu	MA2411B	917032	02/08/2012	02/07/2014			
DC Power Supply	HOLA	DP-3003	001	N.C.R.	N.C.R.			
Coaxial Cable	WOKEN	conducted #2	001	12/21/2012	12/20/2013			
DC Block	Mini-Circuits	BLK-18-S+	002	12/21/2012	12/20/2013			
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412-01 8	12/21/2012	12/20/2013			
Attenuator	Mini-Circuits	BW-S10W2+	002	12/21/2012	12/20/2013			
Temperature Chamber	TERCHY	MHK-120LK	1020582	06/20/2013	06/19/2014			

11.3. Test Set-up:

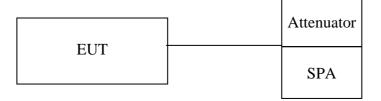

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gines of data and in the data summarian and construction of the data and the dat tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



11.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

11.5. Measurement Result:

Channel separation (MHz)	Limit	Result
1	>=25 kHz or 2/3 times 20dB bandwidth	PASS

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有说明,此報告結果僅對測試之樣品負責,「同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unavful and offenders may be prosecuted to the fullest extent of the law.



Frequency Separation Test Data



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



12. NUMBER OF HOPPING FREQUENCY

12.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

12.2. Measurement Equipment Used:


	Conducted Emission Test Site							
EQUIPMENT	MED	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ	MFR	NUMBER	NUMBER	CAL.	CAL DUE.			
Spectrum Analyzer	Agilent	N9010A	MY51440121	02/13/2012	02/12/2014			
Power Meter	Anritsu	ML2496A	1326001	06/28/2013	06/27/2014			
Power Sensor	Anritsu	MA2411B	917032	02/08/2012	02/07/2014			
DC Power Supply	HOLA	DP-3003	001	N.C.R.	N.C.R.			
Coaxial Cable	WOKEN	conducted #2	001	12/21/2012	12/20/2013			
DC Block	Mini-Circuits	BLK-18-S+	002	12/21/2012	12/20/2013			
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412-01 8	12/21/2012	12/20/2013			
Attenuator	Mini-Circuits	BW-S10W2+	002	12/21/2012	12/20/2013			
Temperature Chamber	TERCHY	MHK-120LK	1020582	06/20/2013	06/19/2014			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



12.3. Test Set-up:



12.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW=430 kHz, VBW=1.5MHz., Detector = Peak
- 5. Max hold, view and count how many channel in the band.

12.5. Measurement Result:

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gness other was stated up to state and was a state of the state of t tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Channel Number

2.4 GHz – 2.441GHz

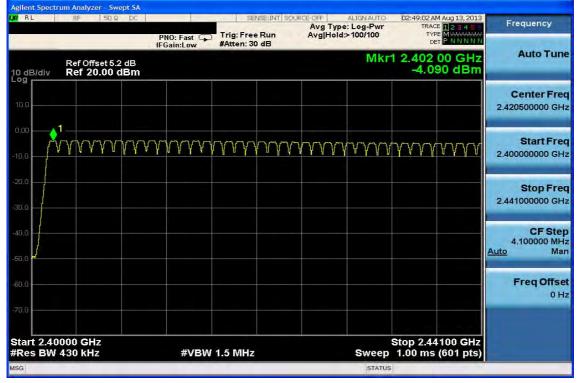

2.441 GHz - 2.4835GHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



13. TIME OF OCCUPANCY (DWELL TIME)

13.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

13.2. Measurement Equipment Used:

	Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.	CAL DUE.			
Spectrum Analyzer	Agilent	N9010A	MY51440121	02/13/2012	02/12/2014			
Power Meter	Anritsu	ML2496A	1326001	06/28/2013	06/27/2014			
Power Sensor	Anritsu	MA2411B	917032	02/08/2012	02/07/2014			
DC Power Supply	HOLA	DP-3003	001	N.C.R.	N.C.R.			
Coaxial Cable	WOKEN	conducted #2	001	12/21/2012	12/20/2013			
DC Block	Mini-Circuits	BLK-18-S+	002	12/21/2012	12/20/2013			
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412-01 8	12/21/2012	12/20/2013			
Attenuator	Mini-Circuits	BW-S10W2+	002	12/21/2012	12/20/2013			
Temperature Chamber	TERCHY	MHK-120LK	1020582	06/20/2013	06/19/2014			

13.3. Test Set-up:

	Attenuator
EUT	SPA

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



13.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = 2~7ms.
- 5. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2

DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4

DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



13.5. Tabular Result of the Measurement:

1Mbps (GFSK):

Test Channel:	Mode:	Measurement Result (ms):	Limit (ms):
Low:	DH1	134.40	400ms
	DH3	268.00	400ms
	DH5	311.47	400ms
Middle:	DH1	134.40	400ms
	DH3	268.00	400ms
	DH5	311.47	400ms
High:	DH1	134.40	400ms
	DH3	268.00	400ms
	DH5	311.47	400ms

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



A period time = 0.4 (s) * 79 = 31.6 (s)

1Mbps:

CH Low	DH1 time slot =	0.420 (ms) * (1600/2/79)	* 31.6 =	134.40 (r	ms)
	DH3 time slot =	1.675 (ms) * (1600/4/79)	* 31.6 =	268.00 (r	ms)
	DH5 time slot =	2.920 (ms) * (1600/6/79)	* 31.6 =	311.47 (r	ms)
CH Mid	DH1 time slot =	0.420 (ms) * (1600/2/79)	* 31.6 =	134.40 (r	ms)

DH3 time slot =
$$1.675 \text{ (ms)} * (1600/4/79) * 31.6 = 268.00 \text{ (ms)}$$

DH5 time slot = $2.920 \text{ (ms)} * (1600/6/79) * 31.6 = 311.47 \text{ (ms)}$

CH High DH1 time slot =
$$0.420 \text{ (ms)} * (1600/2/79) * 31.6 = 134.40 \text{ (ms)}$$

DH3 time slot = $1.675 \text{ (ms)} * (1600/4/79) * 31.6 = 268.00 \text{ (ms)}$
DH5 time slot = $2.920 \text{ (ms)} * (1600/6/79) * 31.6 = 311.47 \text{ (ms)}$

13.6. Measurement Result:

Note: Refer to next page for plots.



CH-Low DH1

RL	RF	5	οΩ DC		ast 🔸				ALIGNAUTO e: Log-Pwr	03:31:27 AM TRACE TYPE DET	Aug 13, 2013 1 2 3 4 5 5 WWWWWWWWW P N N N N N P N N N N N	Frequency
dB/div			5.2 dB 0 dBm						Δ	Mkr3 1.2 -0	250 ms .08 dB	Auto Tun
9 .0; .0;	X			{1∆	2				3 ∆4		7	Center Fre 2.402000000 GF
.0												Start Fre 2.402000000 Gi
0 0 0	J			draft.	ally hadre	phone of My	w.hyrphi	helen helen soul	Ŷ		under particite	Stop Fr 2.402000000 G
enter 2.4 s BW 1.			0 GHz		#VBW	3.0 MHz			Sweep 2	Sp 2.000 ms (an 0 Hz 601 pts)	CF Sto 1.000000 M
R MODE TR		(Δ)	×	420.0		Y 0.09 (INCTION FL	INCTION WIDTH	FUNCTION	VALUE	<u>Auto</u> M
F 1	t			170.0	us	-4.10 dE	m					
Δ4 1 F 1	t	(Δ)		1.250 r 170.0		-0.08 d -4.10 dE						Freq Offs 0
		X O										

DH3






DH5

-		RF	5	JΩ DC			_	SE	INSE	INT SOUP		ALIGNAUTO		3 AM Aug 13, 2013 RACE 1 2 3 4 5	E	requency
						IO: Fast + ain:Low	+	Trig: Fre #Atten: 3			Avg	Type: Log-Pwr		TYPE WWWMAAAAA DET P N N N N		
B/div				5.2 dB 0 dBn		diffeet						Δ	Mkr3	3.747 ms -0.05 dB		Auto Tune
X	2							∆ ^{1∆2}		3∆4						Center Fred 2000000 GH:
															2.40	Start Free 2000000 GH:
y.									₽¶*0*						2.40	Stop Free 2000000 GH:
ter 2 BW				GHz		#VB	w :	3.0 MHz				Sweep	7.520 m	Span 0 Hz ns (601 pts)		CF Step
MODE	TRC 1		(<u>A</u>)			20 ms (/	3)	Y 0.02		3	CTION	FUNCTION WIDTH	FUN	TION VALUE	Auto	Mar
F A4 F	1 1 1	t t	(Δ)		3.7	8.1 µs 47 ms (/ 8.1 µs	2)	-3.99 d -0.05 -3.99 d	dB							Freq Offse 0 Ha

CH-Mid

DH1

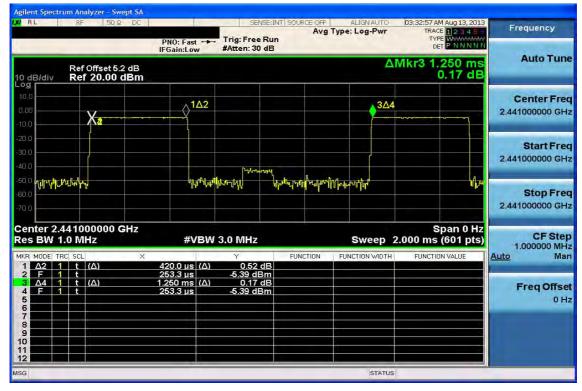




DH3

Frequency	3:36:55 AM Aug 13, 2013 TRACE 1 2 3 4 5 TYPE WWWWWWWW DET P N N N N N		ALIGNA Type: Log-l				PNO: Fast ++	50 Ω DC	F	RI	L
Auto Tune	r3 2.500 ms -0.01 dB	ΔM						t 5.2 dB 00 dBm			3/div
Center Fred 2.441000000 GH:				3∆4		1∆2				Xa	
Start Fred 2.441000000 GH:						њ.m					
Stop Free 2.441000000 GH:	hareford fill				lm yplfron-					11	bogfug19
CF Step 1.000000 MH	Span 0 Hz 00 ms (601 pts)	ep 5.0	Swe			3.0 MHz	#VBW	0 GHz		.4410 1.0 N	
Auto Mar	FUNCTION VALUE	WIDTH	FUNCTION	JNCTION	dB	Y 0.13	1.675 ms (Δ)	X	1	TRC SC	
Freq Offse 0 Ha					dB	-5.01 dE -0.01 -5.01 dE	358.3 μs 2.500 ms (Δ) 358.3 μs		(Δ)	$\frac{1}{1}$ t $\frac{1}{1}$ t	F A4 F
		STATUS									

DH5

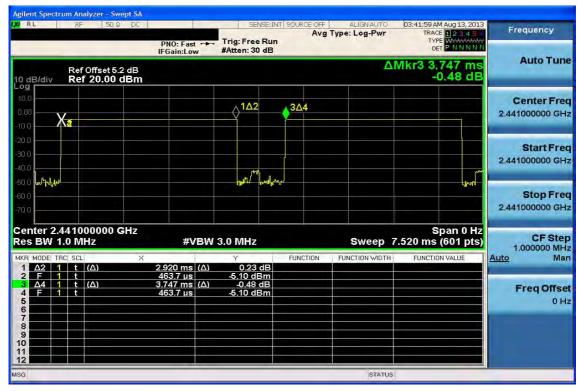




CH-High

DH1

RL RF 50Ω DC		_	SENSE:IN	IT SOURCE OFF	ALIGNAUTO	03:34:10 AM Aug 13, 2013 TRACE 1 2 3 4 5	Frequency	
	PNO: Fast		Trig: Free Run #Atten: 30 dB		Type. Log-Fwi			
Ref Offset 5.2 dB dB/div Ref 20.00 dBm	I SUMES				Δ	Mkr3 1.250 ms 0.01 dB	Auto Tun	
					3∆4		Center Fre 2.480000000 GH	
							Start Fre 2.480000000 GH	
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Jored all a	h-dhal	anghun Apospola	_{/ไ} นในใหญ่งานๆในปัญหา่¶	ban	- horala Her	Stop Fre 2.48000000 GH	
enter 2.480000000 GHz es BW 1.0 MHz	#V	BW :	3.0 MHz		Sweep 2	Span 0 Hz 2.000 ms (601 pts)	CF Ste 1.000000 MI	
R MODE TRC SCL X	420.0 us	700	Y 0.21 dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	Auto M	
	143.3 µs		-5.94 dBm					
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	1.250 ms 143.3 µs	(A)	0.01 dB -5.94 dBm				Freq Offs 01	
					STATUS		je	

DH3

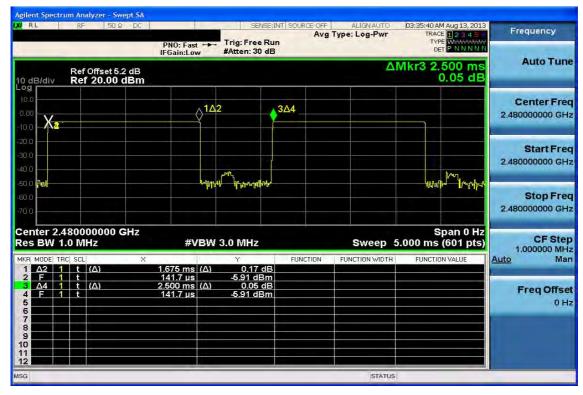



DH5

RL	1	RF	50 Q DC			SEN	SE:INT SO		ALIGNAUTO	03:43:16 AM Au	313,2013	Formation and a
				PNO: Fast IFGain:Lov		Trig: Free #Atten: 30		Avg	Type: Log-Pwr	TRACE	23455 	Frequency
dB/div			Offset 5.2 dB 7 20.00 dBm						Δ	Mkr3 3.74 -0.0	7 ms 2 dB	Auto Tune
	/ \ <mark>4</mark>					1∆2	♦ ^{3∆4}					Center Free 2.480000000 GH
						M					Icr4	Start Free 2.480000000 GH
1.0 k. /4 1.0						- luringi (h.a.ch	ռոյե			la,		Stop Fre 2.480000000 GH
enter : es BW			00000 GHz Hz	#V	BW	3.0 MHz			Sweep 7	Spai .520 ms (60	n 0 Hz 11 pts)	CF Ste
R MODE		t	× (Δ)	2.920 ms	(<u>(</u>)	Y -0.05 (dB	NCTION	FUNCTION WIDTH	FUNCTION VA	LUE	Auto Ma
		t t	(Δ)	238.1 μs 3.747 ms 238.1 μs	(<u>A</u>)	-5.68 dE -0.02 d -5.68 dE	dB					Freq Offse 0 H
-	-	_							W			



14. ANTENNA REQUIREMENT

14.1. Standard Applicable

For intentional device, according to \$15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

14.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is 2.78dBi, and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

15.RF EXPOSURE

15.1 Standard Applicable

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a portable device.

15.2 Measurement Result:

This is a portable device and the Max peak output power is -3.859 dBm (0.00041W) lower than low threshold 60/fGHz mW (24.48mW), d<2.5cm in general population category ;

The SAR measurement is not necessary.

- End of Report -

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.