



The University of Michigan  
Radiation Laboratory  
3228 EECS Building  
Ann Arbor, MI 48109-2122  
Tel: (734) 764-0500  
Fax: (734) 647-2106

Measured Radio Frequency Emissions  
From

**TRW Inc. Transceiver**  
**FCC ID: GQ4-55T**  
**IC: 1470A-36T**

Test Report No. 417124-629  
May 15, 2012


Copyright © 2012

For:  
TRW Inc.  
24175 Research Drive  
Farmington Hills, MI 48335-2642  
Contact: Jeff Rochette  
jeffrochette@trw.com  
Phone: (248) 699-4235  
Fax: (248) 699-4241

Measurements made by: Valdis V. Liepa

Test report written by: Valdis V. Liepa

Testing supervised by:  
Report Approved by:

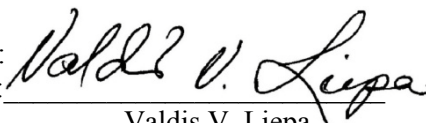  
Valdis V. Liepa

Research Scientist

---

## Summary

Tests for compliance with FCC Regulations, CFR 47, Part 15 and with Industry Canada RSS-210/Gen, were performed on a TRW, FCC ID: GQ4-55T, IC: 1470A-36T. This device under test (DUT) is subject to the rules and regulations as a Transceiver.

In testing completed on February 27, 2012, the DUT tested met the allowed specifications for transmit chain radiated emissions by 34.6 dB. Receiver spurious emissions comply by more than 9.4 dB. AC Mains power conducted emissions are not subject as the DUT is powered by a 12 VDC vehicular system.

## **Table of Contents**

1.	Introduction.....	3
2.	Equipment Used.....	3
3.	Device Under Test .....	4
	3.1 Description & Block Diagram .....	4
	3.2 Samples & Variants .....	4
	3.3 Modes of Operation .....	4
	3.4 Exemptions .....	4
	3.5 EMC Relevant Modifications .....	4
4.	Emissions Limits.....	5
	4.1 Radiated Emissions Limits.....	5
5.	Measurement Procedures .....	6
	5.1 Semi-Anechoic Chamber Radiated Emissions.....	6
	5.2 Outdoor Radiated Emissions.....	6
	5.3 Radiated Field Computations.....	6
	5.4 Indoor Power Line Conducted Emissions.....	6
	5.5 Supply Voltage Variation.....	7
6.	Test Results.....	7
	6.1 Radiated Emissions.....	7
	6.1.1 Correction for Pulse Operation .....	7
	6.1.2 Emission Spectrum .....	7
	6.1.3 Emission Bandwidth .....	7
	6.1.4 Supply Voltage and Supply Voltage Variation.....	7
	6.2 Conducted Emissions.....	7

## 1. Introduction

This TRW Transceiver was tested for compliance with FCC Regulations, Part 15, adopted under Docket 87-389, April 18, 1989 as subsequently amended, and with Industry Canada RSS-210/Gen, Issue 8. Tests were performed at the University of Michigan Radiation Laboratory Willow Run Test Range following the procedures described in ANSI C63.4-2003 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The Site description and attenuation characteristics of the Open Site facility are on file with FCC Laboratory, Columbia, Maryland (FCC Reg. No: 91050) and with Industry Canada, Ottawa, ON (File Ref. No: IC 2057A-1).

## 2. Equipment Used

The test equipment commonly used in our facility is listed in Table 2.1. Except where indicated as a pre-test, monitoring, or support device; all equipment listed below is a part of the University of Michigan Radiation Laboratory (UMRL) quality system. This quality system has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to national standards.

**Table 2.1 Test Equipment.**

Test Instrument	Used	Manufacturer/Model	Q Number
Spectrum Analyzer (9kHz-26GHz)	<input checked="" type="checkbox"/>	Hewlett-Packard 8593E, SN: 3412A01131	HP8593E1
Spectrum Analyzer (9kHz-6.5GHz)	<input checked="" type="checkbox"/>	Hewlett-Packard 8595E, SN: 3543A01546	JDB8595E
Power Meter	<input type="checkbox"/>	Hewlett-Packard, 432A	HP432A1
Harmonic Mixer (26-40 GHz)	<input type="checkbox"/>	Hewlett-Packard 11970A, SN: 3003A08327	HP11970A1
Harmonic Mixer (40-60 GHz)	<input type="checkbox"/>	Hewlett-Packard 11970U, SN: 2332A00500	HP11970U1
Harmonic Mixer (75-110 GHz)	<input type="checkbox"/>	Hewlett-Packard 11970W, SN: 2521A00179	HP11970W1
Harmonic Mixer (140-220 GHz)	<input type="checkbox"/>	Pacific Millimeter Prod., GMA, SN: 26	PMPGMA1
S-Band Std. Gain Horn	<input type="checkbox"/>	S/A, Model SGH-2.6	SBAND1
C-Band Std. Gain Horn	<input type="checkbox"/>	University of Michigan, NRL design	CBAND1
XN-Band Std. Gain Horn	<input type="checkbox"/>	University of Michigan, NRL design	XNBAND1
X-Band Std. Gain Horn	<input type="checkbox"/>	S/A, Model 12-8.2	XBAND1
X-band horn (8.2- 12.4 GHz)	<input type="checkbox"/>	Narda 640	XBAND2
X-band horn (8.2- 12.4 GHz)	<input type="checkbox"/>	Scientific Atlanta , 12-8.2, SN: 730	XBAND3
K-band horn (18-26.5 GHz)	<input type="checkbox"/>	FXR, Inc., K638KF	KBAND1
Ka-band horn (26.5-40 GHz)	<input type="checkbox"/>	FXR, Inc., U638A	KABAND1
U-band horn (40-60 GHz)	<input type="checkbox"/>	Custom Microwave, HO19	UBAND1
W-band horn(75-110 GHz)	<input type="checkbox"/>	Custom Microwave, HO10	WBAND1
G-band horn (140-220 GHz)	<input type="checkbox"/>	Custom Microwave, HO5R	GBAND1
Bicone Antenna (30-250 MHz)	<input checked="" type="checkbox"/>	University of Michigan, RLBC-1	LBBIC1
Bicone Antenna (200-1000 MHz)	<input checked="" type="checkbox"/>	University of Michigan, RLBC-2	HBBIC1
Dipole Antenna Set (30-1000 MHz)	<input type="checkbox"/>	University of Michigan, RLDP-1,-2,-3	UMDIP1
Dipole Antenna Set (30-1000 MHz)	<input type="checkbox"/>	EMCO 3121C, SN: 992 (Ref. Antennas)	EMDIP1
Active Rod Antenna (30 Hz-50 MHz)	<input type="checkbox"/>	EMCO 3301B, SN: 3223	EMROD1
Active Loop Antenna (30 Hz-50 MHz)	<input checked="" type="checkbox"/>	EMCO 6502, SN:2855	EMLOOP1
Ridge-horn Antenna (300-5000 MHz)	<input checked="" type="checkbox"/>	University of Michigan	UMRH1
Amplifier (5-1000 MHz)	<input checked="" type="checkbox"/>	Avantek, A11-1, A25-1S	AVAMP1
Amplifier (5-4500 MHz)	<input checked="" type="checkbox"/>	Avantek	AVAMP2
Amplifier (4.5-13 GHz)	<input type="checkbox"/>	Avantek, AFT-12665	AVAMP3
Amplifier (6-16 GHz)	<input type="checkbox"/>	Trek	TRAMP1
Amplifier (16-26 GHz)	<input type="checkbox"/>	Avantek	AVAMP4
LISN Box	<input type="checkbox"/>	University of Michigan	UMLISN1
Signal Generator	<input type="checkbox"/>	Hewlett-Packard 8657B	HPSG1

**3. Device Under Test**

**3.1 Description & Block Diagram**

The DUT is a 125 kHz Transmitter with built in 433.9 MHz receiver designed for automotive/vehicular applications, and as such it is powered by a 12 VDC source. The device is housed in a plastic case approximately 10 x 11 x 2 cm in dimension. For testing, a generic harness was provided by the manufacturer. The DUT is designed and manufactured by TRW Automotive, 24175 Research Drive Farmington Hills, MI 48335-2642.

Device	Make	[S/N],P/N	EMC Consideration
DUT	TRW	229145-109	Fully populated with external UHF receive antenna connector
DUT	TRW	229145-110	Fully populated with internal UHF receive antenna.
		229145-103 229145-105 229145-106 229145-107 229145-112 229145-118 229145-119	Variants with digital or software components depopulated

**3.2 Samples & Variants**

There were two samples of the DUT provided for testing, one Part Number 229145-109 which was fully populated with external UHF receive antenna connector and one Part Number 229145-110 which was fully populated with an internal UHF receive antenna. An additional 8 variants (listed above) fall under this certification, where each variant has a either a digital component depopulated or a software variation not related to the LF/RF portion of the product. The two worst-case variants are tested herein.

**3.3 Modes of Operation**

The DUT is capable of two modes of operation, as a 125 kHz LF transmitter and as a 433.9 MHz UHF receiver.

**3.4 Exemptions**

The DUT is permanently installed in a transportation vehicle. As such, digital emissions are exempt (per FCC 15.103(a) and IC correspondence on ICES-003) from regulation.

**3.5 EMC Relevant Modifications**

No EMI Relevant Modifications were performed by this test laboratory.

#### 4. Emissions Limits

##### 4.1 Radiated Emissions Limits

The DUT tested falls under the category of an Intentional Radiator. The applicable testing frequencies and corresponding emission limits set by both the FCC and IC are given in Tables 4.1 and 4.2 below.

**Table 4.1. Transmitter Radiated Emission Limits (FCC: 15.205, 15.35; IC: RSS-210, 2.6 Tab. 1,3)**

Frequency (MHz)		Fundamental and Spurious* ( $\mu\text{V/m}$ )
0.009-0.490		2400/F(kHz), 300m
0.490-1.705		24,000/F(kHz), 30m
0.090-0.110	8.291-8.294	Restricted Bands
0.49-0.51	8.37625 - 8.38675	
2.1735-2.190	8.41425 - 8.41475	
3.020-3.026 (IC)	12.29 - 12.293	
4.125-4.128	12.51975 - 12.52025	
4.17725-4.17775	12.57675 - 12.57725	
4.20725-4.20775	13.36 - 13.41	
5.677-5.683 (IC)	16.42 - 16.423	
6.215-6.218	16.69475 - 16.69525	
6.26775-6.26825	16.80425 - 16.80475	
6.31175-6.31225	25.5 - 25.67	

\* Harmonics must be below the fundamental. To translate measurements to the 300/30 m distance, we refer to the journal paper: "Extrapolating Near-Field Emissions of Low-Frequency Loop Transmitters," J. D. Brunett, V. V. Liepa, D. L. Sengupta, IEEE Trans. EMC, Vol. 47, No. 3, August 2005.

**Table 4.2. Spurious Emission Limits (FCC: 15.33, .35, .109/209; IC: RSS-210 2.7, T2)**

Freq. (MHz)	$E_{\text{lim}}$ (3m) $\mu\text{V/m}$	$E_{\text{lim}}$ dB( $\mu\text{V/m}$ )
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
960-2000	500	54.0

Note: Average readings apply above 1000 MHz (1 MHz BW), Quasi-Peak readings apply to 1000 MHz (120 kHz RBW), PRF of intentional emissions > 20 Hz for QPK to apply.

##### Power Line Conducted Emissions Limits

**Table 4.3 Emission Limits (FCC:15.107 (CISPR); IC: RSS-Gen, 7.2.2 T2).**

Frequency (MHz)	Class A (dB $\mu\text{V}$ )		Class B (dB $\mu\text{V}$ )	
	Quasi-peak	Average	Quasi-peak	Average
.150 - 0.50	79	66	66 - 56*	56 - 46*
0.50 - 5	73	60	56	46
5 - 30	73	60	60	50

Notes:

- The lower limit shall apply at the transition frequency
- The limit decreases linearly with the logarithm of the frequency in the range 0.15-0.50 MHz:  
 \*Class B Quasi-peak:  $\text{dB}\mu\text{V} = 50.25 - 19.12 \cdot \log(f)$   
 \*Class B Average:  $\text{dB}\mu\text{V} = 40.25 - 19.12 \cdot \log(f)$
- 9 kHz RBW

## **5. Measurement Procedures**

### **5.1 Semi-Anechoic Chamber Radiated Emissions**

To become familiar with the radiated emission behavior of the DUT, the device is first studied and measured in our shielded semi-anechoic chamber. In the chamber there is a set-up similar to that of an outdoor 3-meter site, with a turntable, an antenna mast, and a ground plane. Instrumentation includes spectrum analyzers and other equipment as needed.

The DUT is laid on the test table as shown in the included block diagram and/or photographs. A shielded loop antenna is employed when studying emissions from 9 kHz to 30 MHz. Above 30 MHz and below 250 MHz a biconical antenna is employed. Above 250 MHz a ridge or standard gain horn antennas are used. The spectrum analyzer resolution and video bandwidths are set so as to measure the DUT emission without decreasing the emission bandwidth (EBW) of the device. Emissions are studied for all orientations (3-axes) of the DUT and all test antenna polarizations. In the chamber, spectrum and modulation characteristics of intentional carriers are recorded. Receiver spurious emissions are measured with an appropriate carrier signal applied. Associated test data is presented in subsequent sections.

### **5.2 Outdoor Radiated Emissions**

After measurements are performed indoors, emissions on our outdoor 3-meter Open Area Test Site (OATS) are made, when applicable. If the DUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.4 are employed. Alternatively, an on-table layout more representative of actual use may be employed if the resulting emissions appear to be worst-case in such a configuration. Any intentionally radiating elements are placed on the test table flat, on their side, and on their end (3-axes) and worst case emissions are recorded. For each configuration the DUT is rotated 360 degrees about its azimuth and the receive antenna is raised and lowered between 1 and 4 meters to maximize radiated emissions from the device. Receiver spurious emissions are measured with an appropriate carrier signal applied. For devices with intentional emissions below 30 MHz, our shielded loop antenna at a 1 meter receive height is used. Low frequency field extrapolation to the regulatory limit distance is employed as needed. Emissions between 30 MHz and 1 GHz are measured using tuned dipoles and/or biconical antennas. Care is taken to ensure that the RBW and VBW used meet the regulatory requirements, and that the EBW of the DUT is not reduced. The Photographs included in this report show the Test Setup.

### **5.3 Radiated Field Computations**

To convert the dBm values measured on the spectrum analyzer to dB( $\mu$ V/m), we use expression

$$E3(\text{dB}\mu\text{V/m}) = 107 + \text{PR} + \text{KA} - \text{KG} + \text{KE} - \text{CF}$$

where

- PR = power recorded on spectrum analyzer, dBm, measured at 3 m
- KA = antenna factor, dB/m
- KG = pre-amplifier gain, including cable loss, dB
- KE = duty correction factor, dB
- CF = distance conversion (employed only if limits are specified at alternate distance), dB

When presenting the data at each frequency, the highest measured emission under all of the possible DUT orientations (3-axes) is given.

### **5.4 Indoor Power Line Conducted Emissions**

When applicable, power line conducted emissions are measured in our semi-anechoic chamber. If the DUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.4 are employed. Alternatively, an on-table layout more representative of actual use may be employed if the resulting emissions appear to be worst-case in such a configuration.

The conducted emissions measured with the spectrum analyzer and recorded (in dB $\mu$ V) from 0-2 MHz and 2-30 MHz for both the ungrounded (Hi) and grounded (Lo) conductors. The spectrum analyzer is set to peak-hold mode in order to record the highest peak throughout the course of functional operation. Only when the emission exceeds or is near the limit are quasi-peak and average detection used.

### **5.5 Supply Voltage Variation**

Measurements of the variation in the fundamental radiated emission were performed with the supply voltage varied by no less than 85% and 115% of the nominal rated value. For battery operated equipment, tests were performed using a new battery, and worst case emissions are re-checked employing a new battery.

## **6. Test Results**

### **6.1 Radiated Emissions**

#### **6.1.1 Correction for Pulse Operation**

When the transmitter is activated by the user (lift of door handle or insertion of key), it can, in the worst case, transmit two 24 ms LF frame consisting of 21.075 ms of Manchester encoded data and 3.75 ms of CW LF in a given 100 ms window. The Manchester dataset exhibits 220 us / 255 us duty. See Figure 6.1. While a duty cycle can be computed and applied to emissions below 490 kHz, no duty is employed in this report to demonstrate compliance.

#### **6.1.2 Emission Spectrum**

The relative DUT emission spectrum is recorded and is shown in Figure 6.2.

#### **6.1.3 Emission Bandwidth**

The emission bandwidth of the signal is shown in Figure 6.3. From the plot we see that the 99% bandwidth is 10.6 kHz. The emission is 34.5 dBc in the 110 kHz restricted band.

#### **6.1.4 Supply Voltage and Supply Voltage Variation**

The DUT has been designed to be powered by a 12 VDC battery. For this test, relative radiated power was measured at the fundamental as the voltage was varied from 6.0 to 18.0 volts. The emission variation is shown in Figure 6.4.

Supply Voltage	V =	12.0 V
Current	I =	157 mA (pulsed)

### **6.2 AC Mains Conducted Emissions**

These tests do not apply, since the DUT is powered from a 12 VDC system.

#### **6.2.1 Receive Antenna Conducted Emissions**

These measurements are made by connecting the DUT antenna terminal (PN: 229145-109) directly to the spectrum analyzer 50  $\Omega$  input and recording all spurious signals. The VCO employed in the receiver circuit operates at 3193 MHz. The following worst case conducted emissions from the sample tested are:

<u>Frequency</u>	<u>Power(dBm)</u>	<u>Power(nW)</u>	<u>Limit (nW)</u>
433.8 MHz	-127.7	0.00000017	2

Receive chain radiated emissions have been evaluated to 5 times the VCO frequency.

### 6.3 Field Behavior at 125 kHz


Because at the specified 300/30 m measurement distance the signal-to-noise (SNR) ratio of the test receiver is insufficient, measurements were made at 3 m (or 10 m). To translate the measurement to the 300/30 m distance, we refer to the journal paper: *Extrapolating Near-Field Emissions of Low-Frequency Loop Transmitters*, J. D. Brunett, V. V. Liepa, D. L. Sengupta, IEEE Trans. EMC, Vol. 47, No. 3, August 2005. **The applicable worst-case field conversion tables are included here for reference, and are derived from data measured at the OAT Site used in this filing.**

Limit Location:	300 (m)		Limit Location:	30 (m)	
Meas. Distance:	3 (m)	10 (m)	Meas. Distance:	3 (m)	10 (m)
Frequency (kHz)	CF (dB)	CF (dB)	Frequency (MHz)	CF (dB)	CF (dB)
9.0	116.7	81.8	0.490	56.4	9.6
10.6	116.7	81.8	0.582	56.2	11.1
12.6	116.7	81.8	0.690	56.0	12.9
14.8	116.7	81.8	0.820	55.7	15.0
17.5	116.6	81.9	0.973	55.4	17.3
20.7	116.6	81.9	1.155	54.9	19.5
24.4	116.6	81.9	1.371	54.4	20.8
28.9	116.6	82.0	1.627	53.7	21.0
34.1	116.5	82.0	1.931	52.9	20.5
40.3	116.4	82.1	2.292	52.0	19.8
47.6	116.3	82.2	2.721	49.8	19.1
56.2	116.2	82.4	3.230	46.6	15.8
66.4	116.0	82.6	3.834	43.3	12.7
78.4	115.8	82.9	4.551	40.1	10.3
92.7	115.4	83.1	5.402	36.8	9.0
109.4	115.0	83.4	6.412	33.5	8.5
129.3	114.5	83.3	7.612	30.3	8.5
152.7	113.9	82.6	9.035	27.0	8.6
180.4	113.1	81.0	10.725	23.9	8.8
213.1	112.2	78.7	12.730	21.2	9.0
251.7	111.3	76.0	15.111	19.3	9.1
297.3	108.3	73.3	17.937	18.4	9.2
351.2	105.2	70.8	21.292	18.2	9.3
414.8	102.1	68.4	25.274	18.3	9.3
490.0	99.1	66.3	30.000	18.4	9.4

In the data table, Table 6.1, the measured field is decreased by the dB values given above to represent the field at 300m or 30m, whichever is applicable.

To further demonstrate the validity of these distance correction factors, the predominate coaxial field decay rate has been measured as a function of distance from the DUT, where care has been taken to maintain a minimum 5 radii distance between the largest loop employed and the DUT (see the paper above for an explanation of this requirement). The following figure illustrates field decay on the order of 60 dB/decade, consistent with the conversion factors employed above.



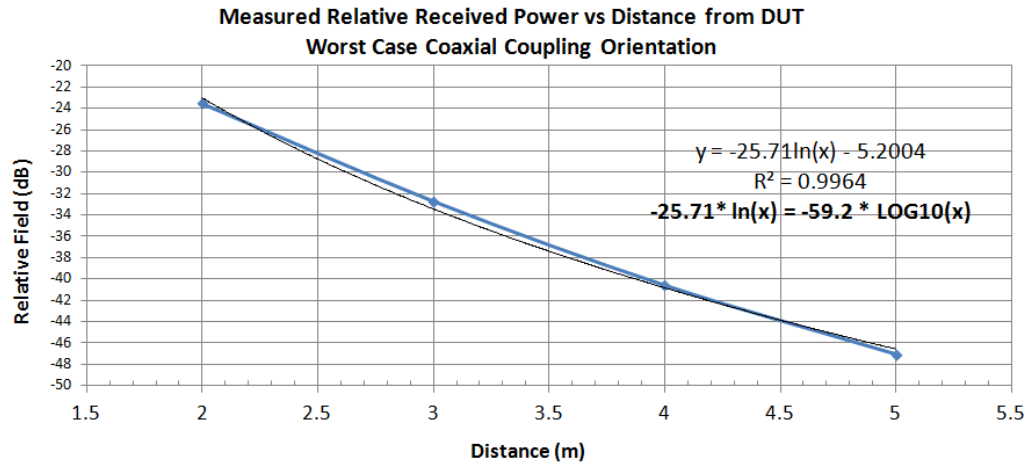

**Figure 6.3.1 Relative Field vs Distance from the DUT**

The University of Michigan  
Radiation Laboratory  
3228 EECS Building  
Ann Arbor, MI 48109-2122  
Tel: (734) 764-0500  
Fax: (734) 647-2106

**Table 6.1(a) Highest Transmit Chain Emissions Measured**

Radiated Emission - LF												TRW; FCC/IC
#	Freq. kHz	Ant. Used	Ant. Orient.	Pr, 3m dBm	Det. Used	Ka dB/m	Kg dB	Conv.** 3/30/300 m	E* dBμV/m	Elim dBμV/m	Pass dB	Comments
1	<b>Max emissions for all antennas</b>											
2	125.0	Loop	V/perp	-11.0	Pk	9.9	0.0	114.8	- 8.9	25.7	<b>34.6</b>	loop perp. (axis in dir. of prop.)
3	125.0	Loop	V/par	-15.0	Pk	9.9	0.0	114.8	-12.9	25.7	38.6	loop paral. (loop in dir. of prop.)
4	125.0	Loop	H	-14.0	Pk	9.9	0.0	114.8	-11.9	25.7	37.6	loop horiz. (loop in horiz. plane)
5	250.0	Loop	V/perp	-51.8	Pk	9.8	0.0	110.4	-45.4	19.6	65.0	loop perp. (noise)
6	250.0	Loop	V/par	-51.0	Pk	9.8	0.0	110.4	-44.6	19.6	64.2	loop paral. (noise)
7	250.0	Loop	H	-54.1	Pk	9.8	0.0	110.4	-47.7	19.6	67.3	loop horiz. (noise)
8	375.0	Loop	V/perp	-61.8	Pk	9.8	0.0	104.5	-49.5	16.1	65.6	loop perp.
9	375.0	Loop	V/par	-66.1	Pk	9.8	0.0	104.5	-53.8	16.1	69.9	loop paral.
10	375.0	Loop	H	-65.0	Pk	9.8	0.0	104.5	-52.7	16.1	68.8	loop horiz.
11	500.0	Loop	All	-70.0	Pk	9.8	0.0	56.3	- 9.5	33.6	43.1	noise
12	625.0	Loop	All	-62.3	Pk	9.8	0.0	56.1	- 1.6	31.7	33.3	noise
13	750.0	Loop	All	-71.0	Pk	9.8	0.0	55.9	-10.1	30.1	40.2	noise
14	875.0	Loop	All	-73.4	Pk	9.8	0.0	55.6	-12.2	28.8	41.0	noise
15	1000.0	Loop	All	-74.0	Pk	9.8	0.0	55.4	-12.6	27.6	40.2	noise
16	1125.0	Loop	All	-76.5	Pk	9.8	0.0	55.1	-14.8	26.6	41.4	background
17	1250.0	Loop	All	-77.3	Pk	9.8	0.0	54.8	-15.3	25.7	40.9	noise
18												
19	<b>Individual Antennas</b>											
20	125.0	Loop	V/perp	-17.0	Pk	9.9	0.0	114.8	-14.9	25.7	40.6	Interior Front
21	125.0	Loop	V/perp	-16.2	Pk	9.9	0.0	114.8	-14.1	25.7	39.8	Interior Rear
22	125.0	Loop	V/perp	-12.4	Pk	9.9	0.0	114.8	-10.3	25.7	36.0	Exterior Left
23	125.0	Loop	V/perp	-11.6	Pk	9.9	0.0	114.8	- 9.5	25.7	35.2	Exterior Right
24	125.0	Loop	V/perp	-11.0	Pk	9.9	0.0	114.8	- 8.9	25.7	34.6	Exterior Rear
25												
26												
27	* Averaging applies up to 490 kHz, but no correction has been employed in this table.											
28	Limit at 300m for f<0.490MHz; 30m for f>0.490MHz											
29	Measurements made at 3 m, see Test Report for extrapolation reference.											
30	9 kHz RBW for f >= 150 kHz, 200 Hz for f < 150 kHz											
31	** Represents the worst case conversion factor for all possible orientations and ground materials.											
32												
<b>Digital Radiated Emissions*</b>												
#	Freq. kHz	Ant. Used	Ant. Pol.	Pr dBm	Det. Used	Ka dB/m	Kg dB		E3 dBμV/m	E3lim dBμV/m	Pass dB	Comments
33												
34												
35												
36												
37	* For devices used in transportation vehicles, digital emissions are exempt from FCC regulations per FCC 15.103(a)											

**Table 6.1(b) Highest Receive Chain Radiated Emissions Measured**

Radiated Emission - RF											TRW; FCC/IC
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr dBm	Det. Used	Ka dB/m	Kg dB	E3 dBµV/m	E3lim dBµV/m	Pass dB	Comments
1	<b>DUT with External Antenna + 50 Ohm Load</b>										
2	325.0	Sbic	H	-76.6	Pk	19.2	22.2	27.4	46.0	18.6	max. of all, noise
3	325.0	Sbic	V	-76.8	Pk	19.2	22.2	27.2	46.0	18.8	max. of all, noise
4	640.0	Sbic	H	-75.6	Pk	25.3	19.1	37.6	46.0	8.4	max. of all, noise
5	640.0	Sbic	V	-76.6	Pk	25.3	19.1	36.6	46.0	<b>9.4</b>	max. of all, noise
6	975.0	Sbic	H	-76.9	Pk	29.2	17.1	42.2	54.0	11.8	max. of all, noise
7	975.0	Sbic	V	-76.7	Pk	29.2	17.1	42.4	54.0	11.6	max. of all, noise
8	1001.0	R-Horn	H/V	-74.5	Pk	19.6	28.0	24.1	54.0	29.9	max. of all, noise
9	1200.0	R-Horn	H/V	-66.6	Pk	20.4	28.0	32.8	54.0	21.2	max. of all, noise
10	1400.0	R-Horn	H/V	-74.6	Pk	21.0	28.0	25.4	54.0	28.6	max. of all, noise
11	1600.0	R-Horn	H/V	-74.5	Pk	21.5	28.0	26.0	54.0	28.0	max. of all, noise
12	1800.0	R-Horn	H/V	-72.4	Pk	22.0	28.0	28.6	54.0	25.4	max. of all, noise
13	2000.0	R-Horn	H/V	-73.0	Pk	22.5	27.4	29.1	54.0	24.9	max. of all, noise
14	3750.0	R-Horn	H/V	-74.6	Pk	27.7	23.6	36.4	54.0	17.6	max. of all, noise
15	7450.0	XN-Horn	H/V	-66.1	Pk	25.3	36.8	29.4	54.0	24.6	max. of all, noise
16	11500.0	X-Horn	H/V	-65.2	Pk	28.9	36.8	33.9	54.0	20.1	max. of all, noise
17	14900.0	Ku-Horn	H/V	-86.1	Pk	33.4	16.8	37.5	54.0	16.5	max. of all, noise
18	17000.0	Ku-Horn	H/V	-86.2	Pk	34.7	15.5	40.0	54.0	14.0	max. of all, noise
19											
20	<b>DUT with Internal Antenna</b>										
21	325.0	Sbic	H	-77.0	Pk	19.2	22.2	27.0	46.0	19.0	max. of all, noise
22	325.0	Sbic	V	-76.2	Pk	19.2	22.2	27.8	46.0	18.2	max. of all, noise
23	640.0	Sbic	H	-78.8	Pk	25.3	19.1	34.4	46.0	11.6	max. of all, noise
24	640.0	Sbic	V	-76.8	Pk	25.3	19.1	36.4	46.0	<b>9.6</b>	max. of all, noise
25	975.0	Sbic	H	-76.9	Pk	29.2	17.1	42.2	54.0	11.8	max. of all, noise
26	975.0	Sbic	V	-76.1	Pk	29.2	17.1	43.0	54.0	11.0	max. of all, noise
27	1001.0	R-Horn	H/V	-74.5	Pk	19.6	28.0	24.1	54.0	29.9	max. of all, noise
28	1200.0	R-Horn	H/V	-66.6	Pk	20.4	28.0	32.8	54.0	21.2	max. of all, noise
29	1400.0	R-Horn	H/V	-74.6	Pk	21.0	28.0	25.4	54.0	28.6	max. of all, noise
30	1600.0	R-Horn	H/V	-74.5	Pk	21.5	28.0	26.0	54.0	28.0	max. of all, noise
31	1800.0	R-Horn	H/V	-72.4	Pk	22.0	28.0	28.6	54.0	25.4	max. of all, noise
32	2000.0	R-Horn	H/V	-73.0	Pk	22.5	27.4	29.1	54.0	24.9	max. of all, noise
3	3750.0	R-Horn	H/V	-75.0	Pk	27.7	23.6	36.0	54.0	18.0	max. of all, noise
4	7450.0	XN-Horn	H/V	-65.6	Pk	25.3	36.8	29.9	54.0	24.1	max. of all, noise
5	11500.0	X-Horn	H/V	-64.7	Pk	28.9	36.8	34.4	54.0	19.6	max. of all, noise
6	14900.0	Ku-Horn	H/V	-86.7	Pk	33.4	16.8	36.9	54.0	17.1	max. of all, noise
7	17000.0	Ku-Horn	H/V	-86.0	Pk	34.7	15.5	40.2	54.0	13.8	max. of all, noise
8											
9											

University of Michigan Radiation Laboratory  
FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-629

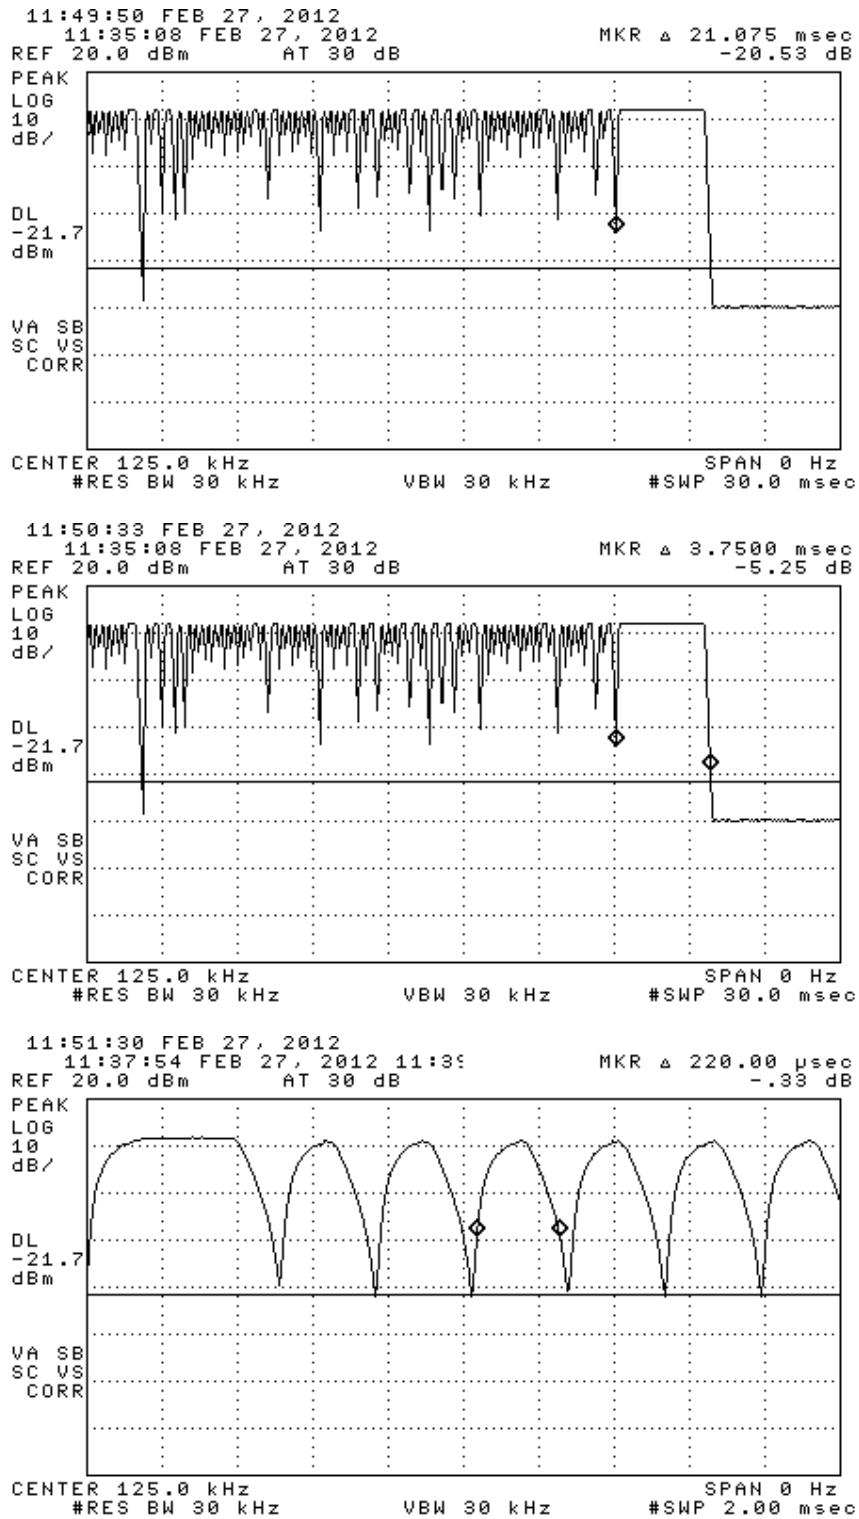


Figure 6.1. Transmission modulation characteristics. (top) complete transmission, (center) expanded transmission, (bottom) expanded word.

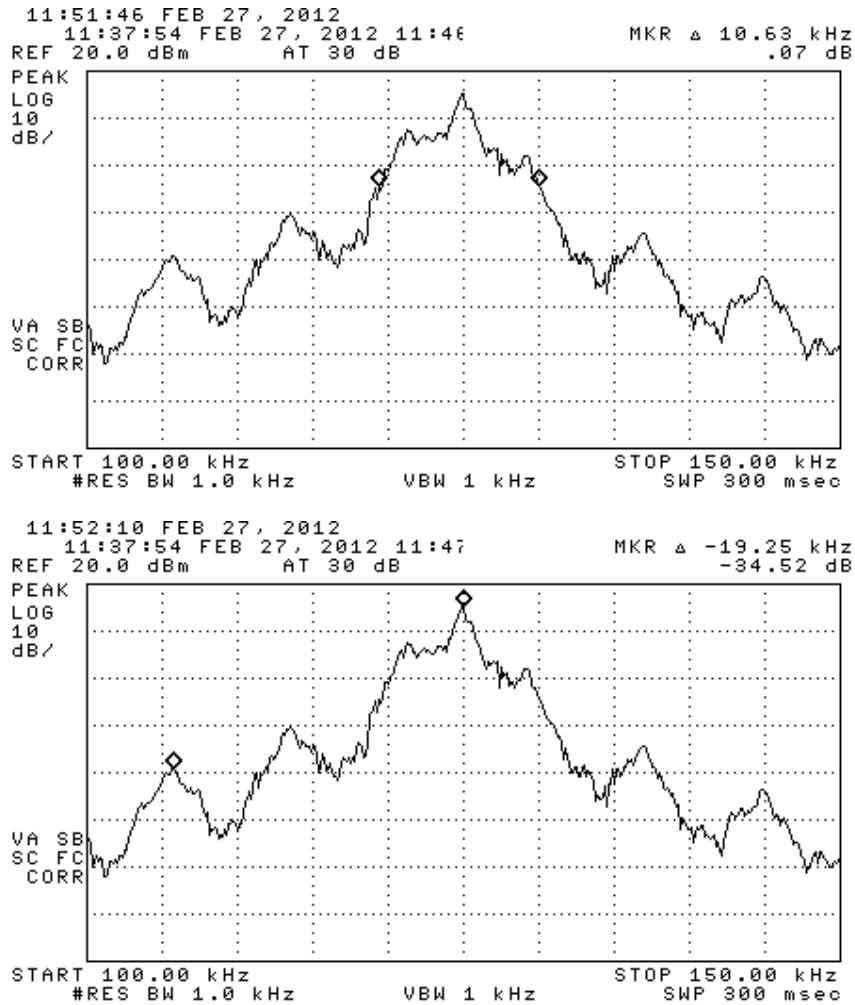


Figure 6.3. Measured emission bandwidth of the DUT (pulsed).


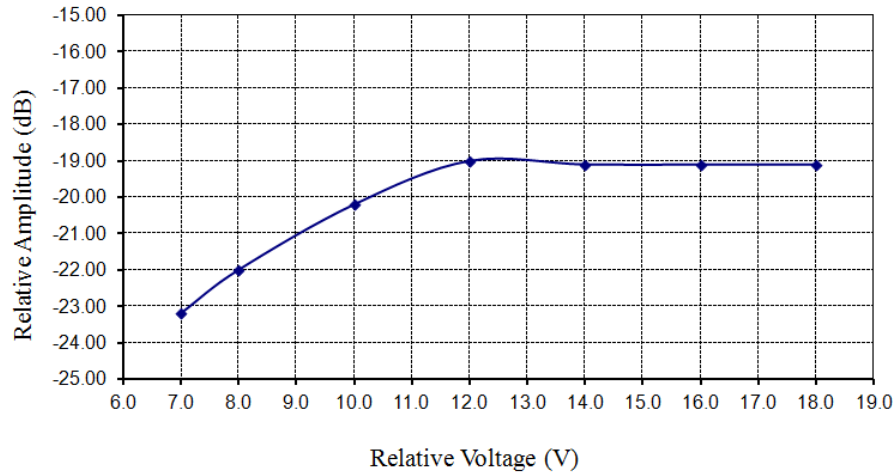


Figure 6.4. Relative emission at fundamental vs. supply voltage (pulsed).



**Photograph 6.5. DUT on OATS (one of three axes tested)**

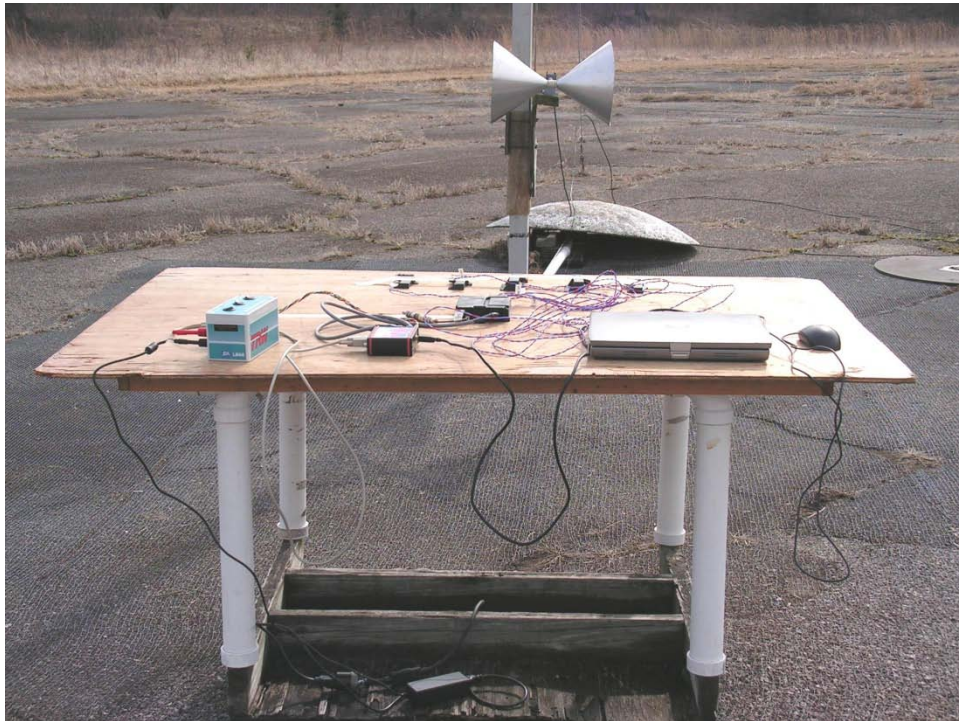

**Photograph 6.6. DUT on OATS (one of three axes tested)**