



Willow Run (WR) Test Labs, Inc.
7117 Fieldcrest Dr.
Brighton, Michigan 48116 USA
Tel: (734) 252-9785
Fax: (734) 926-9785
e-mail: info@wrtest.com

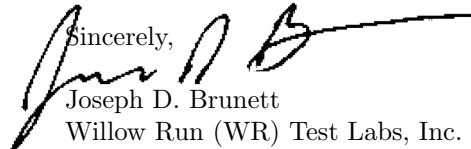
Attn.: Certification and Engineering Bureau, Innovation, Science and Economic Development Canada
3701 Carling Avenue, Bldg. 94
Ottawa, Ontario K2H 8S2
Re: Certification for TRW Automotive MY14 KL/DS Sensor
IC: 1470A-58T

If necessary, we have enclosed application materials for certification of TRW Automotive MY14 KL/DS Sensor. It has been fully tested and found to comply with ISED RSS-210v9/GENv5.

Current Variants:

There are a total of six (6) variants of the EUT. All 6 variants are electrically identical, but three HD sensors (models 68378369AB, 68377546AB, 68377549AB) transmit 4 RF frames and the three DP sensors (models 68376333AB, 68376334AB, 68378326AB) transmit either 4 or 8 RF frames in a given transmission and handle a higher tire pressure range. There is also a minor variation in valve stem hole mounting angle between the two versions.

If there are any questions regarding the application or testing performed, please contact us at the above address or call (734) 252-9785, or e-mail info@wrtest.com.

Sincerely,

Joseph D. Brunett
Willow Run (WR) Test Labs, Inc.



Willow Run (WR) Test Labs, Inc.
7117 Fieldcrest Dr.
Brighton, Michigan 48116 USA
Tel: (734) 252-9785
Fax: (734) 926-9785
e-mail: info@wrtest.com

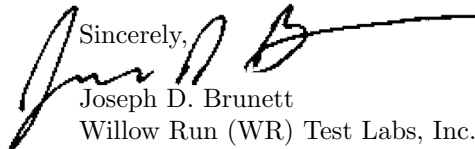
Attn.:Federal Communications Commission
Equipment Approval Services
P.O. Box 358315
Pittsburgh, PA 15251-5315
Re: Certification for TRW Automotive MY14 KL/DS Sensor
FCC ID: GQ4-77T

If necessary, we have enclosed application materials for certification of TRW Automotive MY14 KL/DS Sensor. It has been fully tested and found to comply with CFR Title 47, Part 15.231.

Current Variants:

There are a total of six (6) variants of the EUT. All 6 variants are electrically identical, but three HD sensors (models 68378369AB, 68377546AB, 68377549AB) transmit 4 RF frames and the three DP sensors (models 68376333AB, 68376334AB, 68378326AB) transmit either 4 or 8 RF frames in a given transmission and handle a higher tire pressure range. There is also a minor variation in valve stem hole mounting angle between the two versions.

If there are any questions regarding the application or testing performed, please contact us at the above address or call (734) 252-9785, or e-mail info@wrtest.com.

Sincerely,

Joseph D. Brunett
Willow Run (WR) Test Labs, Inc.