



Report No.: TW2102107-03E File Reference No.: 2021-04-06

Applicant: Qingdao Hisense Intelligent Commercial System Co., Ltd.

Product: POS COMPUTER

Model No.: HK316V

Trademark: N/A

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for

the evaluation of electromagnetic compatibility

Approved By

Jack Chung

Manager

Dated: April 06, 2021

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Date: 2021-04-06



Page 2 of 45

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 45

Report No.: TW2102107-03E

Date: 2021-04-06



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	12
5.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
5.4	Radiated Emission Limit.	13
7.0	6dB Bandwidth Measurement Bandwidth	23
8.0	Maximum Peak Output Power	28
9.0	Power Spectral Density Measurement.	30
10.0	Out of Band Measurement	35
11.0	Antenna Requirement.	42
12.0	FCC ID Label.	43
13.0	Photo of Test Setup and EUT View.	44

Report No.: TW2102107-03E Page 4 of 45

Date: 2021-04-06



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: Qingdao Hisense Intelligent Commercial System Co., Ltd.

Address: 399 Songling Road, Laoshan, Qingdao, Shandong

Telephone: --Fax: ---

1.3 Description of EUT

Product: POS COMPUTER

Manufacturer: Qingdao Hisense Intelligent Commercial System Co., Ltd.

Address: 399 Songling Road, Laoshan, Qingdao, Shandong

Brand Name: N/A
Additional Brand Name: N/A
Model Number: HK316V

Additional Model Number: N/A Hardware Version: HZS7.820 Software Version: HK316V

Type of Modulation GFSK (Bluetooth BLE)

Frequency range 2402-2480MHz Frequency Selection By software

Channel Number 40 Input Voltage: DC24V

Power Supply: Model: FSP120-AAAN3; Input: 100-240V~, 50/60Hz, 1.8A;

Output: 24V 5A,120W

Alternative Power Model: FSP090-AAAN3; Input: 100-240V~, 50-60Hz, 1.2A;

Supply: Output: DC24.0V, 3.75A,90W

Remark: Two power supplies were tested and only the worst case was recorded in the test report.

1.4 Submitted Sample: 1 Samples

Report No.: TW2102107-03E Page 5 of 45

Date: 2021-04-06



1.5 Test Duration

2021-02-25 to 2021-04-06

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 45

Report No.: TW2102107-03E

Date: 2021-04-06



2.0 Test Equipment							
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date		
ESPI Test Receiver	R&S	ESPI 3	100379	2020-06-23	2021-06-22		
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2020-06-23	2021-06-22		
Loop Antenna	EMCO	6507	00078608	2018-06-25	2021-06-24		
Spectrum	R&S	FSIQ26	100292	2020-06-23	2021-06-22		
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2021-06-20		
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08		
Power meter	Anritsu	ML2487A	6K00003613	2020-06-23	2021-06-22		
Power sensor	Anritsu	MA2491A	32263	2020-06-23	2021-06-22		
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03		
9*6*6 Anechoic			N/A	2020-07-06	2021-07-05		
EMI Test Receiver	RS	ESVB	826156/011	2020-06-23	2021-06-22		
EMI Test Receiver	RS	ESH3	860904/006	2020-06-23	2021-06-22		
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2020-06-23	2021-06-22		
Spectrum	HP/Agilent	E4407B	MY50441392	2020-06-23	2021-06-22		
Spectrum	RS	FSP	1164.4391.38	2020-01-16	2021-01-15		
RF Cable	7h an a di	ZT26-NJ-NJ-8		2020-06-23	2021-06-22		
Kr Cable	Zhengdi	M/FA					
RF Cable	Zhengdi	7m		2020-06-23	2021-06-22		
RF Switch	EM	EMSW18	060391	2020-06-23	2021-06-22		
Pre-Amplifier	Schwarebeck	BBV9743	#218	2020-06-23	2021-06-22		
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2020-06-23	2021-06-22		
LISN	SCHAFFNER	NNB42	00012	2021-01-06	2022-01-05		

2.2 Automation Test Software

For Conducted Emission Test

Name	Version		
EZ-EMC	Ver.EMC-CON 3A1.1		

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

Date: 2021-04-06



3.0 Technical Details

3.1 Summary of test results

Standard	Test Type	Result	Notes
CC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
CC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB	PASS	Complies
ECC De # 15 Demonstral 15 247(h)	bandwidth>500kHz Maximum peak output	DACC	Committee
FCC Part 15, Paragraph 15.247(b)	power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm/3kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Date: 2021-04-06



5.Power Line Conducted Emission Test

5.1 Schematics of the test

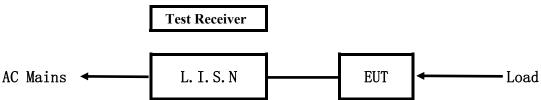


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: DC24V, 60Hz Block diagram of Test setup

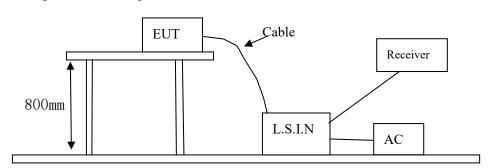

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
POS COMPUTER	Qingdao Hisense Intelligent Commercial System Co., Ltd.	HK316V	GQK-HK316V

Report No.: TW2102107-03E Page 9 of 45

Date: 2021-04-06



B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)				
(MHz)	Quasi-peak Level	Average Level			
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*			
$0.50 \sim 5.00$	56.0	46.0			
5.00 ~ 30.00	60.0	5 .0			

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2021-04-06



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Results: PASS

Please refer to following diagram for individual

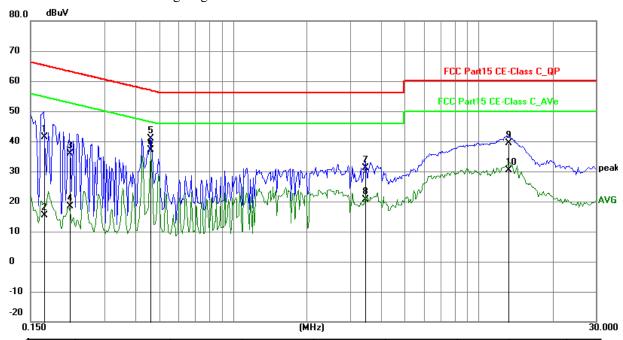

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1695	31.66	9.77	41.43	64.98	-23.55	QP	Р
2	0.1695	5.56	9.77	15.33	54.98	-39.65	AVG	Р
3	0.2163	26.17	9.75	35.92	62.96	-27.04	QP	Р
4	0.2163	8.74	9.75	18.49	52.96	-34.47	AVG	Р
5	0.4620	31.01	9.77	40.78	56.66	-15.88	QP	Р
6	0.4620	27.40	9.77	37.17	46.66	-9.49	AVG	Р
7	3.4563	21.15	9.86	31.01	56.00	-24.99	QP	Р
8	3.4563	10.71	9.86	20.57	46.00	-25.43	AVG	Р
9	13.2219	29.12	10.30	39.42	60.00	-20.58	QP	Р
10	13.2219	20.14	10.30	30.44	50.00	-19.56	AVG	Р

Report No.: TW2102107-03E Page 11 of 45

Date: 2021-04-06



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Please refer to following diagram for individual

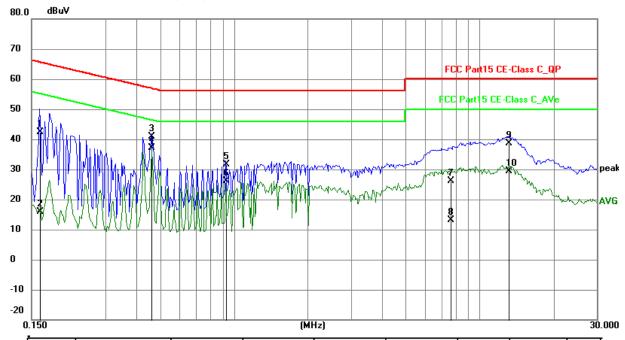

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1617	32.66	9.78	42.44	65.38	-22.94	QP	Р
2	0.1617	6.21	9.78	15.99	55.38	-39.39	AVG	Р
3	0.4620	31.05	9.77	40.82	56.66	-15.84	QP	Р
4	0.4620	27.27	9.77	37.04	46.66	-9.62	AVG	Р
5	0.9261	21.80	9.79	31.59	56.00	-24.41	QP	Р
6	0.9261	16.23	9.79	26.02	46.00	-19.98	AVG	Р
7	7.6060	15.99	10.04	26.03	60.00	-33.97	QP	Р
8	7.6060	3.05	10.04	13.09	50.00	-36.91	AVG	Р
9	13.1868	28.43	10.30	38.73	60.00	-21.27	QP	Р
10	13.1868	19.00	10.30	29.30	50.00	-20.70	AVG	Р

Report No.: TW2102107-03E Page 12 of 45

Date: 2021-04-06




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

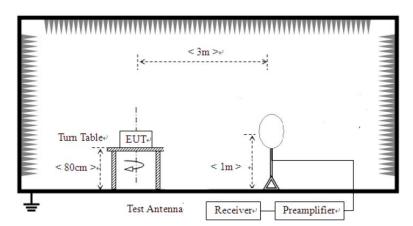


Date: 2021-04-06



For radiated emissions from 30MHz to1GHz

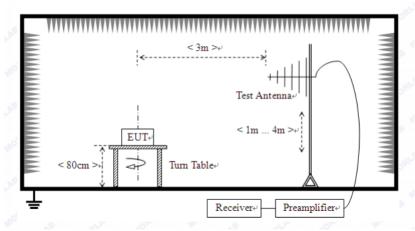

For radiated emissions above 1GHz

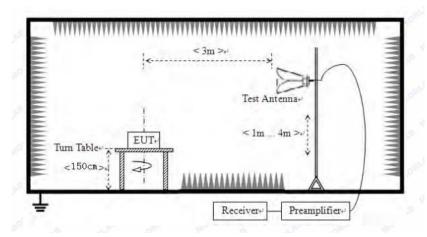

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2102107-03E Page 14 of 45

Date: 2021-04-06



Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Page 15 of 45

Report No.: TW2102107-03E

Date: 2021-04-06



Test result


General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Test Figure:

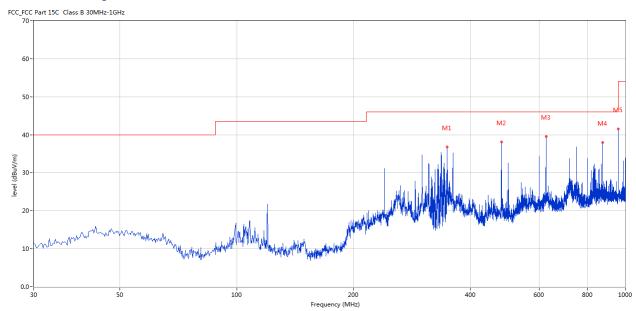

No	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	347.838	36.82	-9.43	46.0	-9.18	Peak	0.00	100	Horizontal	Pass
2	479.968	38.15	-7.40	46.0	-7.85	Peak	132.00	100	Horizontal	Pass
3	624.946	39.40	-4.85	46.0	-6.60	Peak	45.00	100	Horizontal	Pass
4	874.901	38.00	-2.17	46.0	-8.00	Peak	72.00	100	Horizontal	Pass
5	959.998	42.45	-1.63	46.0	-3.55	Peak	42.00	100	Horizontal	Pass

Page 16 of 45

Report No.: TW2102107-03E

Date: 2021-04-06



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Test Figure:

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	239.953	38.64	-12.33	46.0	-7.36	Peak	0.00	100	Vertical	Pass
2	374.991	38.79	-9.44	46.0	-7.21	Peak	0.00	100	Vertical	Pass
3	479.968	39.37	-7.40	46.0	-6.63	Peak	0.00	100	Vertical	Pass
4	750.045	37.29	-3.43	46.0	-8.71	Peak	0.00	100	Vertical	Pass
5	959.998	42.87	-1.63	46.0	-3.13	Peak	0.00	100	Vertical	Pass

Report No.: TW2102107-03E Page 17 of 45


Date: 2021-04-06



Test Figures above 1GHz:

Please refer to the following test plots for details:

Low Channel: Vertical

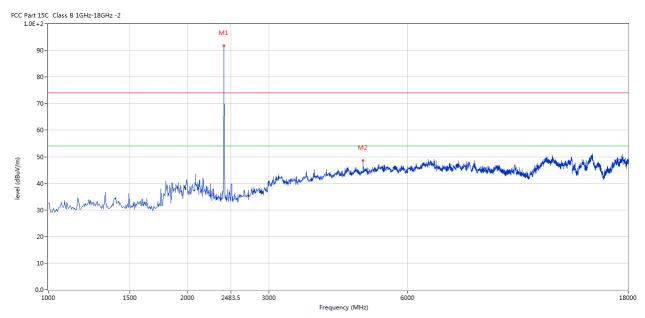

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4803.750	49.68	3.13	74.0	-24.32	Peak	84.00	100	Vertical	Pass


Page 18 of 45

Report No.: TW2102107-03E

Date: 2021-04-06



Low Channel: Horizontal

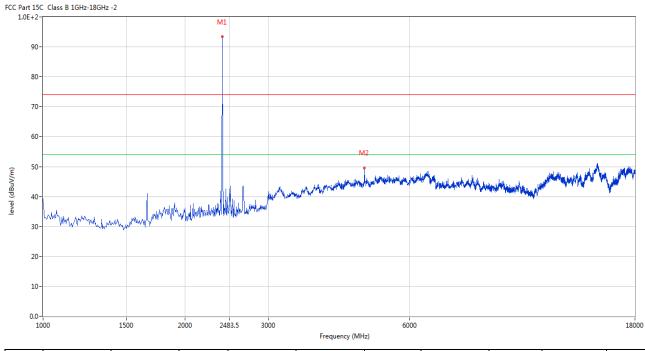

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4803.750	49.89	3.13	74.0	-24.11	Peak	75.00	100	Horizontal	Pass


Page 19 of 45

Report No.: TW2102107-03E

Date: 2021-04-06



Middle Channel: Vertical

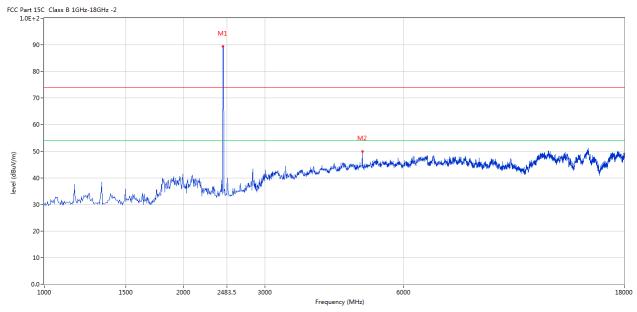


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4880.250	49.95	3.20	74.0	-24.05	Peak	85.00	100	Vertical	Pass

Page 20 of 45 Report No.: TW2102107-03E

Date: 2021-04-06



Middle Channel: Horizontal

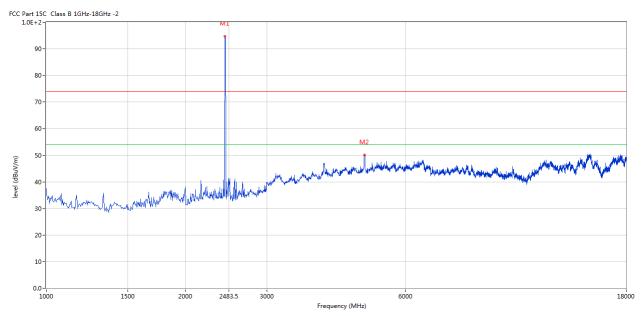


Ī	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
	2	4880.250	50.83	3.20	74.0	-23.17	Peak	109.00	100	Horizontal	Pass

Page 21 of 45 Report No.: TW2102107-03E

Date: 2021-04-06



High Channel: Vertical

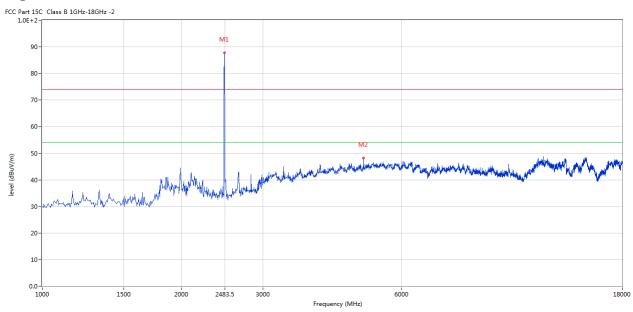


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4961.000	48.29	3.39	74.0	-25.71	Peak	84.00	100	Vertical	Pass

Report No.: TW2102107-03E Page 22 of 45

Date: 2021-04-06



High Channel: Horizontal

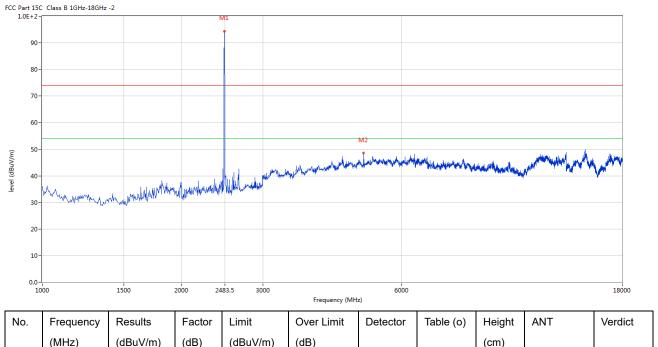

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4961.000	48.67	3.39	74.0	-25.33	Peak	101.00	100	Horizontal	Pass

Note: 1. Level = Reading + AF + Cable - Preamp

- 2. For the radiated emissions above 18G and below 30MHz, it is the floor noise.
- 3. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Page 23 of 45


Report No.: TW2102107-03E

Date: 2021-04-06



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No.: TW2102107-03E Page 24 of 45

Date: 2021-04-06



6dB BW

EUT		POS COM	PUTER	Model			HK316V
Mode	Mode Keep Tran		smitting	Input Voltag	e	DC24V	
Temperat	Temperature 24 de		. C,	Humidity			56% RH
Channel		el Frequency (MHz)	,	andwidth Hz)	M	inimum Limit (MHz)	Pass/ Fail
Low		2402	7	703		0.5	Pass
Middle	iddle 2440		709			0.5	Pass
High	High 2480		721			0.5	Pass

Page 25 of 45


Report No.: TW2102107-03E

Date: 2021-04-06



Test Figure:

1. Condition: Low Channel

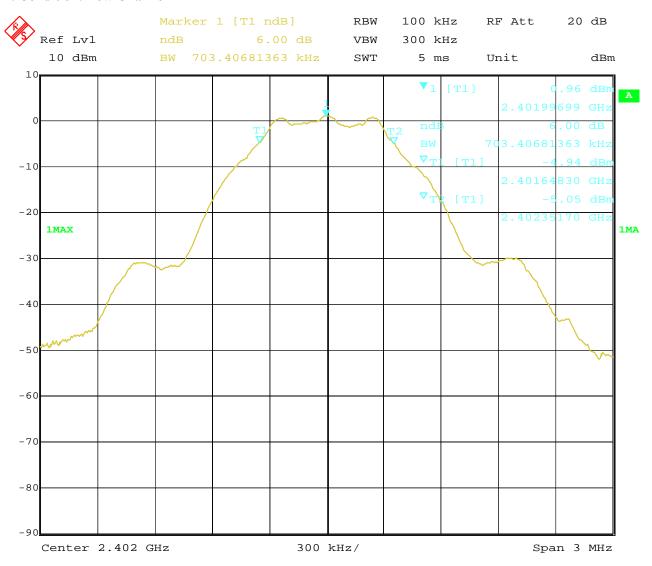

5.MAR.2021

16:16:25

Date:


Page 26 of 45

Report No.: TW2102107-03E

Date: 2021-04-06



2. Condition: Middle Channel

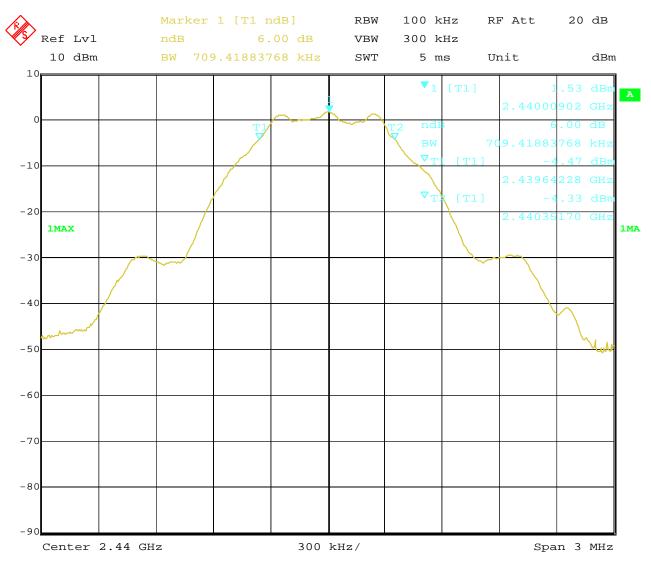


Date: 5.MAR.2021 16:22:47

Report No.: TW2102107-03E Page 27 of 45

Date: 2021-04-06



3. High Channel

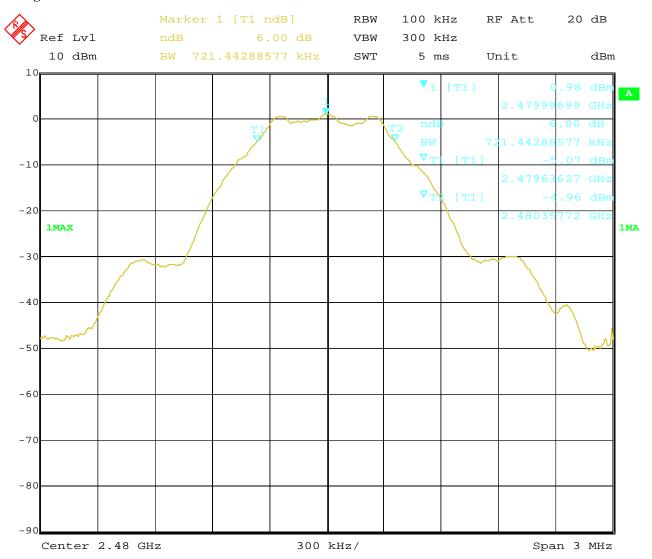

Date: 5.MAR.2021 16:24:52


Date: 2021-04-06



Page 28 of 45

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: The Peak power were measured.

Date: 2021-04-06



Page 29 of 45

8.4Test Results

EUT		POS COMPU	JTER	Model		HK316V	V
Mode				DC24V	7		
Temperatu	re	24 deg. (C, Humidity		Humidity		H
Channel	Cł	Channel Frequency Ma		Max. Power Output (dBm)		Peak Power Limit	Pass/ Fail
Chamici		(MHz)		Peak		(dBm)	
Low		2402		1.87		30	Pass
Middle		2440		2.38		30	Pass
High		2480		1.87		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator


Date: 2021-04-06



Page 30 of 45

9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be $\leq 8 \text{ dBm/3kHz}$.

Page 31 of 45 Report No.: TW2102107-03E

Date: 2021-04-06



9.4Test Result

EUT		PC	S COMPUT	ER	Model	Н	X316V
Mode		Κe	ep Transmitt	ing	Input	D	C24V
					Voltage		
Temperat	Temperature 24 deg. C,		Humidity	56% RH			
	Peak	Power	Cable	Final Power Spectral		Maximum	
Channel	Re	ading	Loss	D	ensity	Limit	Pass/ Fail
	(d	lBm)	(dB)	(dBn	n/10kHz)	(dBm/3kHz)	
Low	-:	8.26	0.2	-	-8.06	8	Pass
Middle	-'	7.58	0.2	-	-7.38	8	Pass
High	-:	8.28	0.2	-	-8.08	8	Pass

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss


Report No.: TW2102107-03E Page 32 of 45

Date: 2021-04-06



Test Figure:

1. Condition: Low Channel

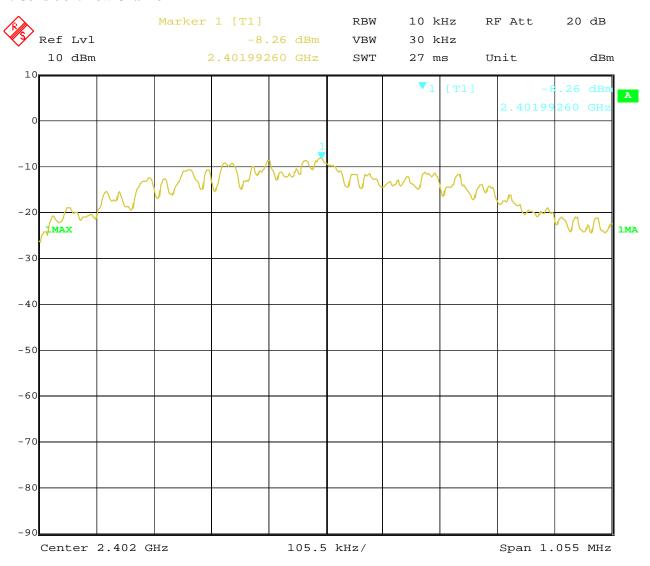


Date: 5.MAR.2021 16:36:09

Report No.: TW2102107-03E Page 33 of 45

Date: 2021-04-06



2. Condition: Middle Channel

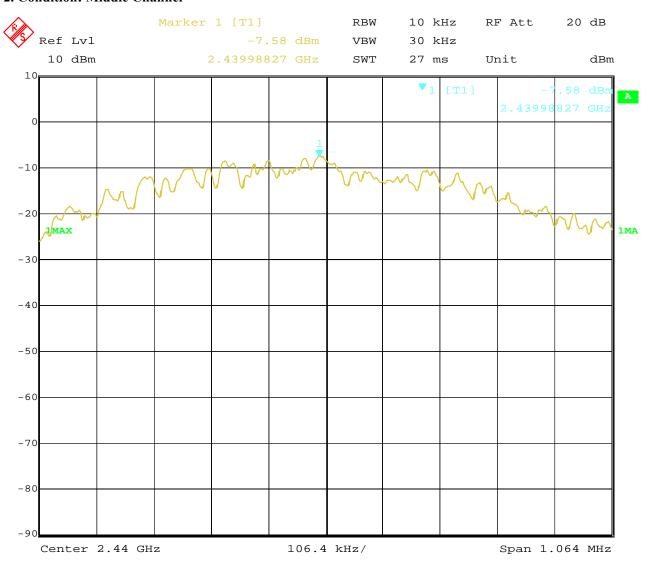


Date: 5.MAR.2021 16:37:19

Report No.: TW2102107-03E Page 34 of 45

Date: 2021-04-06



3. High Channel

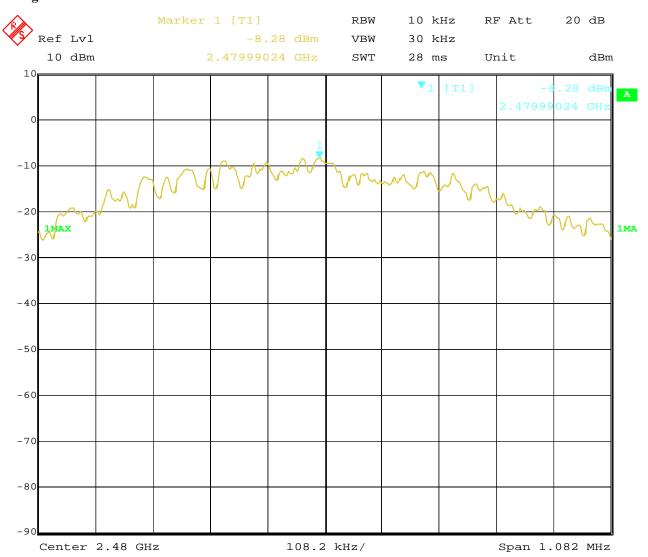


Date: 5.MAR.2021 16:38:23

Date: 2021-04-06



Page 35 of 45

10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule. 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 36 of 45

Report No.: TW2102107-03E


Date: 2021-04-06



10.4 Band-edge Measurement

EUT	POS COMPUTER	Model	HK316V
Mode	Keep Transmitting	Input Voltage	DC24V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

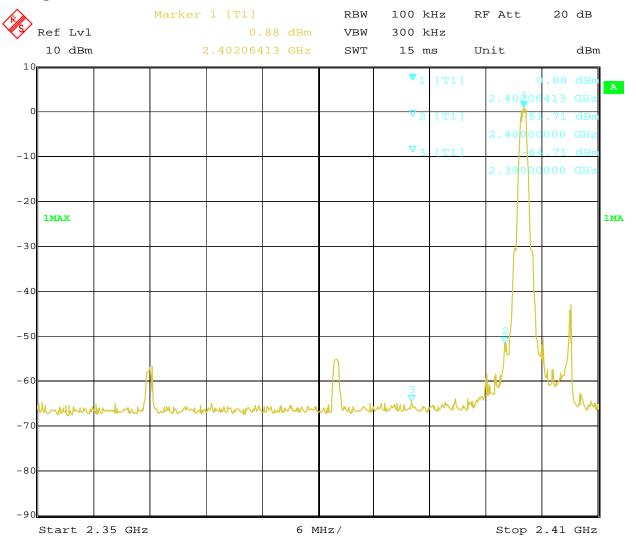

Date: 5.MAR.2021 16:40:25

Page 37 of 45

Report No.: TW2102107-03E


Date: 2021-04-06



10.4 Band-edge Measurement

EUT	POS COMPUTER	Model	HK316V
Mode	Keeping Transmitting	Input Voltage	DC24V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

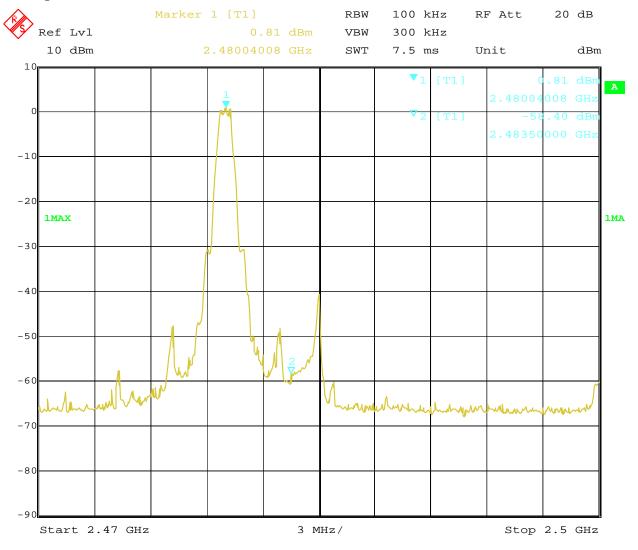

Date: 5.MAR.2021 16:39:09

Page 38 of 45

Report No.: TW2102107-03E

Date: 2021-04-06



10.4 Restrict Band Measurement

	EUT	F	OS COMPU	JTER	Mod	el		H	K316V	
	Mode	F	eep Transm	itting	Input Vo	oltage		D	C24V	
	Гетрегаtu	e	24 deg. C	2,	Humio	dity		56	% RH	
,	Test Resul	:	Pass							
	art 15C Class B 1GF 0E+2-	-18GHz -2							M1	
	90-									
(dBuV/m)	50-	l a			سنر	\	M3	, day	M2	CONT.
level (dBuV/m)	50-	المرافية والمرافقة والمراف	hand the spirit of the spirit	amp densita foldellere basel	سنم معيله النطقه عندا	Vinishinghingh	M3	Habital Andrew	M2 •	A PARTY
level (dBuV/m)	50 - 40 - 30 - 20 -	hilligenderselleiteralberalditeralberald	hadring springer black op the	martholist i bethlusined	أستعم فمضله فالمعاشد المستعلق المعاشد	* When it to supply the state of the	M3 http://distribute/kytkykyky	Na selection de la constantina della constantina	M2	AND
	30 - 20 -	hjerjeni versi versi kan bijan b	and the second sections where	amerikasi perbebukan	مستمر كالمتطاعات	** White the state of the state	M3 Alighiday depolately depolately	Natural Hally and	M2 •	
level (dBuV/m)	50 - 40 - 30 - 20 -	hittigen of the state of the st	hadrida personal deletativa	amerikasi perilektisak adi	Frequency (MH.		M3 http://display.gluples/ephyde	Assertable and the second seco	M2 •	2410
	30- 20- 10- 2350	ncy Results	Factor	Limit	Frequency (MH:	z) Detector	Table (o)	Height	ANT	2410 Verdict
	30- 20- 10- 2350	ncy Results	Factor	The state of the s	· · ·	ı	Table (o)	asyde deliberation		T

Note: The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Page 39 of 45

Report No.: TW2102107-03E

Date: 2021-04-06



10.4 Restrict Band Measurement

	EUT	PO	S COMPU	TER	M	odel		HK	316V	
	Mode	Kee	ep Transmi	itting	Input	Voltage		DO	C24V	
T	emperature		24 deg. C	· ,	Hur	nidity		569	% RH	
7	Test Result:		Pass							
	rt 15C Class B 1GHz-18GHz	:-2								
1.01	212							М	1	
	90-									
	80-								$\overline{}$	
	70-									
	60-							M2		
								/ •	\	
(m/,	50-								July.	
(dBuV/m)	40-	. Maria		.1	, long	М	3		\/h	
level (dBuV/m)	40- 46-idd hywddionolon i'n blanddion	والمناسلين والمناسلين والمناسلين والمناسلين	المتاباة والتصديعية والمساطرة والمتابرة	dippide de palemente de	aller to the state of the state	Maring distribution of the	3 Jayani, Ayliyetti bilani bilani ban	New York	\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1	
level (dBuV/m)	40-	والموادا المستعمل المدارة والاستعمالية	المشابئة والمتعددة والمسابقة والمتعددة والمتعددة والمتعددة والمتعددة والمتعددة والمتعددة والمتعددة والمتعددة وا	Lipphyllogikoviteniovskad	allowing the state of the state	Maradischichterische		white the same of	VAL.	
level (dBuV/m)	40- 46-idd hywddionolon i'n blanddion	فالمتعادث والمتعادث والمتع	ikiseliseliseeniseeleebilee	displacement	attended to the second	M	3 Napasi Andreik Parintipa Jun	where the same state of the sa	\n'\\\	
level (dBuV/m)	40- 	datember home in the later hands and the	territoria de la constituida de la cons	d sylvek polenie de	aller and the self-of-body	Mary described	3 Halanda Arthur Maria (Anglaighean Anglaighean Anglaighean Anglaighean Anglaighean Anglaighean Anglaighean Angl	abus .	\17\ _W	
level (dBuV/m)	30 - 20 - 10 -	فالمتعادث والمتعادث والمتع	ikissiinsikuseen kerkilissi	d significally contains and an annian design of the contains and an annian design of	aller military distribution of the second	M.	3 Vojani, an <mark>dere</mark> iki i fairid e ian, dee	www.	\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1	
level (dBuV/m)	30-	dantera escada por proporto de la compansión de la compan	ideiseljis elle see estatelis elikulus elikulus elikulus elikulus elikulus elikulus elikulus elikulus elikulus	disperiente de la contraction	Frequency (MHz)	Market salis lain expetited	3		\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1\1	2410
	30 - 20	Results	Factor	Limit		Detector	Table (o)	Height	ANT	2410 Verdict
No.	30 - 20 - 2350			The state of the s	Frequency (MHz)	a haran diginali si diginali dalah	to para and mile to privilege a Jun	Height (cm)	ANT	

Note: The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Page 40 of 45

Report No.: TW2102107-03E

Date: 2021-04-06



10.4 Restrict Band Measurement

EUT		POS	S COMP	UTER	Me	odel		F	HK316V	
Mode		Kee	p Transı	nitting	Input	Voltage			DC24V	
Temperatu	ıre		24 deg.	C,	Hun	nidity		5	56% RH	
Test Resu	lt:		Pass							
CC Part 15C Class B 1G	Hz-18GHz	-2								
90-										
80-										
70-										
				`						
60-										
					M					
	. 1 1	Company of the state of the sta	/			N. Lewis Mary	ith a still be be be a still the beginning	le Addate, de vidado la Leje Assantin	ويرة المقرمين والواري في المربعة المنافعة المنافع منافعة المرب	ne the the second
(dBuV/m) 40-	i felial na di sejektual	Martin to additional prince and the second			***	Name of the last o	at the splitter of the splitte	ha bili dayada ya dada da	, edd da d	nige the subsection
(W/\ngp) = 40 - 30 -	lifektus) namakanjipi nef	Applied & Miller State Control of the State Control			M	Maria de la compania del compania del compania de la compania del la compania de la compania dela compania del la compania de la compania de la compania dela compania del la compania de	dhikayilkila bachillida jirgana.	in til der der Andrea tres des return	addas ku ku kada o dhasadha.	net de silven de consta
(dBuV/m) 40-	i pitra) and kingkinal	And the Additional State of the			Mark Market Mark	Maria de la compansión	يدارية والخار إسرار للمنابة بمصور	h Velstada, deletaka da alam	nd digas de la grada de plada en pida que	nije die julioorde
(W/\ngp) = 40 - 30 -	and injury.	Noville Hallington and Park			M	America de la compansa de la compans	think after a portunities of the second	is b ^h làsada, dhéada _l a da cann	addina kir kordi de ili da sabita,	nie de sierodonie
((m) 50- 50- 40- 30- 20-	ight of some installed	Ayadidi i Milipina arabah			2483.5		ikh-k-villibelan jamikan kateka papunen u	h bhis de dde dae dae	add a selection described and the selection of the select	2500
30- 20- 20- 2470		And the state of t			2483.5 Frequency (MI	Hz)			ad dagas kira kerak kanda da filosophika, m	
30- 20- 20- 2470 No. Frequ	ency	Results	Factor	Limit	Over Limit		Table (o)	Height	ANT	
30- 20- 20- 2470	ency		Factor (dB)	(dBuV/m)	Frequency (Mi	Hz) Detector				2500
30- 20- 20- 2470 No. Frequ	ency)	Results			Over Limit	Hz)		Height		2500


Page 41 of 45

Report No.: TW2102107-03E

Date: 2021-04-06



10.4 Restrict Band Measurement

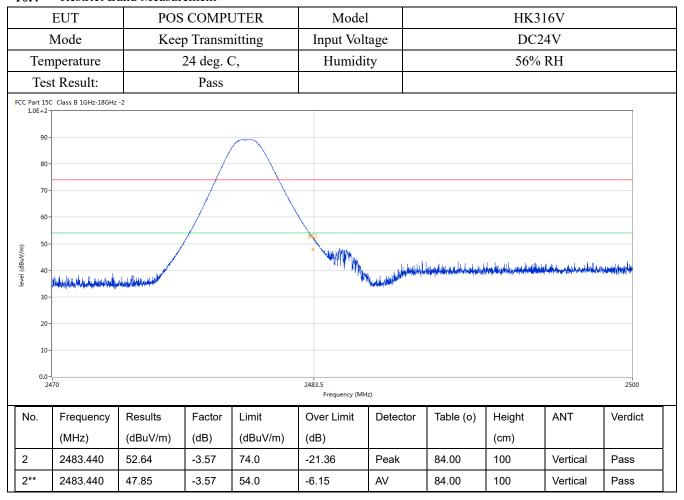

Date: 2021-04-06



Page 42 of 45

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna used. The gain of the antennas is 1.48dBi.

Report No.: TW2102107-03E Page 43 of 45

Date: 2021-04-06




12.0 FCC ID Label

FCC ID: GQK-HK316V

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

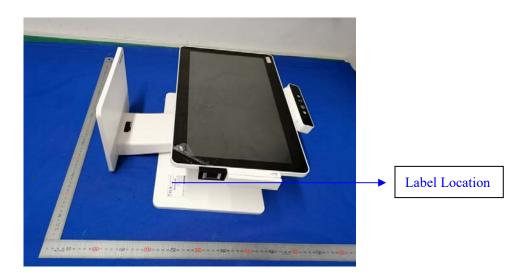

Page 44 of 45


Report No.: TW2102107-03E

Date: 2021-04-06



13.0 **Photo of testing**


Conducted Emission Test Setup:

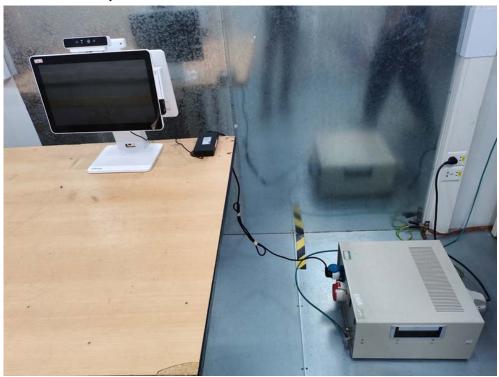

Date: 2021-04-06



Radiated Emission Test Setup:

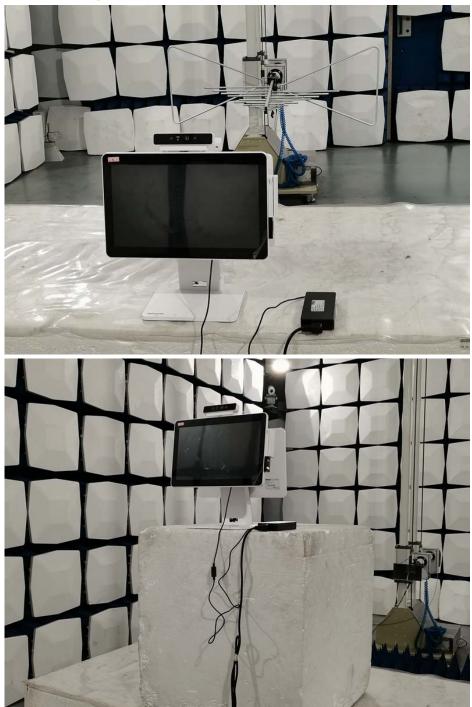

Photographs - EUT

Please refer test report TW2102107-01E

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.