

FCC PART 15.225

TEST REPORT

For

Qingdao Hisense Intelligent Commercial System Co., Ltd.

399 Songling Road, Laoshan, Qingdao, China

FCC ID: GQK-HK560

Report Type: Original Report	Product Type: POS COMPUTER
Test Engineer: Stone Zhang <i>Stone Zhang</i>	
Report Number: RSHD190813001-00B	
Report Date: 2019-09-14	
Reviewed By:	Oscar Ye <i>Oscar Ye</i> RF Leader
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
FCC§15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTED CONSTRUCTION	9
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE	10
FACTOR & OVER LIMIT CALCULATION.....	11
TEST RESULTS SUMMARY	11
TEST DATA	11
FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC§15.225(E) - FREQUENCY STABILITY.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST DATA	29
§15.215(C) - 20DB EMISSION BANDWIDTH TESTING	31
REQUIREMENT	31
TEST PROCEDURE	31
TEST DATA	31

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Qingdao Hisense Intelligent Commercial System Co., Ltd.
Tested Model	HK560
Product Type	POS COMPUTER
Dimension	405mm(L)*250mm(W)*370mm(H)
Power Supply	AC100~240V

Adapter-1 Information:

Model: FSP120-AAAN3

Input: AC100-240 V, 50-60Hz, 1.8A

Output: DC24V, 5A

Adapter-2 Information:

Model: FSP060-DAAN3

Input: AC100-240 V, 50-60Hz, 1.8A

Output: DC24V, 2.5A(60W MAX)

**All measurement and test data in this report was gathered from production sample serial number: 20190813001. (Assigned by the BACL. The EUT supplied by the applicant was received on 2019-08-13)*

Objective

This Type approval report is prepared on behalf of *Qingdao Hisense Intelligent Commercial System Co., Ltd.* in accordance with Part 2- Subpart J, and Part 15-Subparts A and C of the Federal Communication Commission's rules.

The objective is to determine the Compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.225.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
Radiated emission	9kHz~30MHz	6.07dB
	30MHz~1GHz	6.11dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

The EUT is tested in the engineering mode.

Equipment Modifications

No modification on the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
EPSON	Printer	M335A	X239004205
Lenovo	USB flash disk 1	T180	0A1266865200521
Lenovo	USB flash disk 2	T180	0A1233865200536
/	Cash box	/	/
DELL	Notebook	E6410	3094742521
BOLD	Earphone	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable	1.0	EUT	Adapter 1
Power Cable	1.0	EUT	Adapter 2
Cable	0.2	EUT	Printer
Cable	1.0	EUT	Cash box
RJ45 Cable 2	10	EUT	Notebook
Earphone USB Cable	1.0	EUT	Earphone

Block Diagram of Test Setup

For Conducted Emissions:

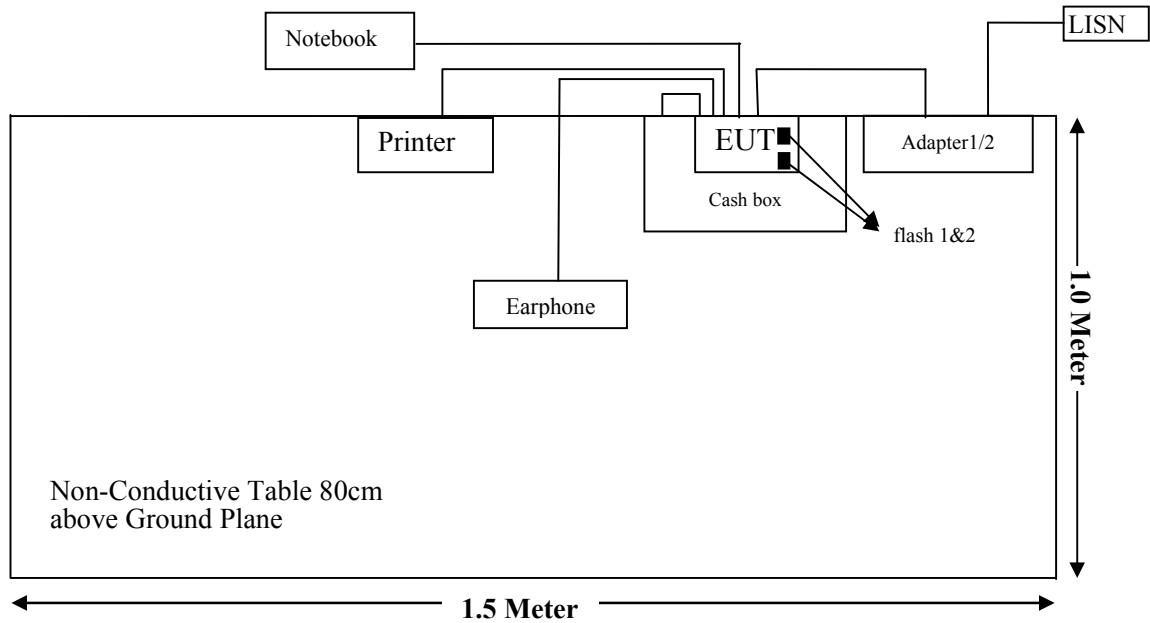

For Radiated Emissions (Below & Above 30MHz):

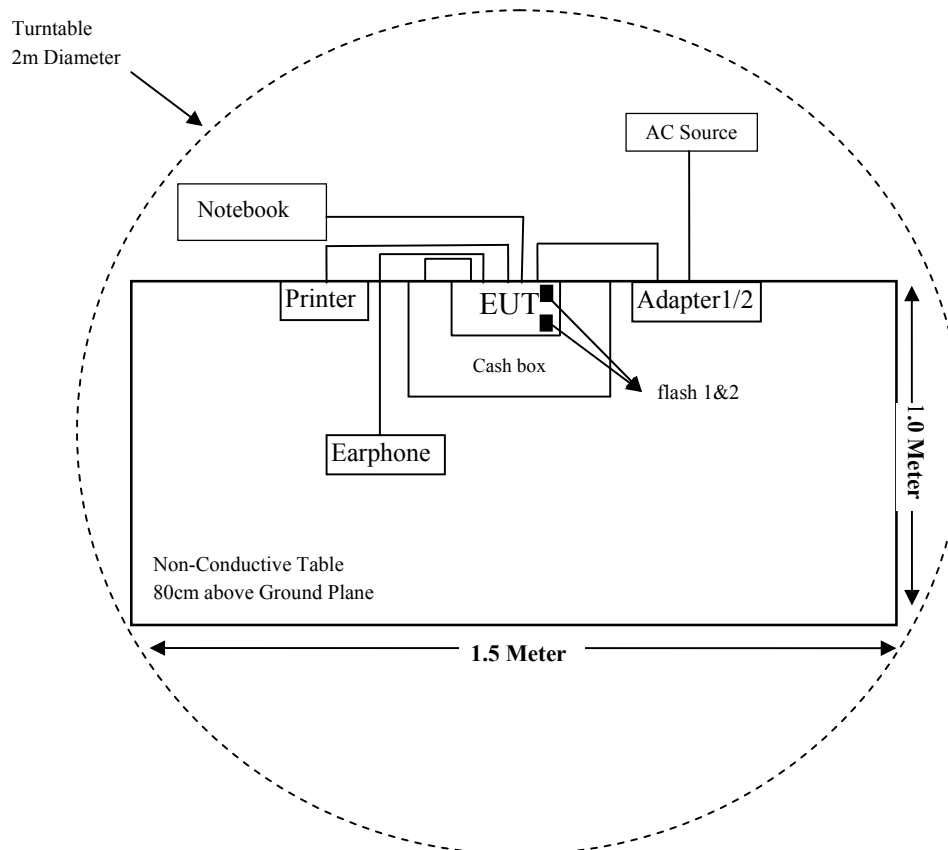

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.225 §15.209 §15.205	Radiated Emission Test	Compliant
§15.225(e)	Frequency Stability	Compliant
§15.215(c)	20dB Emission Bandwidth Testing	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-30	2019-11-29
Sunol Sciences	Broadband Antenna	JB3	A040914-2	2016-01-09	2022-01-08
Sonoma Instrument	Pre-amplifier	310N	171205	2019-08-15	2020-08-14
ETS-LINDGREN	Loop Antenna	6512	00108100	2019-04-25	2022-04-24
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-07-11	2020-07-10
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-30	2019-11-29
Audix	Test Software	e3	V9	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2019-08-15	2020-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connected Construction

The EUT has a PCB antenna and antenna gain is 0dBi, which was permanently attached, fulfill the requirement of this section, please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

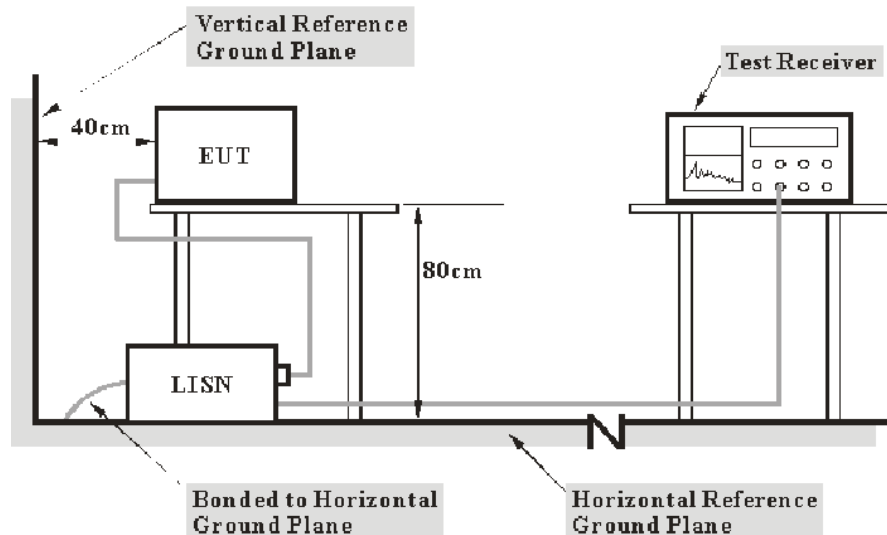

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over Limit of 7 dB means the emission is 7 dB above the limit. The equation for over limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	23.2~24.6℃
Relative Humidity:	48~50 %
ATM Pressure:	101.1~101.3kPa

The testing was performed by Stone Zhang from 2019-08-19 to 2019-08-23.


EUT operation mode: Transmitting (for Adapter-1)

AC 120V/60 Hz, Line

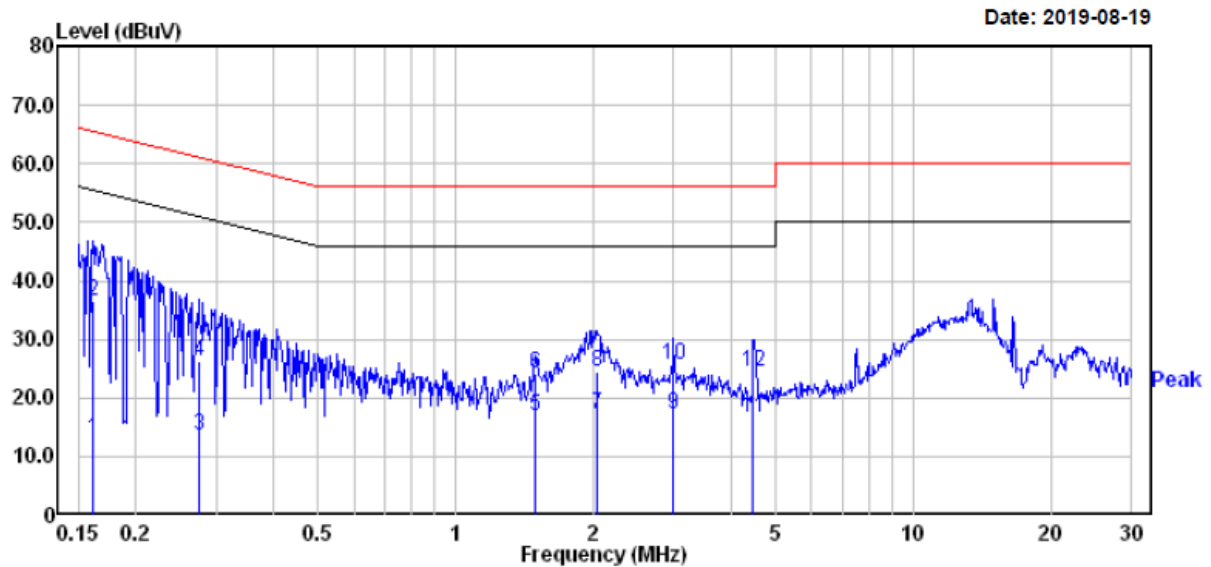

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.161	-6.90	19.83	12.93	55.43	-42.50	Average
2	0.161	16.70	19.83	36.53	65.43	-28.90	QP
3	0.274	-6.30	19.82	13.52	50.98	-37.46	Average
4	0.274	6.30	19.82	26.12	60.98	-34.86	QP
5	1.495	-3.00	19.84	16.84	46.00	-29.16	Average
6	1.495	4.35	19.84	24.19	56.00	-31.81	QP
7	2.044	-2.65	19.79	17.14	46.00	-28.86	Average
8	2.044	4.61	19.79	24.40	56.00	-31.60	QP
9	2.993	-2.30	19.46	17.16	46.00	-28.84	Average
10	2.993	6.10	19.46	25.56	56.00	-30.44	QP
11	4.478	-3.00	19.48	16.48	46.00	-29.52	Average
12	4.478	4.90	19.48	24.38	56.00	-31.62	QP


AC 120V/60 Hz, Neutral

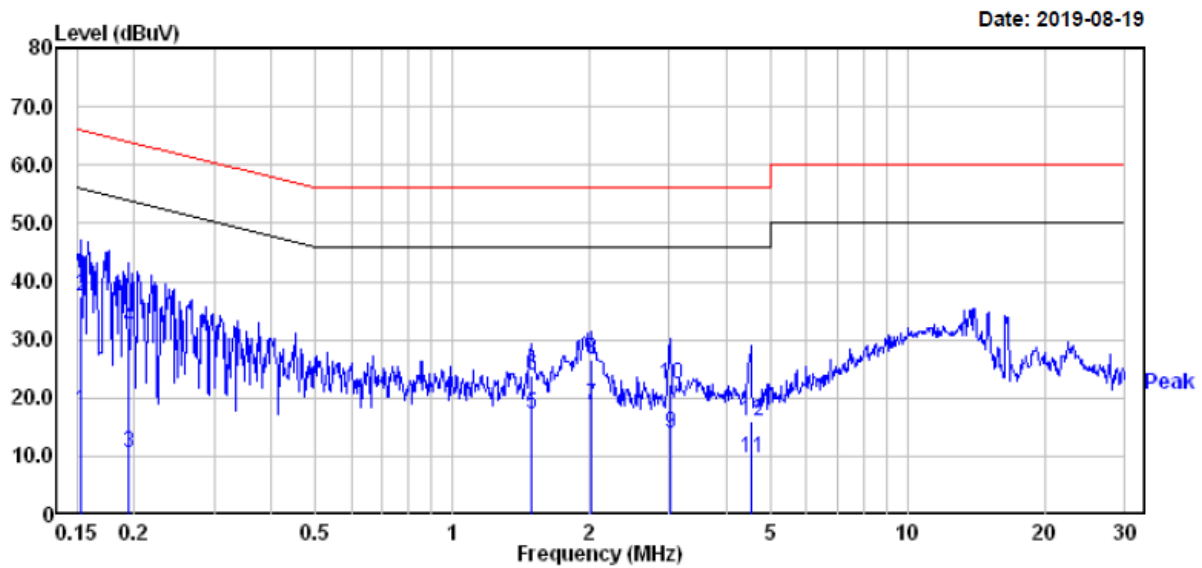


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.152	-1.90	19.82	17.92	55.87	-37.95	Average
2	0.152	17.50	19.82	37.32	65.87	-28.55	QP
3	0.194	-9.40	19.82	10.42	53.84	-43.42	Average
4	0.194	12.30	19.82	32.12	63.84	-31.72	QP
5	1.487	-2.60	19.84	17.24	46.00	-28.76	Average
6	1.487	4.10	19.84	23.94	56.00	-32.06	QP
7	2.012	-1.00	19.82	18.82	46.00	-27.18	Average
8	2.012	6.60	19.82	26.42	56.00	-29.58	QP
9	3.025	-5.70	19.46	13.76	46.00	-32.24	Average
10	3.025	2.80	19.46	22.26	56.00	-33.74	QP
11	4.525	-9.71	19.49	9.78	46.00	-36.22	Average
12	4.525	-3.61	19.49	15.88	56.00	-40.12	QP

EUT operation mode: Transmitting (for Adapter-2)

AC 120V/60 Hz, Line

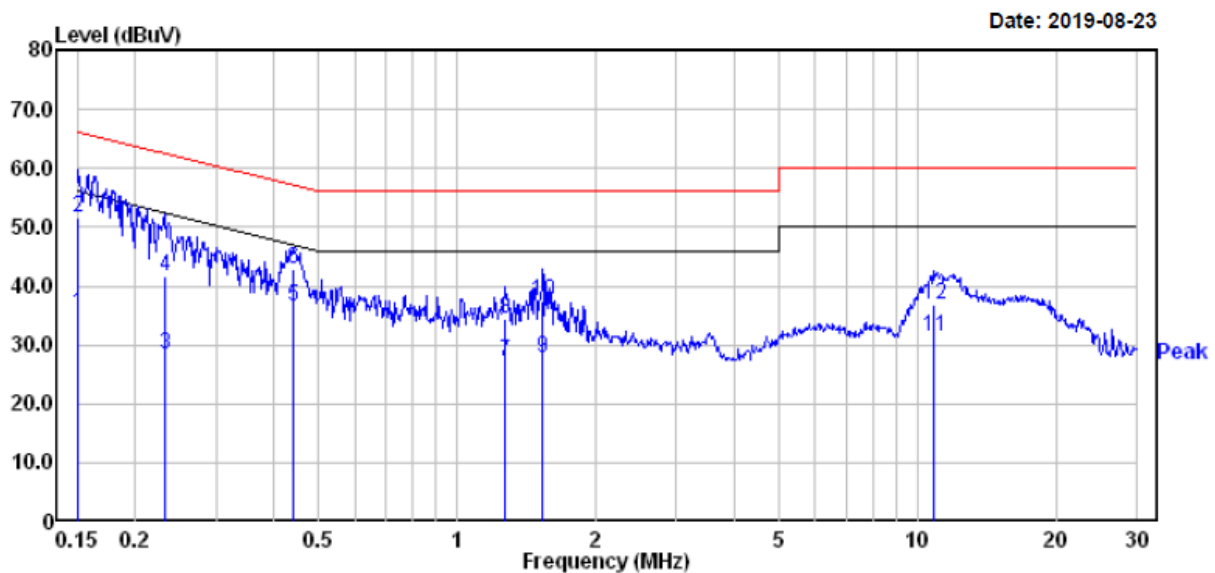

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	15.40	19.82	35.22	56.00	-20.78	Average
2	0.150	31.70	19.82	51.52	66.00	-14.48	QP
3	0.232	8.50	19.82	28.32	52.39	-24.07	Average
4	0.232	21.70	19.82	41.52	62.39	-20.87	QP
5	0.440	16.80	19.75	36.55	47.07	-10.52	Average
6	0.440	23.10	19.75	42.85	57.07	-14.22	QP
7	1.276	7.40	19.82	27.22	46.00	-18.78	Average
8	1.276	14.50	19.82	34.32	56.00	-21.68	QP
9	1.535	7.79	19.85	27.64	46.00	-18.36	Average
10	1.535	17.59	19.85	37.44	56.00	-18.56	QP
11	10.905	11.90	19.57	31.47	50.00	-18.53	Average
12	10.905	17.20	19.57	36.77	60.00	-23.23	QP

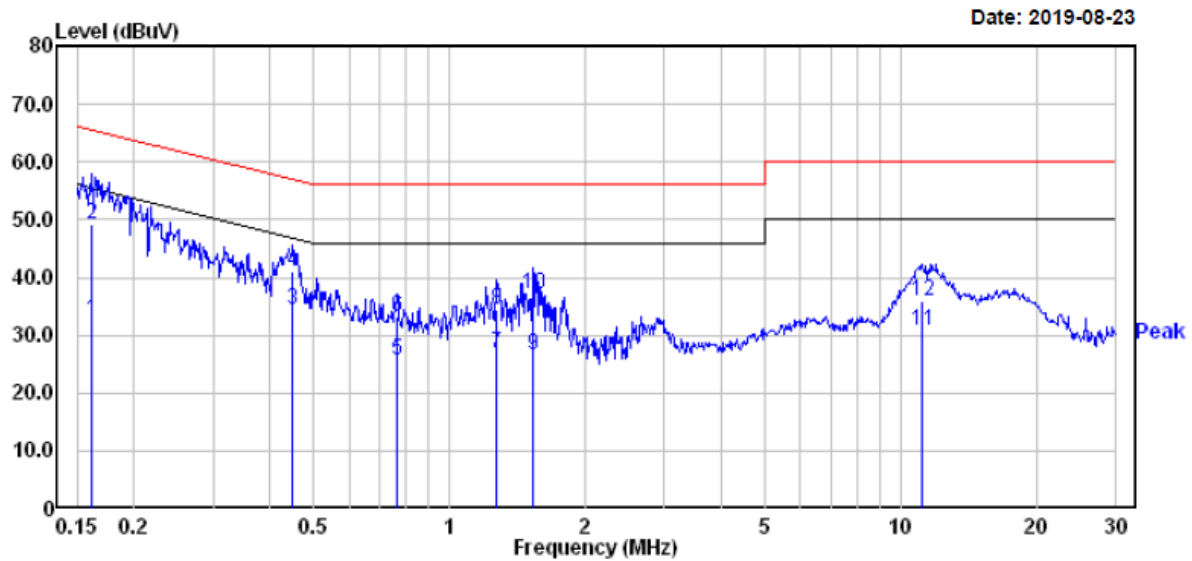AC 120V/60 Hz, Neutral

		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.161	12.90	19.83	32.73	55.43	-22.70	Average
2	0.161	29.40	19.83	49.23	65.43	-16.20	QP
3	0.449	14.60	19.75	34.35	46.89	-12.54	Average
4	0.449	21.40	19.75	41.15	56.89	-15.74	QP
5	0.767	5.90	19.72	25.62	46.00	-20.38	Average
6	0.767	13.60	19.72	33.32	56.00	-22.68	QP
7	1.276	6.90	19.82	26.72	46.00	-19.28	Average
8	1.276	14.70	19.82	34.52	56.00	-21.48	QP
9	1.535	6.69	19.85	26.54	46.00	-19.46	Average
10	1.535	17.29	19.85	37.14	56.00	-18.86	QP
11	11.139	11.09	19.58	30.67	50.00	-19.33	Average
12	11.139	16.49	19.58	36.07	60.00	-23.93	QP

Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST

Applicable Standard

As per FCC Part 15.225


(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

EUT Setup

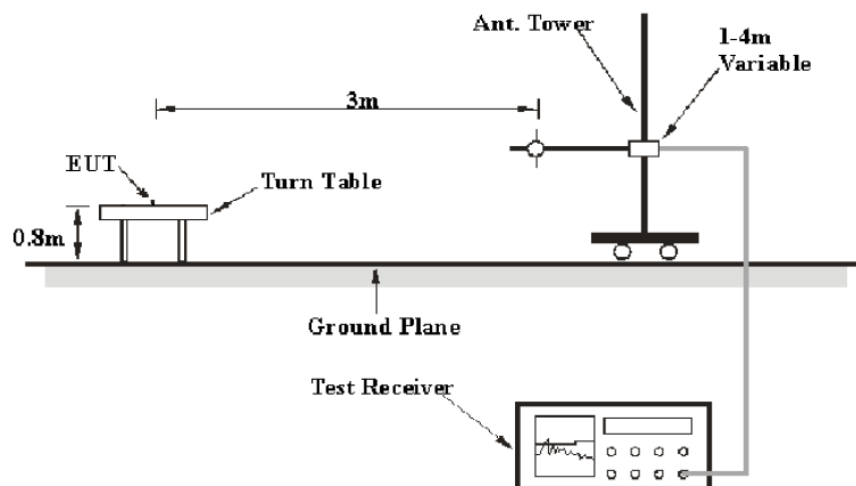

The radiated emission tests were performed in the 3-meter chamber a test site, using the setup accordance with the ANSI C63.10. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	200 Hz	1 kHz	/	
150 kHz – 30 MHz	9 kHz	30 kHz	/	QP/Average
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

Note: If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP/Average measurement.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Factor = Antenna Factor + Cable Loss- Amplifier Gain

Corrected Amplitude = Meter Reading + Corrected Factor

The “**Margin**” column of the following data tables indicates the degree of Compliant with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209, 15.205, 15.225.

Test Data


Environmental Conditions

Temperature:	24.2~25.1 °C
Relative Humidity:	48~50 %
ATM Pressure:	101.1~101.3 kPa

The testing was performed by Stone Zhang from 2019-09-10 to 2019-09-11.

Test mode: Transmitting (for Adapter-1)

1) Spurious Emissions (9 kHz~150 kHz):

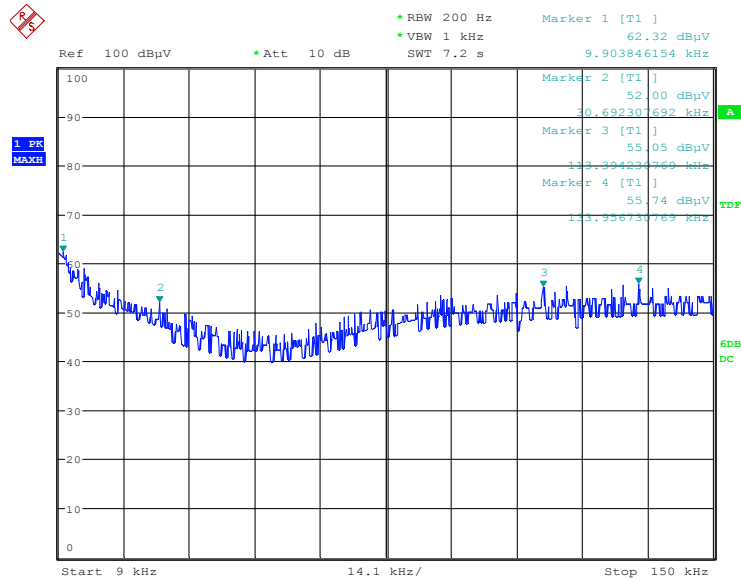


Date: 10.SEP.2019 08:02:13

Frequency (KHz)	Corrected Amplitude (dBμV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	FCC Part 15.225/15.209	
				Limit (dBμV/m)@3m	Margin (dB)
9.90	62.32	PK	45.85	127.69	65.37
30.69	52.00	PK	45.14	117.86	65.86
65.22	48.32	PK	44.21	111.32	63.00
73.63	51.06	PK	45.92	110.26	59.20
113.39	55.05	PK	50.41	106.51	51.46
133.96	55.74	PK	50.87	105.06	49.32

Note: The EMI Test Receiver only can mark 4 points, and there are 2 points recorded by manual.

Note: The average emissions which fall into frequencies 9-90 kHz, 110-490 kHz was not recorded, because the peak emissions are below the average limit.

2) Spurious Emissions (150 kHz~30 MHz):

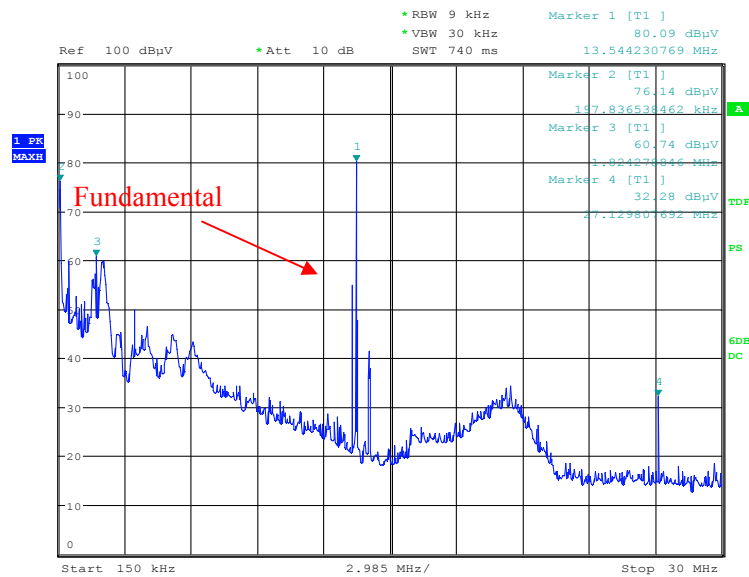


Date: 11.SEP.2019 00:04:42

Frequency (MHz)	Corrected Amplitude (dBμV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	FCC Part 15.225/15.209	
				Limit (dBμV/m)@3m	Margin (dB)
0.20	76.14	PK	51.56	101.71	25.57
1.82	60.74	PK	14.96	69.54	8.80
4.36	46.53	PK	15.15	69.54	23.01
13.56	80.09	PK	6.12	124.00	43.91
20.86	28.67	PK	5.58	69.54	40.87
27.13	32.28	PK	5.29	69.54	37.26


Note: The average emissions which fall into frequencies 9-90 kHz, 110-490 kHz was not recorded, because the peak emissions are below the average limit.

3) Spurious Emissions (13.11MHz~13.41 MHz):

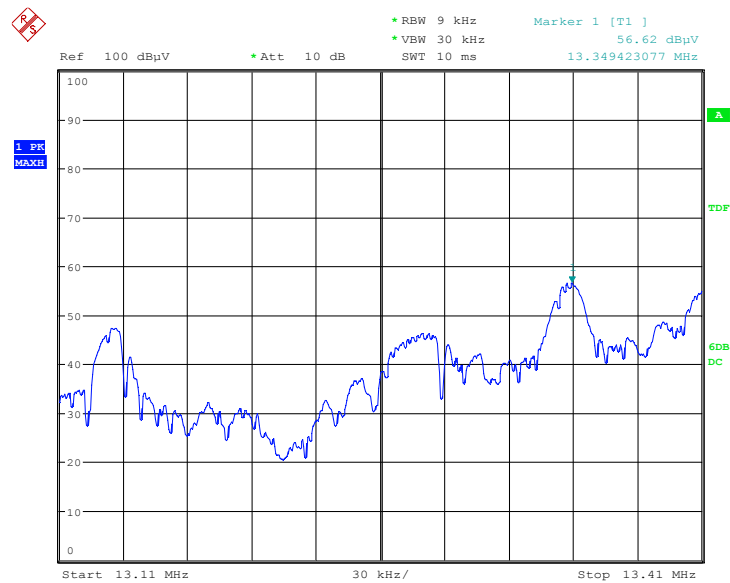


Date: 10.SEP.2019 08:07:13

Spurious Emissions (13.41MHz~13.553 MHz):

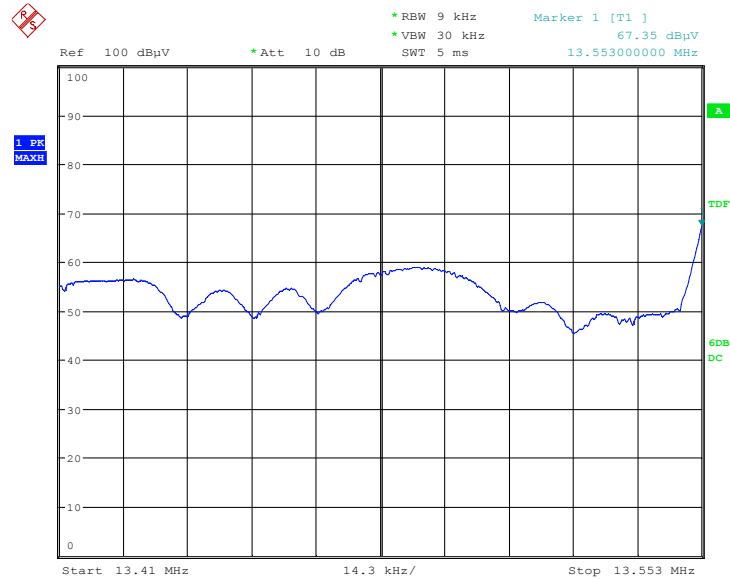


Date: 10.SEP.2019 08:12:46

Spurious Emissions (13.567MHz~13.71 MHz):

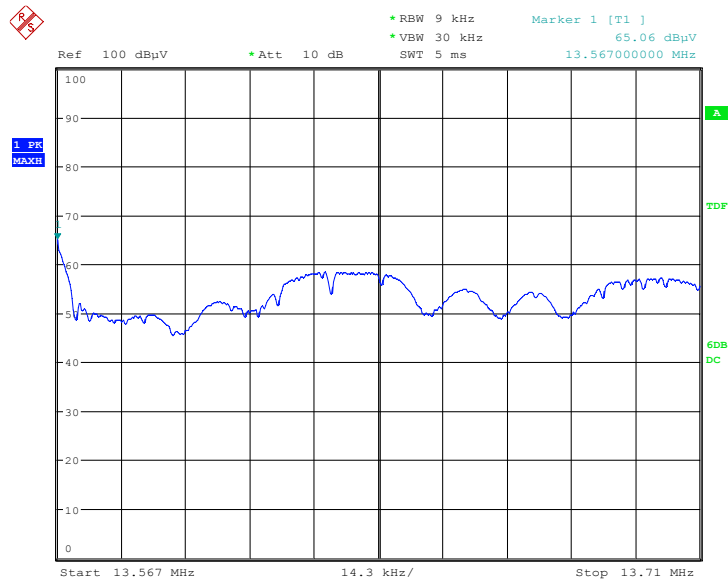

Date: 10.SEP.2019 08:14:40


Spurious Emissions (13.71MHz~14.01 MHz):

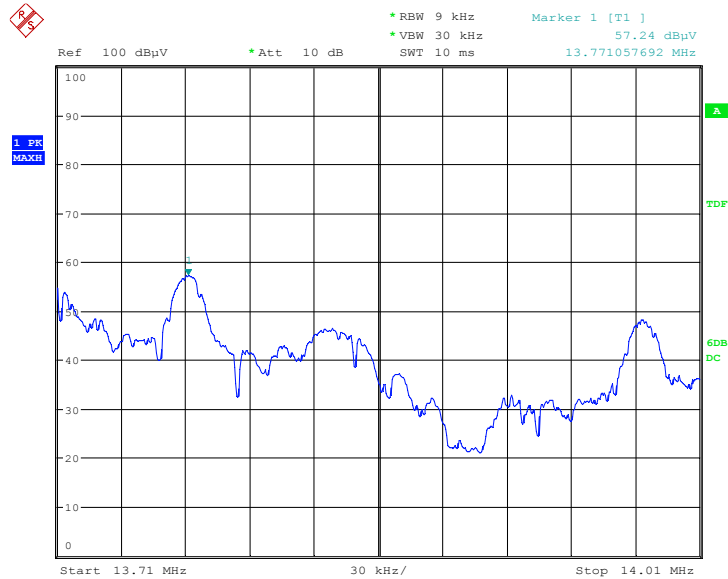

Date: 10.SEP.2019 08:21:57

Frequency (MHz)	Corrected Amplitude (dB μ V/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	FCC Part 15.225/15.209	
				Limit (dB μ V/m)@3m	Margin (dB)
13.349	56.62	PK	6.14	80.50	23.88
13.553	67.35	PK	6.12	90.50	23.15
13.567	65.06	PK	6.12	90.50	25.44
13.771	57.24	PK	6.09	80.50	23.26

4) Spurious Emissions (30 MHz ~1 GHz):

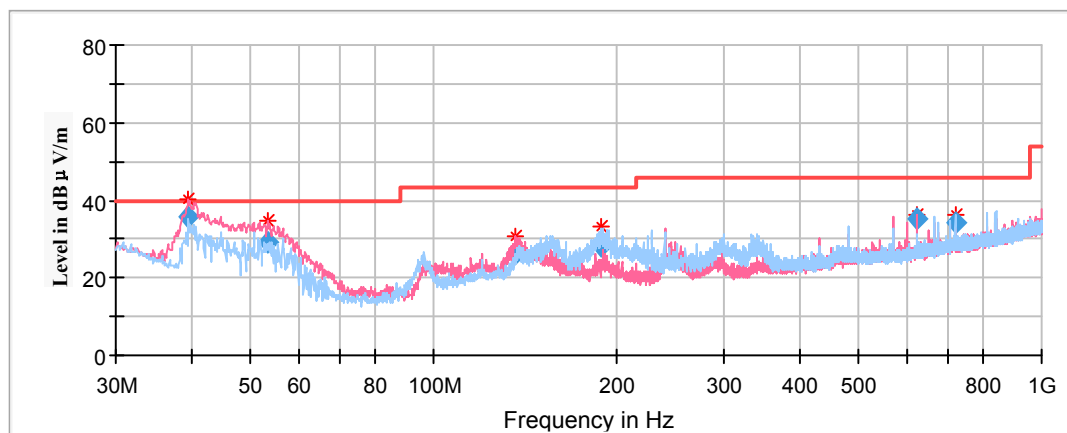

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	QuasiPeak (dB μ V/m)	Height (cm)	Polar (H/V)				
39.46	35.60	100	V	301	-11.1	40.00	4.40
53.30	29.26	100	V	175	-17.7	40.00	10.74
136.74	26.12	100	V	40	-11.8	43.50	17.38
189.24	28.10	100	H	283	-13.0	43.50	15.40
624.01	35.19	100	V	240	-4.7	46.00	10.81
720.00	34.08	200	H	175	-2.9	46.00	11.92

Note:


Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (Rx) + cable loss – amplifier factor

Margin = Limit - Corrected Amplitude

Test mode: Transmitting(for Adapter-2)

1) Spurious Emissions (9 kHz~150 kHz):

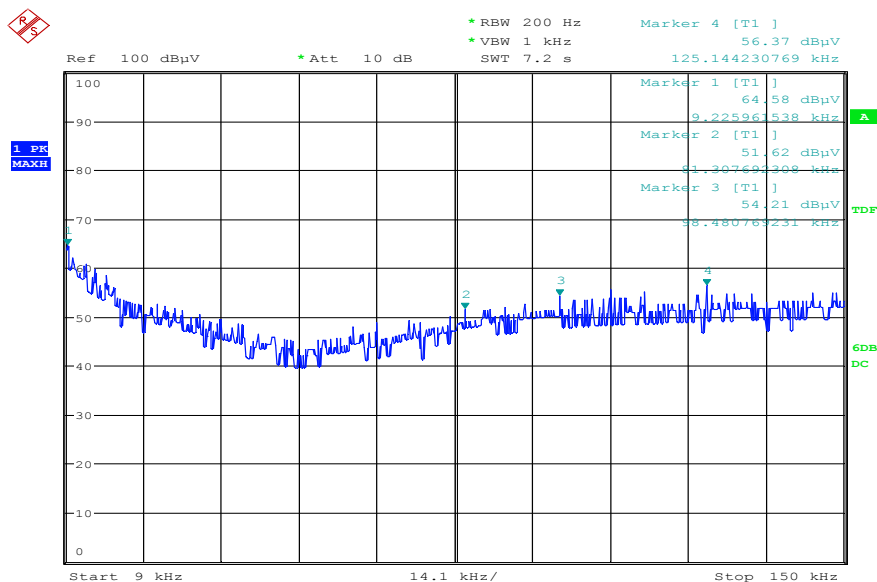


Date: 10.SEP.2019 08:01:04

Frequency (KHz)	Corrected Amplitude (dBμV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	FCC Part 15.225/15.209	
				Limit (dBμV/m)@3m	Margin (dB)
9.23	64.58	PK	56.85	128.30	63.72
35.21	51.62	PK	45.85	116.67	65.05
81.31	51.62	PK	47.14	109.40	57.78
98.48	54.21	PK	49.95	107.74	53.53
125.14	56.37	PK	50.55	105.66	49.29
147.36	53.27	PK	50.86	104.24	50.97

Note: The EMI Test Receiver only can mark 4 points, and there are 2 points recorded by manual.

Note: The average emissions which fall into frequencies 9-90 kHz, 110-490 kHz was not recorded, because the peak emissions are below the average limit.

2) Spurious Emissions (150 kHz~30 MHz):

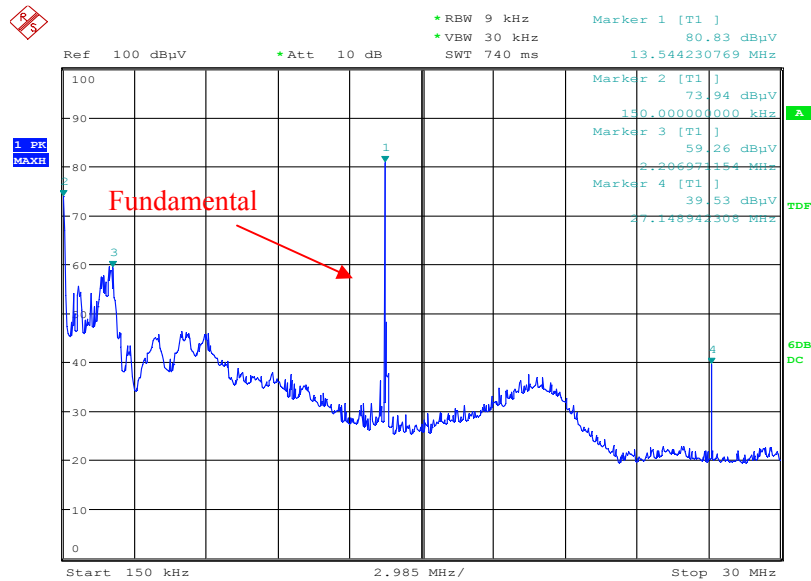


Date: 10.SEP.2019 07:39:06

Frequency (MHz)	Corrected Amplitude (dBμV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	FCC Part 15.225/15.209	
				Limit (dBμV/m)@3m	Margin (dB)
0.15	73.94	PK	50.90	104.08	30.14
2.21	59.26	PK	13.52	69.54	10.28
4.36	48.63	PK	15.15	69.54	20.91
13.56	80.83	PK	6.12	124.00	43.17
20.86	36.57	PK	5.58	69.54	32.97
27.15	39.53	PK	5.25	69.54	30.01


Note: The average emissions which fall into frequencies 9-90 kHz, 110-490 kHz was not recorded, because the peak emissions are below the average limit.

3) Spurious Emissions (13.11MHz~13.41 MHz):

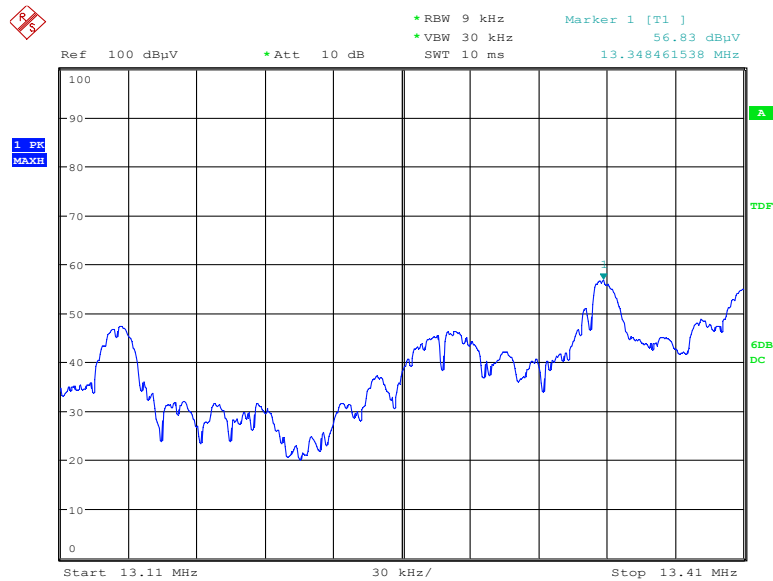


Date: 10.SEP.2019 08:08:53

Spurious Emissions (13.41MHz~13.553 MHz):

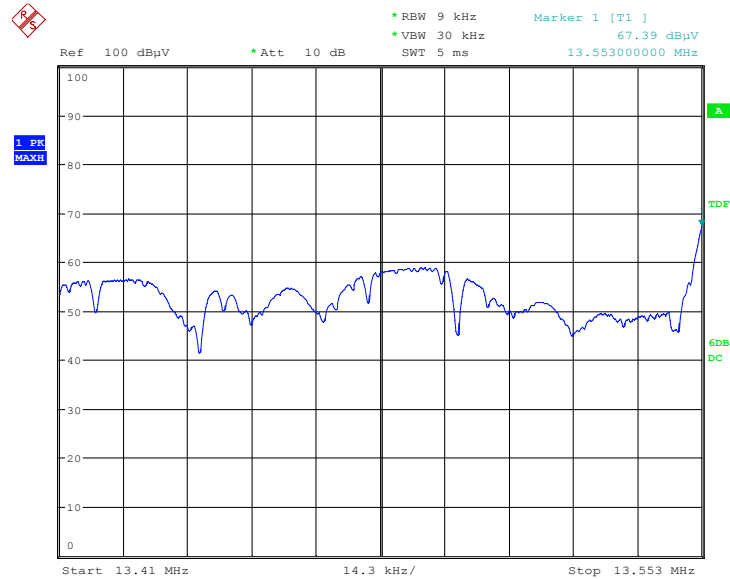


Date: 10.SEP.2019 08:10:19

Spurious Emissions (13.567MHz~13.71 MHz):

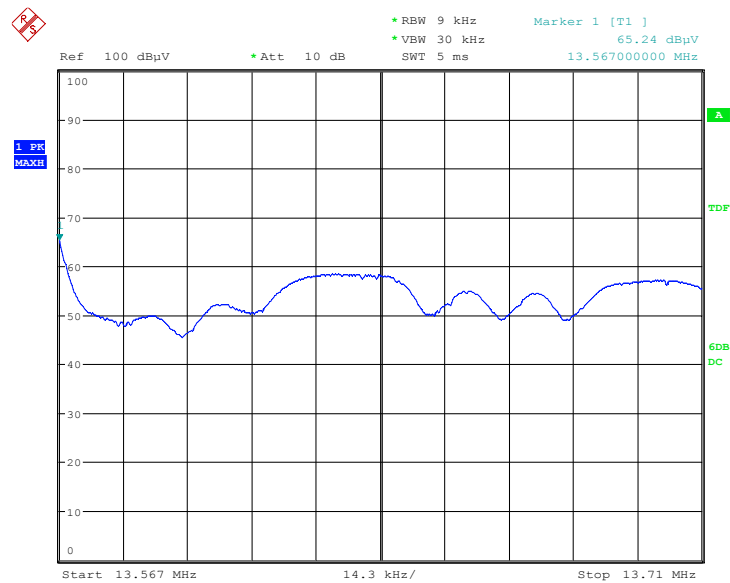

Date: 10.SEP.2019 08:17:36


Spurious Emissions (13.71MHz~14.01 MHz):

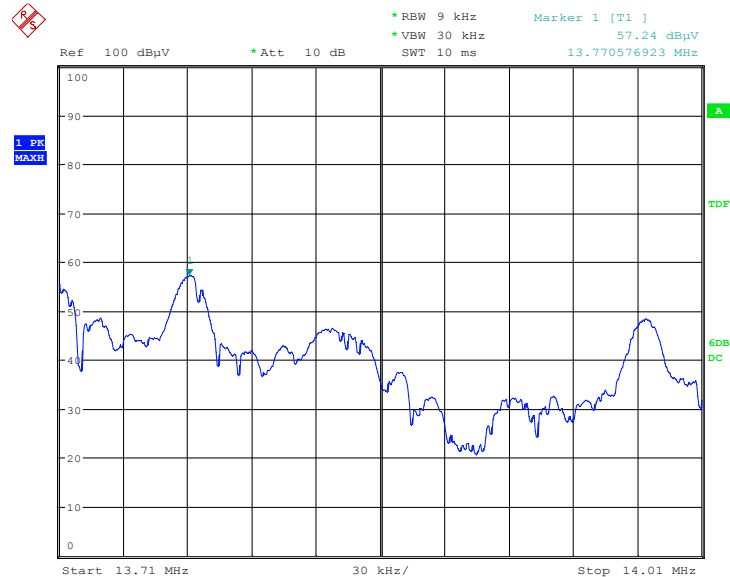

Date: 10.SEP.2019 08:20:10

Frequency (MHz)	Corrected Amplitude (dBμV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	FCC Part 15.225/15.209	
				Limit (dBμV/m)@3m	Margin (dB)
13.348	56.83	PK	6.14	80.50	23.67
13.553	67.39	PK	6.12	90.50	23.11
13.567	65.24	PK	6.12	90.50	25.26
13.771	57.24	PK	6.09	80.50	23.26

4) Spurious Emissions (30 MHz ~1 GHz):

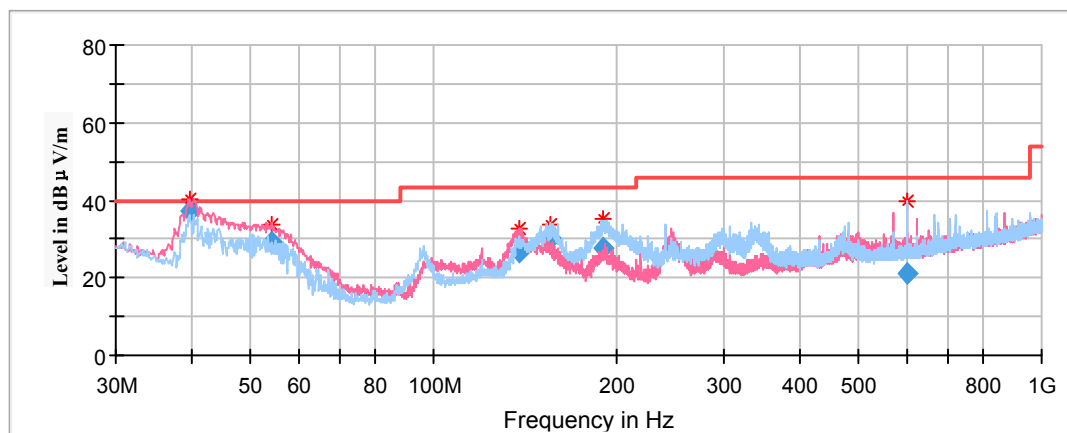

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
39.66	37.32	101	V	326.0	-10.5	40.00	2.68
54.30	29.33	101	V	133.0	-17.7	40.00	10.67
137.82	26.46	101	V	67.0	-11.9	43.50	17.04
156.09	30.43	200	H	102.0	-12.6	43.50	13.07
189.62	27.67	200	H	266.0	-13.0	43.50	15.83
600.00	21.11	200	H	132.0	-5.2	46.00	24.89

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (Rx) + cable loss – amplifier factor

Margin = Limit - Corrected Amplitude

FCC§15.225(e) - FREQUENCY STABILITY

Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Procedure

a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.

b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.
NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.

e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.

f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

g) Measure the frequency at each of frequencies specified in 5.6.

h) Switch OFF the EUT but do not switch OFF the oscillator heater.

i) Lower the chamber temperature by not more than 10°C , and allow the temperature inside the chamber to stabilize.

j) Repeat step f) through step i) down to the lowest specified temperature.

Test Data**Environmental Conditions**

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Stone Zhang on 2019-09-12.

Test Mode: Transmitting (for Adapter-1).

Test Result: Pass

F₀=13.56MHz				
Power Supply(V_{AC})	Temperature (°C)	Measured Frequency (MHz)	Frequency Error (%)	Part 15.225 Limit
120V	-20	13.5605365	0.00396	±0.01%
	-10	13.5604375	0.00323	±0.01%
	0	13.5606325	0.00466	±0.01%
	+10	13.5605226	0.00385	±0.01%
	+20	13.5604351	0.00321	±0.01%
	+30	13.5603275	0.00242	±0.01%
	+40	13.5602118	0.00156	±0.01%
	+50	13.5602208	0.00163	±0.01%
102V	+20	13.5605226	0.00385	±0.01%
138V	+20	13.5604351	0.00321	±0.01%

Test Mode: Transmitting (for Adapter-2).

Test Result: Pass

$F_0=13.56\text{MHz}$				
Power Supply(V _{AC})	Temperature (°C)	Measured Frequency (MHz)	Frequency Error (%)	Part 15.225 Limit
120V	-20	13.5609886	0.00729	±0.01%
	-10	13.5610864	0.00801	±0.01%
	0	13.5610895	0.00803	±0.01%
	+10	13.5610885	0.00803	±0.01%
	+20	13.5610622	0.00783	±0.01%
	+30	13.5605190	0.00383	±0.01%
	+40	13.5604370	0.00322	±0.01%
	+50	13.5603985	0.00294	±0.01%
102V	+20	13.5610885	0.00803	±0.01%
138V	+20	13.5610622	0.00783	±0.01%

§15.215(c) - 20dB EMISSION BANDWIDTH TESTING

Requirement

Per 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

Test Data

Environmental Conditions

Temperature:	24.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3kPa


The testing was performed by Stone Zhang on 2019-09-10.

Test Mode: Transmitting

Test Result: Pass.

Frequency (MHz)	20 dB Bandwidth (kHz)
13.56	1.875

20 dB Emission Bandwidth

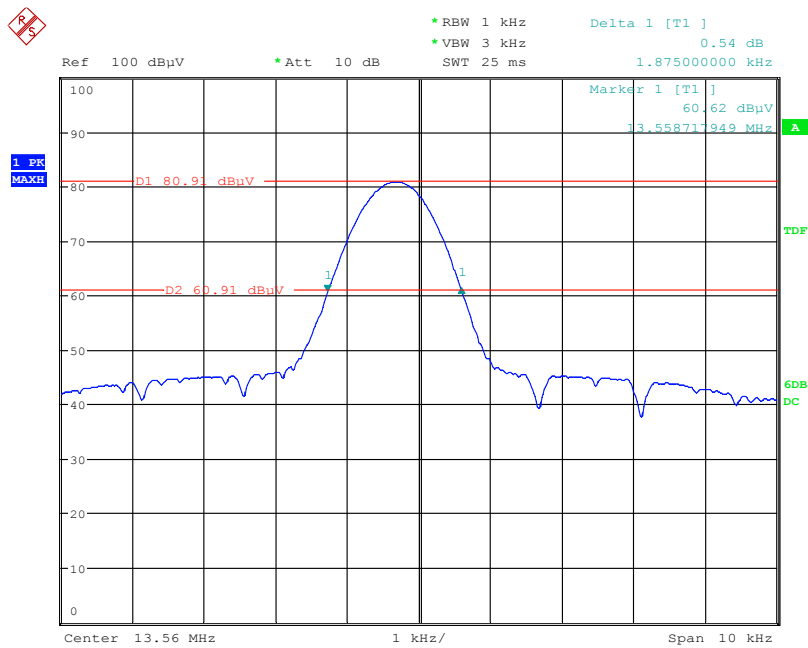

Date: 10.SEP.2019 07:57:09

***** END OF REPORT *****