



Report No.: TW2012217-01E File Reference No.: 2021-01-16

Applicant: Qingdao Hisense Intelligent Commercial System Co., Ltd.

Product: Tablet POS

Model No.: HM628N, HM628

Trademark: N/A

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility



Dated: January 16, 2021

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Date: 2021-01-16



Page 2 of 121

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	13
6.1	Test Method and Test Procedure.	13
6.2	Configuration of the EUT	14
6.3	EUT Operation Condition.	14
6.4	Radiated Emission Limit	14
7.0	6dB Bandwidth Measurement.	24
8.0	Maximum Output Power	44
9.0	Power Spectral Density Measurement.	47
10.0	Out of Band Measurement.	65
11.0	Antenna Requirement.	83
12.0	FCC ID Label.	84
13.0	Photo of Test Setup and EUT View.	85

Date: 2021-01-16



Page 4 of 121

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Qingdao Hisense Intelligent Commercial System Co., Ltd.

Address: 399 Songling Road, Laoshan, Qingdao, China

Telephone: --Fax: ---

1.3 Description of EUT

Product: Tablet POS

Manufacturer: Qingdao Hisense Intelligent Commercial System Co., Ltd.

Address: 399 Songling Road, Laoshan, Qingdao, China

Brand Name: N/A

Model Number: HM628N Additional Model Number: HM628 Hardware Version: WTR288C1

Software Version: HX-JX-10-GLKC2R100

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz; 802.11n HT40: 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n HT20, HT40

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20/HT40: mcs0-mcs9

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels; EEE 802.11n (HT40): 7 Channels; Antenna: Integral antennas use. The gain of the antennas is 1.48dBi (get from the antenna

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2021-01-16



Page 5 of 121

specification provided the applicant)

Input Voltage: DC12V

Battey: DC7.6V, 11000mAh Li-ion battery

Power Supply: Model: PG241-12020001; Input: 100-240V~, 50/60Hz, 0.8A;

(for simple base) Output: 12.0V 2.0A,24W

Power Supply: Model: FSP090-AAAN3; Input: 100-240V~, 50-60Hz, 1.2A;

(for multi-functional Output: DC24.0V, 3.75A,90W

base)

1.4 Submitted Sample: 1 Samples

1.5 Test Duration

2020-12-17 to 2021-01-16

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by



Page 6 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2020-06-23	2021-06-22
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2020-06-23	2021-06-22
Loop Antenna	EMCO	6507	00078608	2018-06-25	2021-06-24
Spectrum	R&S	FSIQ26	100292	2020-06-23	2021-06-22
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2021-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2020-06-23	2021-06-22
Power sensor	Anritsu	MA2491A	32263	2020-06-23	2021-06-22
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2020-06-23	2021-06-22
EMI Test Receiver	RS	ESH3	860904/006	2020-06-23	2021-06-22
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2020-06-23	2021-06-22
Spectrum	HP/Agilent	E4407B	MY50441392	2020-06-23	2021-06-22
Spectrum	RS	FSP	1164.4391.38	2020-01-16	2021-01-15
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2020-06-23	2021-06-22
RF Cable	7h an a di	7m		2020-06-23	2021-06-22
	Zhengdi				
RF Switch	EM	EMSW18	060391	2020-06-23	2021-06-22
Pre-Amplifier	Schwarebeck	BBV9743	#218	2020-06-23	2021-06-22
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2020-06-23	2021-06-22
LISN	SCHAFFNER	NNB42	00012	2021-01-06	2022-01-05

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2021-01-16



Page 7 of 121

3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: msc0 data rate (worst case) were chosen for full testing

Note: during the test, the duty cycle was set up to 100%.

Page 8 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



3.0 **Technical Details**

3.1 Summary of test results

The EUT has been tested according to the following specifications:				
Standard	Test Type	Result	Notes	
FCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies	
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies	
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies	
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies	
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm/3kHz	PASS	Complies	
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies	

Note: the multi-functional base and simple base were tested and only the worst case was reported. The multi-functional base was the worst case.

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Date: 2021-01-16



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

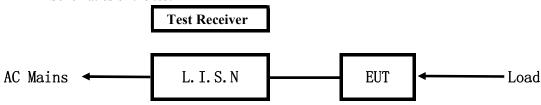


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

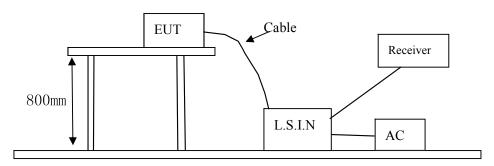

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Tablet DOC	Qingdao Hisense Intelligent	HM628N,	COV HMC20N
Tablet POS	Commercial System Co., Ltd.	HM628	GQK-HM628N

B. Internal Device

Device Manufacturer		Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating

5.4 EUT Operating Condition

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2021-01-16



Page 10 of 121

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)		
(MHz)	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	56.0	46.0	
5.00 ~ 30.00	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2021-01-16



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Results: PASS

Please refer to following diagram for individual

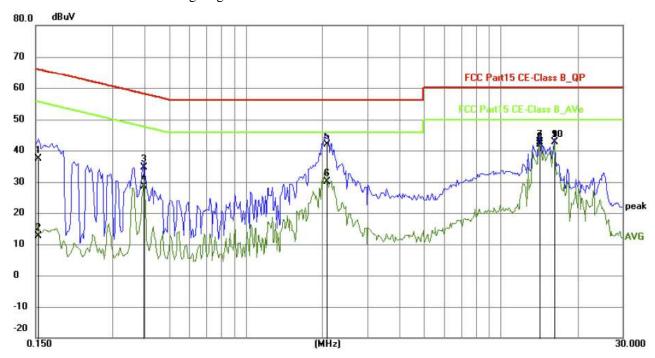

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	27.58	9.78	37.36	65.79	-28.43	QP	Р
2	0.1539	2.87	9.78	12.65	55.79	-43.14	AVG	Р
3	0.3996	24.85	9.76	34.61	57.86	-23.25	QP	Р
4	0.3996	18.83	9.76	28.59	47.86	-19.27	AVG	Р
5	2.0727	32.10	9.80	41.90	56.00	-14.10	QP	Р
6	2.0727	20.26	9.80	30.06	46.00	-15.94	AVG	Р
7	14.2125	32.16	10.35	42.51	60.00	-17.49	QP	Р
8	14.2125	31.11	10.35	41.46	50.00	-8.54	AVG	Р
9	16.2288	32.26	10.45	42.71	60.00	-17.29	QP	Р
10	16.2288	32.16	10.45	42.61	50.00	-7.39	AVG	Р

Date: 2021-01-16



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

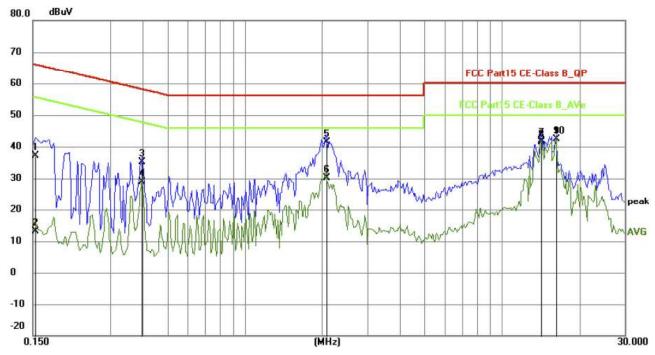

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	27.39	9.78	37.17	65.79	-28.62	QP	Р
2	0.1539	3.47	9.78	13.25	55.79	-42.54	AVG	Р
3	0.3996	25.28	9.76	35.04	57.86	-22.82	QP	Р
4	0.3996	19.24	9.76	29.00	47.86	-18.86	AVG	Р
5	2.0727	31.50	9.80	41.30	56.00	-14.70	QP	Р
6	2.0727	20.22	9.80	30.02	46.00	-15.98	AVG	Р
7	14.2125	31.56	10.35	41.91	60.00	-18.09	QP	Р
8	14.2125	30.99	10.35	41.34	50.00	-8.66	AVG	Р
9	16.2288	31.84	10.45	42.29	60.00	-17.71	QP	Р
10	16.2288	31.81	10.45	42.26	50.00	-7.74	AVG	Р

Report No.: TW2012217-01E Page 13 of 121

Date: 2021-01-16




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

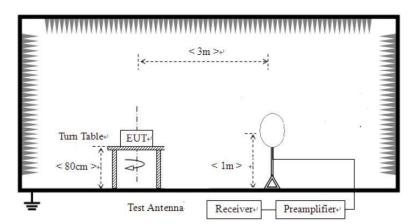


Date: 2021-01-16



For radiated emissions from 30MHz to1GHz

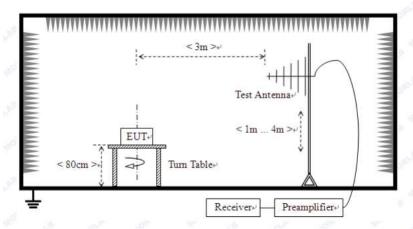

For radiated emissions above 1GHz

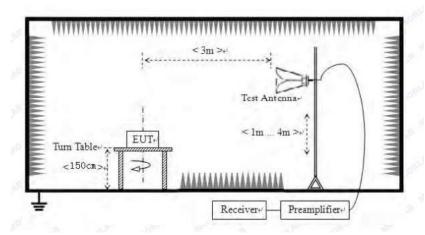

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209

Report No.: TW2012217-01E Page 15 of 121

Date: 2021-01-16



Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Worse case were recorded in the test report. 802.11b was the worst case.
- 5. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 16 of 121

Report No.: TW2012217-01E

Date: 2021-01-16




Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: Pass

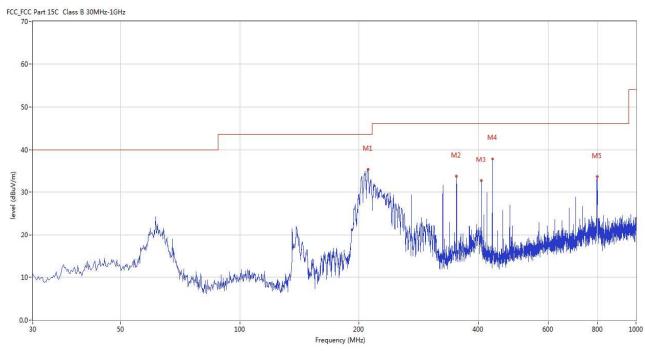

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	210.617	35.34	-13.62	43.5	-8.16	Peak	0.00	100	Horizontal	Pass
2	352.444	33.75	-9.46	46.0	-12.25	Peak	9.00	100	Horizontal	Pass
3	406.993	32.73	-8.61	46.0	-13.27	Peak	9.00	100	Horizontal	Pass
4	433.904	37.78	-8.03	46.0	-8.22	Peak	6.00	100	Horizontal	Pass
5	799.260	33.59	-2.99	46.0	-12.41	Peak	11.00	100	Horizontal	Pass

Report No.: TW2012217-01E Page 17 of 121

Date: 2021-01-16




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: Pass

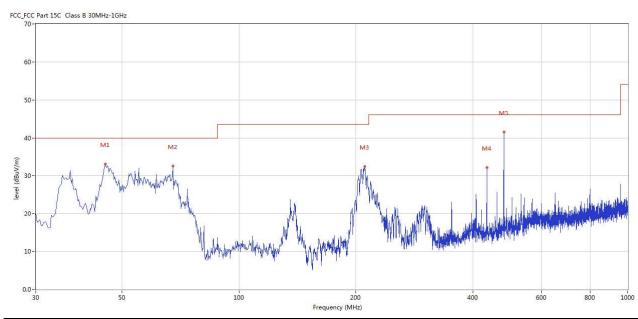

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	45.274	33.10	-11.40	40.0	-6.90	Peak	358.00	100	Vertical	Pass
2	67.578	32.57	-14.47	40.0	-7.43	Peak	360.00	100	Vertical	Pass
3	210.375	32.37	-13.60	43.5	-11.13	Peak	351.00	100	Vertical	Pass
4	433.904	32.19	-8.03	46.0	-13.81	Peak	360.00	100	Vertical	Pass
5	479.968	41.59	-7.40	46.0	-4.41	Peak	358.00	100	Vertical	Pass

Page 18 of 121


Date: 2021-01-16



Please refer to the following test plots for details:

CH01 for 11b at 1Mbps: Horizontal

Report No.: TW2012217-01E

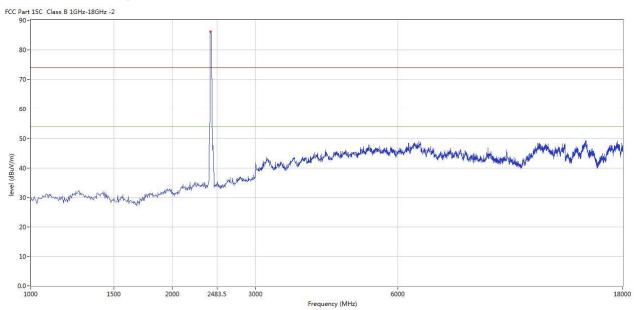


Page 19 of 121 Report No.: TW2012217-01E

Date: 2021-01-16



CH01 for 11b at 1Mbps: Vertical

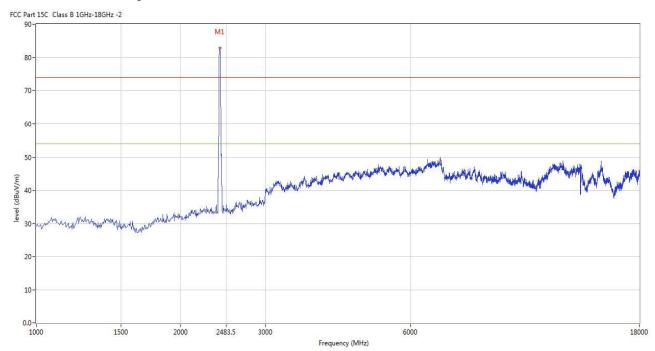


Page 20 of 121 Report No.: TW2012217-01E

Date: 2021-01-16



CH06 for 11b at 1Mbps: Vertical

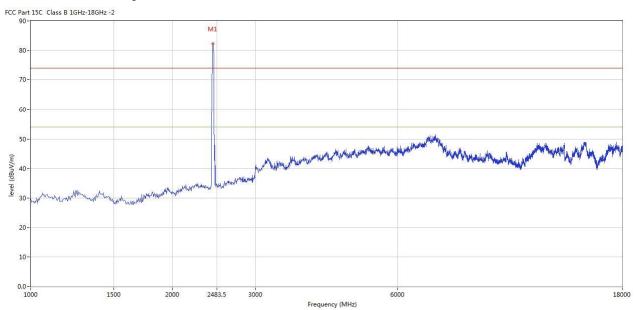


Report No.: TW2012217-01E Page 21 of 121

Date: 2021-01-16



CH06 for 11b at 1Mbps: Horizontal

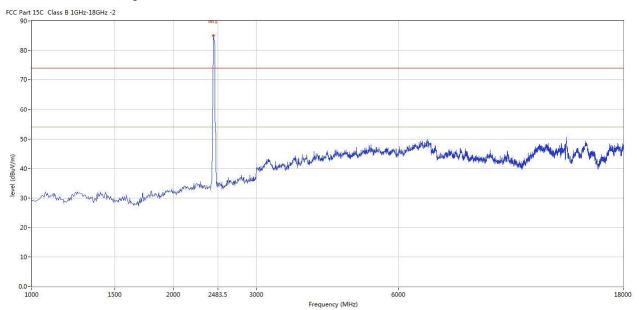


Report No.: TW2012217-01E Page 22 of 121

Date: 2021-01-16



CH11 for 11b at 1Mbps: Vertical

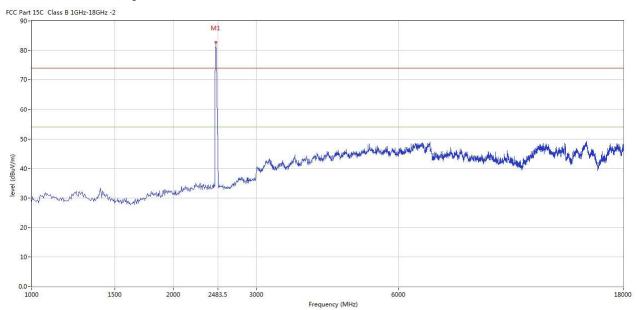


Page 23 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



CH11 for 11g at 6Mbps: Horizontal

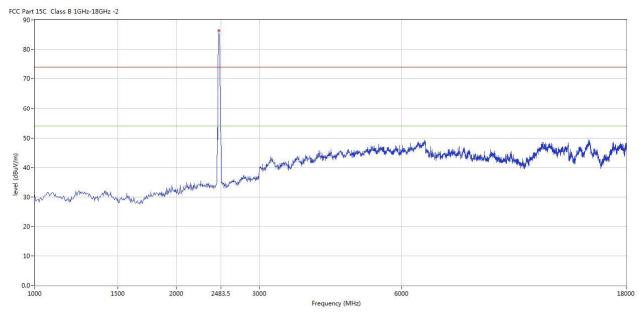

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result– Limit
- 4. For radiated Emissions from 18-25GHz and below 30MHz, it is only the floor noise.
- 5. The peak value less than the AV limit, no necessary to take down the AV measurement result.

Page 24 of 121


Report No.: TW2012217-01E

Date: 2021-01-16



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth $(VBW) \ge 3 \times RBW$.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 25 of 121 Report No.: TW2012217-01E

Date: 2021-01-16



6dB Occupied Bandwidth


EUT	EUT		Tablet POS			lel	HM628N		
Mode		802.11b			Input Voltage		DC7.6V		
Temperat	ure	24		Humidity	r	56% RH			
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail	
1		2412	1	10	.04	0.5		Pass	
6		2437		10.04			0.5	Pass	
11		2462	1	10	.04		0.5	Pass	
1		2412	11	9.92			0.5	Pass	
6		2437	11	9.	9.92		92 0.5		Pass
11		2462	11	9.	9.92		92 0.5		Pass

Report No.: TW2012217-01E Page 26 of 121

Date: 2021-01-16



1. 802.11b at 1Mbps of CH01

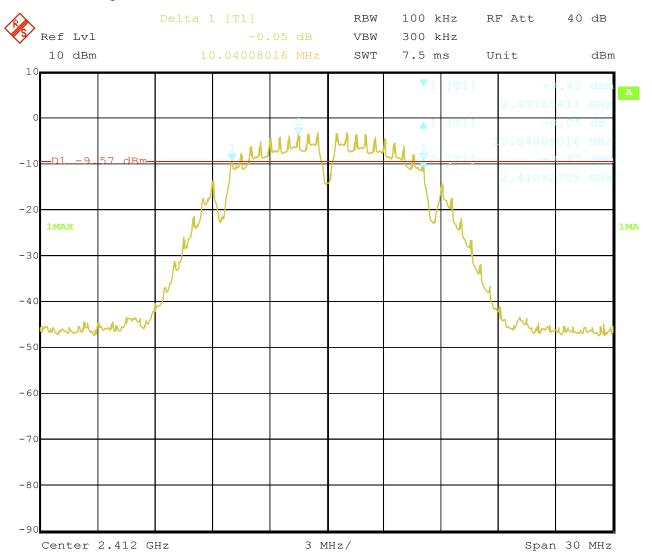


15.JAN.2021 14:05:17 Date:

Report No.: TW2012217-01E Page 27 of 121

Date: 2021-01-16



2. 802.11b at 1Mbps of CH06

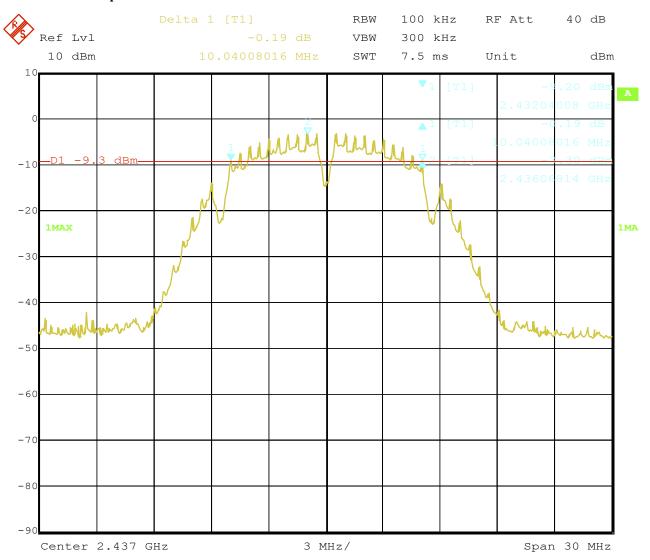


15.JAN.2021 14:20:28 Date:

Report No.: TW2012217-01E Page 28 of 121

Date: 2021-01-16



3. 802.11b at 1Mbps of CH11

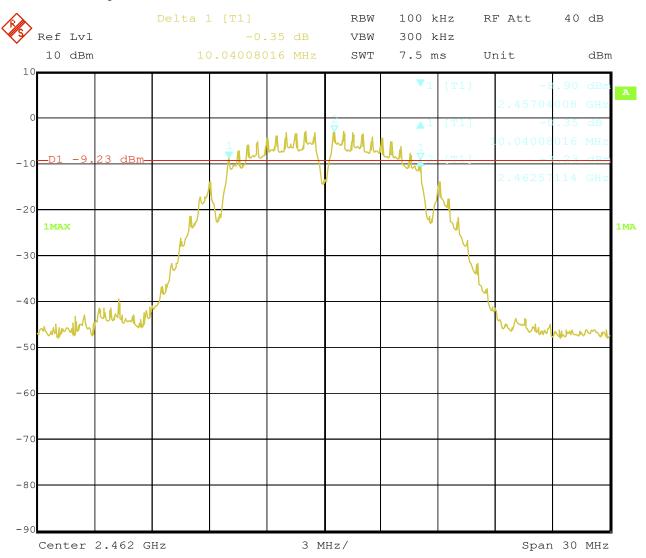


15.JAN.2021 14:21:54 Date:

Report No.: TW2012217-01E Page 29 of 121

Date: 2021-01-16



4. 802.11b at 11Mbps of CH01

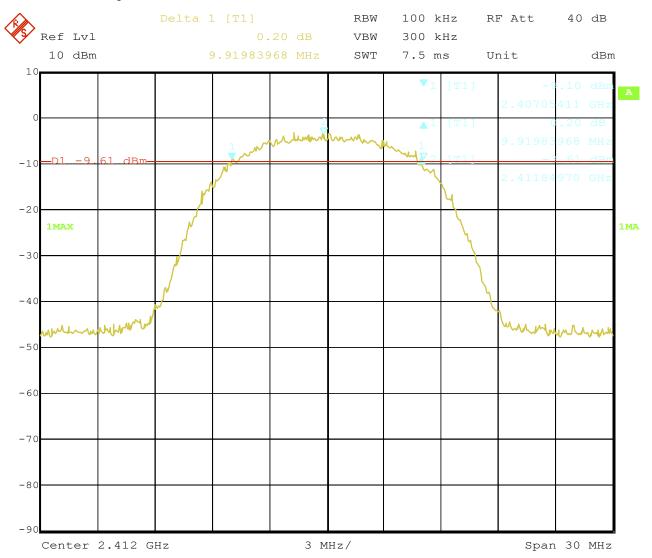


15.JAN.2021 14:09:21 Date:

Report No.: TW2012217-01E Page 30 of 121

Date: 2021-01-16



5. 802.11b at 11Mbps of CH06

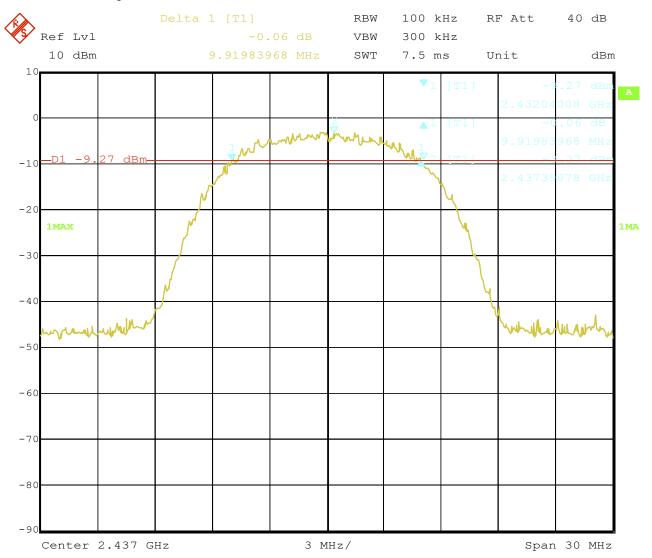


15.JAN.2021 14:16:17 Date:

Report No.: TW2012217-01E Page 31 of 121

Date: 2021-01-16



6. 802.11b at 11Mbps of CH11

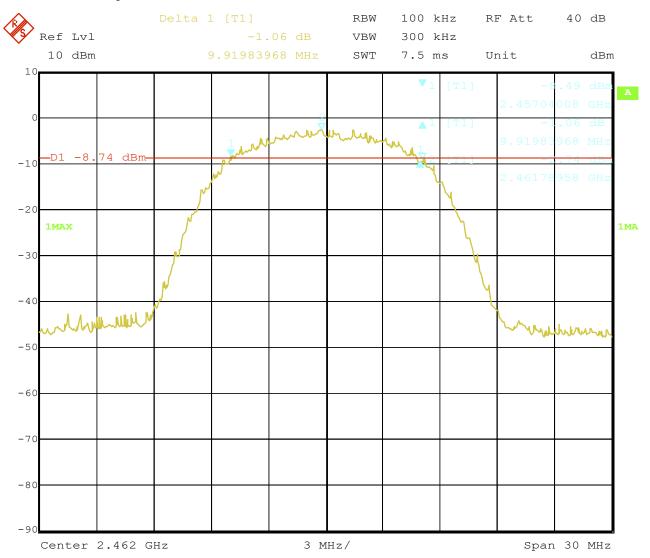

15.JAN.2021 14:27:59 Date:

Report No.: TW2012217-01E Page 32 of 121

Date: 2021-01-16



6dB Occupied Bandwidth

EUT		Tablet POS			Model		HM628N	
Mode		8		Input Voltage		DC7.6V		
Temperat	ure	24 deg. C,			Humidity		56% RH	
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)			Pass/ Fail
1		2412	6	16	5.41		0.5	Pass
6		2437	6	16	16.41		0.5	Pass
11		2462	6	16	5.41		0.5	Pass


Report No.: TW2012217-01E Page 33 of 121

Date: 2021-01-16



Test Plots:

1. 802.11g at 6Mbps of CH01

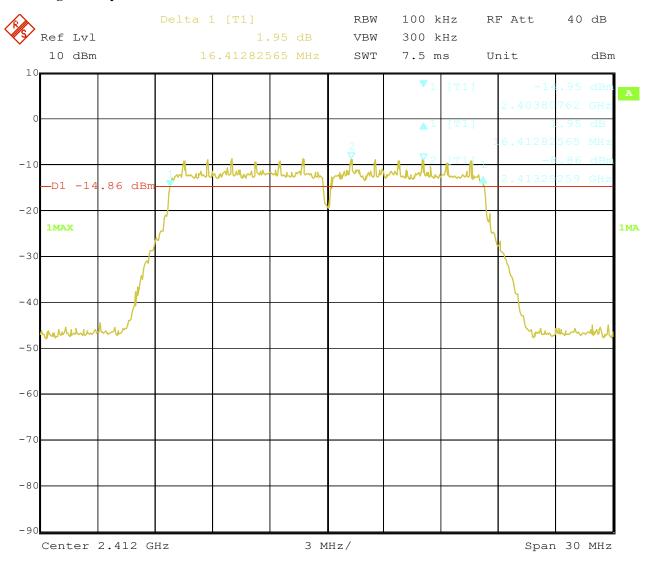


Date: 15.JAN.2021 14:07:35 Report No.: TW2012217-01E Page 34 of 121

Date: 2021-01-16



2. 802.11g at 6Mbps of CH06

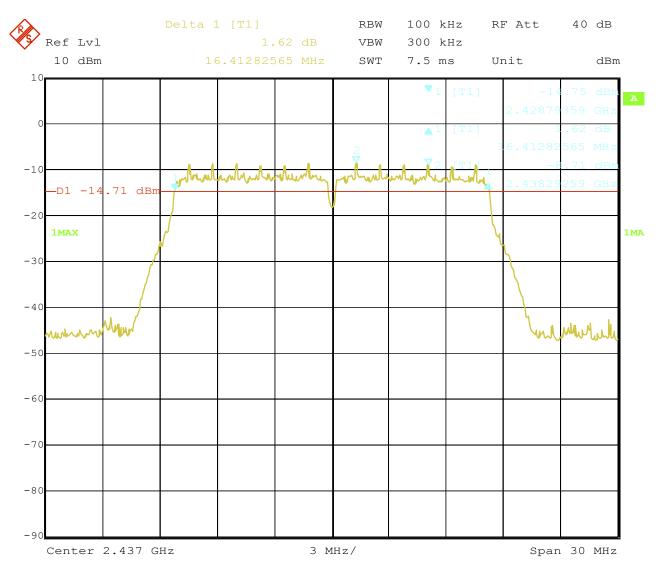


Date: 15.JAN.2021 14:18:57 Report No.: TW2012217-01E Page 35 of 121

Date: 2021-01-16



3. 802.11g at 6Mbps of CH11

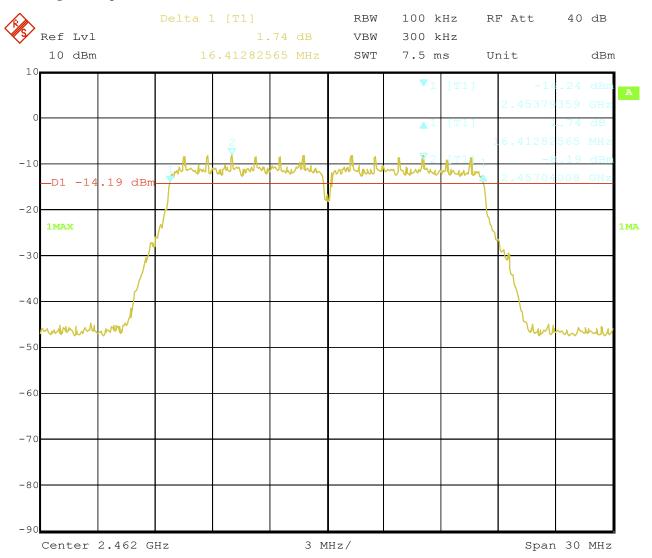

15.JAN.2021 14:24:37 Date:

Report No.: TW2012217-01E Page 36 of 121

Date: 2021-01-16



6dB Occupied Bandwidth

EUT		Tablet POS			Model		HM628N	
Mode		802		Input Voltage		DC7.6V		
Temperat	ure	24		Humidity		56% RH		
Channel	Channel Frequen (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
1		2412	mcs0	17	.56	0.5		Pass
6		2437	mcs0	17	17.56		0.5	Pass
11		2462	mcs0	17	7.56 0.5		0.5	Pass


Report No.: TW2012217-01E Page 37 of 121

Date: 2021-01-16



Test Plots:

1.802.11n at HT20 of CH01

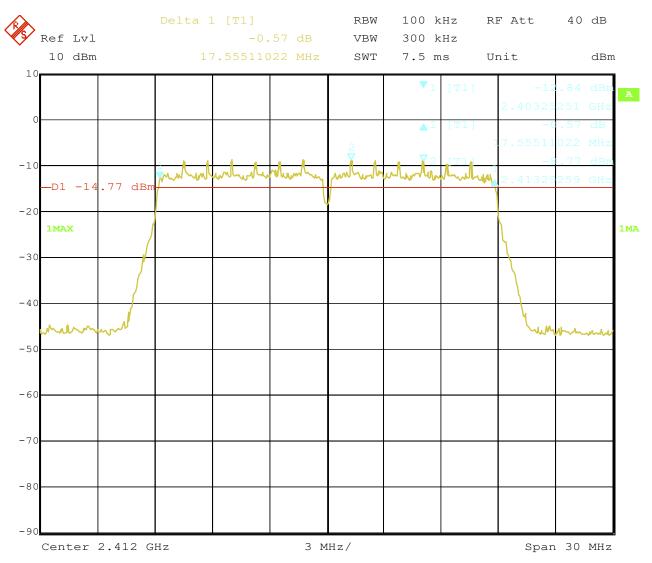


Date: 15.JAN.2021 14:39:31 Report No.: TW2012217-01E Page 38 of 121

Date: 2021-01-16



2.802.11n at HT20 of CH06

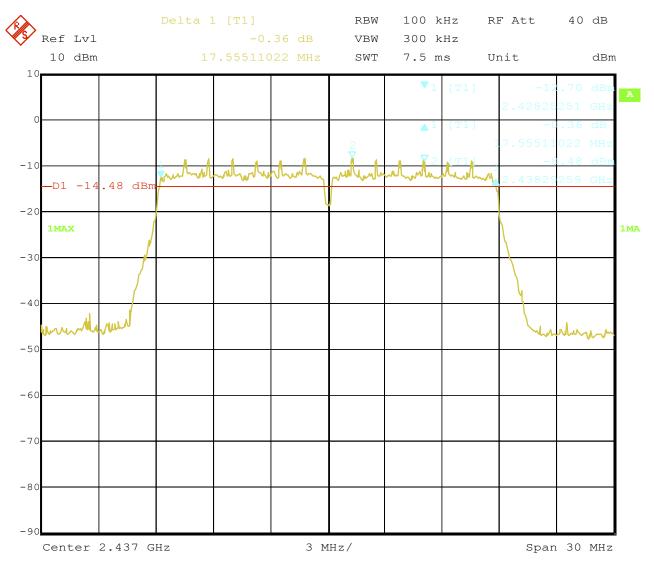


15.JAN.2021 14:35:50 Date:

Report No.: TW2012217-01E Page 39 of 121

Date: 2021-01-16



3. 802.11n at HT20 of CH11

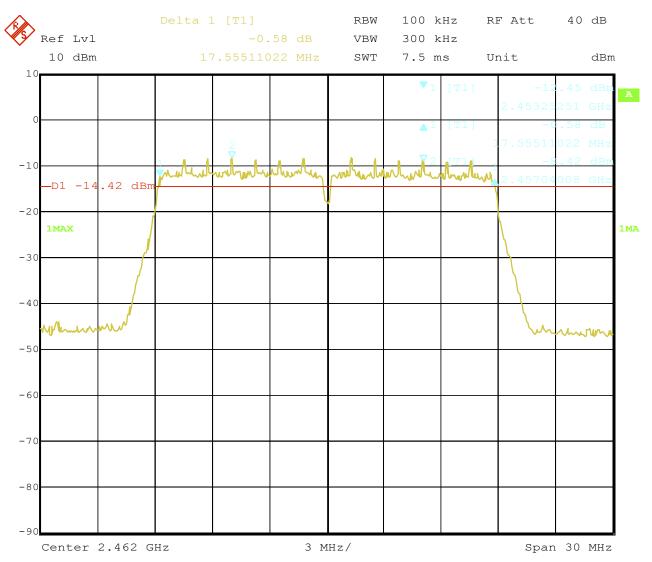

15.JAN.2021 14:30:49 Date:

Report No.: TW2012217-01E Page 40 of 121

Date: 2021-01-16



6dB Occupied Bandwidth

EUT	EUT		Tablet POS			Model		628N
Mode		802.11n HT40			Input Vol	tage	DC	7.6V
Temperat	ure	24 deg. C,			Humidity		56%	% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		num Limit MHz)	Pass/ Fail
3		2422	mcs0	36	.15		0.5	Pass
6		2437		36.15			0.5	Pass
9		2452	mcs0	36	.15		0.5	Pass


Report No.: TW2012217-01E Page 41 of 121

Date: 2021-01-16



Test Plots:

1.802.11n at HT40 of CH03

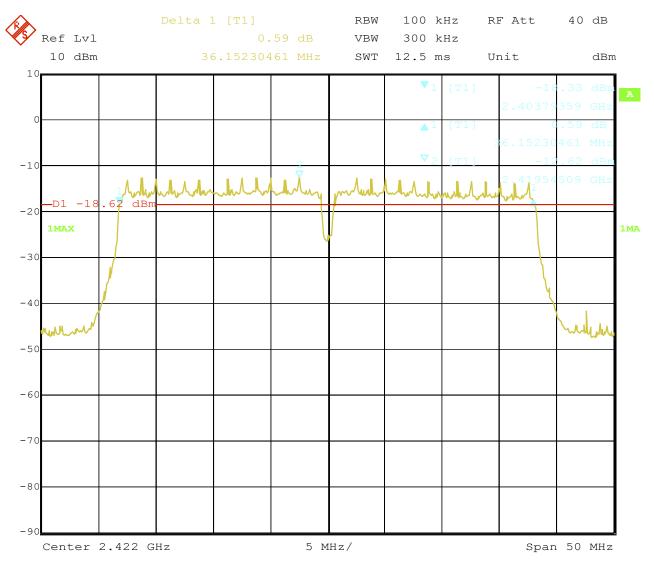


Date: 15.JAN.2021 14:42:32 Report No.: TW2012217-01E Page 42 of 121

Date: 2021-01-16



2.802.11n at HT40 of CH06

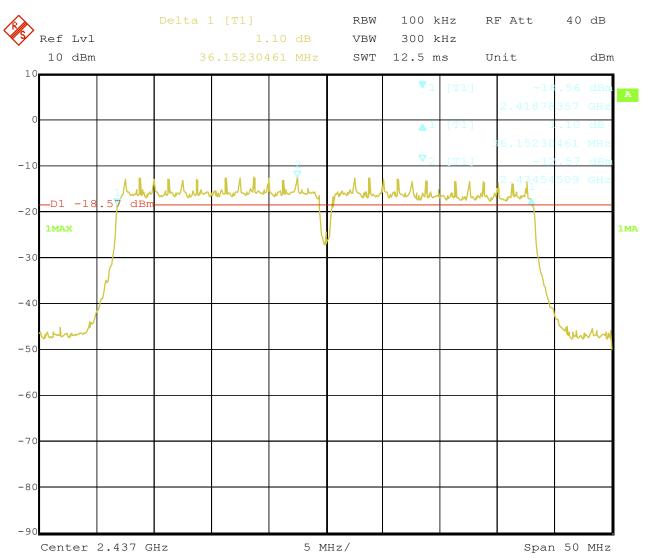


15.JAN.2021 14:48:32 Date:

Report No.: TW2012217-01E Page 43 of 121

Date: 2021-01-16



3. 802.11n at HT40 of CH09

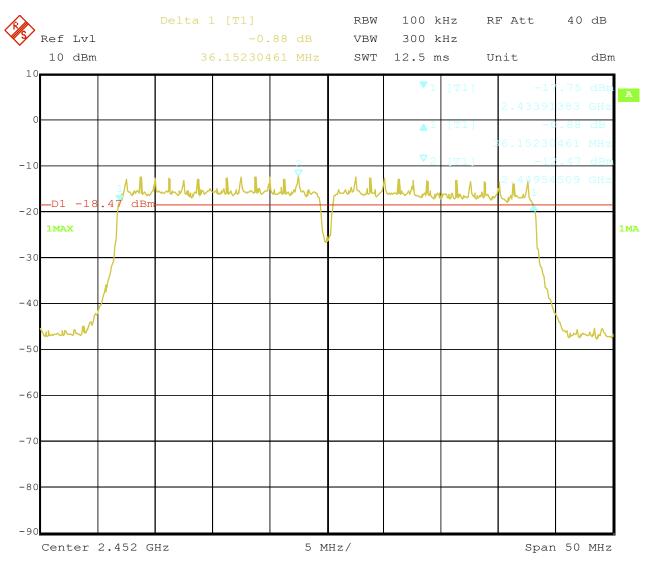

15.JAN.2021 14:46:47 Date:

Report No.: TW2012217-01E


Date: 2021-01-16



Page 44 of 121

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: The Peak power was measured

Page 45 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



8.4Test Results

EUT		Та	ablet POS	Model		HM628N	
Mode	Mode		802.11b	Input Voltage		DC7.6V	
Temperat	Temperature		4 deg. C,	Humidity		56% RH	
Channel	Freque		Total Max. Powe	er Output (dBm)	Power Limit Page		Pass/ Fail
Chamilei	((MHz)	dBm	mW		(dBm)	Pass/ Faii
1		2412	8.84	7.66		30	Pass
6		2437	8.88	7.73		30	Pass
11		2462	9.02	7.98		30	Pass

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		Та	ablet POS	Model		HM628N	
Mode	Mode		802.11g	Input Voltage		DC7.6V	
Temperati	Temperature		4 deg. C,	Humidity		56% R	Н
Channel	Frequency		Total Max. Powe	er Output (dBm)	Power Limit Page 1		Pass/ Fail
Chamie	((MHz)	dBm	mW		(dBm)	Pass/ Fall
1		2412	8.22	6.64		30	Pass
6		2437	8.55	7.16		30	Pass
11		2462	8.62	7.28		30	Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 46 of 121

Date: 2021-01-16

Report No.: TW2012217-01E



EUT	EUT T		ablet POS	Model		HM628N		
Mode	Mode 802		11n (HT20)	Input Voltage		DC7.6V		
Temperati	ure	2	4 deg. C,	Humidity		56% R	RH	
Channel	Frequency		Total Max. Powe	er Output (dBm)	Power Limit Page		Pass/ Fail	
Chamiei	(MHz)	dBm	mW		(dBm)	Tass/Tan	
1		2412	7.91	6.18	30		Pass	
6		2437	7.87	6.12		30	Pass	
11		2462	7.20	5.25		30	Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		Та	ablet POS	Model		HM628	3N
Mode		802.	11n (HT40)	Input Voltage		DC7.6V	
Temperati	ure	2	4 deg. C,	Humidity		56% R	Н
Channel	Frequency		Total Max. Powe	er Output (dBm)	Power Limit Page/Fo		Pass/ Fail
Chamie	(MHz)	dBm	mW		(dBm)	rass/Taii
3		2422	6.78	4.76		30	Pass
6		2437	6.45	4.42		30	Pass
9		2452	6.59	4.56		30	Pass

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Report No.: TW2012217-01E Page 47 of 121

Date: 2021-01-16



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm/3kHz.

Report No.: TW2012217-01E Page 48 of 121

Date: 2021-01-16



9.4Test Result

EUT	1	Tablet POS		Model		HM628N	
26.1							
Mode	e	80	02.11b 11Mbps	Input Voltage		DC7.6V	
Tempera	ture		24 deg. C,	Humidity	56% RH		
Channel	Free	quency	Power Spec	OkHz)	Limit	Pass/ Fail	
	(N	ИHz)				(dBm/3kHz)	
1	2	412		-15.33		8	Pass
6	2	437		-12.80		8	Pass
11	2	462		-12.94		8	Pass

EUT		Tablet POS		Model		HM628N	
Mode			802.11b 1Mbps	Input Voltage		DC7.6V	
Temperat	ture		24 deg. C,	Humidity		56% RH	
Channel	1 -	iency Hz)	Power Spectral D	Density (dBm/10kHz)		Limit (dBm/3kHz)	Pass/ Fail
1	24	12	-	13.27		8	Pass
6	24	37	-1	12.47		8	Pass
11	24	62	-1	13.64		8	Pass

EUT		Tablet POS		Model	HM628N		
Mode			802.11g 6Mbps	Input Voltage		DC7.6V	
Temperati	ure		24 deg. C,	Humidity	56% RH		
Channel	Frequ	iency	Power Spectral	Density (dBm/10kHz)	Limit		Pass/ Fail
	(M	Hz)			(dBm/3kHz)		
1	24	12 -		-17.85		8	Pass
6	24	37		-17.50		8	Pass
11	24	62 -		-17.23		8	Pass

Report No.: TW2012217-01E Page 49 of 121

Date: 2021-01-16



ELIT							
EUT		Tablet POS		Model		HM628N	
Mode	fode 802.1		02.11n HT20 mcs0	Input Voltage		DC7.6V	
Temperat	ture		24 deg. C,	Humidity	56% RH		
Channel	Frequ	iency	Power Spectral	al Density (dBm/10kHz)		Limit	Pass/ Fail
	(M	Hz)				(dBm/3kHz)	
1	24	12		-18.59		8	Pass
6	24	37		-18.66		8	Pass
11	24	62		-17.18		8	Pass

EUT		Tablet POS Model			HM628N		
Mode	de 802.11n H		02.11n HT40 mcs0	Input Voltage		DC7.6V	
Temperat	ure		24 deg. C,	Humidity	56% RH		
Channel	Frequ	iency	Power Spectral	ral Density (dBm/10kHz)		Limit	Pass/ Fail
	(M	Hz)				(dBm/3kHz)	
3	24	22		-20.99		8	Pass
6	24	37		-21.76		8	Pass
9	24	52		-21.74		8	Pass


Report No.: TW2012217-01E Page 50 of 121

Date: 2021-01-16



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

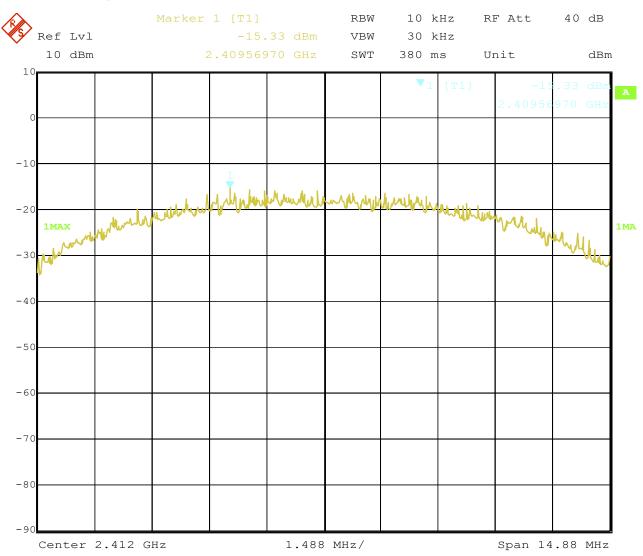

Date: 15.JAN.2021 15:23:15


Page 51 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



2. 802.11b at 11Mbps at CH06

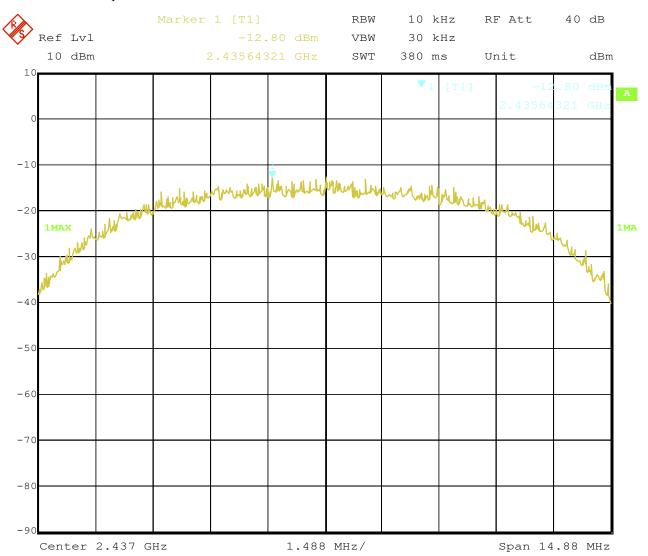


15.JAN.2021 15:23:43 Date:

Report No.: TW2012217-01E Page 52 of 121

Date: 2021-01-16



3. 802.11b at 11Mbps of CH11

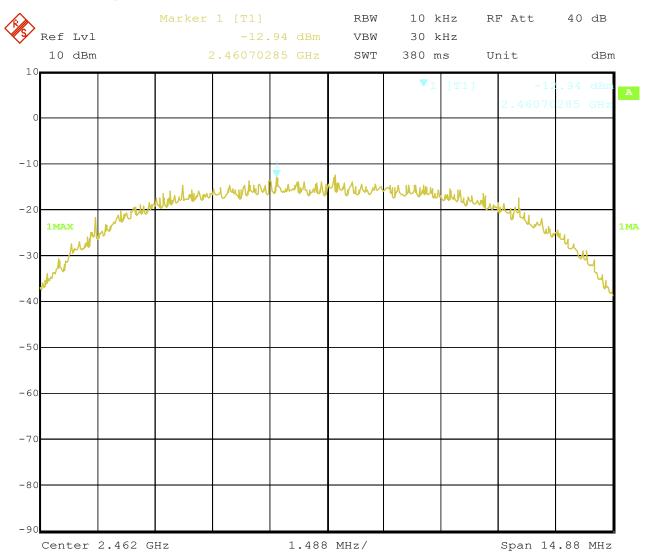


15.JAN.2021 15:24:37 Date:

Report No.: TW2012217-01E Page 53 of 121

Date: 2021-01-16



4. 802.11b at 1Mbps of CH1

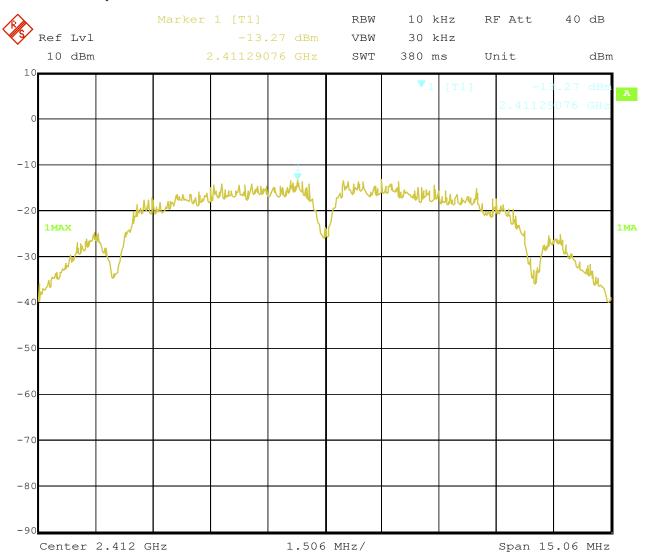

15.JAN.2021 15:31:00 Date:


Page 54 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



5. 802.11b at 1Mbps of CH6

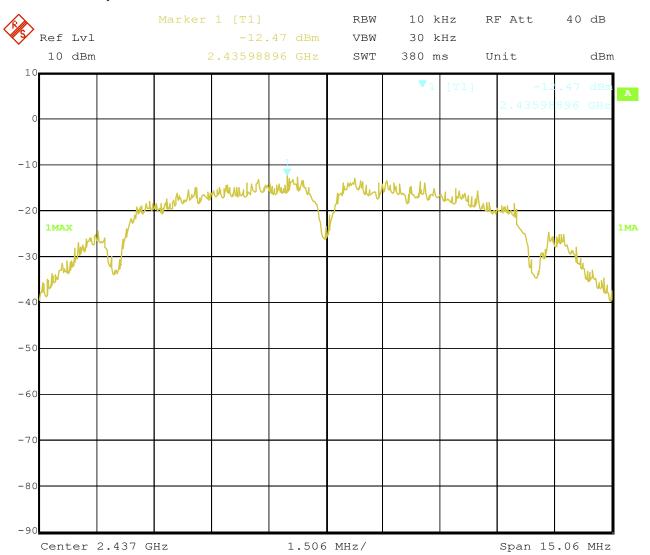


15.JAN.2021 15:30:35 Date:

Report No.: TW2012217-01E Page 55 of 121

Date: 2021-01-16



6. 802.11b at 1Mbps of CH11

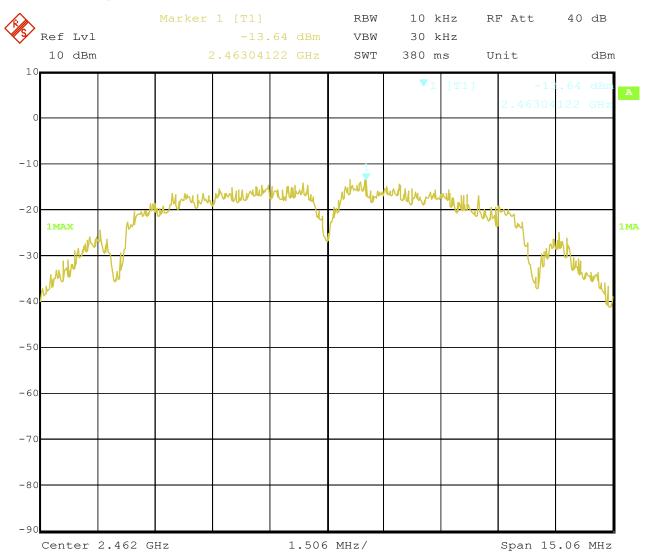

15.JAN.2021 15:30:08 Date:


Page 56 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



7. 802.11g at 6Mbps of CH1

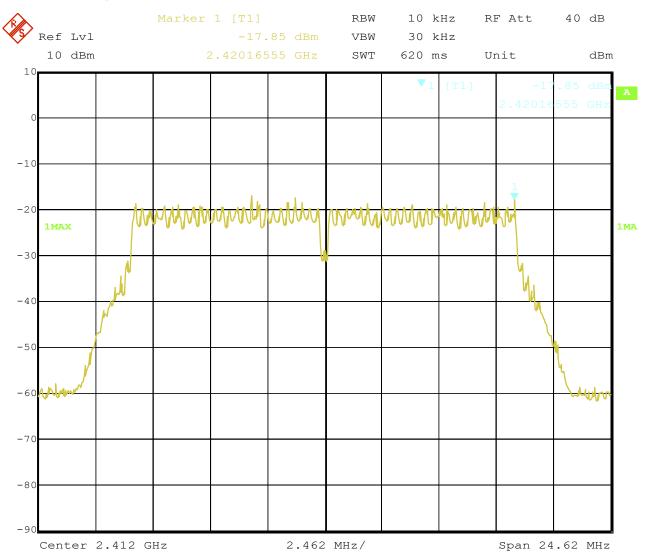

15.JAN.2021 15:26:26 Date:


Page 57 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



8. 802.11g at 6Mbps of CH6

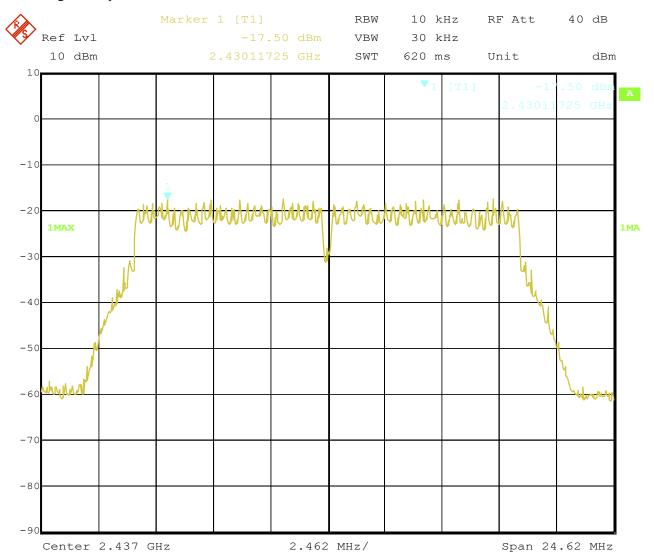

15.JAN.2021 15:25:51 Date:


Page 58 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



9. 802.11g at 6Mbps of CH11

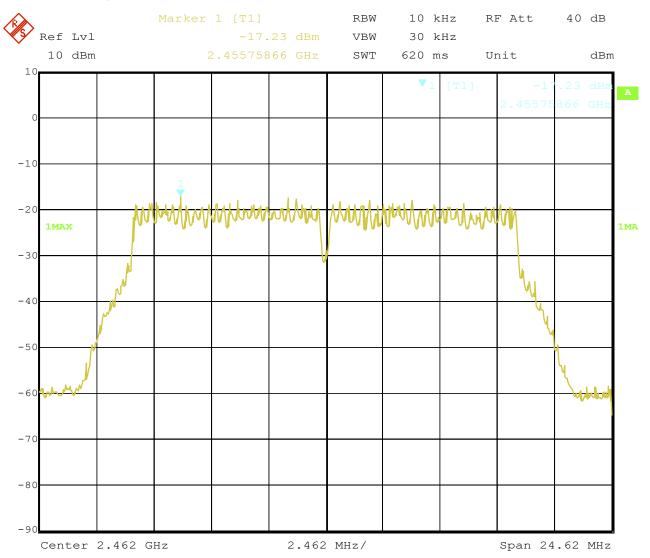

15.JAN.2021 15:26:57 Date:


Page 59 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



10. 802.11n at HT20 of CH01

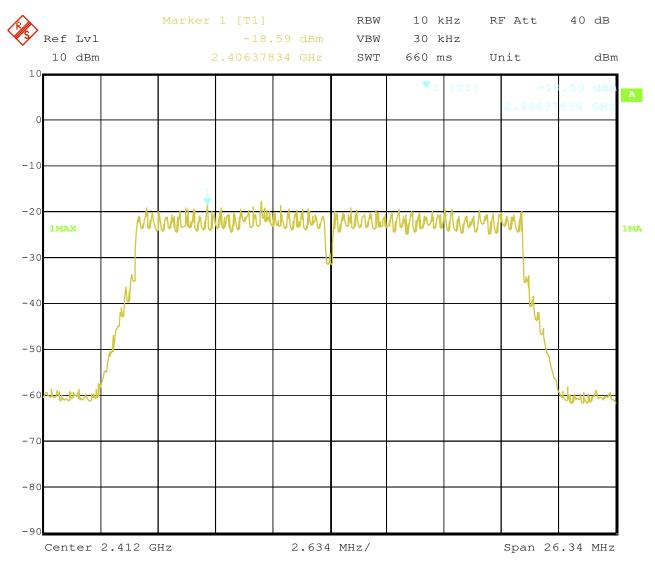

15.JAN.2021 15:31:37 Date:


Page 60 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



11. 802.11n at HT20 of CH06

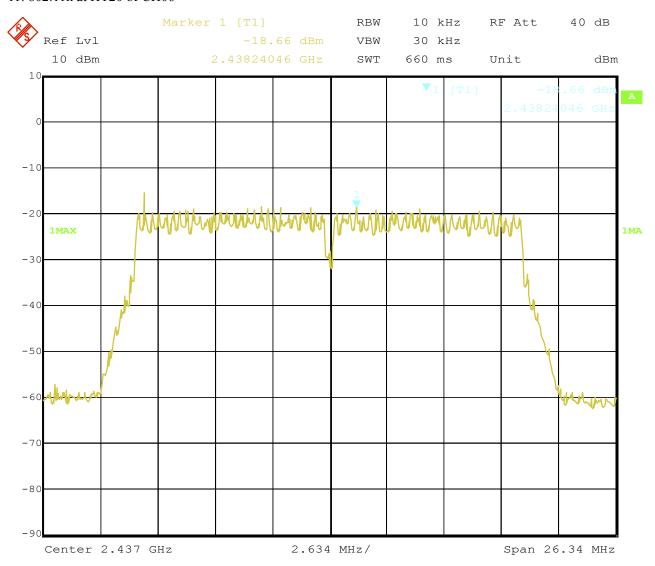


15.JAN.2021 15:32:04 Date:

Report No.: TW2012217-01E Page 61 of 121

Date: 2021-01-16



12. 802.11n at HT20 of CH11

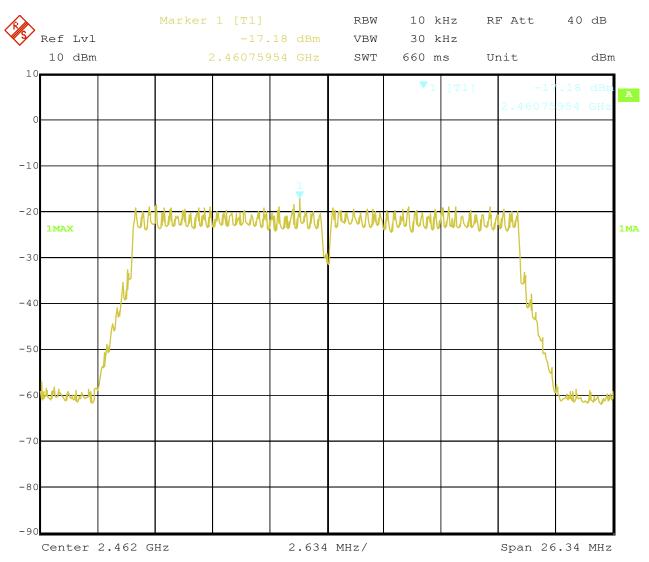


15.JAN.2021 15:32:28 Date:

Report No.: TW2012217-01E Page 62 of 121

Date: 2021-01-16



13. 802.11n at HT40 of CH01

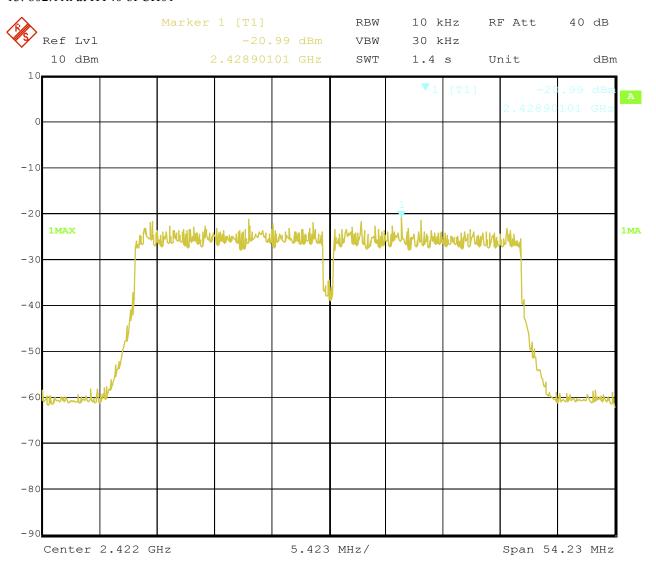


15.JAN.2021 15:33:18 Date:

Report No.: TW2012217-01E Page 63 of 121

Date: 2021-01-16



14. 802.11n at HT40 of CH04

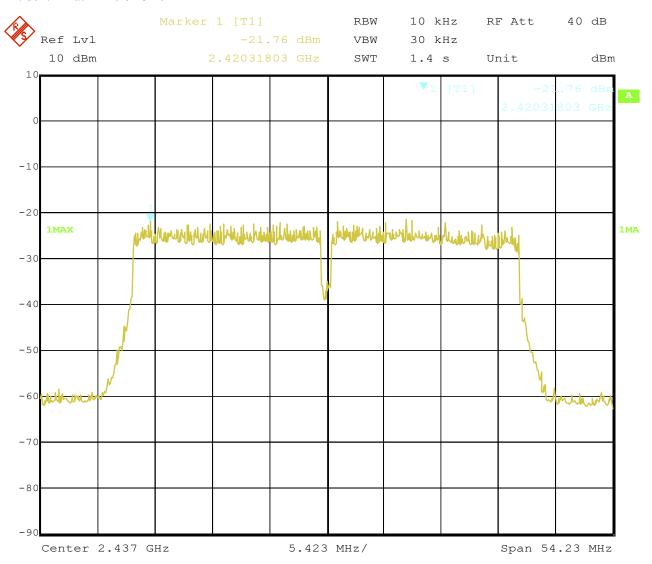

15.JAN.2021 15:34:03 Date:


Page 64 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



15. 802.11n at HT40 of CH07

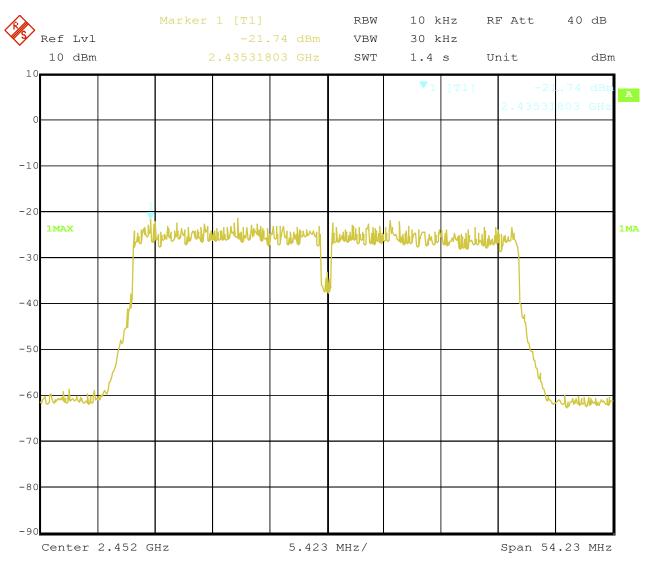


15.JAN.2021 15:34:30 Date:

Report No.: TW2012217-01E Page 65 of 121

Date: 2021-01-16



10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule. 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 66 of 121

Report No.: TW2012217-01E

Date: 2021-01-16




For 802.11b mode

CH01 at 1Mbps

Band-edge Measurement 10.4

EUT	Tablet POS	Model	HM628N
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

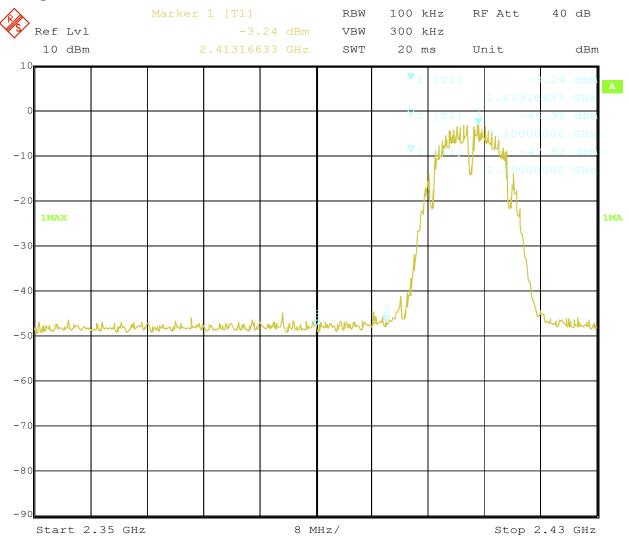

15.JAN.2021 15:36:51

Page 67 of 121

Report No.: TW2012217-01E

Date: 2021-01-16




CH11 at 1Mbps

10.4 Band-edge Measurement

EUT	Tablet POS	Model	HM628N
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

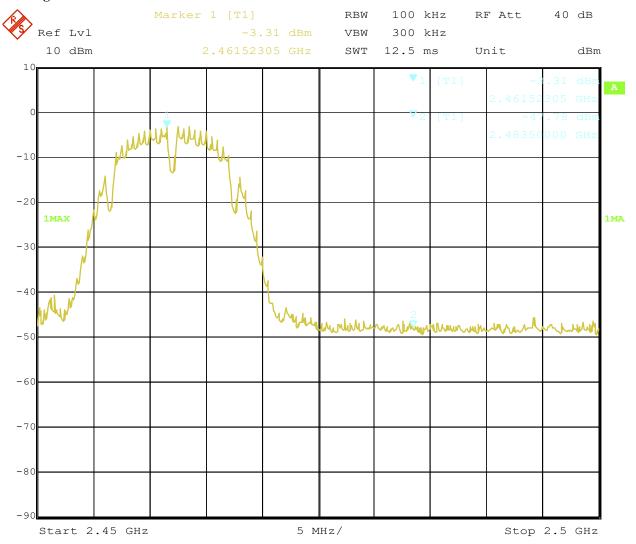

Date: 15.JAN.2021 15:39:58

Page 68 of 121

Report No.: TW2012217-01E

Date: 2021-01-16




For 802.11b mode

CH01 at 11Mbps

Band-edge Measurement 10.4

EUT	Tablet POS	Model	HM628N
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

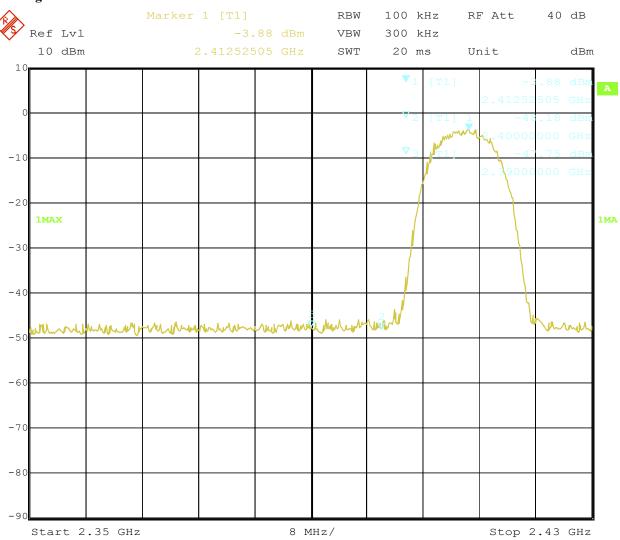

15.JAN.2021 15:37:57

Page 69 of 121

Report No.: TW2012217-01E

Date: 2021-01-16




CH11 at 11Mbps

10.4 Band-edge Measurement

EUT	Tablet POS	Model	HM628N
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

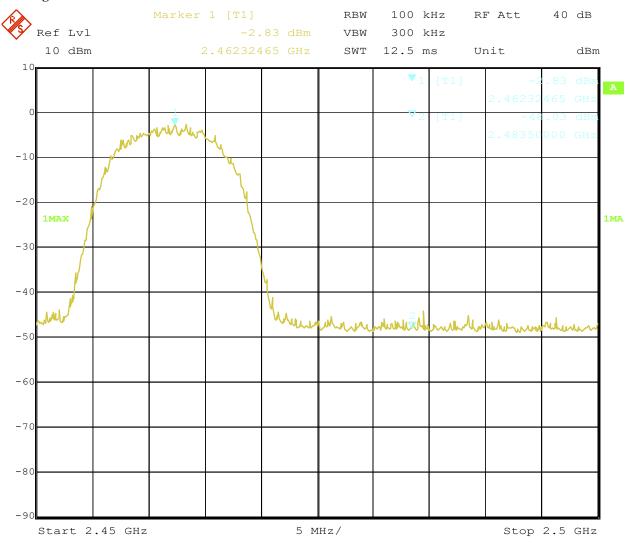

Date: 15.JAN.2021 15:38:43

Page 70 of 121

Report No.: TW2012217-01E

Date: 2021-01-16




For 802.11g mode

CH01 at 6Mbps

10.4 Band-edge Measurement

EUT	Tablet POS	Model	HM628N
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

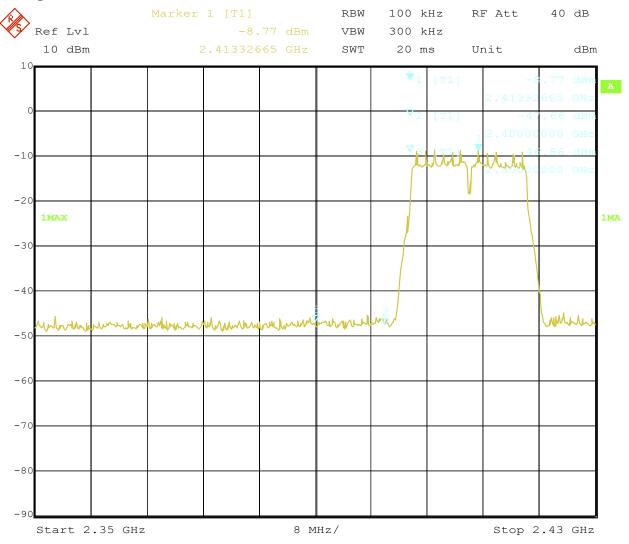

15.JAN.2021 15:37:29

Page 71 of 121

Report No.: TW2012217-01E

Date: 2021-01-16




CH11 at 6Mbps

10.4 Band-edge Measurement

EUT	Tablet POS	Model	HM628N
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

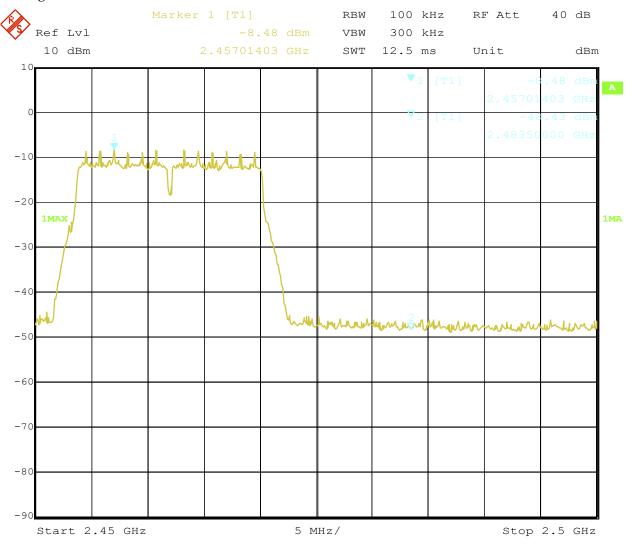

Date: 15.JAN.2021 15:39:24

Page 72 of 121

Report No.: TW2012217-01E

Date: 2021-01-16




For 802.11n (HT20) mode

CH01 at mcs0

Band-edge Measurement 10.4

EUT	Tablet POS	Model	HM628N
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

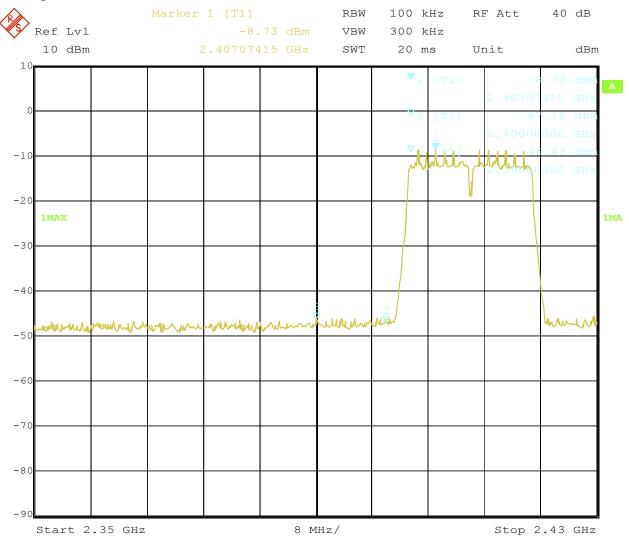

15.JAN.2021 15:36:19

Page 73 of 121

Report No.: TW2012217-01E

Date: 2021-01-16




CH11 at mcs0

10.4 Band-edge Measurement

EUT	Tablet POS	Model	HM628N
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

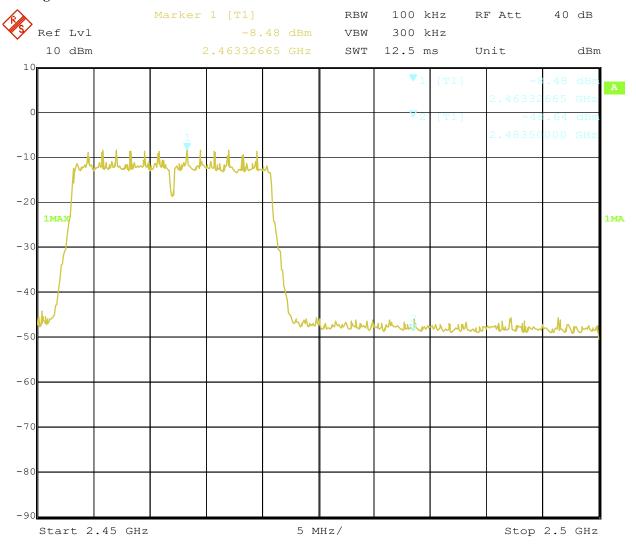

Date: 15.JAN.2021 15:40:27

Page 74 of 121

Report No.: TW2012217-01E

Date: 2021-01-16




For 802.11n (HT40) mode

CH03 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	Tablet POS	Model	HM628N
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

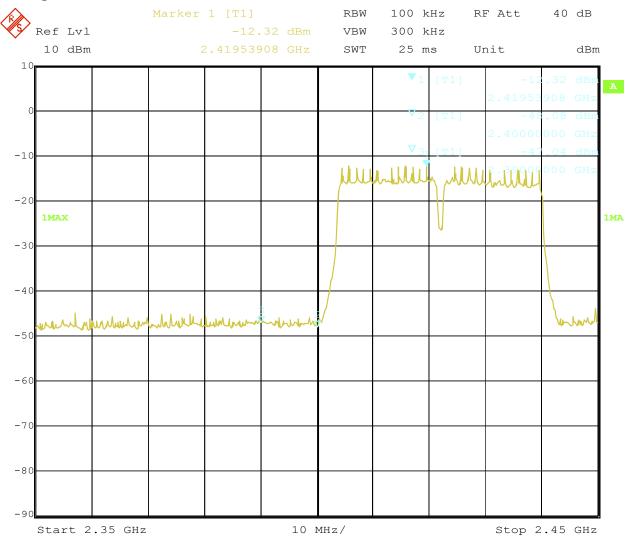

Date: 15.JAN.2021 15:35:44

Page 75 of 121

Report No.: TW2012217-01E

Date: 2021-01-16




CH09 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	Tablet POS	Model	HM628N
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

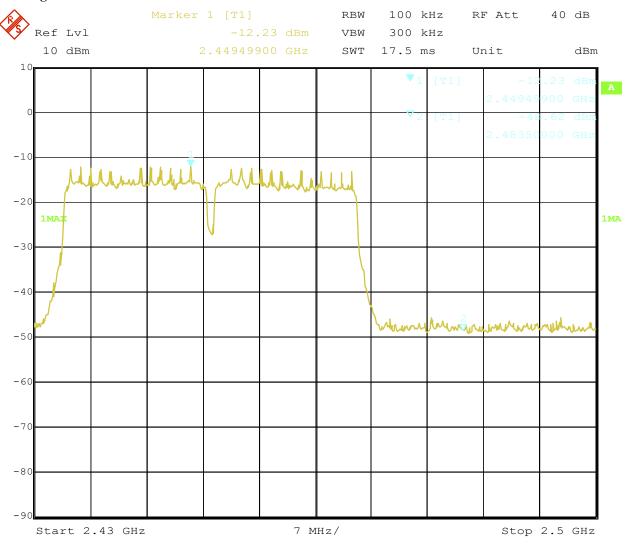

Date: 15.JAN.2021 15:34:56 Report No.: TW2012217-01E Page 76 of 121

Date: 2021-01-16



10.5 Restricted band Measurement

EUT	Tal	olet POS	Model	HM628N			
Mode	Keeping	Transmitting	Input Voltage	DC7.6V			
Temperature	24	deg. C,	Humidity	56% RH			
Test Result:		Pass	Detector	PK			
		802.11b mode, Low C	Channel, Horizonta	1			
2390	PK (dBµV/m)	46.88	T ::4	$74(dB\mu V/m)$			
	AV (dBμV/m)		Limit	54(dBµV/m)			
802.11b mode, Low Channel, Vertical							
2390	PK (dBµV/m)	45.37	Limit	74(dBμV/m)			
	AV (dBμV/m)		Lillit	54(dBμV/m)			

EUT	Ta	blet POS	Model	HM628N				
Mode	Keeping	g Transmitting	Input Voltage	DC7.6V				
Temperature	24	l deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
802.11b mode, High Channel, Horizontal								
2483.5	PK (dBµV/m)	43.82	T ::4	$74(dB\mu V/m)$				
	AV (dBμV/m)		Limit	54(dBμV/m)				
802.11b mode, High Channel, Vertical								
2483.5	PK (dBµV/m)	43.29	T::4	74(dBμV/m)				
	AV (dBμV/m)		Limit	54(dBμV/m)				

Report No.: TW2012217-01E Page 77 of 121

Date: 2021-01-16



10.5 Restricted band Measurement

EUT	Ta	blet POS	Model	HM628N					
Mode	Keeping	g Transmitting	Input Voltage	DC7.6V					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
		802.11g mode, Low C	hannel, Horizonta	1					
2390	PK (dBμV/m)	51.87	T ::4	74(dBµV/m)					
	AV (dBμV/m)		Limit	54(dBµV/m)					
	802.11g mode, Low Channel, Vertical								
2390	PK (dBμV/m)	51.25	Limit	74(dBµV/m)					
	AV (dBμV/m)		Limit	54(dBµV/m)					

EUT	Ta	blet POS	Model	HM628N				
Mode	Keeping	g Transmitting	Input Voltage	DC7.6V				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
		802.11g mode, High	Channel, Horizont	al				
2483.5	PK (dBµV/m)	(/m) 48.77		74(dBμV/m)				
	AV (dBμV/m)		Limit	54(dBμV/m)				
802.11g mode, High Channel, Vertical								
2483.5	PK (dBµV/m)	48.36	T ::4	$74(dB\mu V/m)$				
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$				

Report No.: TW2012217-01E Page 78 of 121

Date: 2021-01-16



10.5 Restricted band Measurement

EUT	Tal	blet POS	Model	HM628N					
Mode	Keeping	Transmitting	Input Voltage	DC7.6V					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
	802.11n HT20 mode, Low Channel, Horizontal								
2390	PK (dBµV/m)	52.22	Tible	$74(dB\mu V/m)$					
	AV (dBμV/m)		Limit	54(dBµV/m)					
	802.11n HT20 mode, Low Channel, Vertical								
2390	PK (dBμV/m)	51.65	Limit	74(dBμV/m)					
	AV (dBμV/m)		Limit	54(dBµV/m)					


EUT	Tal	olet POS	Model	HM628N					
Mode	Keeping	Transmitting	Input Voltage	DC7.6V					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
	802.11n HT20 mode, High Channel, Horizontal								
2483.5	PK (dBμV/m)	48.12	T ::4	$74(dB\mu V/m)$					
	AV (dBμV/m)		Limit	54(dBμV/m)					
	802.11n HT20 mode, High Channel, Vertical								
2483.5	PK (dBµV/m)	47.95	Limit	74(dBμV/m)					
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$					

Page 79 of 121 Report No.: TW2012217-01E

Date: 2021-01-16



EUT	Tablet POS	Model	HM628N				
Mode	Keeping Transmitting	Input Voltage	DC7.6V				
Temperature	24 deg. C,	Humidity	56% RH				
Test Result:	Pass	Detector	PK				
802.11n HT40 mode, Low Channel							

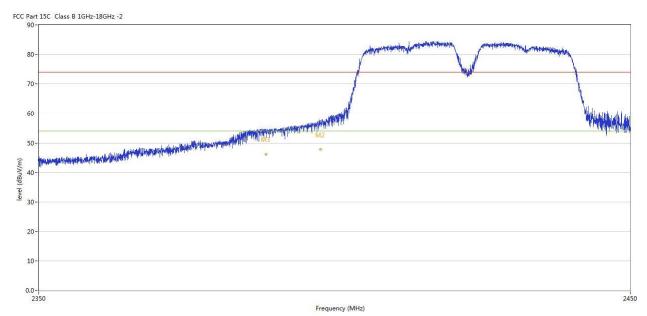


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
2	2397.125	57.66	-3.56	74.0	-16.34	Peak	18.00	100	Horizontal	Pass
2**	2397.125	47.80	-3.56	54.0	-6.20	AV	18.00	100	Horizontal	Pass
3	2389.925	54.19	-3.52	74.0	-19.81	Peak	0.00	100	Horizontal	Pass
3**	2389.925	46.07	-3.52	54.0	-7.93	AV	0.00	100	Horizontal	Pass

Page 80 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



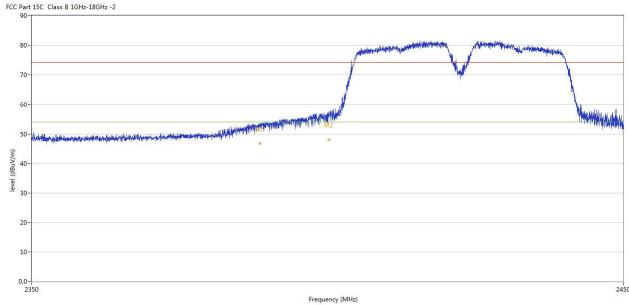

					91 8					
No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
2	2399.725	54.62	-3.57	74.0	-19.38	Peak	194.00	100	Vertical	Pass
2**	2399.725	47.98	-3.57	54.0	-6.02	AV	194.00	100	Vertical	Pass
3	2389.875	53.98	-3.52	74.0	-20.02	Peak	229.00	100	Vertical	Pass
3**	2389.875	46.82	-3.52	54.0	-7.18	AV	229.00	100	Vertical	Pass

Page 81 of 121


Report No.: TW2012217-01E

Date: 2021-01-16



10.5 Restricted band Measurement

EUT	Tablet POS	Model	HM628N						
Mode	Keeping Transmitting	Input Voltage	120V~ DC7.6V						
Temperature	24 deg. C,	Humidity	56% RH						
Test Result:	Pass	Detector	PK						
802.11n HT40 mode, High Channel, Horizontal									

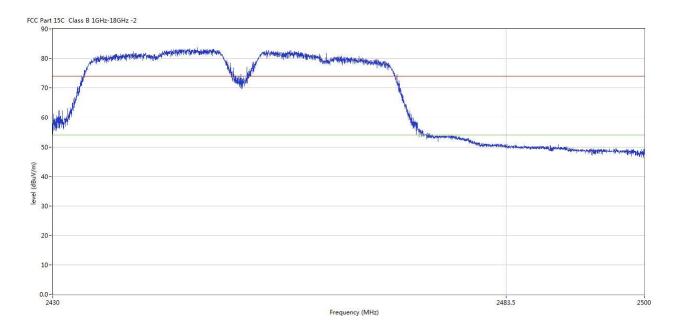

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
2	2483.560	50.92	-3.57	74.0	-23.08	Peak	355.00	100	Horizontal	Pass


Note: The peak value less than the AV limit, no necessary to take down the AV measurement result.

Page 82 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



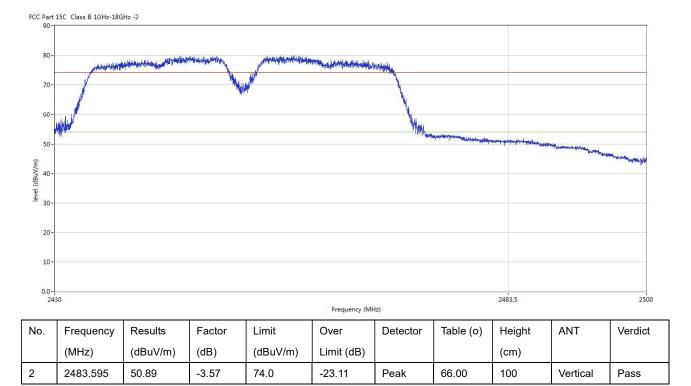

Note: The peak value less than the AV limit, no necessary to take down the AV measurement result.

Report No.: TW2012217-01E

Date: 2021-01-16



Page 83 of 121

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna used. The gain of 1.48dBi.

Report No.: TW2012217-01E Page 84 of 121

Date: 2021-01-16




12.0 FCC ID Label

FCC ID: GQK-HM628N

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

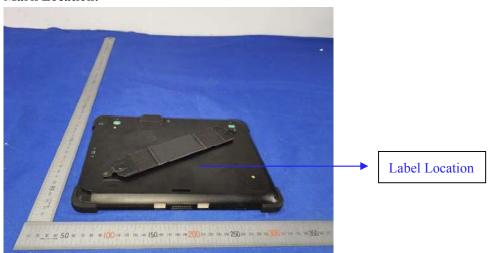


Report No.: TW2012217-01E Page 85 of 121

Date: 2021-01-16



13.0 **Photo of testing**

Conducted Emission Test Setup:

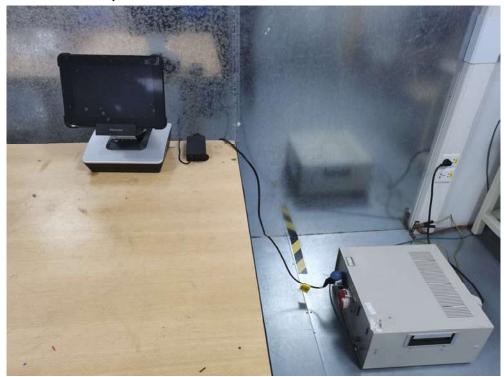


Page 86 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



Radiated Emission Test Setup:

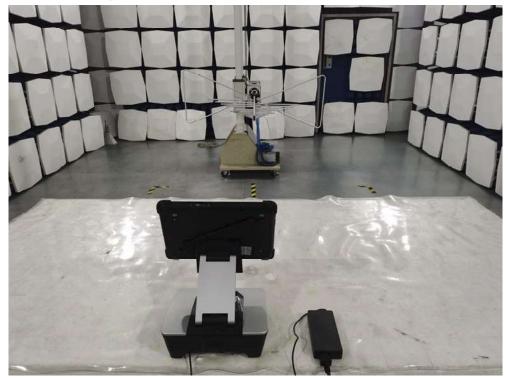



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 87 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



Photographs - EUT

Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 88 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: TW2012217-01E Page 89 of 121

Date: 2021-01-16



Outside View



Page 90 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 91 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 92 of 121


Report No.: TW2012217-01E

Date: 2021-01-16



Inside view



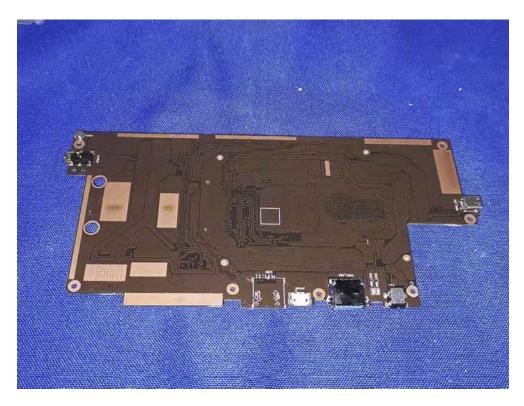

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 93 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 94 of 121


Report No.: TW2012217-01E

Date: 2021-01-16



Inside view

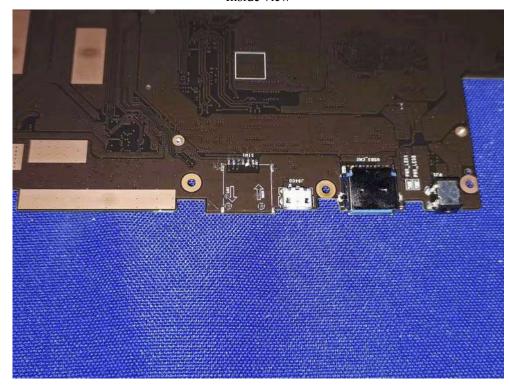

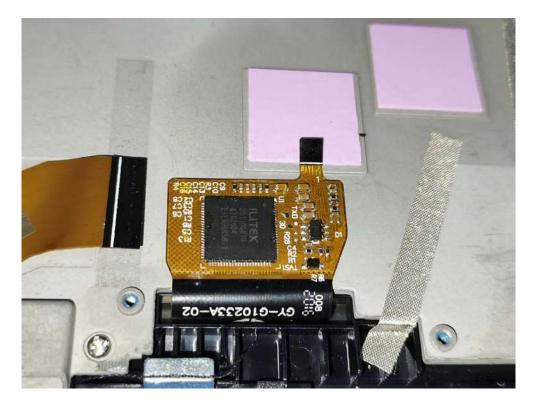

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 95 of 121


Report No.: TW2012217-01E

Date: 2021-01-16



Inside view

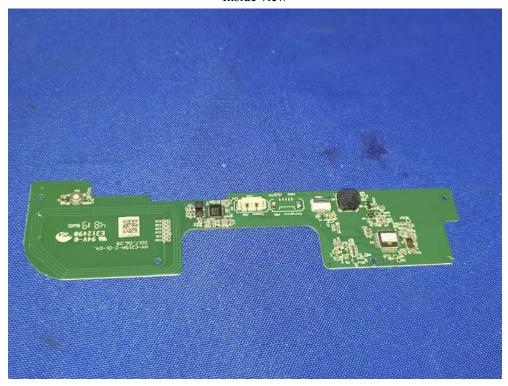

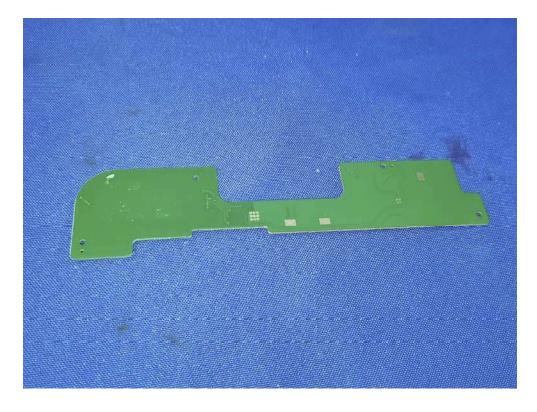

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 96 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 97 of 121

Report No.: TW2012217-01E

Date: 2021-01-16



Inside view

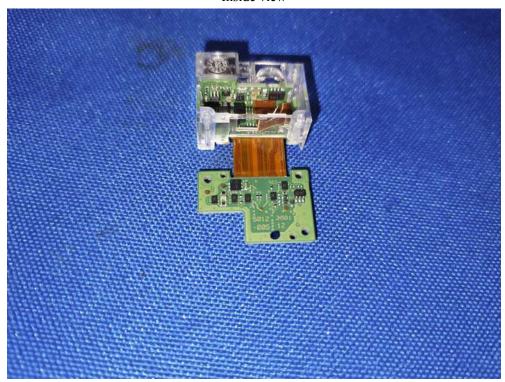



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 98 of 121 Report No.: TW2012217-01E

Date: 2021-01-16



Inside view

