

DATE: 04 May 2008

I.T.L. (PRODUCT TESTING) LTD.
FCC EMC/Radio Test Report
for
Visonic Inc.

Equipment under test:
Ceiling Mounted Dual Technology Detector

DUO-220

Written by: *E. Ever*
E. Ever, Documentation

Approved by: *[Signature]* for A. Gurewitz
A. Gurewitz, Test Engineer

Approved by: *[Signature]*
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written
permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Measurement/Technical Report for Visonic Inc.

Ceiling Mounted Dual Technology Detector

DUO-220

FCC ID: GSADUO220E AM

04 May 2008

This report concerns: Original Grant x Class II change

Class B verification X Class A verification _____ Class I change

Equipment type: Direct Sequence Spread Spectrum Transmitter

Request Issue of Grant:

x Immediately upon completion of review

Limits used:

CISPR 22 _____

Part 15 X

Measurement procedure used is ANSI C63.4-2003.

Application for Certification
prepared by:

Ishaishou Raz
ITL (Product Testing) Ltd.
Kfar Bin Nun
D.N. Shimshon 99780
Israel
e-mail Sraz@itl.co.il

Applicant for this device:
(different from "prepared by")

Arik Elshtein
Visonic Ltd.
Tel Aviv
Habarzel 24
Israel 69710
Tel: +936-03-6456789
e-mail: aelshtein@visonic.com

TABLE OF CONTENTS

1.	GENERAL INFORMATION-----	4
1.1	Administrative Information.....	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION-----	7
2.1	Justification.....	7
2.2	EUT Exercise Software	7
2.3	Special Accessories	7
2.4	Equipment Modifications	7
2.5	Configuration of Tested System.....	7
3.	THEORY OF OPERATION -----	8
3.1	Theory of Operation	8
4.	SET UP PHOTOGRAPHS -----	9
5.	FIELD STRENGTH OF FUNDAMENTAL -----	10
5.1	Test Specification	10
5.2	Test Procedure	10
5.3	Measured Data.....	10
5.4	Test Instrumentation Used, Field Strength of Fundamental	12
6.	SPURIOUS RADIATED EMISSION IN THE RESTRICTED BAND, BELOW 1 GHZ -----	13
6.1	Test Specification	13
6.2	Test Procedure.....	13
6.3	Test Data.....	14
6.4	Test Instrumentation Used, Radiated Measurements	15
6.5	Field Strength Calculation	16
7.	SPURIOUS RADIATED EMISSION IN THE RESTRICTED BAND, ABOVE 1 GHZ -----	17
7.1	Radiated Emission Above 1 GHz.....	17
7.2	Test Data	18
7.3	Test Instrumentation Used, Radiated Measurements Above 1 GHz	21
8.	APPENDIX A - CORRECTION FACTORS -----	22
8.1	Correction factors for CABLE.....	22
8.2	Correction factors for CABLE.....	23
8.3	Correction factors for CABLE.....	24
12.6	Correction factors for LOG PERIODIC ANTENNA	25
8.4	Correction factors for LOG PERIODIC ANTENNA	26
8.5	Correction factors for BICONICAL ANTENNA.....	27
8.6	Correction factors for Double-Ridged Waveguide Horn	28
8.7	Correction factors for Horn Antenna	29
8.8	Correction factors for ACTIVE LOOP ANTENNA	30

1. General Information

1.1 Administrative Information

Manufacturer:	Visonic Inc.
Manufacturer's Address:	Habarzel 24 Tel Aviv Israel 69710 Tel: +936-03-6456789 Fax: +936-03-6456788
Manufacturer's Representative:	Arik Elshtein
Equipment Under Test (E.U.T):	Ceiling Mounted Dual Technology Detector
Equipment Model No.:	DUO-220
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	20.03.08
Start of Test:	20.03.08
End of Test:	30.03.08
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	See Section 2

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), File No. IC 4025.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 *Product Description*

The DUO 220 is a microcomputer-controlled, ceiling-mounted dual-technology intrusion detector.

1.4 *Test Methodology*

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 *Test Facility*

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing August 22, 2006).
I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 *Measurement Uncertainty*

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 *Justification*

Radiated emission screening was performed in 3 orthogonal orientations. The worst-case orientation was the horizontal position.

2.2 *EUT Exercise Software*

Manufacturing software was used for the tests.

2.3 *Special Accessories*

No accessories were needed.

2.4 *Equipment Modifications*

No modifications were needed.

2.5 *Configuration of Tested System*

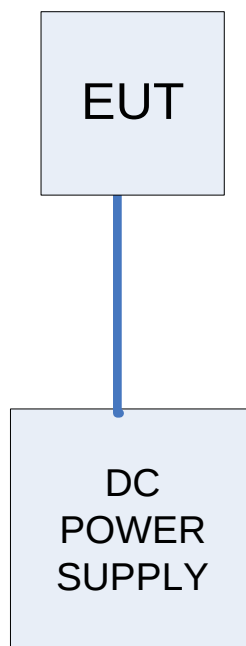


Figure 1. Configuration of Tested System

3. Theory of Operation

3.1 *Theory of Operation*

The DUO 220 is a microcomputer-controlled, ceiling-mounted dual-technology intrusion detector. Its operation is based on two physical phenomena – the infrared (IR) radiation emitted by the human body and the Doppler frequency shift caused by a person moving in a microwave (MW) field. The IR and MW technologies, when combined in a single detector, complement each other to assure the most reliable detection and immunity false alarms.

During the tests the EUT was operated at 2459 MHz in “normal” mode.

4. Set Up Photographs



Figure 2. Radiated Emission

5. Field Strength of Fundamental

5.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.245

5.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (2.45 GHz).

The distance between the E.U.T. and test antenna was 3 meters.

The turntable and antenna were adjusted for maximum level reading on the EMI receiver.


5.3 Measured Data

JUDGEMENT: Passed by 25.0 dB

The EUT met the FCC Part 15, Subpart C, Section 15.245 specification requirements.

The details of the highest emissions are given in *Figure 3*.

TEST PERSONNEL:

Tester Signature:  for A. Gurewitz Date: 04.05.2008

Typed/Printed Name: A. Gurewitz

Field Strength of Fundamental

E.U.T Description Ceiling Mounted Dual
 Technology Detector
 Model Number DUO-220
 Serial Number: Not Designated

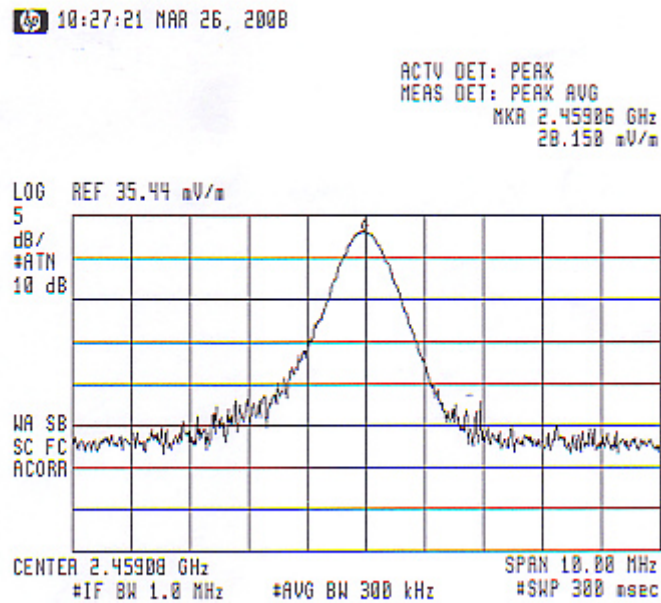


Figure 3. Field Strength of Fundamental
Detector: Peak

Test Result: 28.158 mV/m = 89.0 dBuV/m

Limit: 500 mV/m = 114 dBuV/m (Average Detector)

5.4 Test Instrumentation Used, Field Strength of Fundamental

Instrument	Manufacturer	Model	Serial Number	Last Calibration	Period
EMI Receiver	HP	85422E	3411A00102	November 30, 2007	1 year
EMI Receiver Filter Section	HP	85420E	3427A00103	November 30, 2007	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	February 26, 2008	2 years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

6. Spurious Radiated Emission in the Restricted Band, Below 1 GHz

6.1 Test Specification

9kHz-1000 MHz, F.C.C., Part 15, Subpart C

6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30 MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter.

In the frequency range 30-1000 MHz, the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

- Turning the E.U.T on and off.

- Using a frequency span less than 10 MHz.

- Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.


6.3 Test Data

JUDGEMENT: Passed

No signals were found in the frequency range of 9 kHz to 1.0 GHz

The EUT met the requirements of the F.C.C. Part 15, Subpart C Section 15.245 specification.

TEST PERSONNEL:

Tester Signature:  for A. Gurewitz

Date: 04.05.2008

Typed/Printed Name: A. Gurewitz

6.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Last Calibration	Period
EMI Receiver	HP	85422E	3411A00102	November 30, 2007	1 year
RF Section	HP	85420E	3427A00103	November 30, 2007	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	March 23, 2008	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 22, 2007	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 15, 2007	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

6.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v/m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dB μ v/m]
RA: Receiver Amplitude [dB μ v]
AF: Receiving Antenna Correction Factor [dB/m]
CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

7. Spurious Radiated Emission in the Restricted Band, Above 1 GHz

7.1 Radiated Emission Above 1 GHz

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used.

In the frequency range 2.9-25.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

7.2 Test Data


JUDGEMENT: Passed by 4.6 dB

For the operation frequency of 2459 MHz, the margin between the emission level and the specification limit is 4.6 dB in the worst case at the frequency of 4918.00 MHz, vertical polarization.

The results for all modulations were the same.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 15.245 specification.

TEST PERSONNEL:

Tester Signature:  for A. Gurewitz

Date: 04.05.2008

Typed/Printed Name: A. Gurewitz

Radiated Emission Above 1 GHz

E.U.T Description Ceiling Mounted Dual Technology
Detector
Type DUO-220
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: 2459 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
4918.00	V	69.4*	74.0	-4.6
4918.00	H	66.6*	74.0	-7.4
7377.00	H	67.5*	74.0	-6.5
7377.00	V	67.6*	74.0	-6.4

**Figure 4. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss + FilterLoss- Preamplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description Ceiling Mounted Dual Technology
Detector
Type DUO-220
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 2459 MHz

Freq.	Polarity	Average Amp	Average Specification	Average Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
4918.00	V	40.0*	54.0	-14.0
4918.00	H	40.6*	54.0	-13.4
7377.00	H	47.7*	54.0	-6.3
7377.00	V	47.7*	54.0	-6.3

**Figure 5. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss + Filter Loss- Preamplifier Gain

7.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	HP	85422E	3411A00102	November 30, 2008	1 year
RF Section	HP	85420E	3427A00103	November 30, 2008	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A
Antenna-Log Periodic	A.H.System	SAS-200/511	253	February 26, 2009	2 years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 16, 2010	2 years
Horn Antenna	ARA	SWH-28	1008	December 8, 2006	2 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 2, 2007	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	February 8, 2007	1 year
Spectrum Analyzer	HP	8593EM	3536A00120	February 26, 2008	1 year
Spectrum Analyzer	HP	8546E	3442A00275	November 14, 2007	1 year
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

8. APPENDIX A - CORRECTION FACTORS

8.1 Correction factors for CABLE from EMI receiver to test antenna at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

8.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY	CORRECTION
(GHz)	FACTOR
(dB)	
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

8.3 Correction factors for

CABLE

from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

12.6 Correction factors for LOG PERIODIC ANTENNA

**Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission
Test EMI Receiver".

8.4 Correction factors for

LOG PERIODIC ANTENNA Type SAS-200/511 at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

8.5 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

8.6 Correction factors for Double-Ridged Waveguide Horn

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)	FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			

8.7 Correction factors for

Horn Antenna
Model: SWH-28
at 1 meter range.

FREQUENCY (GHz)	APE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4

8.8 Correction factors for ACTIVE LOOP ANTENNA

Model 6502
S/N 9506-2950

FREQUENCY	Magnetic Antenna Factor	Electric Antenna Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2