



HERMON LABORATORIES



Electrical

Hermon Laboratories Ltd.
P.O.Box 23
Binyamina 30550, Israel
Tel. +972 66288001
Fax. +972 66288277
e-mail: mail@hermonlabs.com

RADIO TEST REPORT

**ACCORDING TO 47 CFR Part 15 SUBPART C §15.231, §15.205, §15.209 and SUBPART B;
RSS-210 Issue 5:2001; ICES-003 Issue 3:1997**

for

VISONIC Ltd.

EQUIPMENT UNDER TEST:

Supervised wireless Power Code smoke detector

Model: MCT-430 @ 315 MHz

This report is in conformity with ISO/IEC 17025. The A2LA logo endorsement applies only to the test methods and the standards that are listed in the scope of Hermon Laboratories accreditation.
The test results relate only to the items tested. **This test report must not be reproduced in any form except in full with the approval of Hermon Laboratories Ltd.**

Page 1 of 35

Document ID: visrad_fcc.15164.doc
Date of Issue: July 02



Contents

CONTENTS.....	2
1 PROJECT INFORMATION	3
2 SUMMARY OF TESTS AND REQUIREMENTS	4
3 EUT DESCRIPTION	6
3.1 GENERAL DESCRIPTION	6
3.2 EUT TEST CONFIGURATION	6
3.3 TRANSMITTER DESCRIPTION.....	7
4 TEST RESULTS.....	8
4.1 BANDWIDTH OF EMISSION ACCORDING TO § 15.231 (c) AND RSS-210 § 6.1.1(c)	8
4.2 FIELD STRENGTH OF FUNDAMENTAL, § 15.231 AND RSS-210 § 6.1.1(B).....	9
4.3 FIELD STRENGTH OF SPURIOUS RADIATION, § 15.231 AND RSS-210 § 6.1.1(B)	10
4.4 UNINTENTIONAL RADIATED EMISSIONS TEST ACCORDING TO §15.109 AND ICES-003.....	11
APPENDIX A - PLOTS	12
APPENDIX B – TEST SETUP PHOTOGRAPHS.....	23
APPENDIX C - TEST EQUIPMENT USED FOR TESTS	27
APPENDIX D - GENERAL INFORMATION.....	34
TEST FACILITY DESCRIPTION	34
ABBREVIATIONS AND ACRONYMS	34
SPECIFICATION REFERENCES	34
FCC EQUIPMENT CODES AND DESCRIPTIONS	35



1 Project information

Description of equipment under test

Test items	: Supervised wireless Power Code smoke detector
Manufacturer	: Visonic Ltd.
Brand name	: MCT-430
Equipment serial number	: Cat 0-3643-1
Types (Models)	: MCT-430 @ 315 MHz
Equipment FCC code ¹	: DSC

Applicant information

Applicant's responsible person	: Mr. Arick Elshtein, project manager
Company	: Visonic Ltd.
Address	: 27 Habarzel Street
Postal code	: 69710
City	: Tel Aviv
Country	: Israel
Telephone number	: +972 3 6456714
Telefax number	: +972 3 6456891

Test performance

Project Number:	: 15164
Location	: Hermon Laboratories
Receipt date	: June 25, 2002
Test performed	: July 14, 2002
Purpose of test	: Apparatus compliance verification in accordance with emission requirements
Test specification(s)	: 47CFR Part 15, subpart C, §15.231, §15.205, §15.209, and subpart B §15.109; RSS-210 Issue 5: 2001 and ICES-003 Issue 3: 1997

¹ FCC Equipment codes – see Appendix D



2 Summary of tests and requirements


Parameter	Subclause	C	NC	NT	NA	Tested by	Date tested	Remarks
Transmitter characteristics, §15.231								
Periodic operation	15.231(a)	X				Refer to Installation instructions		
Bandwidth of emission	15.231(c)	X				Mrs. E. Pitt, test engineer	July 14, 2002	
Field strength of fundamental	15.231(b)(2)	X				Mr. M. Feldman, test engineer	July 14, 2002	
Field strength of spurious radiation	15.231(b)(3)	X				Mrs. E. Pitt, test engineer	July 14, 2002	
Unintentional radiation, §15.107, §15.109								
Conducted emissions	15.107				X			
Radiated emissions	15.109	X				Mrs. E. Pitt, test engineer	July 14, 2002	
General conditions under §15.231, Periodic operation in the band 40.66 - 40.70 MHz and above 70 MHz								
The intentional radiator does not operate in the restricted bands of operation.	15.205	X						
The intentional radiator has permanently attached antenna or antenna that uses a unique coupling to the intentional radiator.	15.203	X				Refer to Installation instructions		
No antenna other than that furnished by the responsible party can be used with the device.	15.203	X						
The intentional radiator has no standard antenna jack or electrical connector.	15.203	X				This requirement does not apply to intentional radiators that must be professionally installed		
The intentional radiator must be professionally installed.	15.203				X			
The Intentional radiator operates at 315 MHz.	15.231 (a)	X						
Intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc.	15.231 (a)	X				Refer to Installation instructions		
Radio control of toys is not permitted.	15.231 (a)	X				Refer to Installation instructions		



Parameter	Subclause	C	NC	NT	NA	Tested by	Date tested	Remarks
Continuous transmissions, such as voice or video, and data transmissions are not permitted.	15.231 (a)	X						Refer to Installation instructions
A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.	15.231 (a) (1)				X			
A transmitter activated automatically shall cease transmission within 5 seconds after activation.	15.231 (a) (2)				X			
Periodic transmissions at regular predetermined intervals are not permitted.	15.231 (a) (3)	X						Refer to Installation instructions
The intentional radiator polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.	15.231 (a) (3)	X						Refer to Installation instructions
The intentional radiators, employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.	15.231 (a) (4)	X						Refer to Installation instructions
NOTE: C: The parameter is compliant with the requirements. NC: The parameter is not compliant with the requirements. NT: The parameter is not tested. NA: The test of this parameter is not applicable.								

Test report prepared by: Mrs. V. Mednikov, certification engineer

Test report approved by: Mr. A. Usoskin, QA manager





3 EUT description


3.1 General description

The MCT-430 is a low profile, battery operated, photoelectric smoke detector, which shares its housing with a UHF "Power Code" type transmitter.

3.2 EUT test configuration

Test configuration is provided in Figure 3.2.1.

Figure 3.2.1 EUT test configuration

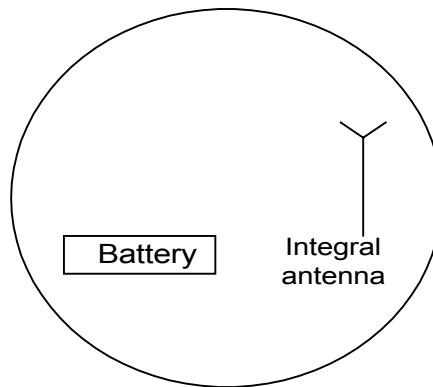



3.3 Transmitter description

Operating frequency:		315 MHz	
Extreme temperature conditions ² :			
Operating Temperature: 0°C to 38°C (32°F to 100°F)			
Heat Detection: Alarm if ambient temperature exceeds 57°C (135°F)			
Maximum rated output power			
At transmitter permanent external 50 Ω rf output connector (dBm)		NA	
Effective radiated power (for equipment with integral antenna) (dBm)		-38	
Transmitter duty cycle (worst case)			
Tx on (seconds)		0.061	
Tx off (seconds)		0.039	
Modulation			
Amplitude			
Frequency			
<input checked="" type="checkbox"/> Other (specify): ASK (ON OFF KEYING)			
Can the transmitter be operated without modulation		<input type="checkbox"/> yes	<input checked="" type="checkbox"/> no
Transmitter power source			
<input checked="" type="checkbox"/>	Battery	Nominal rated voltage (VDC)	6
Nickel Cadmium			
<input checked="" type="checkbox"/>	Lithium CR 123 A		
	DC	Nominal rated voltage (VDC)	
	AC mains	Nominal rated voltage (VAC)	
Is there common power source for transmitter and receiver		<input type="checkbox"/> yes	<input type="checkbox"/> no
Antenna type			
<input checked="" type="checkbox"/>	Integral		
	External		
Type of antenna jack ³ - NA			
	standard	connector type	<input type="checkbox"/> Male <input type="checkbox"/> Female
	unique	connector type	<input type="checkbox"/> Male <input type="checkbox"/> Female

² Frequency tolerance test for devices operating in the frequency band 40.66 – 40.70 MHz shall be performed in normal and extreme test conditions.

³ Standard antenna jack use is prohibited excluding devices which must be professionally installed



4 Test results

4.1 Bandwidth of emission according to § 15.231 (c) and RSS-210 § 6.1.1(c)

METHOD OF MEASUREMENT: ANSI 63.4 §13.1.7
DATE: July 14, 2002
RELATIVE HUMIDITY: 43 %
AMBIENT TEMPERATURE: 23 °C
MODULATION: ON
DETECTOR USED: Peak

Carrier frequency MHz	Occupied bandwidth, kHz	Reference to plot in Annex A
315	480	A1
Measurement uncertainty, ppm	0.2	

TEST EQUIPMENT USED:

HL 0465	HL 0521	HL 0589	HL 0604	HL 1004		
---------	---------	---------	---------	---------	--	--

LIMIT (§ 15.231 (c))

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

For 315 MHz frequency the specified limit is 787.5 kHz

TEST PROCEDURE

The spectrum trace data around transmitter fundamental frequency was obtained with the spectrum analyzer in "Max Hold" mode. The bandwidth value was determined between two points 20 dBc.



4.2 Field strength of fundamental, § 15.231 and RSS-210 § 6.1.1(b)

METHOD OF MEASUREMENT: ANSI 63.4 §13.1.5
 DATE: July 14, 2002
 RELATIVE HUMIDITY: 43 %
 AMBIENT TEMPERATURE: 23 °C
 SITE DESCRIPTION: Anechoic chamber
 MODULATION: ON
 DETECTOR USED: Peak

	§ 15.231 (b)	§ 15.231 (e)
The EUT complies with the requirements of	X	

Frequency, MHz	Measured field strength, dB(μV/m)	Average factor, dB	Calculated result, dB(μV/m)	Specification limit, dB(μV/m)	Reference to plot in Annex A
315	66.0	-9.55	56.45	75.62	A2
Measurement uncertainty, dB			-5.73 dB/ -5.57 dB		

4.2.1 Average factor calculation, §15.35

Tx ON	Duty cycle	Average factor	Reference to plot in Annex A
33.3	0.333	-9.55	A3 to A4

TEST EQUIPMENT USED:

HL 0465	HL 0521	HL 0589	HL 0604	HL 1004		
---------	---------	---------	---------	---------	--	--

LIMIT § 15.231 (b)

Fundamental frequency (MHz)	Field strength of fundamental (b) (mV/m) @ 3 m
260 – 470	3,750 to 12,500

The specified limit for 315 MHz frequency is 75.62 dB(μV/m)

TEST PROCEDURE

The EUT was tested, being placed on a wooden 80 cm height turntable in each of three orthogonal planes in turn. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antenna polarization was changed from vertical to horizontal.



4.3 Field strength of spurious radiation, § 15.231 and RSS-210 § 6.1.1(b)

METHOD OF MEASUREMENT: ANSI 63.4 §13.1.4
 TEST PERFORMED IN: Anechoic chamber
 DATE: July 14, 2002
 RELATIVE HUMIDITY: 43 %
 AMBIENT TEMPERATURE: 23 °C
 TEST PERFORMED AT FIELD STRENGTH: 56.45 dB(μV/m)
 MODULATION: ON
 DETECTOR USED: Peak
 RANGE OF MEASUREMENTS: 9 kHz to 3200 MHz

Frequency, MHz	RBW, kHz	VBW, kHz	Radiated emission (peak), dB(μV/m)	Limit (peak) @ 3 m, dB(μV/m)	Radiated emission, (avrg) dB(μV/m)	Limit (avrg) @ 3 m, dB(μV/m)	Ref. to plot in App. A
630.00	120	300	44.65	75.62	35.1*	55.62	A7, A8
945.00	120	300	47.00	75.62	37.45*	55.62	A7, A9
Measurement uncertainty, dB				-5.73 dB/ -5.57 dB			

For test results refer to Plots A5 to A11.

* Radiated emission value was calculated: Peak value + Average factor

Notes to table:

RBW: resolution bandwidth

VBW: video bandwidth

TEST EQUIPMENT USED:

HL 0041	HL 0446	HL 0465	HL 0521	HL 0589	HL 0604	HL 1004
HL 1947						

LIMIT § 15.231 (b)

Fundamental frequency (MHz)	Field strength of harmonics (b) (mV/m) @ 3 m
260 – 470	375 to 1,250

The specified limit for 315 MHz frequency is 55.62 dB(μV/m)

TEST PROCEDURE

The EUT was tested, being placed on a wooden 80 cm height turntable in each of three orthogonal planes in turn.

9 kHz – 30 MHz frequency range. The loop antenna was positioned with its plane vertical. The loop center was 1 meter above the ground plane. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated about its vertical axis.

30 MHz – 9.5 GHz frequency range. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antennas polarization was changed from vertical to horizontal.



4.4 Unintentional radiated emissions test according to §15.109 and ICES-003

METHOD OF MEASUREMENT: ANSI 63.4 §11.6 / ANSI 63.4 §12.1.4
 TEST PERFORMED IN: Anechoic chamber
 DATE: July 14, 2002
 RELATIVE HUMIDITY: 43 %
 AMBIENT TEMPERATURE: 23 °C
 DISTANCE BETWEEN ANTENNA AND EUT: 3 m
 THE EUT WAS TESTED AS: TABLE-TOP
 FREQUENCY RANGE: 30 MHz – 2 GHz
 DETECTOR TYPE: Peak
 RESOLUTION BANDWIDTH: 120 kHz below 1 GHz, 1 MHz above 1 GHz

The EUT highest used frequency (not including operating frequency), MHz	Upper frequency of measurement range, MHz
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Frequency, MHz	Antenna polarization	Antenna height, m	Turntable position (°)	Radiated emissions, dB (μV/m)	Specification limit, dB (μV/m)	Ref. to plot in App. A
30 - 2000	The limit for unintentional radiated emission, class B was used throughout spurious emission measurements in Tx mode. All emissions except carrier and 3 rd harmonic were found below the limit					A5, A10
Measurement uncertainty, dB		-5.73 dB/ -5.57 dB				

Table abbreviations:

Antenna polarization: V = vertical, H = horizontal

Turntable position: 0° = EUT front panel faces the receiving antenna

TEST EQUIPMENT USED:

HL 0041	HL 0465	HL 0521	HL 0589	HL 0604	HL 1004	
---------	---------	---------	---------	---------	---------	--

LIMIT (§ 15.109)

Frequency, MHz	Class A equipment @ 10 m dB(μV/m)	Class B equipment @ 3 m dB(μV/m)
30 - 88	39.0	40
88 - 216	43.5	43.5
216 - 960	46.4	46
960 - 5000	49.5	54

TEST PROCEDURE

The EUT was placed on a wooden 80 cm height turntable. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antennas polarization was changed from vertical to horizontal.



Appendix A - Plots

Plot A1

Occupied bandwidth measurements

14:09:10 JUL 14, 2002

ACTV DET: PEAK
MEAS DET: PEAK QP
MKR Δ 400 kHz
.04 dB

MEASURE
AT MKR

ADD TO
LIST


HOLD

LOG REF 68.0 dB μ V/m

PREAMP ON

10
dB/
#ATN
0 dB

DL
46.0
dB μ V/m
MA SB
SC FC
ACORR

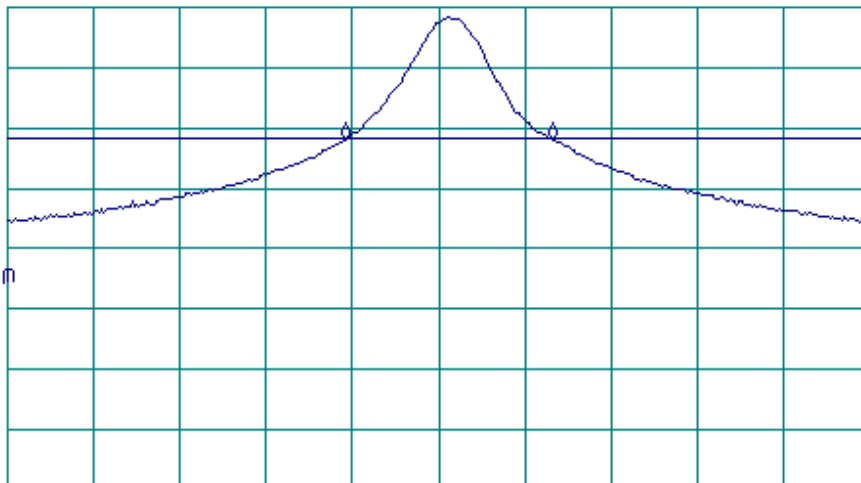

DSP LINE
ON OFF

Change
Title

Display
Config

INTENSITY

CENTER 315.000 MHz

SPAN 2.000 MHz

More

RL #1F BW 100 kHz

#AVG BW 100 kHz

SWP 20.0 msec

1 of 2



Plot A2

Field strength of fundamental measurements

Notes

Horizontal polarization

14:05:51 JUL 14, 2002

FREQ 315.0 MHz
PEAK 66.0 dB μ V/m
QP 65.5 dB μ V/m
AVG NOT SELECTED

MEASURE
AT MKR

ADD TO
LIST

CLEAR
WRITE A


MAX
HOLD A

VIEW A

BLANK A

Trace
A B C

More
1 of 3

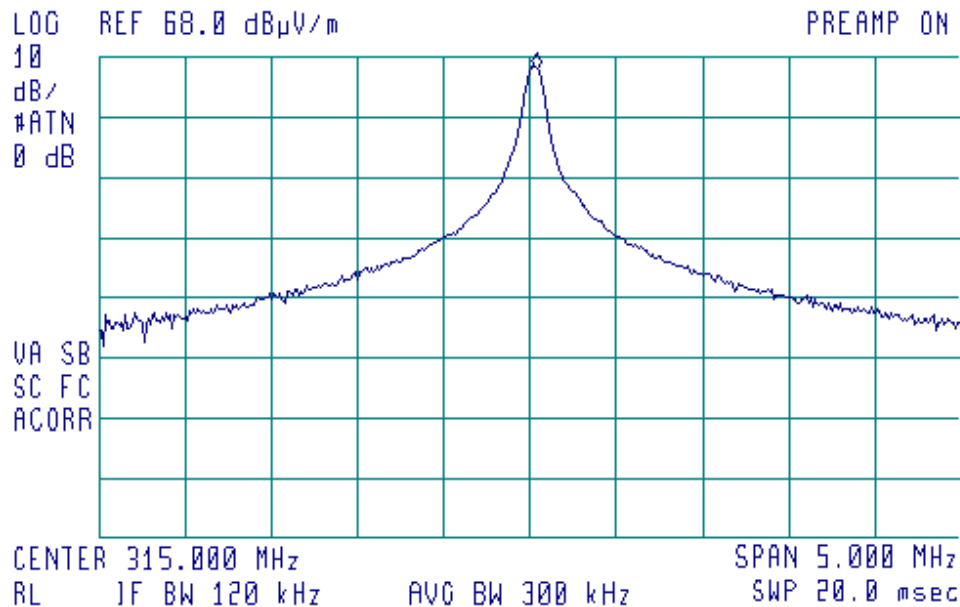


LIMIT=75.6 dB μ V/m @3m



Plot A3

Transmission duration

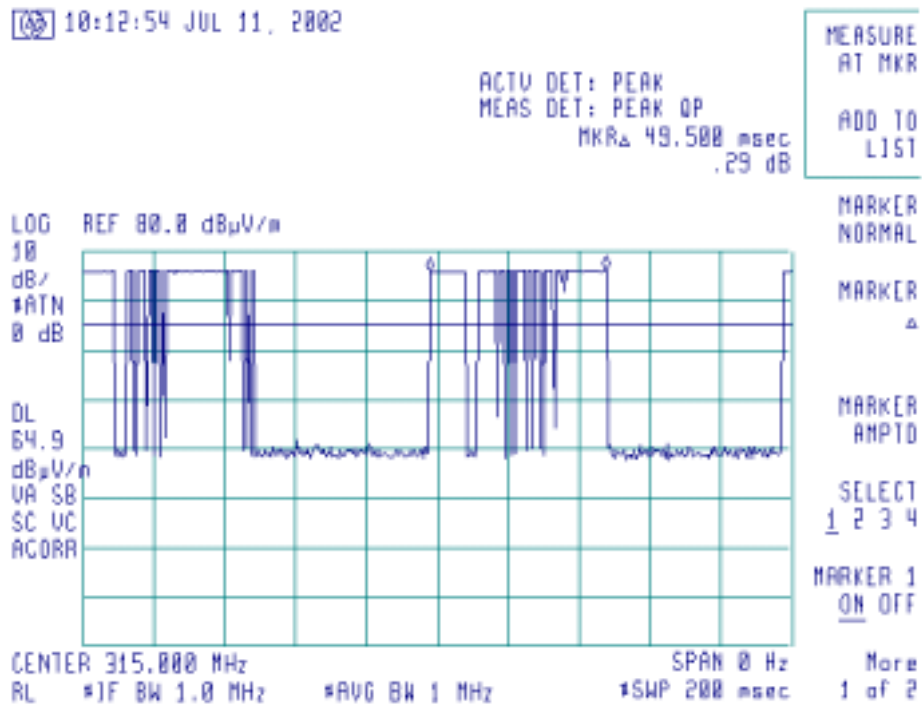

One transmission duration is 49.5 ms



Plot A4

Duty cycle measurements

10:15:11 JUL 11, 2002

ACTV DET: PEAK
MEAS DET: PEAK QP
MKRΔ 50.000 msec
-.11 dB

MEASURE
AT MKR

ADD TO
LIST

MARKER
NORMAL


MARKER
Δ

MARKER
AMPTD

SELECT
1 2 3 4

MARKER 1
ON OFF

More
1 of 2

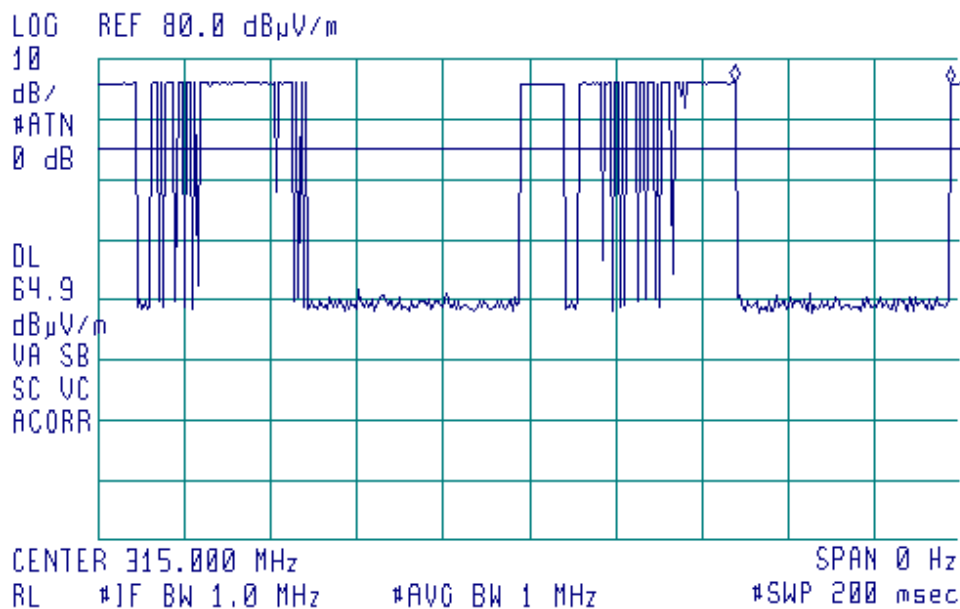

The time between the end of one transmission and the beginning of the other one is 50 ms.

“Power code” means transmission of a sequence of “0” (1/3 ON; 2/3 OFF) or “1” (2/3 ON; 1/3 OFF). The worst case is when all “1” are transmitted.

Tx ON in 100 ms interval = $(100 - 50) \times 2/3 = 33.3$ ms.



Plot A5

Spurious emission measurements
9 kHz – 150 kHz frequency range

15:04:50 JUL 14, 2002

ACTV DET: PEAK
MEAS DET: PEAK OP
MKR 9.3 kHz
59.81 dB μ V/m

MEASURE
AT MKR

ADD TO
LIST

CLEAR
WRITE A

MAX
HOLD A

VIEW A

BLANK A

Trace
A B C

More
1 of 3

LOG REF 130.0 dB μ V/m

15
dB/
ATN
50 dB

VA SB
SC FC
ACORR

START 9.0 kHz

R #1F BW 200 Hz

#AVC BW 30 kHz

STOP 150.0 kHz

SWP 10.3 sec



Plot A6

Spurious emission measurements
150 kHz – 30 MHz frequency range

15:02:35 JUL 14, 2002

ACTV DET: PEAK
MEAS DET: PEAK 0P
MKR 160 kHz
54.80 dB μ V/m

MEASURE
AT MKR

ADD TO
LIST

MARKER
↓ CF

MARKER
△

NEXT
PEAK

NEXT PK
RIGHT

NEXT PK
LEFT

More
1 of 2

LOG REF 105.0 dB μ V/m

10
dB/
ATN
30 dB

VA SB
SC FC
ACORR


START 150 kHz

RL #1F BW 9.0 kHz

#AVG BW 30 kHz

STOP 30.00 MHz

SWP 2.49 sec

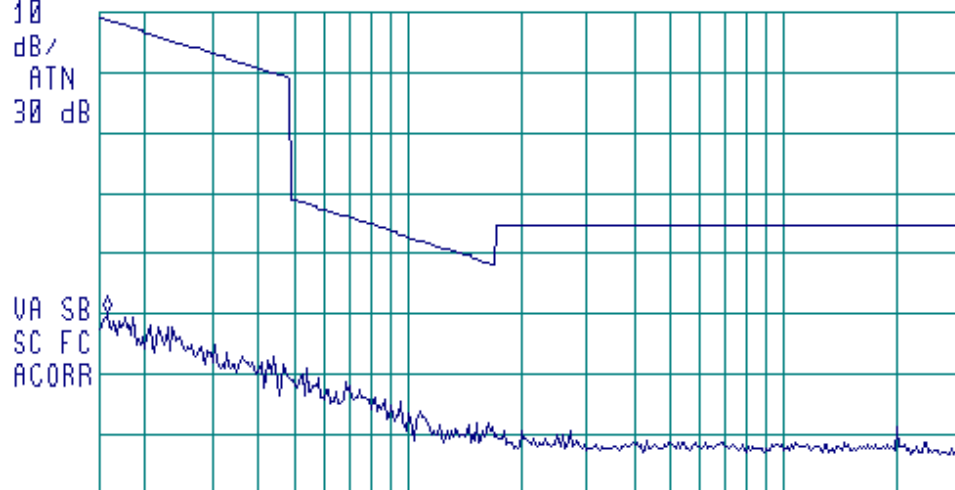




Plot A7

Spurious emission measurements
30 MHz – 1000 MHz frequency range

Notes

Vertical & Horizontal polarization

14:31:58 JUL 14, 2002

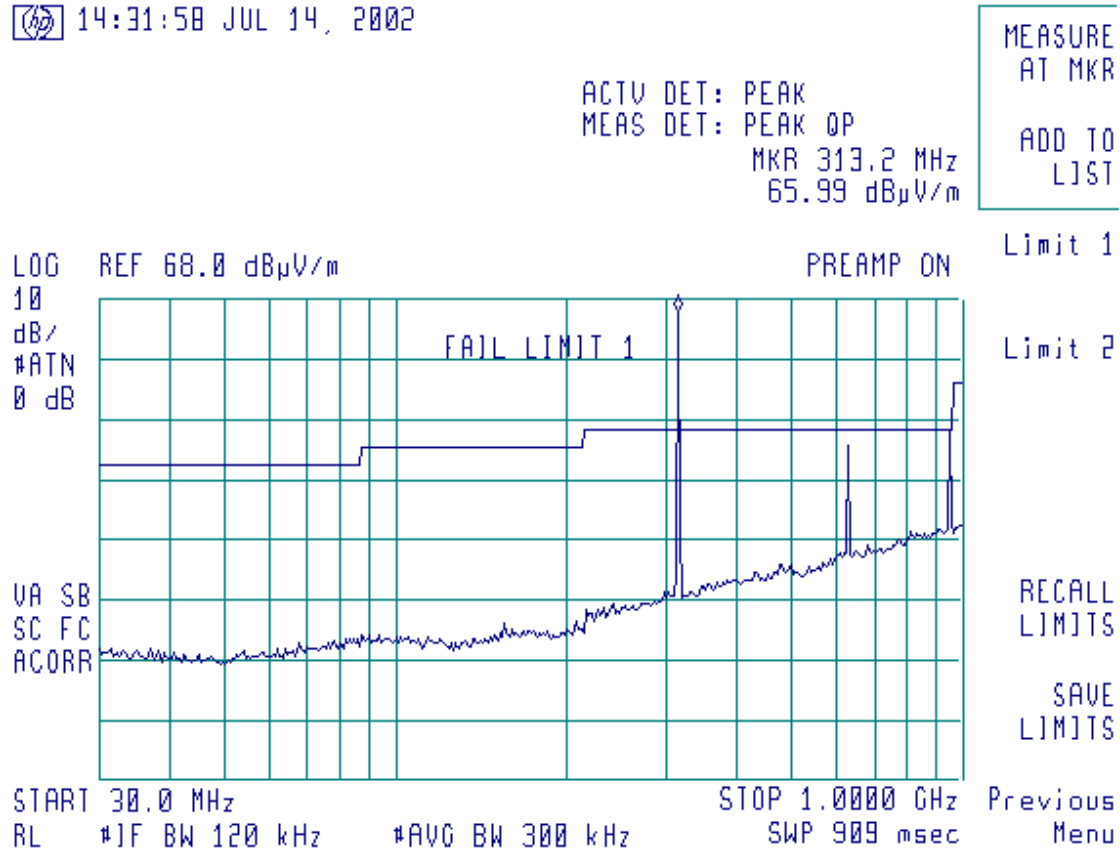



Plot A8

Field strength of 2nd harmonic

Notes

Horizontal polarization

14:17:48 JUL 14, 2002

ACTV DET: PEAK
MEAS DET: PEAK 0P
MKR 630.040 MHz
44.65 dB μ V/m

MEASURE
AT MKR

ADD TO
LIST

MARKER
↓ CF

MARKER
△

NEXT
PEAK

NEXT PK
RIGHT

NEXT PK
LEFT


More
1 of 2

LOG REF 68.0 dB μ V/m

PREAMP ON

10
dB/
#ATN
0 dB

VA SB
SC FC
ACORR

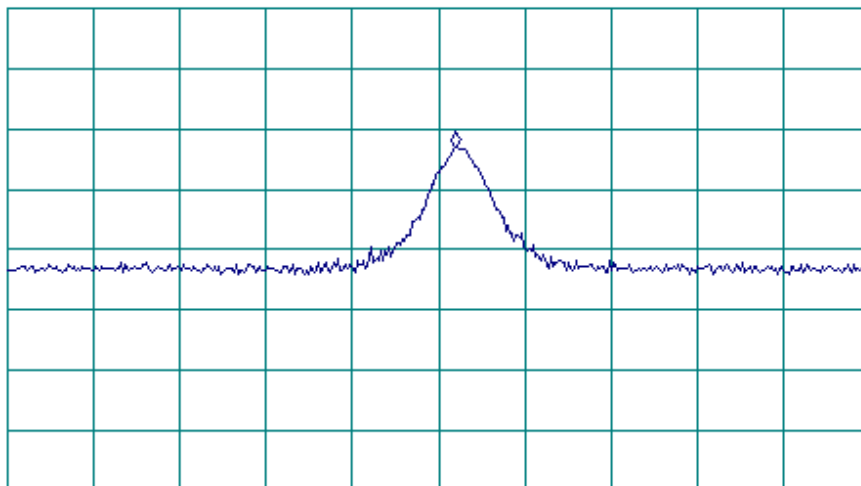

CENTER 630.000 MHz

SPAN 2.000 MHz

RL #1F BW 120 kHz

#AVG BW 300 kHz

SWP 20.0 msec



Plot A9

Field strength of 3rd harmonic

Notes

Horizontal polarization

14:24:57 JUL 14, 2002

ACTV DET: PEAK
MEAS DET: PEAK 0P
MKR 945.065 MHz
47.00 dBμV/m

MEASURE
AT MKR

ADD TO
LIST

MARKER
↓ CF

MARKER
△

NEXT
PEAK

NEXT PK
RIGHT

NEXT PK
LEFT


More
1 of 2

LOG REF 68.0 dBμV/m

PREAMP ON

10
dB/
#ATN
0 dB

VA SB
SC FC
ACORR

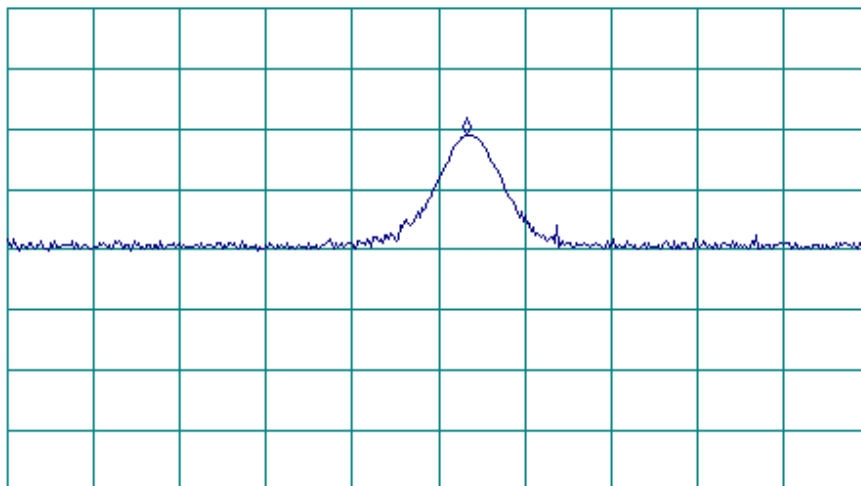

CENTER 945.000 MHz

SPAN 2.000 MHz

RL #1F BW 120 kHz

#AVC BW 300 kHz

SWP 20.0 msec



Plot A10

Spurious emission measurements
1 – 2 GHz frequency range

Notes

Vertical & Horizontal polarization

14:49:04 JUL 14, 2002

ACTV DET: PEAK
MEAS DET: PEAK OP
MKR 1.996 GHz
46.48 dB μ V/m

MEASURE
AT MKR

ADD TO
LIST

CLEAR
WRITE A

MAX
HOLD A

VIEW A

BLANK A

Trace
A B C

More
1 of 3

LOG REF 70.0 dB μ V/m

PREAMP ON

10
dB/
#ATTN
0 dB

VA SB
SC FC
ACORR

START 1.000 GHz

STOP 2.000 GHz

R #1F BW 1.0 MHz

#AVG BW 1 MHz

SWP 700 msec



Plot A11

Spurious emission measurements
2 – 3.2 GHz frequency range

Notes

Vertical & Horizontal Polarization

15:28:02 JUL 14, 2002

ACTV DET: PEAK
MEAS DET: PEAK 0P
MKR 3.036 GHz
44.88 dB μ V/m

MEASURE
AT MKR

ADD TO
LIST

MARKER
↓ CF

MARKER
△

NEXT
PEAK

NEXT PK
RIGHT

NEXT PK
LEFT

More
1 of 2

LOG REF 60.0 dB μ V/m

PREAMP ON

10
dB/
#ATN
0 dB

DL
55.6
dB μ V/m
VA SB
SC FC
ACORR

START 2.000 GHz

STOP 3.200 GHz

RL #1F BW 1.0 MHz

#AVG BW 1 MHz

SWP 40.0 msec




Appendix B – Test setup photographs

RADIATED EMISSION MEASUREMENT SETUP





RADIATED EMISSION MEASUREMENT SETUP

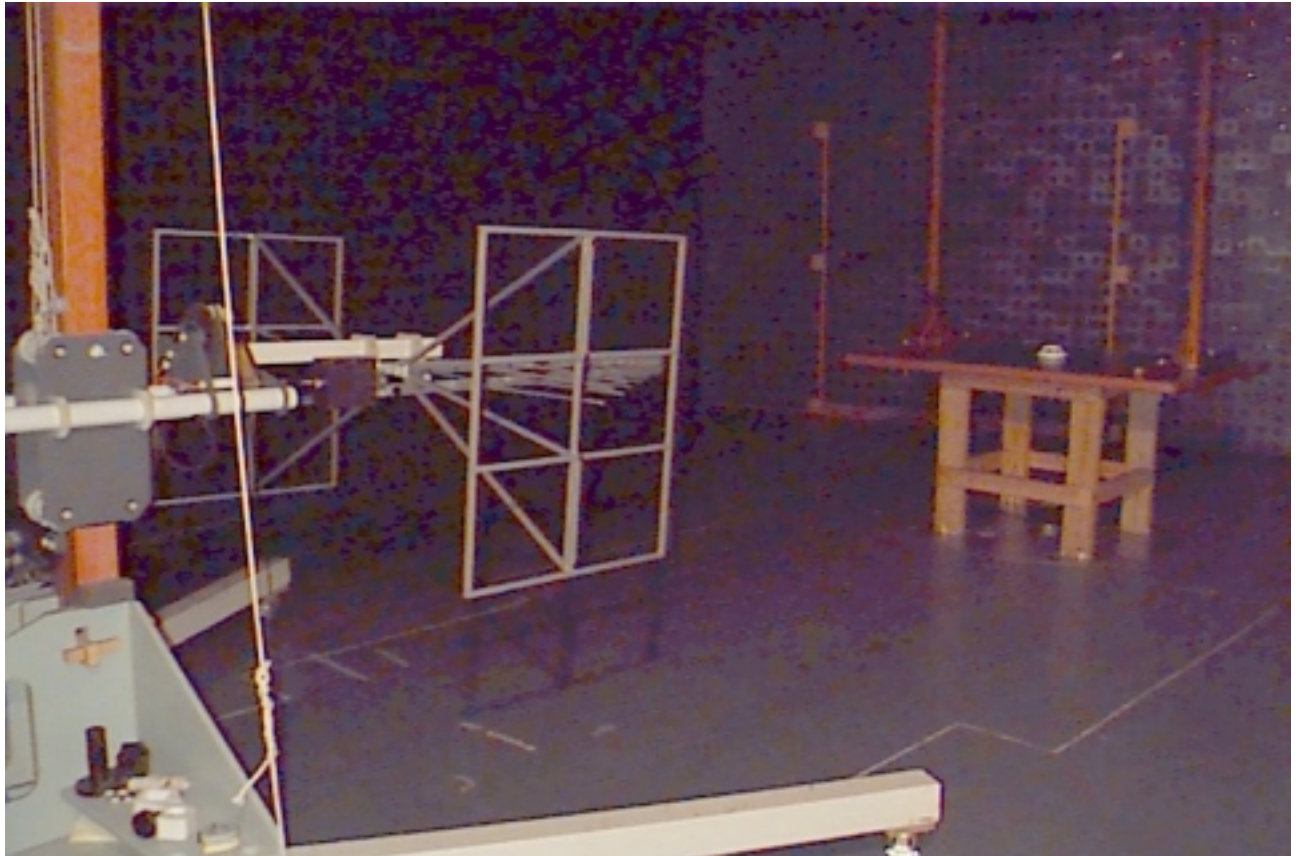




RADIATED EMISSION MEASUREMENT SETUP





RADIATED EMISSION MEASUREMENT SETUP

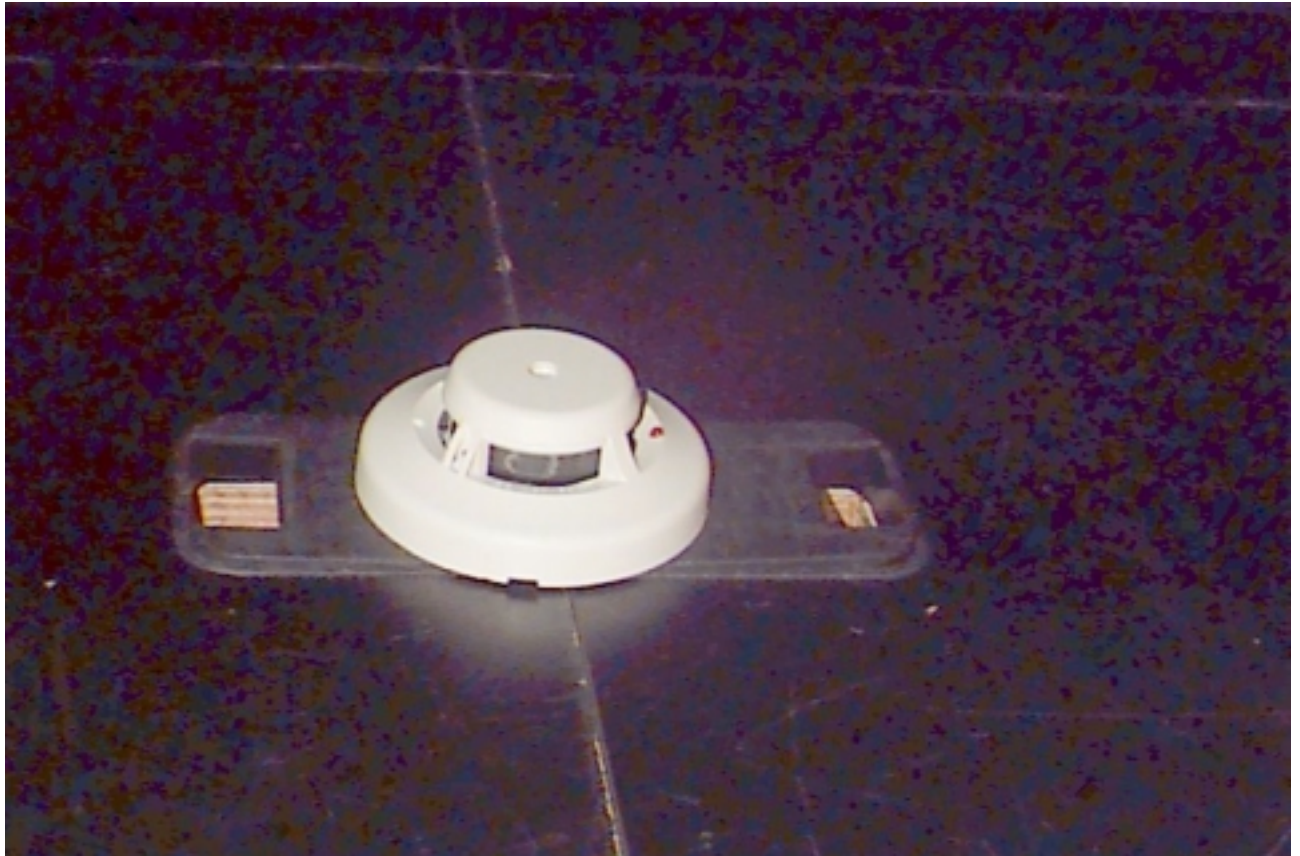



Appendix C - Test equipment used for tests

HL Serial No.	Description	Manufacturer information			Due Calibration Month/ year
		Name	Model No.	Serial No.	
0041	Double ridged guide antenna, 1-18 GHz	Electro-Metrics	RGA 50/60	2811	8/02
0446	Active Loop Antenna 10 kHz-30 MHz	Electro-Mechanics	6502	2857	10/02
0465	Anechoic Chamber 9 (L) x 6.5 (W) x 5.5 (H) m	Hermon Labs	AC-1	023	3/03
0521	Spectrum Analyzer with RF filter section (EMI Receiver 9 kHz - 6.5 GHz)	Hewlett Packard	8546A	0319	7/03
0589	Cable Coaxial, GORE A2POL118.2, 3m	Hermon Labs	GORE-3	589	11/02
0604	Antenna Biconilog Log-Periodic/T Bow- Tie, 26 - 2000 MHz	EMCO	3141	9611-1011	01/03
1004	Cable coaxial, ANDREW PSWJ4, 6 m	Hermon Labs	ANDREW-6	163	12/02
1947	Cable 18 GHz, 6.5 m, blue	Rhophase Microwave Ltd	NPS-1803A- 6500-NPS	T4974	10/02



Appendix E Test equipment correction factors

**Antenna factor, Active Loop Antenna
Model 6502
S/N 2857**

Frequency, MHz	Antenna Factor, dB
0.009	-32.8
0.010	-33.8
0.020	-38.3
0.050	-41.1
0.075	-41.3
0.100	-41.6
0.150	-41.7
0.250	-41.6
0.500	-41.8
0.750	-41.9
1.000	-41.4
2.000	-41.5
3.000	-41.4
4.000	-41.4
5.000	-41.5
10.000	-41.9
15.000	-41.9
20.000	-42.2
25.000	-42.8
30.000	-44.0

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field intensity in dB(μ V)/meter



Antenna Factor
Biconilog Antenna EMCO Model 3141
Ser.No.1011

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field intensity in dB(μ V/meter).



**Antenna factor
Log periodic antenna
Electro-Metrics, model LPA-25/30
Ser.No.1988**

Frequency MHz	Antenna Factor dB(1/m)	Frequency MHz	Antenna Factor dB(1/m)
200	12.6	625	20.4
225	12.2	650	20.9
250	13.4	675	22.0
275	14.3	700	22.2
300	15.2	725	22.7
325	15.7	750	22.5
350	15.9	775	22.7
375	16.4	800	22.8
400	17.0	825	23.2
425	17.4	850	23.5
450	17.9	875	23.9
475	18.6	900	24.0
500	19.1	925	24.0
525	19.3	950	24.2
550	19.6	975	24.7
575	19.8	1000	25.1
600	20.0		

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field intensity in dB(μ V/meter)



**Antenna Factor
Double Ridged Guide Antenna
Model RGA-50/60
S/N 2811**

Frequency, MHz	Antenna Factor, dB
1000	24.3
1500	25.4
2000	28.4
2500	29.2
3000	30.5
3500	31.6
4000	33.7
4500	32.2
5000	34.5
5500	34.5
6000	34.6
6500	35.3
7000	35.5
7500	35.9
8000	36.6
8500	37.3
9000	37.7
9500	37.7
10000	38.2
10500	38.5
11000	39.0
11500	40.1
12000	40.2
12500	39.3
13000	39.9
13500	40.6
14000	41.1
14500	40.5
15000	39.9
15500	37.8
16000	39.1
16500	41.1
17000	41.7
17500	45.1
18000	44.3

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field intensity in dB(μ V)/meter



**Cable Coaxial, GORE A2P01POL118, 2.3 m, model:GORE-3, s/n 176 (HL 0589)
+ Cable Coaxial, ANDREW PSWJ4, 6m, model: ANDREW-6, s/n 163 (HL 1004)
Calibration data**

No.	Parameter	SET, MHz	Measured, dB	Deviation, dB	Tolerance (Specification), dB	Meas. Uncert., dB	Notes
1	Insertion Loss	30	0.33	-	≤ 6.5	± 0.12	
2		50	0.40	-			
3		100	0.57	-			
4		300	0.97	-			
5		500	1.25	-			
6		800	1.59	-			
7		1000	1.81	-			
8		1200	1.97	-			
9		1400	2.15	-			
10		1600	2.28	-			
11		1800	2.43	-			
12		2000	2.61	-			
13		2200	2.75	-			
14		2400	2.89	-			
15		2600	2.97	-			
16	Insertion Loss	2800	3.21	-	≤ 6.5	± 0.12	
17		3000	3.32	-			
18		3300	3.47	-			
19		3600	3.62	-			
20		3900	3.84	-			
21		4200	3.92	-		± 0.17	
22		4500	4.07	-			
23		4800	4.36	-			
24		5100	4.62	-			
25		5400	4.78	-			
26		5700	5.16	-			
27		6000	5.67	-			
28		6500	5.99	-			



Cable 18GHz, 6.5 m, blue, model: NPS-1803A-6500-NPS, s/n T4974 (HL 1947)
Calibration data

Frequency, GHz	Insertion Loss, dB
	HL1947
0.03	0.30
0.05	0.38
0.10	0.53
0.20	0.74
0.30	0.91
0.40	1.05
0.50	1.18
0.60	1.29
0.70	1.40
0.80	1.50
0.90	1.59
1.00	1.68
1.10	1.77
1.20	1.86
1.30	1.94
1.40	2.01
1.50	2.08
1.60	2.16
1.70	2.22
1.80	2.29
1.90	2.36
2.00	2.42
2.10	2.48
2.20	2.54
2.30	2.60
2.40	2.66
2.50	2.71
2.60	2.77
2.70	2.83
2.80	2.89
2.90	2.95
3.10	3.06
3.30	3.17
3.50	3.28
3.70	3.39
3.90	3.51
4.10	3.62
4.30	3.76
4.50	3.87
4.70	4.01
4.90	4.10
5.10	4.21
5.30	4.31
5.50	4.43
5.70	4.56
5.90	4.71

Frequency, GHz	Insertion Loss, dB
	HL1947
6.10	4.87
6.30	4.95
6.50	4.94
6.70	4.88
6.90	4.87
7.10	4.83
7.30	4.85
7.50	4.86
7.70	4.91
7.90	4.96
8.10	5.03
8.30	5.08
8.50	5.13
8.70	5.21
8.90	5.22
9.10	5.34
9.30	5.35
9.50	5.52
9.70	5.51
9.90	5.66
10.10	5.70
10.30	5.78
10.50	5.79
10.70	5.82
10.90	5.86
11.10	5.94
11.30	6.06
11.50	6.21
11.70	6.44
11.90	6.61
12.10	6.76
12.40	6.68
13.00	6.66
13.50	6.81
14.00	6.90
14.50	6.90
15.00	6.97
15.50	7.17
16.00	7.28
16.50	7.27
17.00	7.38
17.50	7.68
18.00	7.92



Appendix E - General information

Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private EMC, Safety and Telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47) and by Industry Canada for electromagnetic emissions (file numbers IC 2186-1 for OATS and IC 2186-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), assessed by TNO Certification EP&S (Netherlands) for a number of EMC, Telecommunications, Safety standards, and by AMTAC (UK) for safety of Medical Devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for Electromagnetic Compatibility, Product Safety, Telecommunications Testing and Environmental Simulation (for exact scope please refer to Certificate No. 839.01).

Address: PO Box 23, Binyamina 30550, Israel.

Telephone: +972 4628 8001

Fax: +972 4628 8277

e-mail: mail@hermonlabs.com

Person for contact: Mr. Alex Usoskin, QA manager.

Abbreviations and acronyms

The following abbreviations and acronyms are applicable to this test report:

AC	alternating current
AE	auxiliary equipment
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
EMC	electromagnetic compatibility
EUT	equipment under test
GHz	gigahertz
H	height
Hz	hertz
kHz	kilohertz
kV	kilovolt
L	length
LISN	line impedance stabilization network
m	meter
MHz	megahertz
NA	not applicable
QP	quasi-peak
RF	radio frequency
RE	radiated emission
rms	root mean square
s	second
V	volt
W	width

Specification references

47CFR part 15: 2001	Radio Frequency Devices
ANSI C63.2:96	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4:92	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.



FCC Equipment codes and descriptions

CYY	Communications Receiver used w/ P.15 transmitter
DCD	Part 15 Low Power transmitter Below 1705 kHz
DSC	Part 15 Security/Remote Control Transmitter
DSR	Part 15 Remote Control/Security Device Transceiver
DSS	Part 15 Spread Spectrum Transmitter
DXX	Part 15 Low Power Communication Device Transmitter
EAV	Part 15 Automatic Vehicle Identification System
ETB	Part 15 Cordless Telephone Base Transceiver
ETR	Part 15 Cordless Telephone Remote Transceiver
ETS	Part 15 Cordless telephone system
FAP	Part 15 Anti-Pilferage Device
FDS	Part 15 Field Disturbance Sensor
GAT	Part 15 Auditory Assistance Device (Transmitter)
HID	Part 15 TV Interface Device
JBC	Part 15 Class B Computing Device/ Personal Computer
JBP	Part 15 Class B Computing Device Peripheral
PUB	Part 15 Unlicensed PCS base station
PUE	Part 15 Unlicensed PCS portable Tx held to ear
PUF	Part 15 Unlicensed PCS portable Tx held to face
PUT	Part 15 Unlicensed PCS portable Tx worn on body