



HERMON LABORATORIES



Hermon Laboratories Ltd.
P.O.Box 23
Binyamina 30500, Israel
Tel. +972 6628 8001
Fax. +972 6628 8277
e-mail: mail@hermonlabs.com

RADIO TEST REPORT

According to 47 CFR Part 15, subpart B and C, §15.231;
RSS-210 Issue 5:2001; ICES-003 Issue 3:1997
for

VISONIC Ltd.

EQUIPMENT UNDER TEST:

Alarm control panel

Model: Powermax+

This report is in conformity with ISO/IEC 17025. The A2LA logo endorsement applies only to the test methods and the standards that are listed in the scope of Hermon Laboratories accreditation.
The test results relate only to the items tested. **This test report must not be reproduced in any form except in full with the approval of Hermon Laboratories Ltd.**

Page 1 of 47

Document ID: VISRAD_FCC.15189.doc
Date of Issue: February 2004



Contents

CONTENTS.....	2
1 PROJECT INFORMATION.....	3
2 SUMMARY AND SIGNATURES	4
3 EUT DESCRIPTION.....	5
3.1 GENERAL DESCRIPTION.....	5
4 TEST RESULTS.....	8
4.1 FIELD STRENGTH OF FUNDAMENTAL, § 15.231 AND RSS-210 § 6.1.1(B)	8
4.2 FIELD STRENGTH OF SPURIOUS RADIATION, § 15.231 AND RSS-210 § 6.1.1(B)	9
4.3 BANDWIDTH OF EMISSION ACCORDING TO § 15.231 (c) AND RSS-210 § 6.1.1(c).....	11
4.4 UNINTENTIONAL RADIATED EMISSIONS TEST ACCORDING TO §15.109 AND ICES-003	12
4.5 CONDUCTED EMISSIONS TEST ACCORDING TO §15.107, 15.207	14
APPENDIX A - PLOTS.....	17
APPENDIX B - TEST EQUIPMENT USED FOR TESTS.....	33
APPENDIX C TEST EQUIPMENT CORRECTION FACTORS	38
APPENDIX D - GENERAL INFORMATION.....	47
TEST FACILITY DESCRIPTION	47
ABBREVIATIONS AND ACRONYMS	47
SPECIFICATION REFERENCES.....	47



1 Project information

EUT attributes

Test item	: Alarm control panel with transmitter
Operating frequency	: 315 MHz
Type (Model)	: Powermax+
Equipment FCC code	: DSC

Applicant information

Applicant's responsible person	: Mr. Arick Elshtein, international standards department manager
Applicant/Manufacturer	: Visonic Ltd.
Address	: 30, Habarzel street
City	: Tel Aviv
Postal code	: 69710
Country	: Israel
Telephone number	: +972 3645 6714
Telefax number	: +972 3645 6788

Test details

Project Number:	: 15189
Location	: Hermon Laboratories
Receipt date	: October 26, 2003
Test performed	: November 4, 2003; February 9, 10, 2004;
Purpose of test	: Apparatus compliance verification in accordance with emission requirements
Test specification(s)	: 47CFR Part 15, subpart B §§15.107, 15.109; subpart C, §§15.231, 15.205, 15.207, 15.209; RSS-210 Issue 5: 2001 and ICES-003 Issue 3: 1997



2 Summary and signatures

The EUT, alarm control panel, was tested according to FCC part 15 subparts B, C, and found to comply with the standard requirements.

Test description	Specification reference	Tested by	Date tested	Test report paragraph	Verdict
Field strength of fundamental	15.231(b)(2)	Mr. A. Troupiansky, test engineer	February 10, 2004	4.1	Pass
Field strength of spurious radiation	15.231(b)(3)	Mr. A. Troupiansky, test engineer	October 26, 2003	4.2	Pass
Bandwidth of emission	15.231(c)	Mr. Y. Neuman, test engineer	November 4, 2003	4.3	Pass
Radiated emissions	15.109	Mr. A. Troupiansky, test engineer	February 10, 2004	4.4	Pass
Conducted emissions	15.207, 15.107	Mr. A. Troupiansky, test engineer	February 9, 2004	4.5	Pass

Test report prepared by:

Mrs. Marina Cherniavsky, MScEE, certification engineer

Test report approved by:

Mr. Michael Nikishin, MScEE, group leader

Mr. Edward Usoskin, PhD, C.E.O.



3 EUT description

3.1 General description

The EUT, PowerMax+, is an alarm control panel with transmitter operating at 315 MHz. The device transmits alarm messages to Visonic's wireless siren and is powered from mains via 120 V AC/9 V AC adapter.

3.2 EUT test configuration

The EUT ports and lines description is given in Table 3.2.1, support/test equipment is provided in Table 3.2.2 and test configuration is shown in Figure 3.2.1.

The highest frequency used in the device (excluding operating frequency) is 23.26429 MHz.

Table 3.2.1

EUT ports and lines

Port type	Port description	Connector type	Quantity	Cable type description	Cable length, m	Connected to
Power	9 V AC	Terminal block	1	Unshielded	1.5	120 V AC / 9 V AC adapter
Telecom	Line	RJ 11	1	Unshielded	3	Line simulator
Signal	Telephone	Terminal block	1	Unshielded	2	Telephone set
Signal	X-10	RJ 11	1	Unshielded	3	Open circuit
Signal	PGM	Terminal block	1	Unshielded	3	Open circuit
Power	+12 V	Terminal block	2	Unshielded	1	Open circuit
Signal	Zone	Terminal block	2	Unshielded	3	2.2 kOhm termination
Signal	V+	Terminal block	1	Unshielded	3	Open circuit
Signal	RS232	RJ45	1	Unshielded	2	PC
Signal	Hold	Terminal block	1	Unshielded	1	Open circuit
Signal	Ext			Unshielded	1	Open circuit
Signal	Int			Unshielded	1	Open circuit




Table 3.2.2
EUT support/test equipment

Description	Manufacturer	Model number	Serial number	FCC ID
PC	Siemens Nixdorf	K466V502-MOD09	YBLV088344	HSSSCENICM602
Monitor	Siemens Nixdorf	S26361-K488-V150	BY410191	ACJ93312131
Keyboard	Siemens Nixdorf	S26381-K252L188	OG8236KJAJ	NA
Mouse	Microsoft	52463-OEM	6572096-40000	S3KKMP3
Line simulator	Hermon Labs	LS-01	1856	NA
Printer LX-810	Seiko Epson Corp.	P80SA	44B1127035	NA
Telephone set	Standard			



Figure 3.2.1

EUT test configuration

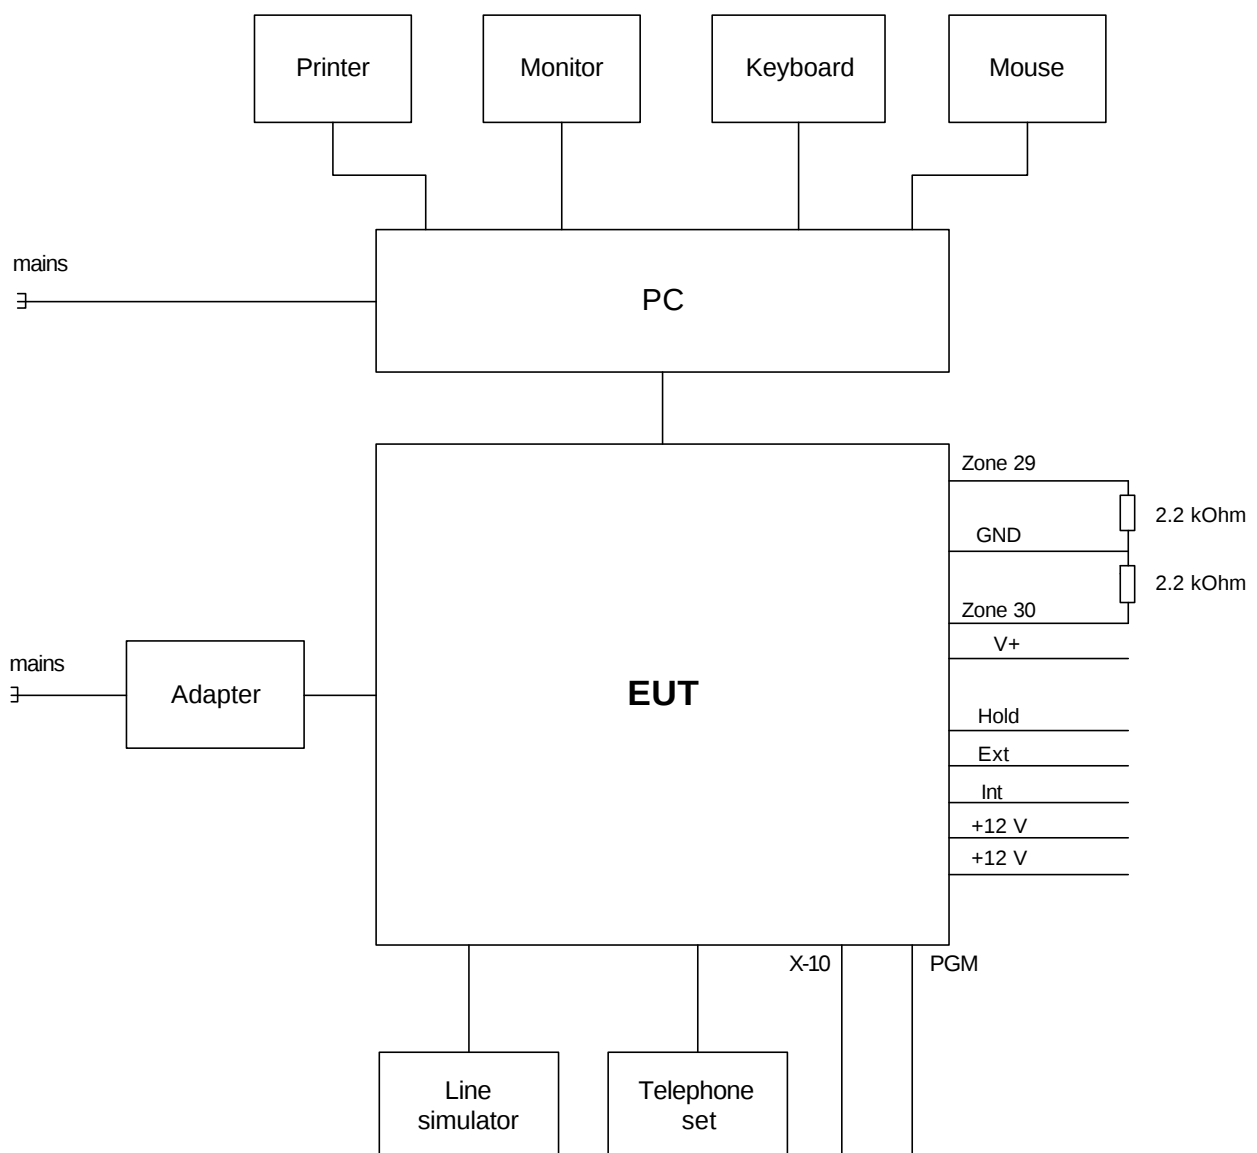



4 Test results

4.1 Field strength of fundamental, § 15.231 and RSS-210 § 6.1.1(b)

METHOD OF MEASUREMENT: ANSI 63.4 §13.1.5
DATE of TEST: February 10, 2004
AMBIENT TEMPERATURE: 21°C
RELATIVE HUMIDITY: 58%
AIR PRESSURE: 1016 hPa
SITE DESCRIPTION: Anechoic chamber
MODE OF OPERATION: Continuous
MODULATION: ON
MEASUREMENT UNCERTAINTY: ± 5.3 dB

	§ 15.231 (b)	§ 15.231 (e)
The EUT complies with the requirements of	X	

Peak detector

Frequency, MHz	Measured field strength, dB(mV/m)	Specification limit, dB(mV/m)	Margin, dB	Reference to plot in Appendix A
315.020	76.3	95.6	19.3	A1

Average detector (Peak detector measurement + average factor)

Frequency, MHz	Measured field strength, dB(mV/m)	Average factor, dB	Calculated result, dB(mV/m)	Specification limit, dB(mV/m)	Margin, dB	Reference to plot in Appendix A
315.020	76.3	-3.4	72.9	75.6	2.7	A1

4.1.1 Average factor calculation, §15.35

Tx ON	Duty cycle	Average factor	Rationale
98.65 ms	67.4%	-3.4 dB	Manufacturer statement (provided in Application documents)

LIMIT § 15.231 (b)

Fundamental frequency, MHz	Field strength of fundamental @ 3 m, dB(mV/m)
315	75.6

The above field strength limits are based on average limits.
The section 15.35 requirements for limiting peak emissions provided.

TEST PROCEDURE

The EUT was tested, being placed on a wooden 80 cm height turntable in vertical and horizontal position in turn. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antenna polarization was changed from vertical to horizontal.

TEST EQUIPMENT USED:

HL 0465	HL 0521	HL 0589	HL 0592	HL 0593	HL 0594	HL 0604
HL 1004	HL 1947	HL 2009				



4.2 Field strength of spurious radiation, § 15.231 and RSS-210 § 6.1.1(b)

METHOD OF MEASUREMENT: ANSI 63.4 §13.1.4
TEST PERFORMED IN: Anechoic chamber
DATE of TEST: February 10, 2004
RELATIVE HUMIDITY: 21°C
AMBIENT TEMPERATURE: 58%
AIR PRESSURE: 1016 hPa
MODULATION: ON
DETECTOR USED: Peak
RANGE OF MEASUREMENTS: 9 kHz to 3200 MHz
MEASUREMENT UNCERTAINTY: ± 6 dB

Frequency, MHz	RBW, kHz	VBW, kHz	Ant. pol.	Ant. hgt, m	TT pos. °	Radiated emission (peak), dB(μV/m)	Limit (peak) @ 3 m, dB(μV/m)	Radiated emission (average)*, dB (μV/m)	Limit (average) @ 3 m, dB(μV/m)	Ref. to plot in Appendix A
630.053	120	300	H	1.2	161	35.5	75.6	32.1	55.6	A4, A5
945.068	120	300	V	2.0	29	45.3	75.6	41.9	55.6	A4, A5
1260.100	1000	3000	H	1.1	187	43.6	75.6**	40.2	55.6**	A7

For full test results refer to Plots A2 to A7.

Verdict: Pass

Notes to table:

The listed test results were obtained throughout measurements in horizontal antenna polarization at 1 m height

* Radiated emission value was calculated: peak value + average factor (-3.4 dB)

** In accordance with RSS-210 the restricted band limits were used: 74 dB (μV/m) peak and 54 dB (μV/m) average

RBW = resolution bandwidth

VBW = video bandwidth

Ant. pol. = antenna polarization, V – vertical, H - horizontal

Ant. hgt.= antenna height.

TT position.= turntable position in degrees, (EUT front panel = 0°)

LIMIT § 15.231 (b)

Fundamental frequency, MHz	Field strength of spurious @ 3 m, dB(μV/m)
315	55.6



TEST PROCEDURE

The EUT was tested, being placed on a wooden 80 cm height turntable in vertical and horizontal position in turn.

9 kHz – 30 MHz range. The test was performed in the anechoic chamber. The loop antenna was positioned with its plane vertical. The loop center was 1 meter above the ground plane. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated about its vertical axis.

30 MHz – 3.2 GHz range. The test was performed in anechoic chamber with biconilog antenna in 30 – 1000 MHz range and with double ridged guide antenna in 1000 – 3200 MHz range. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antennas polarization was changed from vertical to horizontal.

TEST EQUIPMENT USED:

HL 0446	HL 0465	HL 0521	HL 0589	HL 0592	HL 0593	HL 0594
HL 0604	HL 1004	HL 1947	HL 2009	HL 2432		



4.3 Bandwidth of emission according to § 15.231(c) and RSS-210 § 6.1.1(c)

METHOD OF MEASUREMENT: ANSI 63.4 §13.1.7
DATE of TEST: November 4, 2003
AMBIENT TEMPERATURE: 23 °C
RELATIVE HUMIDITY: 35 %
AIR PRESSURE: 1006 hPa
MODULATION: ON
DETECTOR USED: Peak

Carrier frequency MHz	Occupied bandwidth, kHz		Reference to plot in Annex A
	Measured	Limit	
315	355	787.5	A8
Measurement uncertainty	0.56 ppm		

The maximum allowed occupied bandwidth was calculated as 0.0025 of the center frequency.

Verdict: Pass

LIMIT § 15.231 ©

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

TEST PROCEDURE

The spectrum trace data around transmitter fundamental frequency was obtained with the spectrum analyzer in "Max Hold" mode. The bandwidth value was determined between two points 20 dB down from the modulated carrier.

TEST EQUIPMENT USED:

HL 0034	HL 0038	HL 0812	HL 1430			
---------	---------	---------	---------	--	--	--



4.4 Unintentional radiated emissions test according to §15.109 and ICES-003

METHOD OF MEASUREMENT: ANSI 63.4 §11.6 / ANSI 63.4 §12.1.4
TEST PERFORMED IN: Anechoic chamber
DATE of TEST: February 10, 2004
AMBIENT TEMPERATURE: 21°C
RELATIVE HUMIDITY: 58%
AIR PRESSURE: 1016 hPa
DISTANCE BETWEEN ANTENNA AND EUT: 3 m
THE EUT WAS TESTED AS: TABLE-TOP
FREQUENCY RANGE: 30 MHz – 2 GHz

The EUT highest used frequency (including operating frequency), MHz	Upper frequency of measurement range, MHz
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Frequency, MHz	Ant. polar.	Ant. hgt., m	TT pos., (°)	Detector type	RBW, kHz	Radiated emissions, dB (µV/m)	Specification limit, dB (µV/m)	Margin, dB	Verdict
37.168	V	1.00	220	QP	120	34.59	40.00	5.41	Pass
108.983	V	1.20	129	QP	120	34.69	43.50	8.81	Pass
465.341	H	1.10	137	QP	120	40.00	46.00	6.00	Pass
731.252	H	1.10	209	QP	120	42.20	46.00	3.80	Pass
797.729	H	1.65	159	QP	120	41.24	46.00	4.76	Pass
930.674	V	1.00	175	QP	120	42.09	46.00	3.91	Pass
1063.620	H	1.35	149	AVR	1000	41.55	54.00	12.45	Pass

The listed test results were obtained throughout measurements with biconilog antenna.
For full test results refer to plots A9 to A12.

Notes to table:

RBW = resolution bandwidth
VBW = video bandwidth
Ant. pol. = antenna polarization, V – vertical, H - horizontal
Ant. hgt.= antenna height.
TT position.= turntable position in degrees, (EUT front panel = 0°)
Margin = dB below (negative if above) specification limit.

**LIMIT**

Frequency, MHz	Class B equipment @ 3 m dB(μ V/m)	
	FCC § 15.109	ICES-003
30 – 88	40	40
88 – 216	43.5	44
216 – 960	46	46
960 - 1000	54	46
1000 - 5000	54	NA

TEST PROCEDURE

The EUT was placed on a wooden 80 cm height turntable. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antennas polarization was changed from vertical to horizontal.

TEST EQUIPMENT USED:

HL 0465	HL 0521	HL 0589	HL 0592	HL 0593	HL 0594	HL 0604
HL 1004	HL 2009					



4.5 Conducted emissions test according to §15.107, 15.207

METHOD OF MEASUREMENTS:	ANSI 63.4 §13.1.3
DATE of TEST:	February 9, 2004
AMBIENT TEMPERATURE:	21°C
RELATIVE HUMIDITY:	58%
AIR PRESSURE:	1016 hPa
FREQUENCY RANGE:	150 kHz – 30 MHz
RESOLUTION BANDWIDTH:	9 kHz
MEASUREMENT UNCERTAINTY, dB	± 3.9 dB in 9 – 150 kHz ± 3.8 dB in 150 kHz – 30 MHz

EUT power lines, transmit mode (the worst case)

Quasi-peak detector

Frequency, MHz	Line identification	Measured emissions, dB (µV)	Specification QP limit, dB (µV)	Margin, dB	Verdict	Reference to Plots in Appendix A
6.782	2	31.94	60.00	28.06	Pass	A14
8.582	1	33.25	60.00	26.75	Pass	A13
8.644	1	32.70	60.00	27.30	Pass	A13
9.424	1	32.25	60.00	27.75	Pass	A13
9.484	1	32.10	60.00	27.90	Pass	A13

Average detector

Frequency, MHz	Line identification	Measured emissions, dB (µV)	Specification AVRG limit, dB (µV)	Margin, dB	Verdict	Reference to Plots in Appendix A
6.782	2	29.54	50.00	20.46	Pass	A14
8.582	1	31.99	50.00	18.01	Pass	A13
8.644	1	30.97	50.00	19.03	Pass	A13
9.424	1	30.84	50.00	19.16	Pass	A13
9.484	1	31.16	50.00	18.84	Pass	A13

**PC power lines, EUT in transmit mode****Quasi-peak detector**

Frequency, MHz	Line identification	Measured emissions, dB (mV)	Specification QP limit, dB (mV)	Margin, dB	Verdict	Reference to Plots in Appendix A
0.420555	1	41.55	57.48	15.93	Pass	A17, A19
0.480833	2	38.72	56.36	17.64	Pass	A18, A20
6.361650	2	42.17	60.00	17.83	Pass	A18, A20
6.782080	2	45.87	60.00	14.13	Pass	A18, A20
7.142845	1	43.78	60.00	16.22	Pass	A17, A19
8.042348	1	42.27	60.00	17.73	Pass	A17, A19
8.524375	1	46.36	60.00	13.64	Pass	A17, A19
8.583390	1	47.53	60.00	12.47	Pass	A17, A19
8.643273	1	46.94	60.00	13.06	Pass	A17, A19
8.703085	2	43.70	60.00	16.30	Pass	A18, A20
8.942873	1	43.18	60.00	16.82	Pass	A17, A19

Average detector

Frequency, MHz	Line identification	Measured emissions, dB (mV)	Specification AVRG limit, dB (mV)	Margin, dB	Verdict	Reference to Plots in Appendix A
0.420555	1	38.32	47.48	9.17	Pass	A17, A19
0.480833	2	34.72	46.36	11.64	Pass	A18, A20
6.361650	2	41.39	50.00	8.61	Pass	A18, A20
6.782080	2	43.34	50.00	6.66	Pass	A18, A20
7.142845	1	38.83	50.00	11.17	Pass	A17, A19
8.042348	1	37.94	50.00	12.06	Pass	A17, A19
8.524375	1	44.94	50.00	5.06	Pass	A17, A19
8.583390	1	46.18	50.00	3.82	Pass	A17, A19
8.643273	1	45.02	50.00	4.98	Pass	A17, A19
8.703085	2	41.59	50.00	8.41	Pass	A18, A20
8.942873	1	41.02	50.00	8.98	Pass	A17, A19

Note: The same results were recorded throughout measurements with Tx disconnected

**Limit**

Frequency, MHz	Class B equipment, dB(μV)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

*The limit decreases linearly with the logarithm of frequency.

TEST PROCEDURE

The measurements were performed at mains terminals by means of LISN, connected to spectrum analyzer in the frequency range as referred to in the table above. The unused coaxial connector of the LISN was terminated with 50 Ω. The measurements were made with quasi-peak and average detectors as referred to in the tables. The position of the EUT cables was varied to determine maximum emission level.

TEST EQUIPMENT USED:

HL 0163	HL 0447	HL 0672	HL 0787	HL 1430	HL 1502	HL 1510
---------	---------	---------	---------	---------	---------	---------



Appendix A - Plots

Plot A 1

Field strength of fundamental

Antenna polarization: horizontal
EUT position: vertical

11:08:49 FEB 10, 2004


ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 315.020 MHz
76.27 dB μ V/m

LOG REF 80.0 dB μ V/m

10
dB/
ATN
10 dB

VA SB
SC FC
ACORR

CENTER 315.000 MHz SPAN 2.000 MHz
R #1F BW 120 kHz AVG BW 300 kHz SWP 20.0 msec

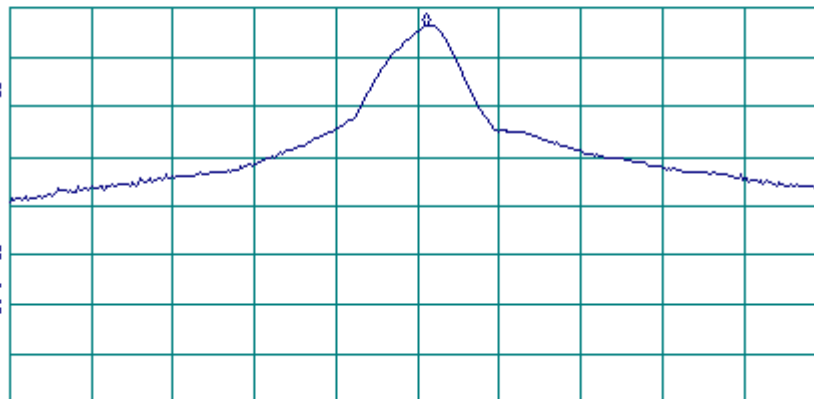



Plot A 2

Spurious emission measurements in anechoic chamber from 9 kHz to 150 kHz

13:59:42 FEB 10, 2004


ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 59.6 kHz
83.21 dB μ V/m

LOG REF 130 0 dB μ V/m

10
dB/
ATN
50 dB

VA SB
SC FC
ACORR

START 9.0 kHz STOP 150.0 kHz
R IF BW 200 Hz AVG BW 300 Hz SWP 10.3 sec

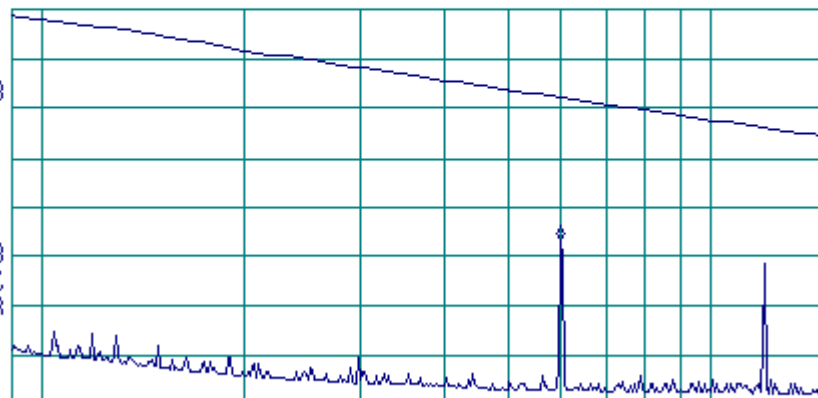



Plot A 3

Spurious emission measurements in anechoic chamber from 150 kHz – 30 MHz

14:16:25 FEB 10, 2004


ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 480 kHz
55.81 dB μ V/m

LOG REF 110 0 dB μ V/m

10
dB/
RTN
30 dB

VA SB
SC FC
ACORR

START 150 kHz STOP 30.00 MHz
R IF BW 9.0 kHz AVG BW 30 kHz SWP 2.49 sec

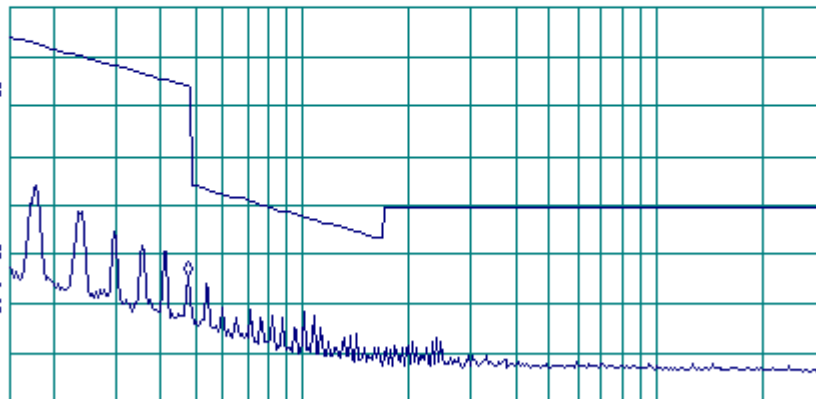




Plot A 4

Spurious emission measurements in anechoic chamber from 30 MHz to 1000 MHz,
vertical antenna polarization

11:28:49 FEB 10, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG

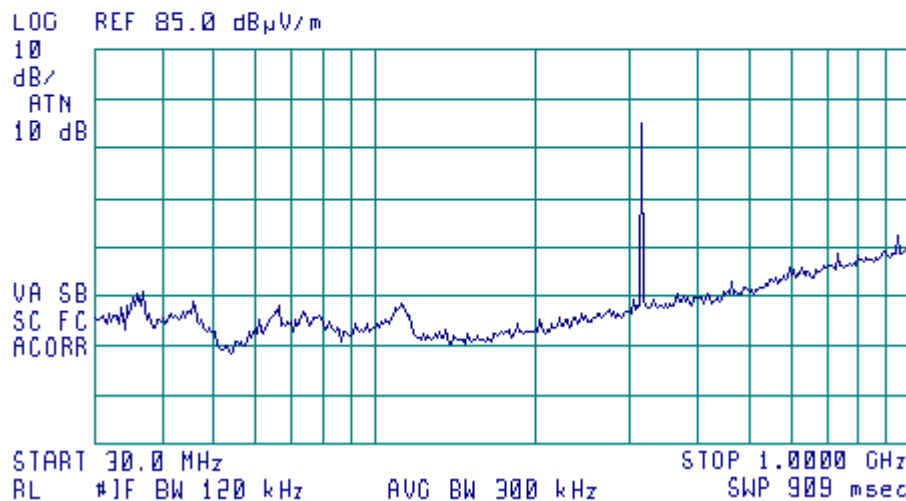

No spurious emissions except fundamental and harmonics were found.




Plot A 5

Spurious emission measurements in anechoic chamber from 30 MHz to 1000 MHz,
Horizontal antenna polarization

11:27:04 FEB 10, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG

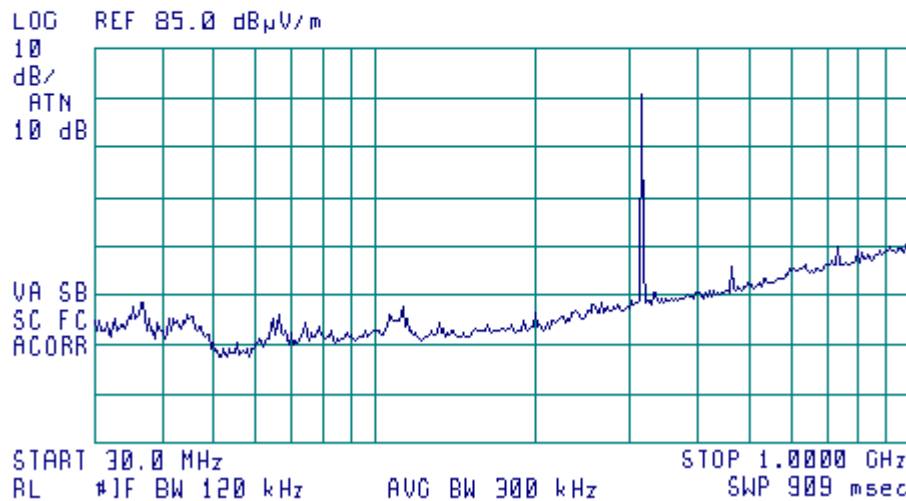

No spurious emissions except fundamental and harmonics were found.



Plot A 6

Spurious emission measurements in anechoic chamber from 1 GHz to 3.2 GHz,
vertical antenna polarization

13:05:11 FEB 10, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 2.955 GHz
46.07 dB μ V/m

LOG REF 70.0 dB μ V/m

PREAMP ON

10
dB/
#ATN
0 dB

DL
55.6
dB μ V/m
VA SB
SC FC
ACORR

START 1.000 GHz

STOP 3.200 GHz

RL #1F BW 1.0 MHz

#AVC BW 3 MHz

SWP 700 msec



Plot A 7

Spurious emission measurements in anechoic chamber from 1 GHz to 3.2 GHz,
horizontal antenna polarization

13:03:38 FEB 10, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 1.258 GHz
42.51 dB μ V/m

LOG REF 70.0 dB μ V/m

PREAMP ON

10
dB/
#ATN
0 dB

DL
55.6
dB μ V/m
VA SB
SC FC
ACORR

START 1.000 GHz

RL #1F BW 1.0 MHz

#AVC BW 3 MHz

STOP 3.200 GHz

SWP 700 msec




Plot A 8

Occupied bandwidth measurement result

10:01:30 NOV 04, 2003

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKRΔ 355.0 kHz
-.05 dB

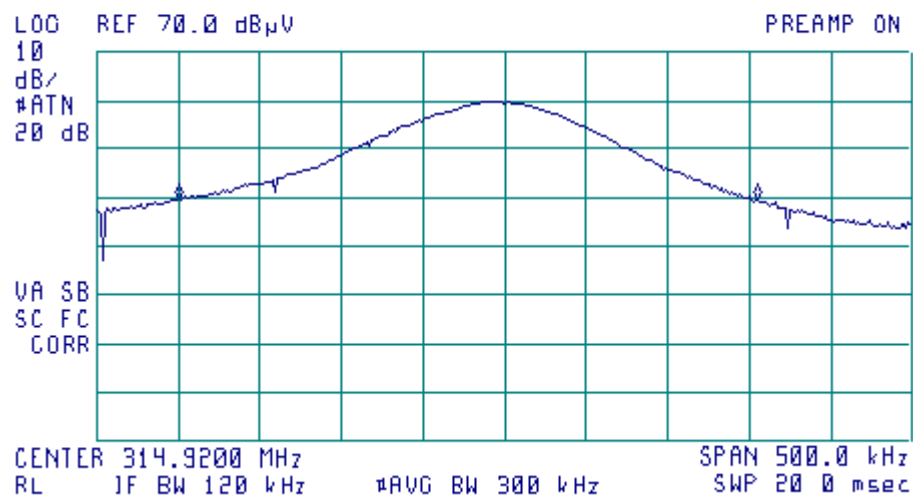



Plot A 9

Unintentional radiated emission measurements in anechoic chamber from 30 MHz to 1 GHz,
vertical antenna polarization

09:23:15 FEB 10, 2004


ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 727.6 MHz
42.80 dB μ V/m

LOG REF 70.0 dB μ V/m

PREAMP ON

10
dB/
#ATN
0 dB

VA SB
SC FC
ACORR

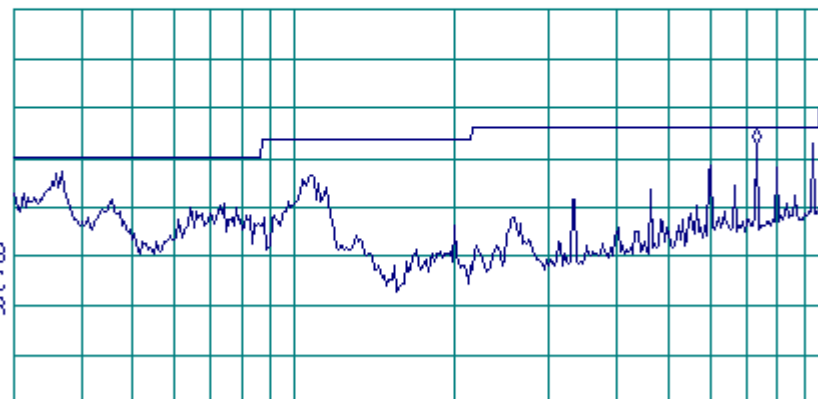

START 30.0 MHz

STOP 1.0000 GHz

RL IF BW 120 kHz

AUG BW 300 kHz

SWP 909 msec




Plot A 10

Unintentional radiated emission measurements in anechoic chamber from 30 MHz to 1 GHz,
horizontal antenna polarization

09:28:21 FEB 10, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 727.6 MHz
42.71 dB μ V/m

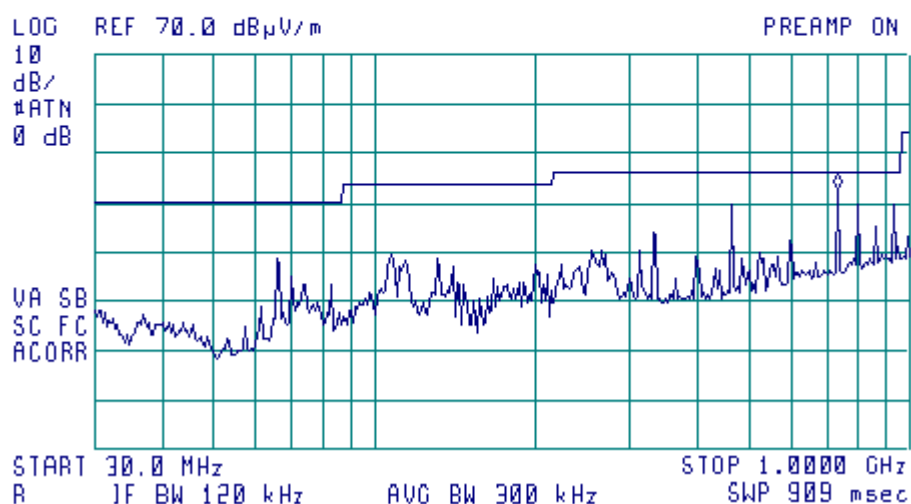




Plot A 11

Unintentional radiated emission measurements in anechoic chamber from 1 GHz to 2 GHz,
vertical antenna polarization

10:22:07 FEB 10, 2004

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

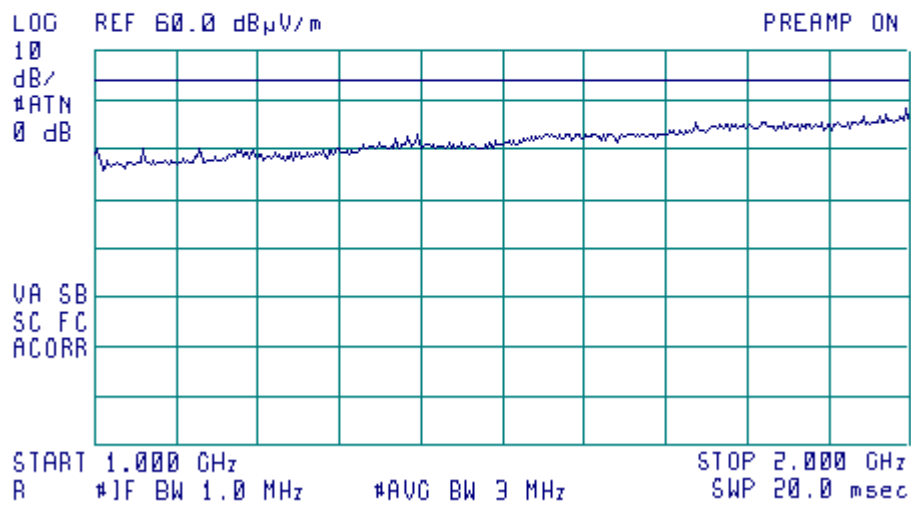



Plot A 12

Unintentional radiated emission measurements in anechoic chamber from 1 GHz to 2 GHz,
horizontal antenna polarization

10:25:44 FEB 10, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 1.063 GHz
42.10 dB μ V/m

LOG REF 60.0 dB μ V/m

PREAMP ON

10
dB/
#ATN
0 dB

VA SB
SC FC
ACORR

START 1.000 GHz

R #1F BW 1.0 MHz

#AVC BW 3 MHz

STOP 2.000 GHz

SWP 20.0 msec




Plot A 13

Conducted emission measurements test results at the EUT power line 1 port,
EUT in Tx mode

14:55:54 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 8.56 MHz
32.83 dBμV

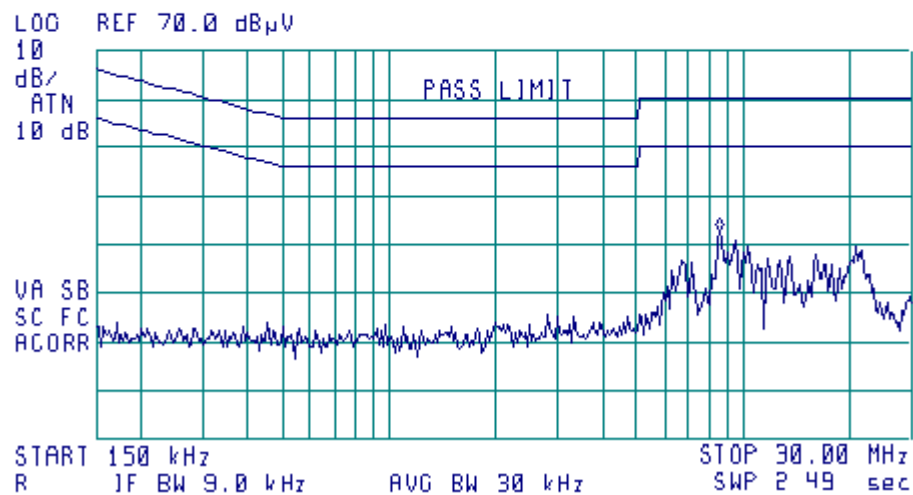




Plot A 14

Conducted emission measurements test results at the EUT power line 2 port,
EUT in Tx mode

15:23:42 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 9.47 MHz
31.39 dBμV

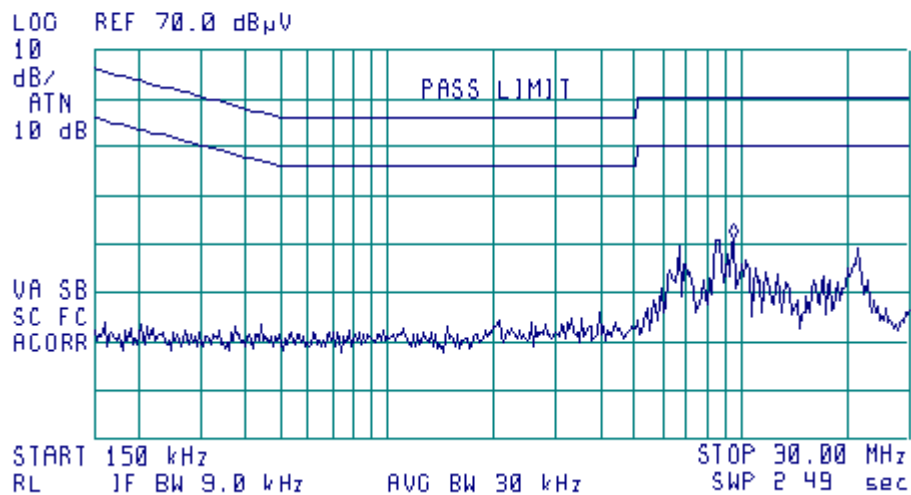



Plot A 15

Conducted emission measurements test results at the EUT power line 1 port,
Tx disconnected

15:15:29 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 8.56 MHz
32.58 dBμV

LOG REF 70.0 dBμV

10

dB/

ATN

10 dB

PASS LIMIT

VA SB

SC FC

ACORR

START 150 kHz

RL IF BW 9.0 kHz

AVG BW 30 kHz

STOP 30.00 MHz

SWP 2.49 sec




Plot A 16

Conducted emission measurements test results at the EUT power line 2 port,
Tx disconnected

15:18:02 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 0.56 MHz
31.68 dBμV

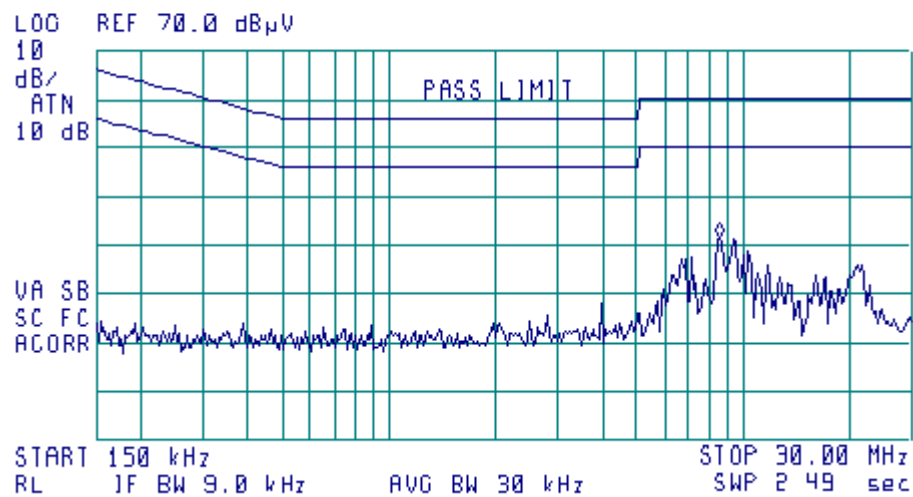




Plot A 17

Conducted emission measurements test results at the PC power line 1 port,
EUT in Tx mode

15:44:51 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 8.56 MHz
46.83 dB μ V

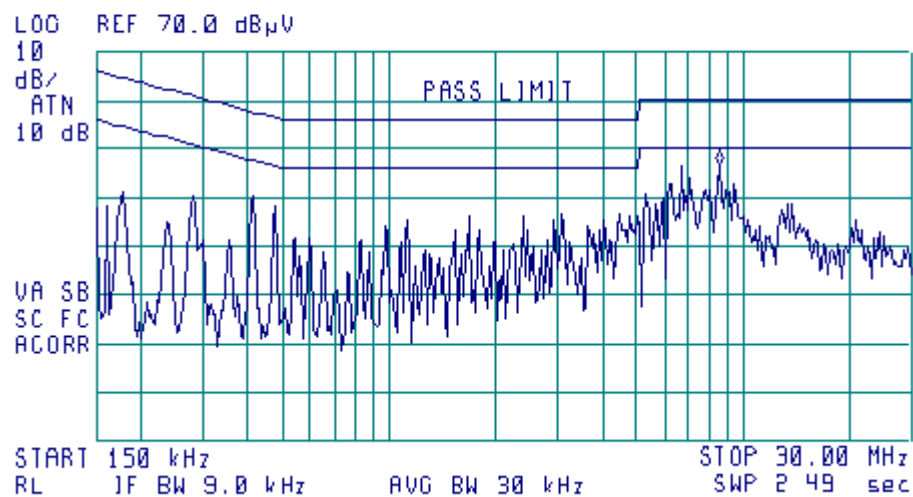




Plot A 18

Conducted emission measurements test results at the PC power line 2 port,
EUT in Tx mode

16:15:15 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 8.56 MHz
47.23 dBμV

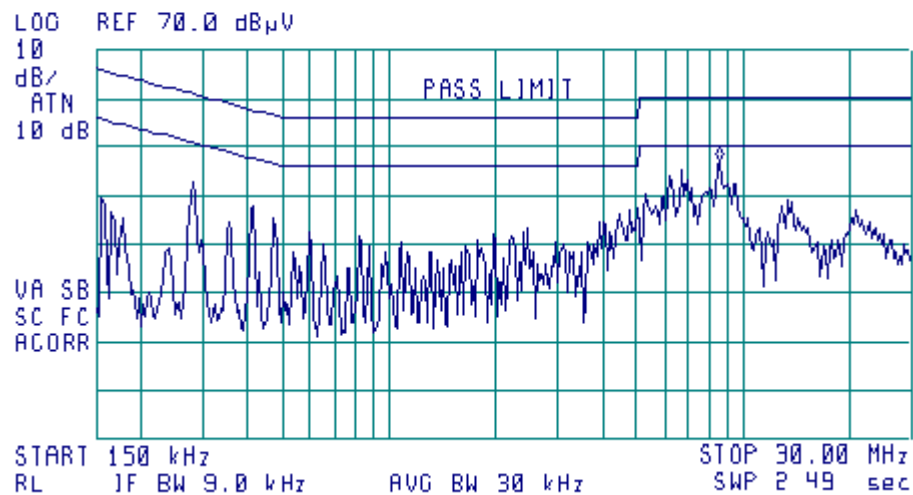




Plot A 19

Conducted emission measurements test results at the PC power line 1 port,
Tx disconnected

16:06:59 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 8.56 MHz
46.09 dBμV

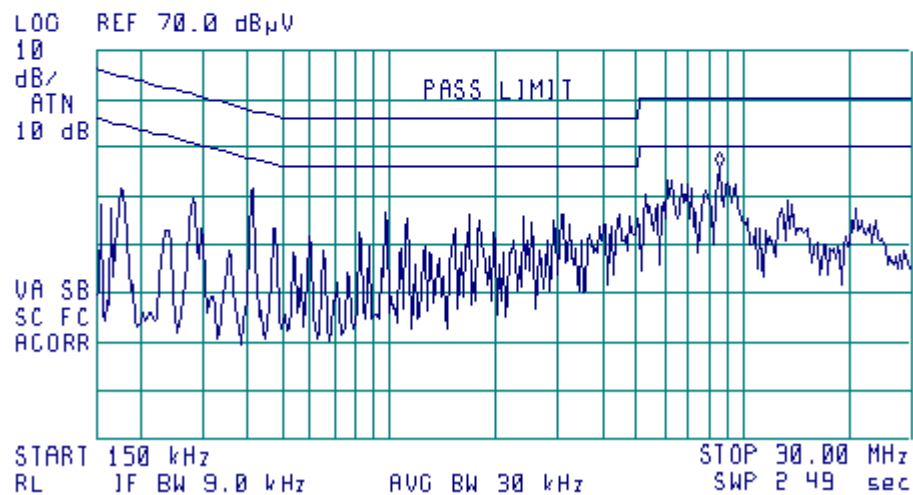




Plot A 20

Conducted emission measurements test results at the PC power line 2 port,
Tx disconnected

16:12:40 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 8.56 MHz
46.23 dB μ V

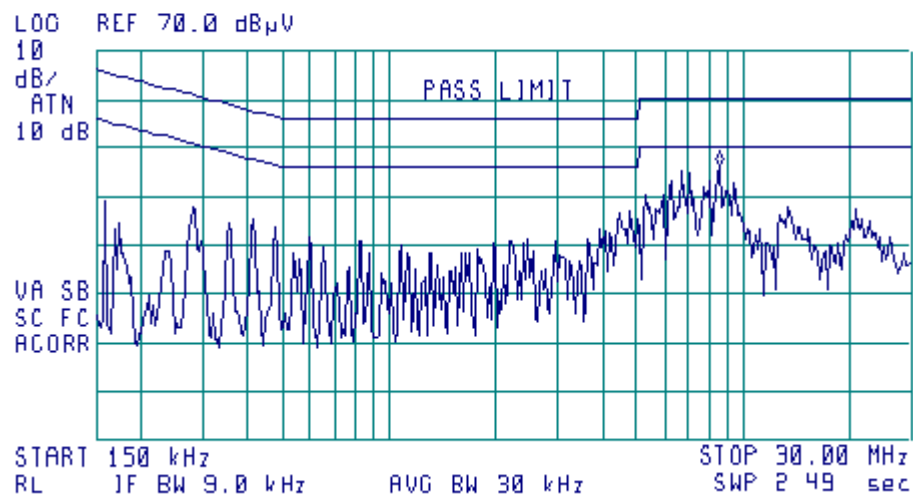



Appendix B - Test equipment used for tests

HL Serial No.	Description	Manufacturer information			Due Calibration Month/ year
		Name	Model No.	Serial No.	
0034	Log periodic antenna, 200 - 1000 MHz	Electro-Metrics	LPA 25/30	1988	1/05
0038	Antenna Mast, 1-4 m	Hermon Labs	AM-1	028	2/05 check
0163	LISN FCC/VDE/MIL -STD	Electro-Metrics	ANS-25/2	1314	10/04
0446	Active Loop Antenna 10 kHz-30 MHz	Electro-Mechanics	6502	2857	10/04
0447	LISN, 16/2, 300 V RMS	Hermon Labs	LISN 16-1	447	11/04
0465	Anechoic chamber 9 (L) x 6.5 (W) x 5.5 (H) m	Hermon Labs	AC-1	023	10/05 check
0521	Spectrum analyzer with RF filter section (EMI receiver 9 kHz - 6.5 GHz)	Hewlett Packard	8546A	0319	9/04
0589	Cable coaxial, GORE A2POL118.2, 3 m	Hermon Labs	GORE-3	589	11/04
0592	Position controller	Hermon Labs	L2-SR3000	100	5/04 check
0593	Antenna mast, 1-4 m/1-6 m pneumatic	Hermon Labs	AM-F1	101	2/05 check
0594	Turntable for Anechoic Chamber, flush mounted, d=1.2 m, pneumatic	Hermon Labs	WDC1	102	1/05 check
0604	Antenna biconilog log-periodic/T Bow- Tie, 26 - 2000 MHz	EMCO	3141	9611-1011	1/05
0672	Shielded room 4.6(L) x 4.2(W) x 2.4(H) m	Hermon Labs	SR-3	027	11/04 check
0787	Transient limiter	Hewlett Packard	11947A-8ZE	3107A01877	11/04
0812	Cable, coax, RG-214, 11.5 m, N-type connectors	Hermon Labs	C214-11	148	5/04
1004	Cable, coaxial ANDREW PSWJ4, 6 m	Hermon Labs	ANDREW-6	163	12/04
1430	EMI Receiver System, 9 kHz - 2.9 GHz	Agilent Technologies	8542E	3807A00262	9/03
1502	Cable RF, 6 m	Belden	M17/167 MIL-C-17	1502	12/04 check
1510	Cable RF, 8 m	Belden	M17/167 MIL-C-17	1510	12/04
1947	Cable 18 GHz, 6.5 m, blue	Rhophase Microwave Ltd	NPS-1803A- 6500-NPS	T4974	10/04
2009	Cable RF, 8 m	Alpha Wire	RG-214	C-56	12/04
2432	Antenna, double-ridged waveguide horn, 1-18 GHz	EMC Test Systems	3115	000271777	7/04



Appendix C - Test equipment correction factors

Correction factor
Line impedance stabilization network, model ANS-25/2
Electro-Metrics

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

Correction factor
Line impedance stabilization network
Model LISN 16 - 1
Hermon Laboratories

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.



Antenna factor
Active loop antenna, model 6502
S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor
Log periodic antenna (HL 0034)
Electro-Metrics, model LPA-25/30
Ser.No.1988

Frequency, MHz	Antenna factor dB(1/m)	Frequency, MHz	Antenna factor dB(1/m)
200	12.6	625	20.4
225	12.2	650	20.9
250	13.4	675	22.0
275	14.3	700	22.2
300	15.2	725	22.7
325	15.7	750	22.5
350	15.9	775	22.7
375	16.4	800	22.8
400	17.0	825	23.2
425	17.4	850	23.5
450	17.9	875	23.9
475	18.6	900	24.0
500	19.1	925	24.0
525	19.3	950	24.2
550	19.6	975	24.7
575	19.8	1000	25.1
600	20.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor
Double-ridged guide horn antenna
Model 3115, serial number: 00027177, HL2432

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Cable loss
Cable Coaxial, GORE A2P01POL118, 2.3 m, model:GORE-3, HL 0589
+ Cable Coaxial, ANDREW PSWJ4, 6m, model: ANDREW-6, HL 1004

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB
1	30	0.33	6.5	±0.12
2	50	0.40		
3	100	0.57		
4	300	0.97		
5	500	1.25		
6	800	1.59		
7	1000	1.81		
8	1200	1.97		
9	1400	2.15		
10	1600	2.28		
11	1800	2.43		
12	2000	2.61		
13	2200	2.75		
14	2400	2.89		
15	2600	2.97		
16	2800	3.21	6.5	±0.12
17	3000	3.32		
18	3300	3.47		±0.17
19	3600	3.62		
20	3900	3.84		
21	4200	3.92		
22	4500	4.07		
23	4800	4.36		
24	5100	4.62		
25	5400	4.78		
26	5700	5.16		
27	6000	5.67		
28	6500	5.99		



Cable loss
Cable coaxial, 6 m, model: M17/167 MIL-C-17, HL 1502

Frequency, MHz	Cable loss, dB
0.1	0.02
1	0.07
3	0.15
5	0.17
10	0.26
30	0.43
50	0.57
80	0.72
100	0.81
300	1.48
500	2.00
800	2.70
1000	3.09

Cable loss
Cable M17/167 MIL-C-17, HL 1510

No.	Frequency, MHz	Cable loss, dB
1	0.1	0.05
2	1	0.09
3	3	0.16
4	5	0.18
5	10	0.27
6	30	0.44
7	50	0.58
8	80	0.69
9	100	0.82
10	300	1.48
11	500	2.01
12	800	2.65
13	1000	3.12



Cable loss
Cable 18 GHz, 6.5 m, blue, model: NPS-1803A-6500-NPS, S/N T4974, HL 1947

Frequency, GHz	Cable loss, dB
0.03	0.30
0.05	0.38
0.10	0.53
0.20	0.74
0.30	0.91
0.40	1.05
0.50	1.18
0.60	1.29
0.70	1.40
0.80	1.50
0.90	1.59
1.00	1.68
1.10	1.77
1.20	1.86
1.30	1.94
1.40	2.01
1.50	2.08
1.60	2.16
1.70	2.22
1.80	2.29
1.90	2.36
2.00	2.42
2.10	2.48
2.20	2.54
2.30	2.60
2.40	2.66
2.50	2.71
2.60	2.77
2.70	2.83
2.80	2.89
2.90	2.95
3.10	3.06
3.30	3.17
3.50	3.28
3.70	3.39
3.90	3.51
4.10	3.62
4.30	3.76
4.50	3.87
4.70	4.01
4.90	4.10
5.10	4.21
5.30	4.31
5.50	4.43
5.70	4.56
5.90	4.71

Frequency, GHz	Cable loss, dB
6.10	4.87
6.30	4.95
6.50	4.94
6.70	4.88
6.90	4.87
7.10	4.83
7.30	4.85
7.50	4.86
7.70	4.91
7.90	4.96
8.10	5.03
8.30	5.08
8.50	5.13
8.70	5.21
8.90	5.22
9.10	5.34
9.30	5.35
9.50	5.52
9.70	5.51
9.90	5.66
10.10	5.70
10.30	5.78
10.50	5.79
10.70	5.82
10.90	5.86
11.10	5.94
11.30	6.06
11.50	6.21
11.70	6.44
11.90	6.61
12.10	6.76
12.40	6.68
13.00	6.66
13.50	6.81
14.00	6.90
14.50	6.90
15.00	6.97
15.50	7.17
16.00	7.28
16.50	7.27
17.00	7.38
17.50	7.68
18.00	7.92



Cable loss
RF cable 8 m, model RG-214, HL 2009

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB
1	1	0.10	NA	±0.12
2	10	0.14		
3	30	0.25		
4	50	0.34		
5	100	0.53		
6	300	0.99		
7	500	1.31		
8	800	1.73		
9	1000	1.98		
10	1100	2.11		
11	1200	2.21		
12	1300	2.35		
13	1400	2.46		
14	1500	2.55		
15	1600	2.68		
16	1700	2.78		
17	1800	2.88		
18	1900	2.98		
19	2000	3.09		



Appendix D - General information

Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private EMC, safety, environmental and telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47) and by Industry Canada for electromagnetic emissions (file numbers IC 2186-1 for OATS and IC 2186-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), assessed by TNO Certification EP&S (Netherlands) for a number of EMC, telecommunications, environmental, safety standards, and by AMTAC (UK) for safety of medical devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: PO Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com

Person for contact: Mr. Alex Usoskin, QA manager.

Abbreviations and acronyms

The following abbreviations and acronyms are applicable to this test report:

AC	alternating current
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
EUT	equipment under test
GHz	gigahertz
H	height
Hz	hertz
kHz	kilohertz
kV	kilovolt
L	length
LISN	line impedance stabilization network
m	meter
MHz	megahertz
NA	not applicable
QP	quasi-peak
RF	radio frequency
RE	radiated emission
rms	root mean square
s	second
V	volt
W	width

Specification references

47CFR part 15: 2003	Radio Frequency Devices
ANSI C63.2:96	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4:2001	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.