



FCC SAR

# TEST REPORT

of

## ViewBook 730

Model Name: VS14145  
Brand Name: ViewSonic  
Report No.: SH11030006S01  
FCC ID: GSS-VS14145  
IC: 4280A-VS14145

*prepared for*

### ViewSonic Corporation

381 Brea Canyon Road Walnut, CA 91789, USA



### Shenzhen Electronic Product Quality Testing Center Morlab Laboratory

3/F, Electronic Testing Building, Shahe Road, Xili,  
Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 86130398

Fax: +86 755 86130218



LAB CODE 20081223-00

**NOTE:** This test report can be duplicated completely for the legal use with the approval of the applicant, it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.

**GENERAL SUMMARY**

Product Name	ViewBook 730	Model	VS14145
Brand Name	ViewSonic	Carrier	William Hsieh
Quantity of EUT	One	Manufacturer	Technology (China)CO.,LTD.
Standard(s)	<p><b>ANSI C95.1-1999:</b> IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fieldst.</p> <p><b>IEEE 1528-2003:</b> Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.</p> <p><b>RSS-102 Issue 4-2010:</b>Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)</p> <p><b>OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01):</b> Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.</p> <p><b>KDB Publication 447498:</b>Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Polices</p> <p><b>KDB248227:</b> SAR measurement procedures for 802.112abg transmitters.</p>		
Conclusion	<p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.</p> <p>General Judgment: <b>Pass</b></p> <p style="text-align: right;"><b>Date of issue: Mar. 15. 2011</b></p>		
Comment	<p>TX Freq. Band: 2412MHz-2462MHz (wifi 802.11b/g)</p> <p>TX Freq. Band: 2402MHz-2480 MHz (Bluetooth)</p> <p>Antenna Character : build inside</p> <p>The test result only responds to the measured sample.</p>		

Tested by: Shi Feng Date: 2011. 3. 21

Checked by: Zhang Jun Date: 2011. 3. 21

Approved by: Wei Bei Date: 2011. 3. 21.



## TABLE OF CONTENT

<b>1</b>	<b>GENERAL CONDITIONS.....</b>	<b>4</b>
<b>2</b>	<b>ADMINISTRATIVE DATE.....</b>	<b>5</b>
2.1	IDENTIFICATION OF THE RESPONSIBLE TESTING LABORATORY .....	5
2.2	IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION(S) .....	5
2.3	ORGANIZATION ITEM .....	5
2.4	IDENTIFICATION OF APPLICANT.....	5
<b>3</b>	<b>EQUIPMENT UNDER TEST (EUT).....</b>	<b>6</b>
<b>4</b>	<b>OPERATIONAL CONDITIONS DURING TEST .....</b>	<b>7</b>
4.1	SCHEMATIC TEST CONFIGURATION .....	7
4.2	SAR MEASUREMENT SYSTEM .....	7
4.2.1	<i>Robot system specification</i> .....	8
4.2.2	<i>Probe Specification</i> .....	8
	ISOTROPIC E-FIELD PROBE SPECIFICATION.....	10
	BOUNDARY DETECTION UNIT AND PROBE MOUNTING DEVICE .....	10
	DAQ-PAQ (ANALOG TO DIGITAL ELECTRONICS).....	11
4.2.3	<i>Phantoms, Device Holder and Simulant Liquid</i> .....	12
	ALSAS UNIVERSAL WORKSTATION .....	13
	UNIVERSAL DEVICE POSITIONER.....	13
4.2.4	<i>SAR measurement procedure</i> .....	14
4.2.5	<i>Validation Test Using Flat Phantom</i> .....	15
	VALIDATION DIPOLES .....	15
	<b>Validation Result</b> .....	<b>16</b>
4.2.6	<i>Measurement Procedure</i> .....	16
4.2.7	<i>Description of Interpolation/Extrapolation Scheme</i> .....	16
<b>5</b>	<b>CHARACTERISTICS OF THE TEST .....</b>	<b>17</b>
5.1.1	<i>Applicable Limit Regulations</i> .....	17
5.1.2	<i>Applicable Measurement Standards</i> .....	17
<b>6</b>	<b>LABORATORY ENVIRONMENT .....</b>	<b>18</b>
<b>7</b>	<b>TEST RESULTS .....</b>	<b>19</b>
7.1	EXPLAIN .....	19
7.2	DIELECTRIC PERFORMANCE.....	19
7.3	CONDUCTED POWER .....	19
7.4	SUMMARY OF MEASUREMENT RESULTS (802.11B).....	20
7.5	SUMMARY OF MEASUREMENT RESULTS (WIRELESS LAN/ WLAN AND BLUETOOTH FUNCTION).....	20
7.6	CONCLUSION .....	21
<b>8</b>	<b>MEASUREMENT UNCERTAINTIES .....</b>	<b>22</b>
<b>9</b>	<b>MAIN TEST INSTRUMENTS.....</b>	<b>24</b>



ANNEX A- ACCREDITATION CERTIFICATE.....	25
ANNEX B- TEST LAYOUT .....	27
ANNEX C- SAMPLE PHOTOGRAPHS.....	32
ANNEX D- GRAPH TEST RESULTS.....	33

## 1 GENERAL CONDITIONS

This report only refers to the item that has undergone the test. This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.

This document is only valid if complete; no partial reproduction can be made without written approval of Shenzhen Morlab Communications Technology Co., Ltd.

This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Shenzhen Morlab Communications Technology Co., Ltd. and the Accreditation Bodies, if it applies.



## 2 Administrative Data

### 2.1 Identification of the Responsible Testing Laboratory

**Company Name:** Shenzhen Morlab Communications Technology Co.,Ltd.  
**Department:** Testing Department  
**Address:** 3F1, Electronic Testing Building, ShaHe Road, NanShan District, Shenzhen, P. R. China  
**Telephone:** +86 755 86130268  
**Fax:** +86 755 86130218  
**Responsible Test Lab Managers:** Mr. Shu Luan

### 2.2 Identification of the Responsible Testing Location(s)

**Company Name:** Shenzhen Electronic Product Quality Testing Center Morlab Laboratory  
**Address:** 3F1, Electronic Testing Building, ShaHe Road, NanShan District, Shenzhen, P. R. China

### 2.3 Organization Item

**Morlab Report No.:** SH11030006S01  
**Morlab Project Leader:** Mr. Zhang Jun  
**Morlab Responsible for Accreditation scope:** Mrs. Wei Bei  
**Start of Testing:** 2011-3-15  
**End of Testing:** 2011-3-15

### 2.4 Identification of Applicant

**Company Name:** ViewSonic Corporation  
**Address:** 381 Brea Canyon Road Walnut, CA 91789, USA  
**Contact person:** William Hsieh  
**Telephone:** +886-2-22463456  
**Fax:** +886-2-82423660

### 2.5. Identification of Manufacture

**Company Name:** Creative Technology (China)CO.,LTD.  
**Address:** 4-12Building, No1388, Zhangdong Road, Pudong New District, Shanghai, P.R. China

**Notes:** This data is based on the information offered by the applicant.

### 3 Equipment Under Test (EUT)

#### 3.1. Identification of the Equipment under Test

<b>Product Name:</b>	ViewBook 730		
<b>Brand name:</b>	ViewSonic		
<b>Model No:</b>	VS14145		
<b>General description:</b>	Test frequency	Wireless LAN/ WLAN	
	Accessories	Charger, Battery,	
	Battery Model	PR-43100113N	
	Battery specification	3.7V 5000 mAh	
	Battery Manufacture	TCL HYPERPOWER BATTERIES INC	
	Antenna type	Wireless LAN/ WLAN,Bluetooth	
	Wireless LAN/ WLAN		
	Modulation mode	DSSS and OFDM	
	Buletooth Information	Modulation Mode: GFSK, π/4DQPSK,8-DPSK Frequency Range: 2400-2483.5MHz Occupied	

#### 3.2. Identification of all used Test Sample of the Equipment under Test

EUT Code	Serial Number	Hardware Version	Software Version	IMEI
#1	N.A	ZF0422	v0.92.01	/

**NOTE:**

1. The EUT consists of Hand-Held Terminal Set and normal options: Charger, Lithium Battery as listed above.
2. Please refer to Appendix C for the photographs of the EUT. For a more detailed features description of the EUT, please refer to its User's Manual.

## 4 OPERATIONAL CONDITIONS DURING TEST

### 4.1 Schematic Test Configuration

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, The EUT is a bluetooth, Wireless LAN/ WLAN portable device. It provides Wireless LAN/ WLAN (IEEE 802.11b and IEEE 802.11g) wireless interface, operating at 2.4GHz ISM band. The Wireless LAN/ WLAN Modulations are Direct Sequence Spread Spectrum (DSSS) for IEEE 802.11b and Orthogonal Frequency Division Multiplexing (OFDM) for IEEE 802.11g. The Channels and transmitter center frequencies are: Channel 1: 2412 MHz (lowest channel) - Channel 6: 2437 MHz (middle channel) - Channel 11: 2462 MHz (highest channel). The EUT is commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.


The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

### 4.2 SAR Measurement System

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller. ALSAS-10U uses the latest methodologies and FDTD order to provide a platform which is repeatable with minimum uncertainty.

Applications Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are

embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently is available up to 6 GHz in simulated tissue.

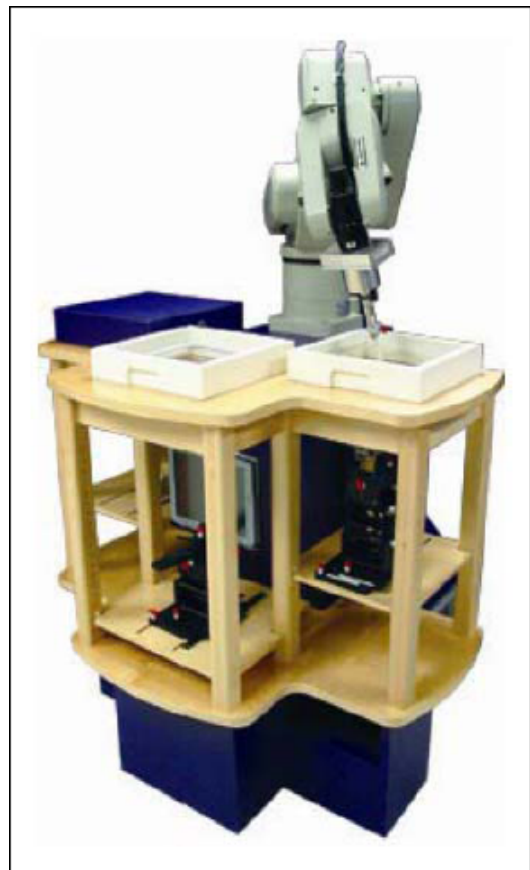

#### 4.2.1 Robot system specification

ALSAS-10U utilizes a six articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelop. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.



<b>Robot/Controller Manufacturer</b>	Thermo CRS
<b>Number of Axis</b>	Six independently controlled axis
<b>Positioning Repeatability</b>	0.05mm
<b>Controller Type</b>	Single phase Pentium based C500C
<b>Robot Reach</b>	710mm
<b>Communication</b>	RS232 and LAN compatible


#### 4.2.2 Probe Specification

The isotropic E-Field probe has been fully calibrated and assessed for isotropic, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change. A number of methods is used for calibrating probes, and these are outlined in the table below:

<b>Calibration Frequency</b>	<b>Air Calibration</b>	<b>Tissue Calibration</b>
<b>850MHZ</b>	<b>TEM Cell</b>	<b>Temperature</b>
<b>1900MHZ</b>	<b>TEM Cell</b>	<b>Temperature</b>
<b>2450 MHZ</b>	<b>Waveguide</b>	<b>Waveguide</b>

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:



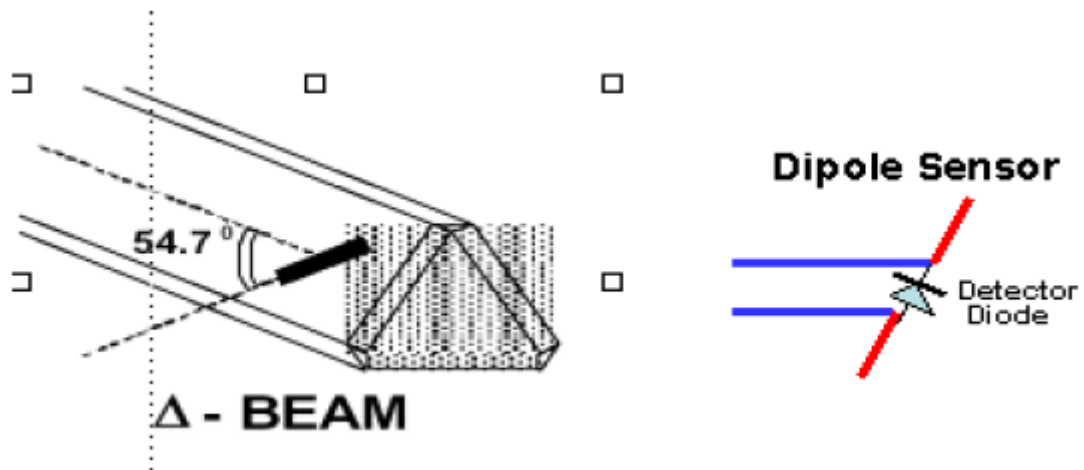

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

## Isotropic E-Field Probe Specification

<b>Calibration in Air</b>	Frequency Dependent Below 2GHz Calibration in air performed in a TEM Cell Above 2GHz Calibration in air performed in waveguide
<b>Sensitivity</b>	0.70 $\mu\text{V}/(\text{V}/\text{m})^2$ to 0.85 $\mu\text{V}/(\text{V}/\text{m})^2$
<b>Dynamic Range</b>	0.0005 W/kg to 100W/kg
<b>Isotropic Response</b>	Better than 0.2dB
<b>Diode Compression point (DCP)</b>	Calibration for Specific Frequency
<b>Probe Tip Radius</b>	< 5mm
<b>Sensor Offset</b>	1.56 (+/- 0.02mm)
<b>Probe Length</b>	290mm
<b>Video Bandwidth</b>	@ 500 Hz: 1dB @1.02 KHz: 3dB
<b>Boundary Effect</b>	Less than 2% for distance greater than 2.4mm
<b>Spatial Resolution</b>	Diameter less than 5mm Compliant with Standards

ALSAS-100 incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detecting during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, &Z). The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connected to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

**Daq-Paq (Analog to Digital Electronics)**


ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from 5  $\mu$  V to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via a RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

<b>ADC</b>	12 Bit
Amplifier Range	20mV to 200mV and 150mV to 800mV
Field Integration	Local Co-Processor utilizing proprietary integration algorithms
Number of Input Channels	4 in total 3 dedicated and 1 spare
Communication	Packet data via RS232

### 4.2.3 Phantoms, Device Holder and Simulant Liquid

#### 4.2.3.1 Sam Phantom

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

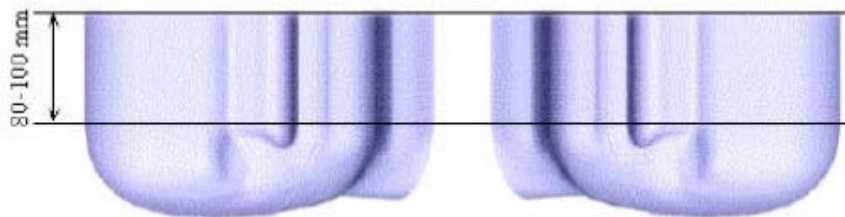

intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



## Device and Dipole Holder

### ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurement using different types of phantoms with one set up, which significantly speeds up the measurement process.

### Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A  $15^\circ$  tilt movements for head SAR analysis. Overall uncertainty for measurements has been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.



### 4.2.3.2 Tissue Simulating Liquids

There is no simulating liquids that can cover all frequency bands. Therefore, our system is using different liquids for the measured band as explained bellows.


The parameters of the simulating solution strongly influence the SAR values. The different normalization organizations have defined adapted solutions for the each mobile system.

2.45GHz Liquid: is made of de-ionized water, Glycol monobutyl and NaCl, reconstituting the electric properties of human tissues at 2450MHz

Several measurement systems are available for measuring the dielectric parameters.

Antennessa has developed its own software, based on a coaxial probe. This method allows measurement of liquid permittivity between 300 MHz and 6GHz.

#### 4.2.4 SAR measurement procedure

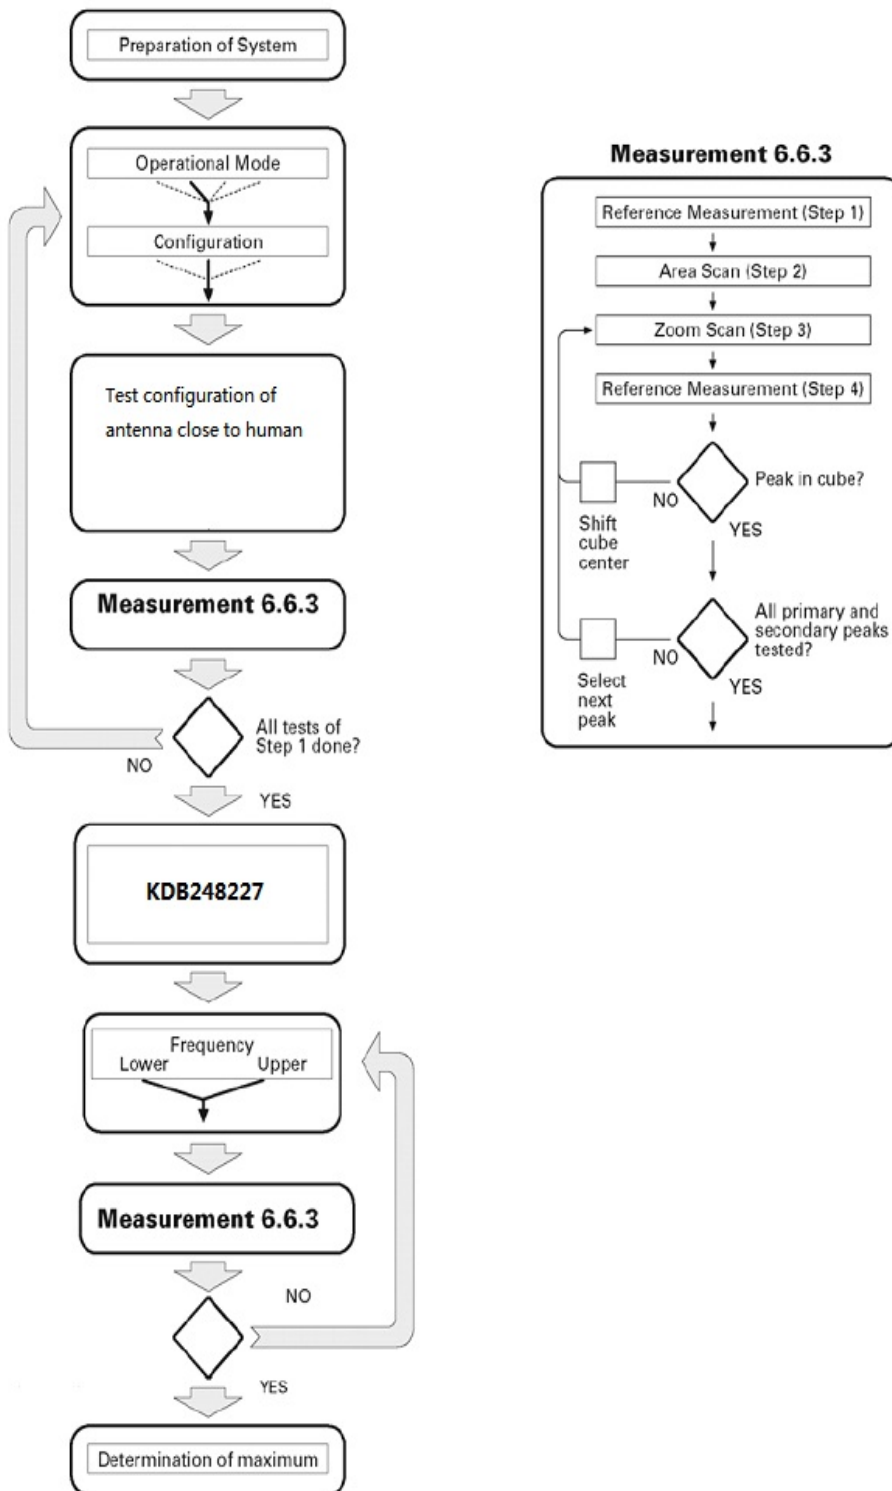


After an area scan has been done at a fixed distance of 8mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between

these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE P1528 standard. This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behavior are tested.


#### 4.2.5 Validation Test Using Flat Phantom

The following procedure, recommended for performing validation tests using flat phantom is based on the procedures described in the IEEE standard P1528. Setup according to the setup diagram below:

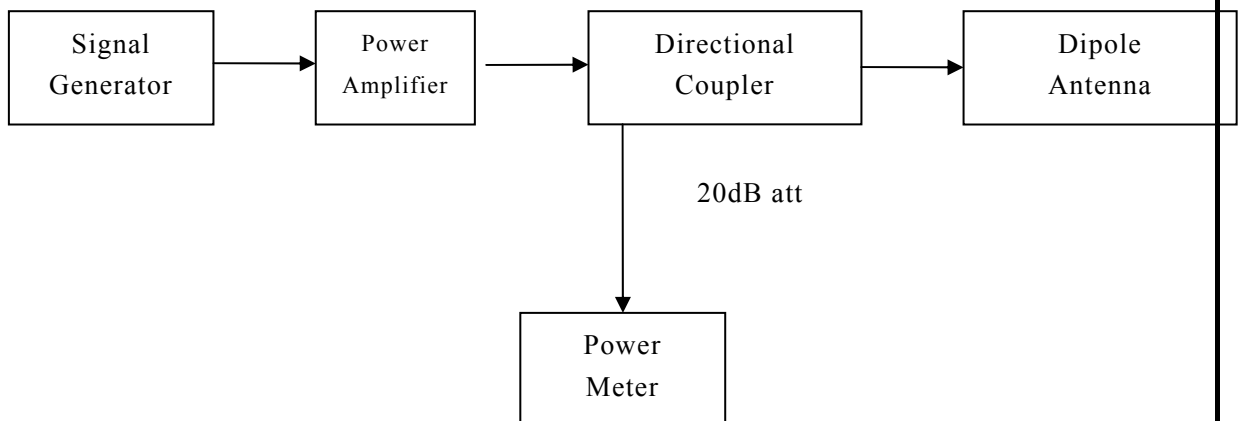

##### 4.2.5.1 Setting up the Box Phantom for Validation Testing

#### Validation Dipoles

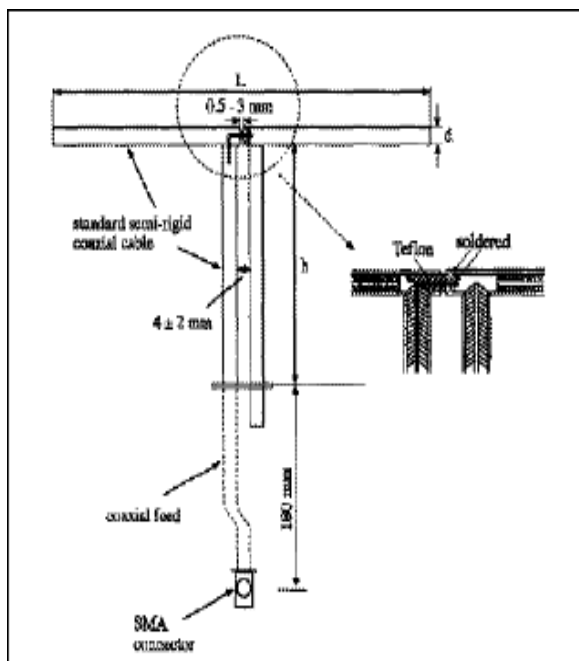

The dipoles used are based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. The table below provides details for the mechanical and electrical specifications for the dipoles.

Frequency	L(mm)	h(mm)	d(mm)
2450 MHZ	54	30.4	3.6

### Validation Result

System Performance Check at 2450MHz

Validation Kit: ASL-D-2450-S-2 Probe : E-020 (273-B)

Frequency(MHz)	Description	SAR(W/Kg) 1g	SAR(W/Kg) 10g	Tissue Temp.(°C)
2450MHz	Standard result	52.4	24.0	N/A
	Calibration data	53.1	24.4	
	15-Mar-11 Test Value(1W)	55.576	25.064	20.3
	15-Mar-11 Test Value(0.25W)	13.894	6.266	20.3

Note: Validation SAR values are normalized to 1W forward power

#### 4.2.6 Measurement Procedure

The following steps are used for each test position

Establish a call with the maximum output power with a base station simulator. The connection between the mobile phone and the base station simulator is established via air interface.

Measurement of the local E-field distribution is done with a grid of 8 to 16mm\*8 to 16mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolating scheme.

Around this point, a cube of 30\*30\*30mm or 32\*32\*32mm is assessed by measuring 5 or 8\*5 or 8\*4 or 5mm. With these data, the peak spatial-average SAR value can be calculated.

#### 4.2.7 Description of Interpolation/Extrapolation Scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise



measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is base on a fourth-order least square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8mm. to obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1gram requires a very fine resolution in the three-dimensional scanned data array.

## **5 CHARACTERISTICS OF THE TEST**

### **5.1.1 Applicable Limit Regulations**

**ANSI C95.1–1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### **5.1.2 Applicable Measurement Standards**

**IEEE 1528–2003:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

**OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01):** Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

**KDB648474 D01 SAR Handsets Multi Xmitter and Ant, v01r05:** SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas.

**KDB248227:** SAR measurement procedures for 802.11abg transmitters.

It specifies the measurement method for demonstration of compliance with the SAR limits for such equipments.

**KDB Publication 447498:** Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Polices

## 6 LABORATORY ENVIRONMENT

**Table: The Ambient Conditions during SAR Test**

Temperature	Min. =15°C, Max. =30°C
Relative humidity	Min. =30%, Max. =70%
Ground system resistance	<0.5Ω

Ambient noise is checked and found very low and in compliance with requirement of standards.

Reflection of surrounding objects is minimized and in compliance with requirement of standards.

## 7 TEST RESULTS

### 7.1 Explain

The EUT has been tested under the operating conditions.

### 7.2 Dielectric Performance

For body-worn measurements, the device was tested against flat phantom representing the user body.

Under measurement phone was put on in the belt holder.

**Table: Dielectric Performance of Body Tissue Simulating Liquid**

Temperature: 23.0~23.8°C, humidity: 54~60%.

/	Frequency	Permittivity $\epsilon$	Conductivity $\sigma$ (S/m)
Target value	2450 MHz	52.70	1.95
Validation value (Mar 15)	2450 MHz	53.12	1.90

### 7.3 Conducted Power

The conducted power for Wireless LAN/ WLAN is as following:

802.11b/data rate	Conducted Power (dBm)		
	2412MHz	2437MHz	2462MHz
1M	14.16	14.26	14.38
2M	14.10	14.23	14.29
5.5M	14.15	14.22	14.31
11M	14.12	14.18	14.25
802.11g/data rate	Conducted Power (dBm)		
	2412MHz	2437MHz	2462MHz
6M	11.19	11.40	11.49
9M	11.10	11.37	11.43
12M	11.15	11.45	11.25
18M	11.15	11.36	11.50
24M	11.25	11.51	11.27
36M	11.31	11.34	11.43
48M	11.37	11.41	11.45
54M	11.28	11.38	11.46
Bluetooth	Conducted Power (dBm)		
	2402MHz	2441MHz	2480MHz
Results	-0.22	0.13	0.51

## NOTES:

1. 802.11g is not required when the maximum average output power is less than ¼ dB higher than measured on the corresponding 802.11b channels.
2. BT and Wireless LAN/ WLAN can not simultaneous transmission and BT output power <math>< 60/f(\text{GHz})</math>, so BT SAR not required.
3. According to the conducted power as above, the body measurements are performed with 802.11b 1M data rate.

## 7.4 Summary of Measurement Results (802.11b )


Table 1: SAR Values (802.11b 1M data rate- Body)

Temperature: 21.0~23.5°C, Relative Humidity: 60~65%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Configuration	Measurement Result (W/kg)	
	1 g Average(W/kg)	Power Drift(%)
Frontside Towards phantom with 2412MHz	0.247	1.22
Frontside Towards phantom with 2437MHz	0.251	0.73
Frontside Towards phantom with 2462MHz	0.260	-2.11
Leftside Towards phantom with 2412MHz	0.413	-0.34
Leftside Towards phantom with 2437MHz	0.420	-2.54
Leftside Towards phantom with 2462MHz	0.432	1.33
Topside Towards phantom with 2412MHz	0.352	0.89
Topside Towards phantom with 2437MHz	0.439	-1.44
Topside Towards phantom with 2462MHz	0.478	2.73
Backside Towards phantom with 2412MHz	1.063	3.11
Backside Towards phantom with 2437MHz	1.066	-2.07
Backside Towards phantom with 2462MHz	1.070	-1.57

## 7.5 Summary of Measurement Results (Wireless LAN/ WLAN and Bluetooth function)

The distance between BT antenna and Wireless LAN/ WLAN antenna is  $0\text{cm} < 2.5\text{cm}$ . Both BT and Wireless LAN/ WLAN antenna can not Simultaneous Transmission. Because of 'Stand-alone SAR is not required for an unlicensed transmitter with output power  $\leq P_{\text{Ref}}$  mW when either the output power or 1-g SAR for each of the other antennas within 2.5 cm of that unlicensed transmitting antenna is  $\leq P_{\text{Ref}}$  mW or  $< 1.2 \text{ W/kg}$ .' in KDB 648474, SAR for BT is not required.

The location of the antennas inside is shown below:

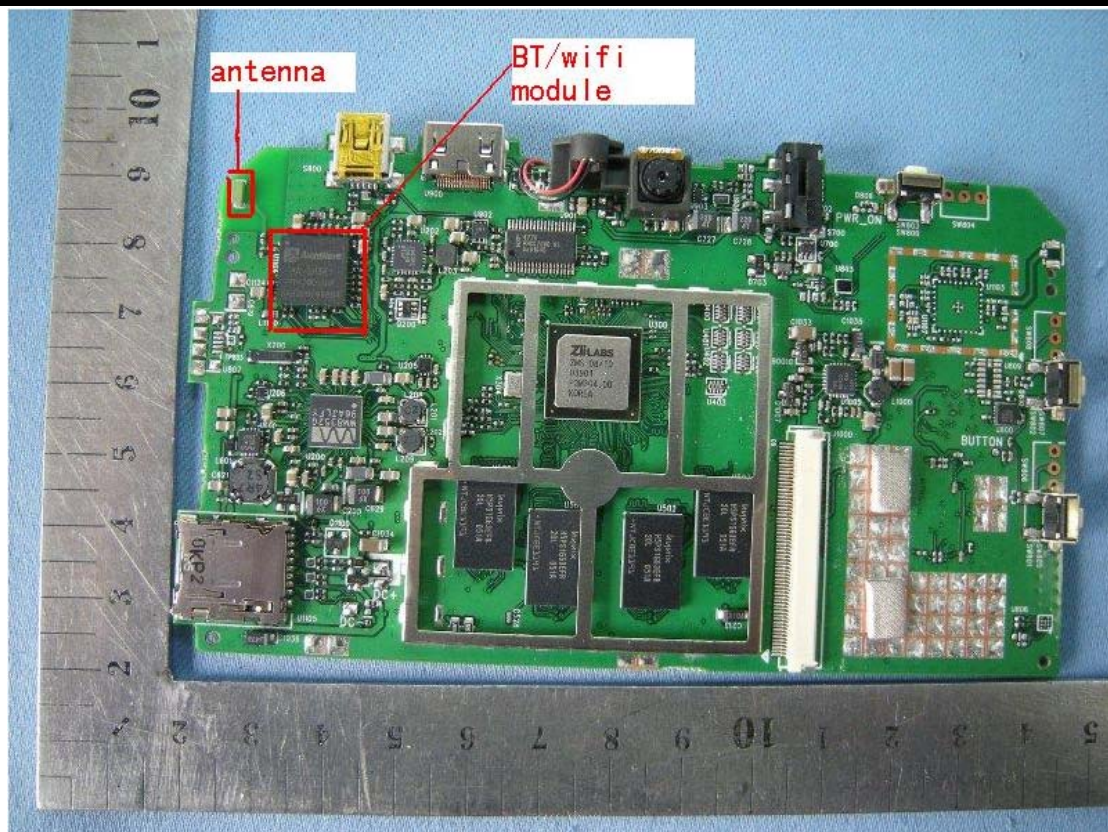

Because the conducted power for Wireless LAN/ WLAN transmitter is  $> 2P_{ref}$ , stand-alone SAR for Wireless LAN/ WLAN should be performed. Then, simultaneous transmission SAR for Wireless LAN/ WLAN is considered with measurement results of Wireless LAN/ WLAN.

Because SAR is not required for 802.11g channels since the output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels, and for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 0.25dB higher than those measured at the lowest data rate. According to the above conducted power, the EUT should be tested for “802.11b, 1Mbps, channel 11”. If SAR for highest output channel is  $> 50\%$  of SAR limit, test all channels.

## 7.6 Conclusion

Peak Spatial-Average Specific Absorption Rate (SAR) of this portable wireless device has been measured in all configurations requested by the relevant standards cited in Clause 5.2 of this report. SAR values are below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

## 8 Measurement Uncertainties

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

UNCERTAINTY EVALUATION FOR HANDSET SAR TEST

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	ci1 (1-g)	ci1 (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	$\sqrt{3}$	$\sqrt{cp}$	$\sqrt{cp}$	4.4	4.4
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1



Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	$\sqrt{3}$	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	0.0	normal	1	0.7	0.5	0.0	0.0
Liquid Permittivity(target)	5.0	rectangular	$\sqrt{3}$	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	2.4	normal	1	0.6	0.5	1.4	1.2
Combined Uncertainty		RSS				9.3	9.2
Combined Uncertainty (coverage factor=2)		Normal(k=2)				18.7	18.3

## 9 MAIN TEST INSTRUMENTS

Instrument	Manufacture	Model No.	Serial No.	Last Calibration
Universal Work Station	Apriel	ALS-UWS	100-00154	Jun.2010
Data Acquisition Package	Apriel	ALS-DAQ-PAQ-3	110-00215	Jun.2010
Probe Mounting Device and Boundary Detection Sensor System	Apriel	ALS-PMDPS-3	120-00265	Jun.2010
Miniature Isotropic RF Probe 900 MHz	APREL Laboratories	E-020	273-B	Sep.2010
Miniature Isotropic RF Probe 1800 MHz	APREL Laboratories	E-020	273-B	Sep.2010
Left ear SAM Phontom	Apriel	ALS-P-SAM-L	130-00312	N/A
Right ear SAM Phontom	Apriel	ALS-P-SAM-R	140-00362	N/A
Universal SAM Phontom	Apriel	ALS-P-SU-1	150-00410	N/A
Reference Validation Dipole 900MHz	Apriel	ALS-D-900-S-2	190-00607	May 28 2009
Reference Validation Dipole 1800MHz	Apriel	ALS-D-1800-S-2	200-00657	May 28 2009
Reference Validation Dipole 2450MHz	Apriel	ALS-D-2450-S-2	2450-220-00755	May 28 2009
Dielectric Probe Kit	Apriel	ALS-PR-DIEL	260-00955	N/A
Device Holder 2.0	Apriel	ALS-H-E-SET-2	170-00506	N/A
SAR software	Apriel	ALS-SAR-AL-10	Ver.2.3.6	N/A
CRS C500C Controller	Thermo	ALS-C500	RCF0504291	N/A
CRS F3 Robot	Apriel	ALS-F3-SW	N/A	N/A
Power Amplifier	Mini-Circuit	SN0974	040306	N/A
Directional Coupler	Agilent	778D-012	N/A	N/A
Universal Radio Communication Tester	Rohde&Schwarz	CMU200	104845	Jan.10
Vector Network	Anritsu	MS4623B	N/A	Nov.10
Signal Generator	Agilent	E8257D	N/A	Jan.10
Power Meter	Rohde&Schwarz	NRP	N/A	Jan.10





## ANNEX A- Accreditation Certificate

of

Shenzhen Morlab Communications Technology Co.,Ltd.

CONFORMANCE TEST REPORT FOR  
HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

ViewBook 730

REPORT NO: SH11030006S01

Type Name: ViewSonic

Hardware Version: ZF0422

Software Version: v0.92.01

Accreditation Certificate





**China National Accreditation Service for Conformity Assessment**

**LABORATORY ACCREDITATION CERTIFICATE**

(No. CNAS L1659 )

*China National Accreditation Service for Conformity Assessment has accredited*

**Shenzhen Electronic Product Quality Testing Center**

Electronic Testing Building, Shahe Road, Xili, Nanshan District,

Shenzhen, Guangdong, China

*to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing and calibration.*

*The scope of accreditation is detailed in the attached schedule bearing the same accreditation number as above. The schedule forms an integral part of this certificate.*

Date of Issue: 2009-09-29

Date of Expiry: 2012-09-28

Date of Initial Accreditation: 1999-08-03



Signed on behalf of China National Accreditation Service  
for Conformity Assessment

China National Accreditation Service for Conformity Assessment(CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation systems for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA), and the signatory to Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).

## ANNEX B- Test Layout

of

Shenzhen Morlab Communications Technology Co.,Ltd.

CONFORMANCE TEST REPORT FOR  
HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

ViewBook 730

REPORT NO: SH11030006S01

Type Name: ViewSonic

Hardware Version: ZF0422

Software Version: v0.92.01

Test Layout

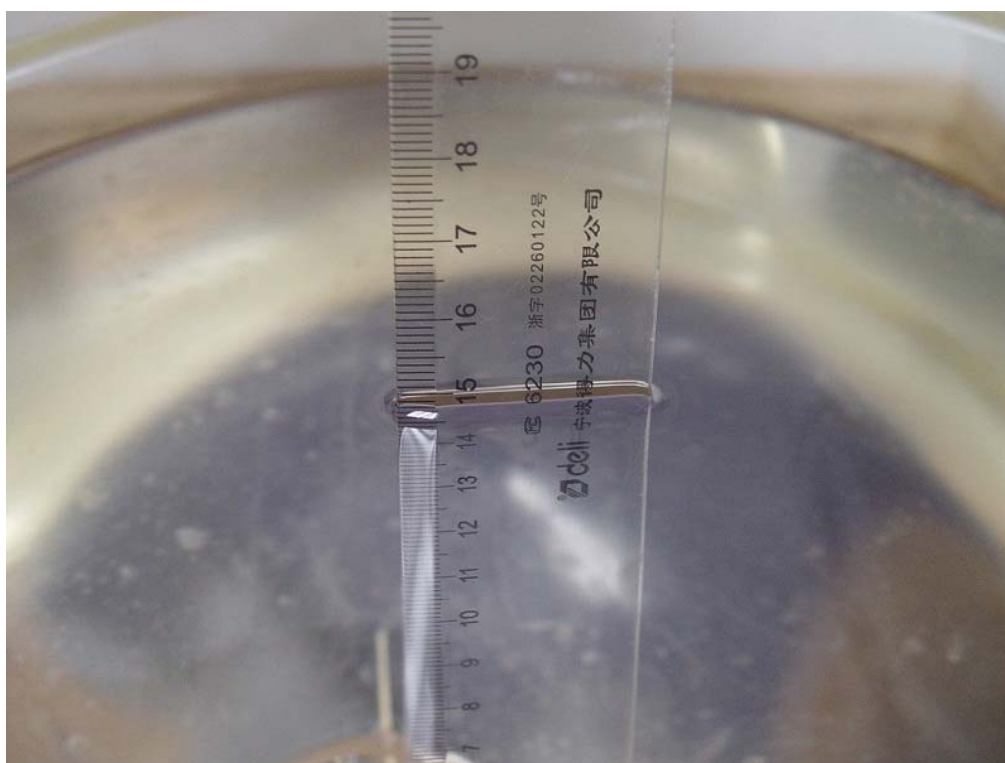


Figure B.1 Depth of Simulating Liquid in SAM Head Phantom



Figure B.2 EUT Frontside Towards phantom

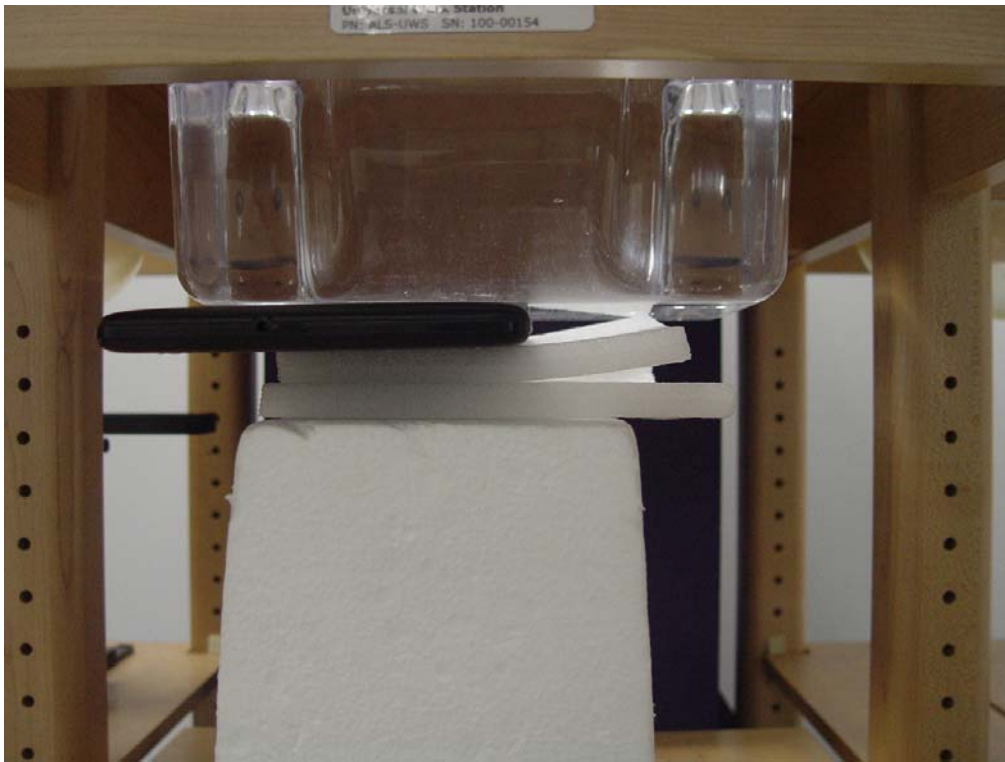


Figure B.3 EUT Backside Towards phantom

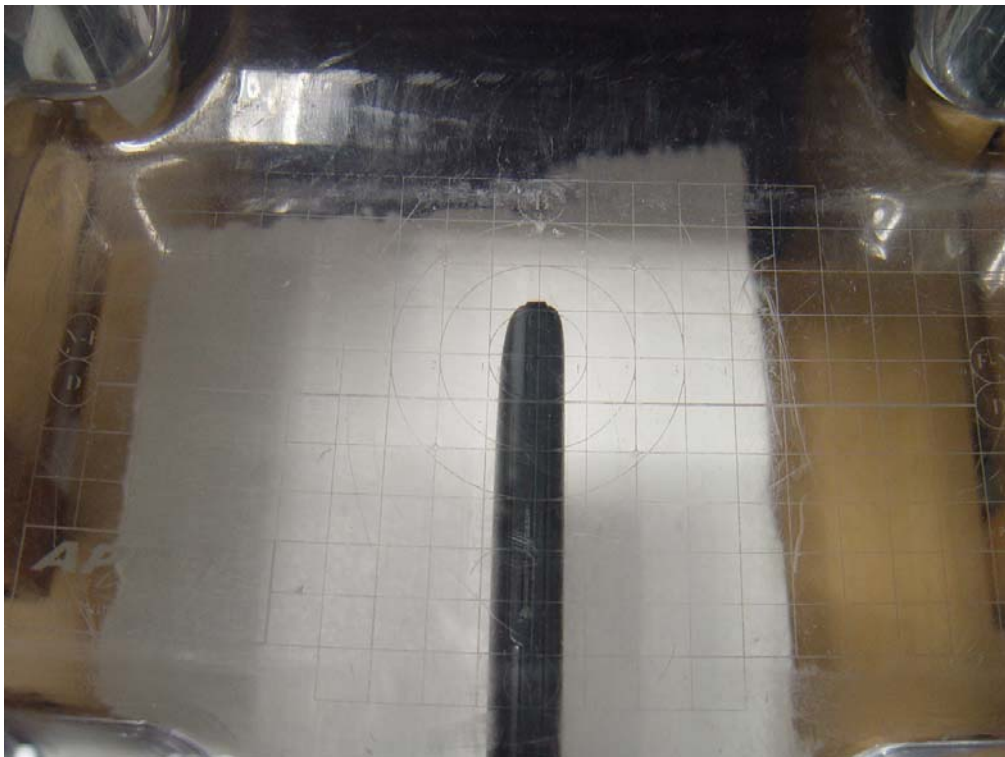


Figure B.4 EUT Leftside Towards phantom

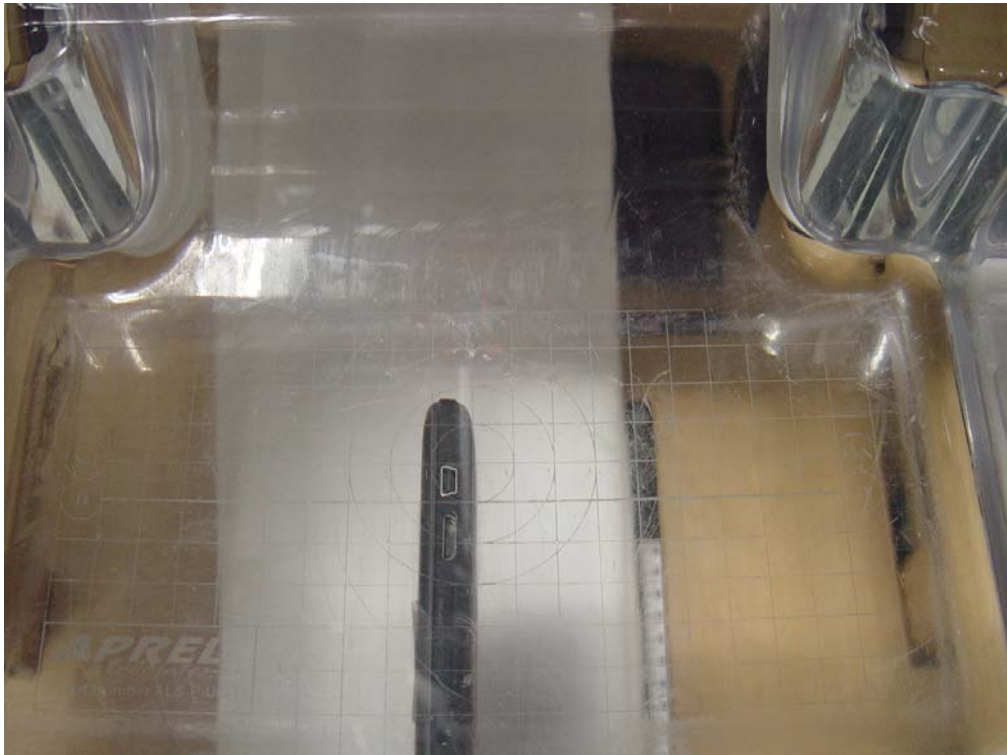
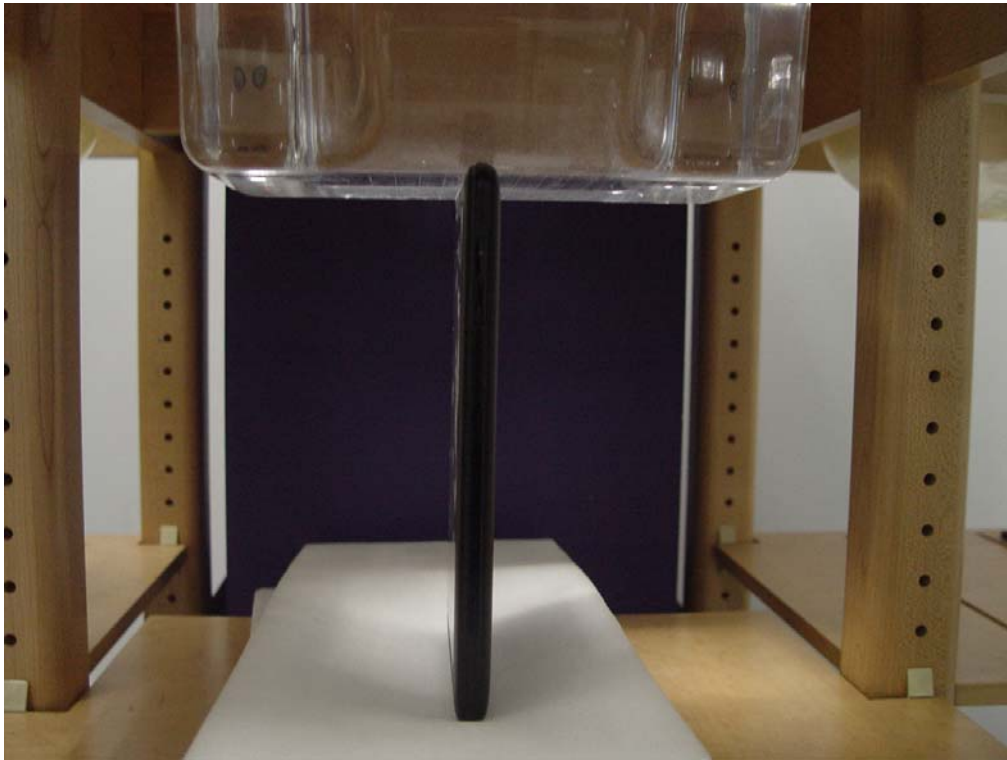


Figure B.5 EUT Topside Towards phantom

## ANNEX C- Sample Photographs

of

Shenzhen Morlab Communications Technology Co.,Ltd.

CONFORMANCE TEST REPORT FOR  
HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

ViewBook 730

REPORT NO: SH11030006S01

Type Name: ViewSonic

Hardware Version: ZF0422

Software Version: v0.92.01



Photograph of the Equipment under Test





Report No: SH11030006S01

## ANNEX D- Graph Test Results

of

Shenzhen Morlab Communications Technology Co.,Ltd.

CONFORMANCE TEST REPORT FOR  
HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

ViewBook 730

REPORT NO: SH11030006S01

Type Name: ViewSonic

Hardware Version: ZF0422


Software Version: v0.92.01

Graph Test Results




## Frontside Towards phantom with 2412MHz

<b>Frequency (MHz)</b>	<b>2412</b>
<b>Relative permittivity (real part)</b>	<b>52.014</b>
<b>Conductivity (S/m)</b>	<b>1.9234</b>
<b>Variation (%)</b>	<b>1.22</b>
<b>Duty Cycle Factor</b>	<b>1</b>
<b>Crest Factor</b>	<b>1</b>
<b>Conversion Factor</b>	<b>3.6</b>
<b>Probe Sensitivity</b>	<b>1.20 1.20 1.20 <math>\mu\text{V}/(\text{V/m})^2</math></b>
<b>Data</b>	<b>2011-3-15</b>

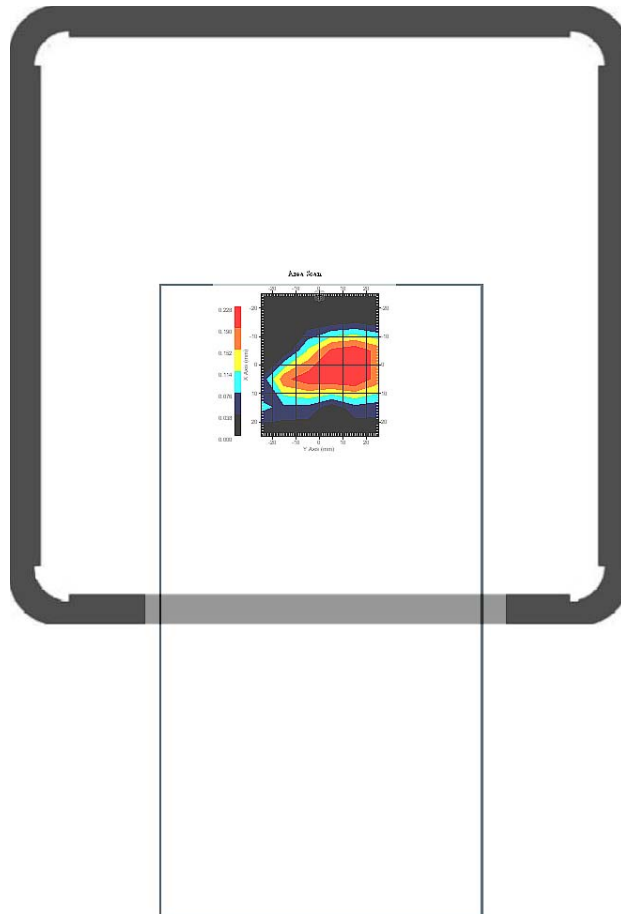


SAR-Z Axis  
at Hotspot x:-3.02 y:6.95

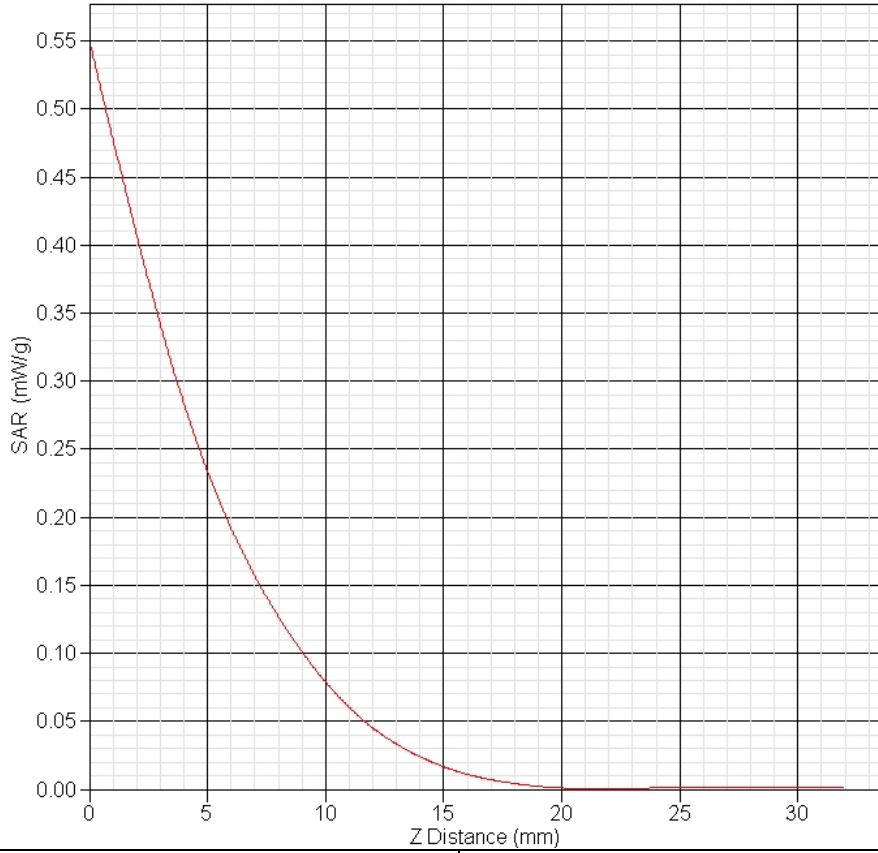


<b>SAR 10g (W/Kg)</b>	<b>0.102</b>
<b>SAR 1g (W/Kg)</b>	<b>0.247</b>

## Frontside Towards phantom with 2437MHz

<b>Frequency (MHz)</b>	<b>2437</b>
<b>Relative permittivity (real part)</b>	<b>52.167</b>
<b>Conductivity (S/m)</b>	<b>1.9301</b>
<b>Variation (%)</b>	<b>0.73</b>
<b>Duty Cycle Factor</b>	<b>1</b>
<b>Crest Factor</b>	<b>1</b>
<b>Conversion Factor</b>	<b>3.6</b>
<b>Probe Sensitivity</b>	<b>1.20 1.20 1.20 <math>\mu\text{V}/(\text{V/m})^2</math></b>
<b>Data</b>	<b>2011-3-15</b>

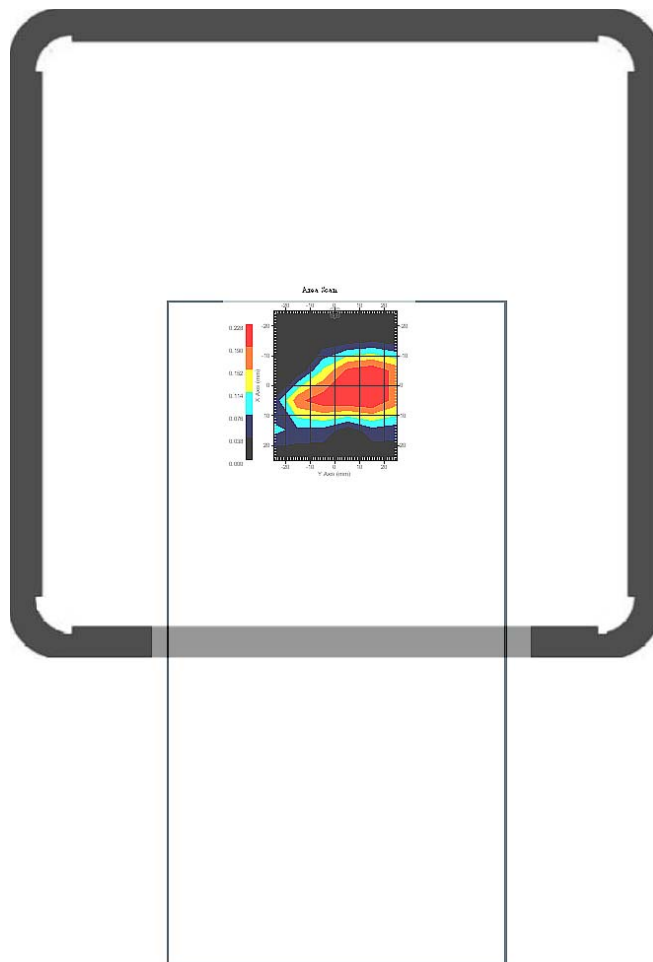


**SAR-Z Axis**  
at Hotspot x:-3.02 y:6.95

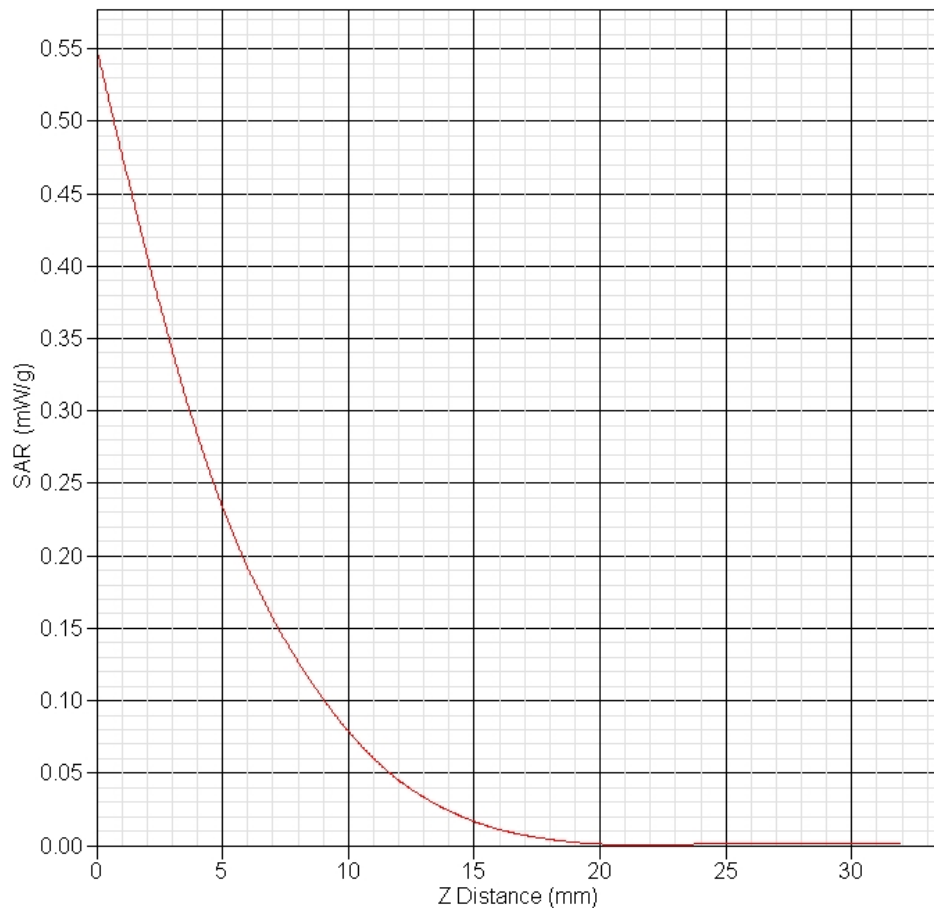


<b>SAR 10g (W/Kg)</b>	<b>0.111</b>
<b>SAR 1g (W/Kg)</b>	<b>0.251</b>

## Frontside Towards phantom with 2462MHz

<b>Frequency (MHz)</b>	<b>2462</b>
<b>Relative permittivity (real part)</b>	<b>52.311</b>
<b>Conductivity (S/m)</b>	<b>1.9436</b>
<b>Variation (%)</b>	<b>-2.11</b>
<b>Duty Cycle Factor</b>	<b>1</b>
<b>Crest Factor</b>	<b>1</b>
<b>Conversion Factor</b>	<b>3.6</b>
<b>Probe Sensitivity</b>	<b>1.20 1.20 1.20 <math>\mu\text{V}/(\text{V/m})^2</math></b>
<b>Data</b>	<b>2011-3-15</b>

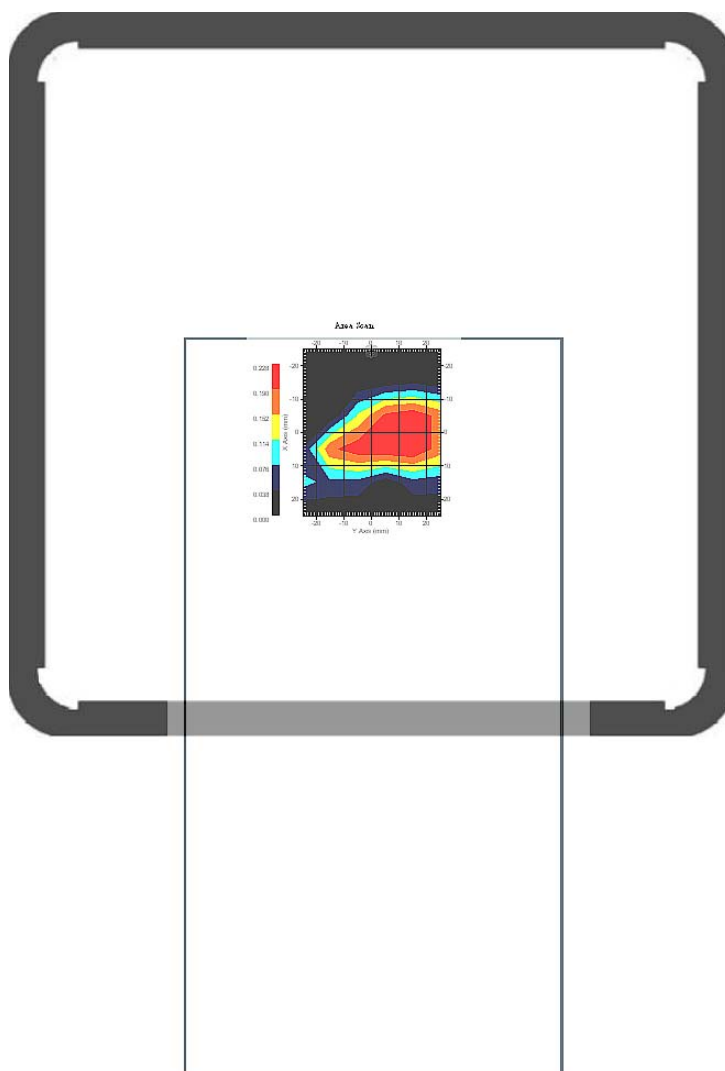


SAR-Z Axis  
at Hotspot x:-3.02 y:6.95

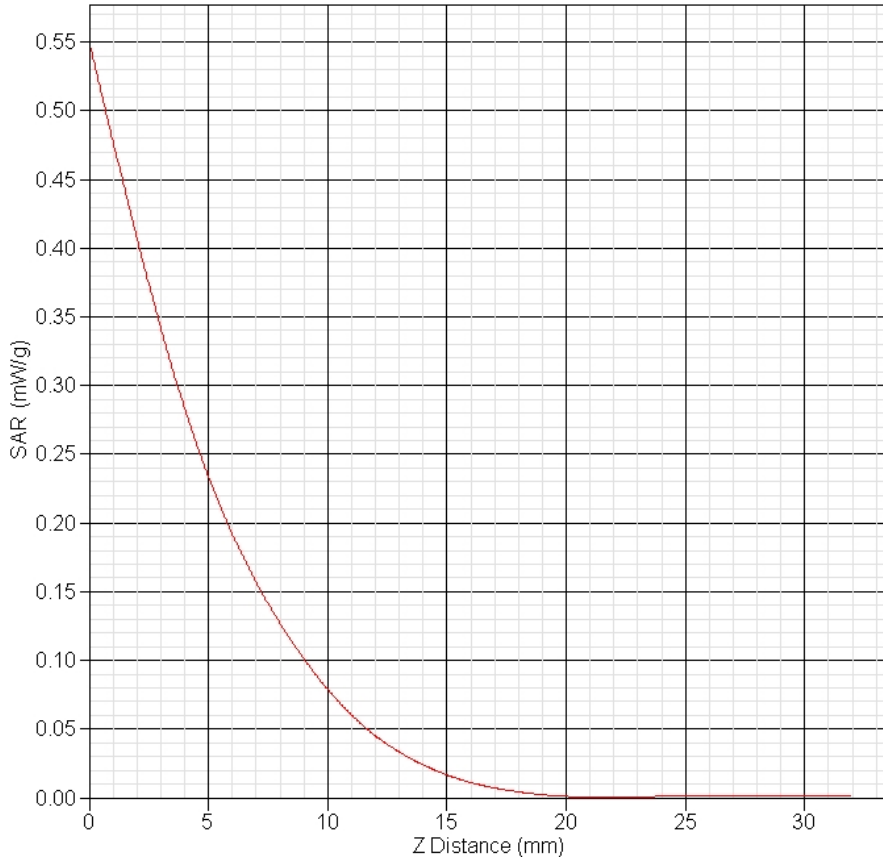

<b>SAR 10g (W/Kg)</b>	<b>0.117</b>
<b>SAR 1g (W/Kg)</b>	<b>0.260</b>


## Leftside Towards phantom with 2412MHz

<b>Frequency (MHz)</b>	<b>2412</b>
<b>Relative permittivity (real part)</b>	<b>52.014</b>
<b>Conductivity (S/m)</b>	<b>1.9234</b>
<b>Variation (%)</b>	<b>-0.34</b>
<b>Duty Cycle Factor</b>	<b>1</b>
<b>Crest Factor</b>	<b>1</b>
<b>Conversion Factor</b>	<b>3.6</b>
<b>Probe Sensitivity</b>	<b>1.20 1.20 1.20 <math>\mu\text{V}/(\text{V/m})^2</math></b>
<b>Data</b>	<b>2011-3-15</b>

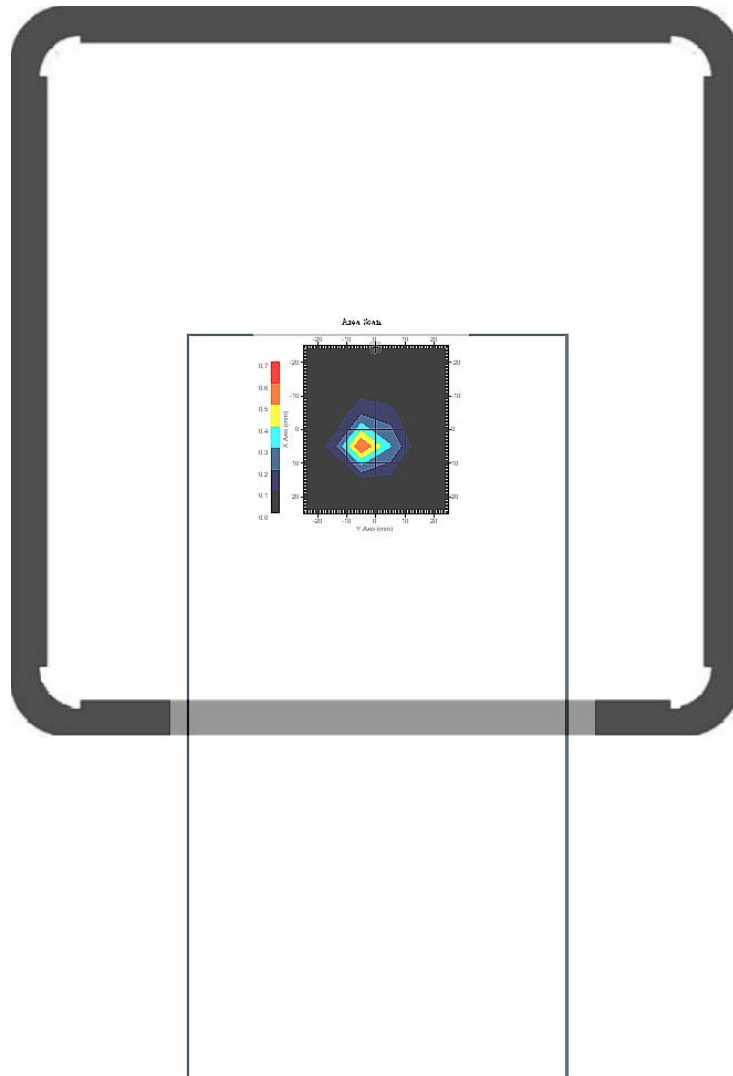




SAR-Z Axis  
at Hotspot x:5.04 y:-5.13

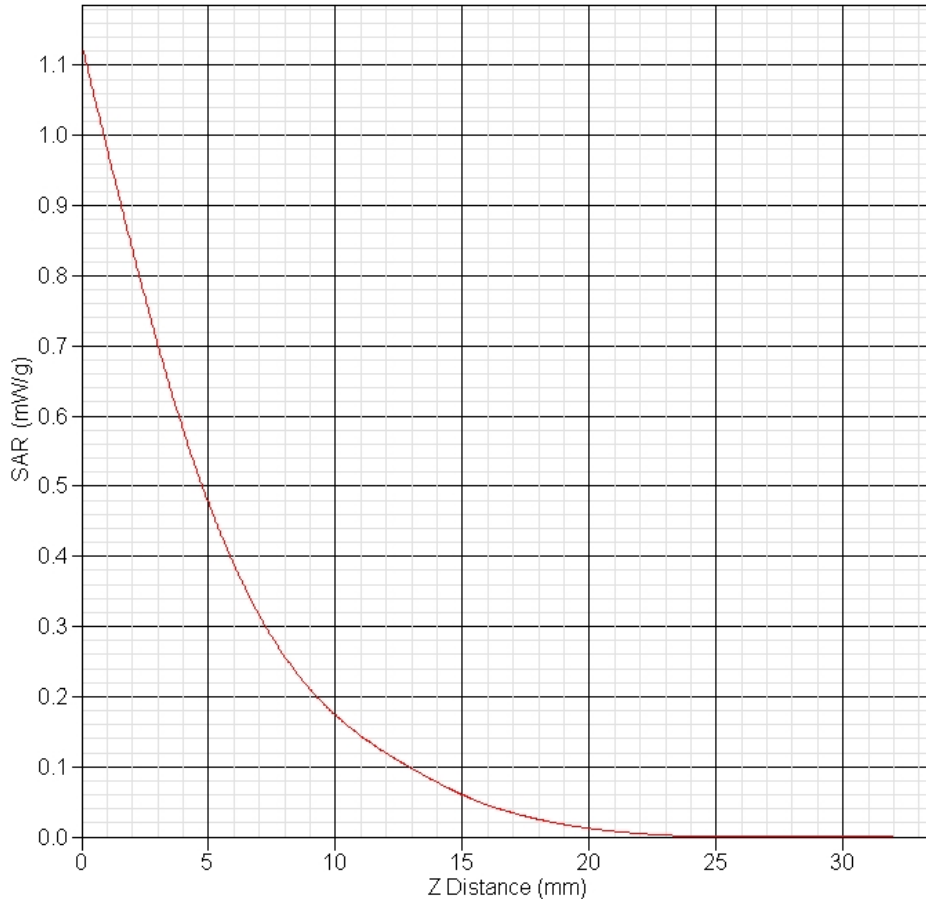


<b>SAR 10g (W/Kg)</b>	<b>0.125</b>
<b>SAR 1g (W/Kg)</b>	<b>0.413</b>

## Leftside Towards phantom with 2437MHz

<b>Frequency (MHz)</b>	<b>2437</b>
<b>Relative permittivity (real part)</b>	<b>52.167</b>
<b>Conductivity (S/m)</b>	<b>1.9301</b>
<b>Variation (%)</b>	<b>-2.54</b>
<b>Duty Cycle Factor</b>	<b>1</b>
<b>Crest Factor</b>	<b>1</b>
<b>Conversion Factor</b>	<b>3.6</b>
<b>Probe Sensitivity</b>	<b>1.20 1.20 1.20 <math>\mu\text{V}/(\text{V}/\text{m})^2</math></b>
<b>Data</b>	<b>2011-3-15</b>

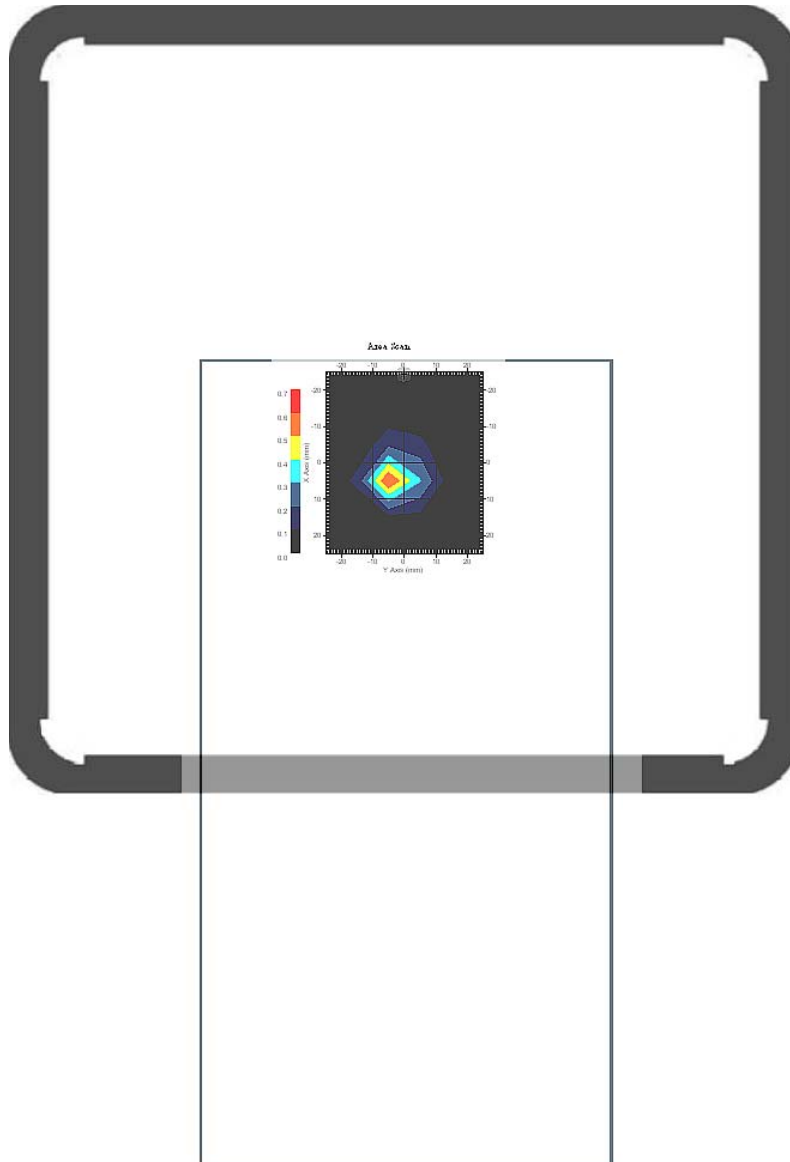


SAR-Z Axis  
at Hotspot x:5.04 y:-5.13

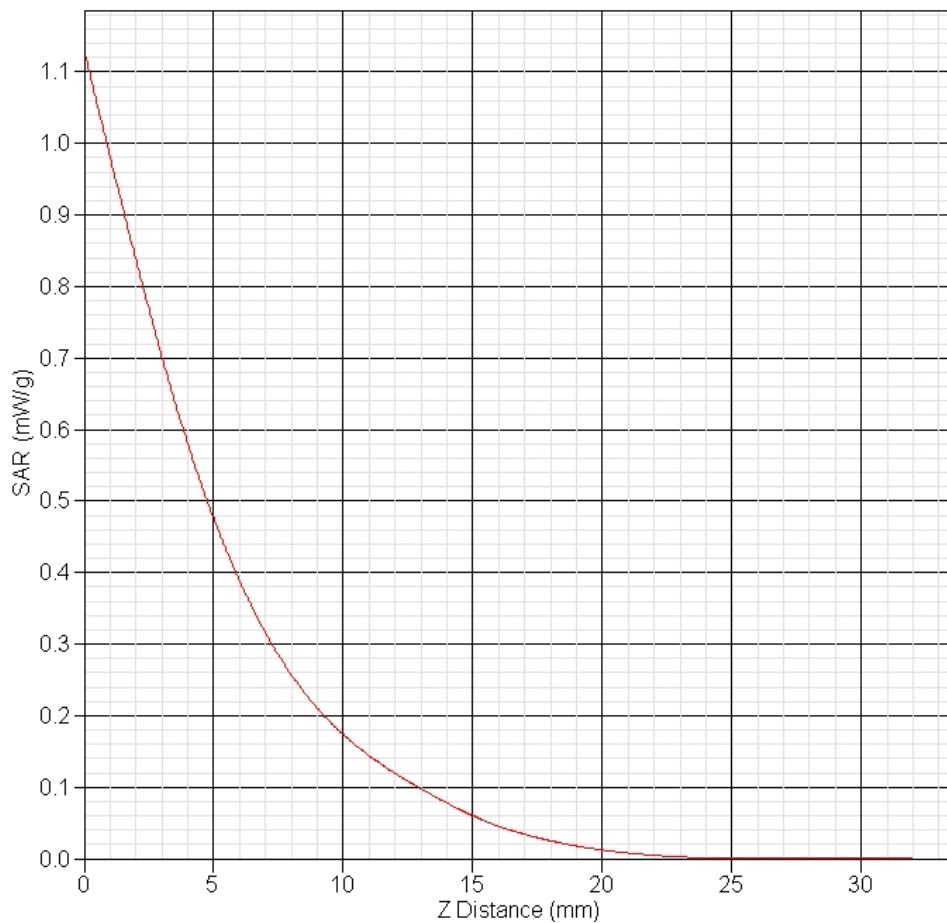


<b>SAR 10g (W/Kg)</b>	<b>0.129</b>
<b>SAR 1g (W/Kg)</b>	<b>0.420</b>

## Leftside Towards phantom with 2462MHz

<b>Frequency (MHz)</b>	<b>2462</b>
<b>Relative permittivity (real part)</b>	<b>52.311</b>
<b>Conductivity (S/m)</b>	<b>1.9436</b>
<b>Variation (%)</b>	<b>1.33</b>
<b>Duty Cycle Factor</b>	<b>1</b>
<b>Crest Factor</b>	<b>1</b>
<b>Conversion Factor</b>	<b>3.6</b>
<b>Probe Sensitivity</b>	<b>1.20 1.20 1.20 <math>\mu\text{V}/(\text{V}/\text{m})^2</math></b>
<b>Data</b>	<b>2011-3-15</b>

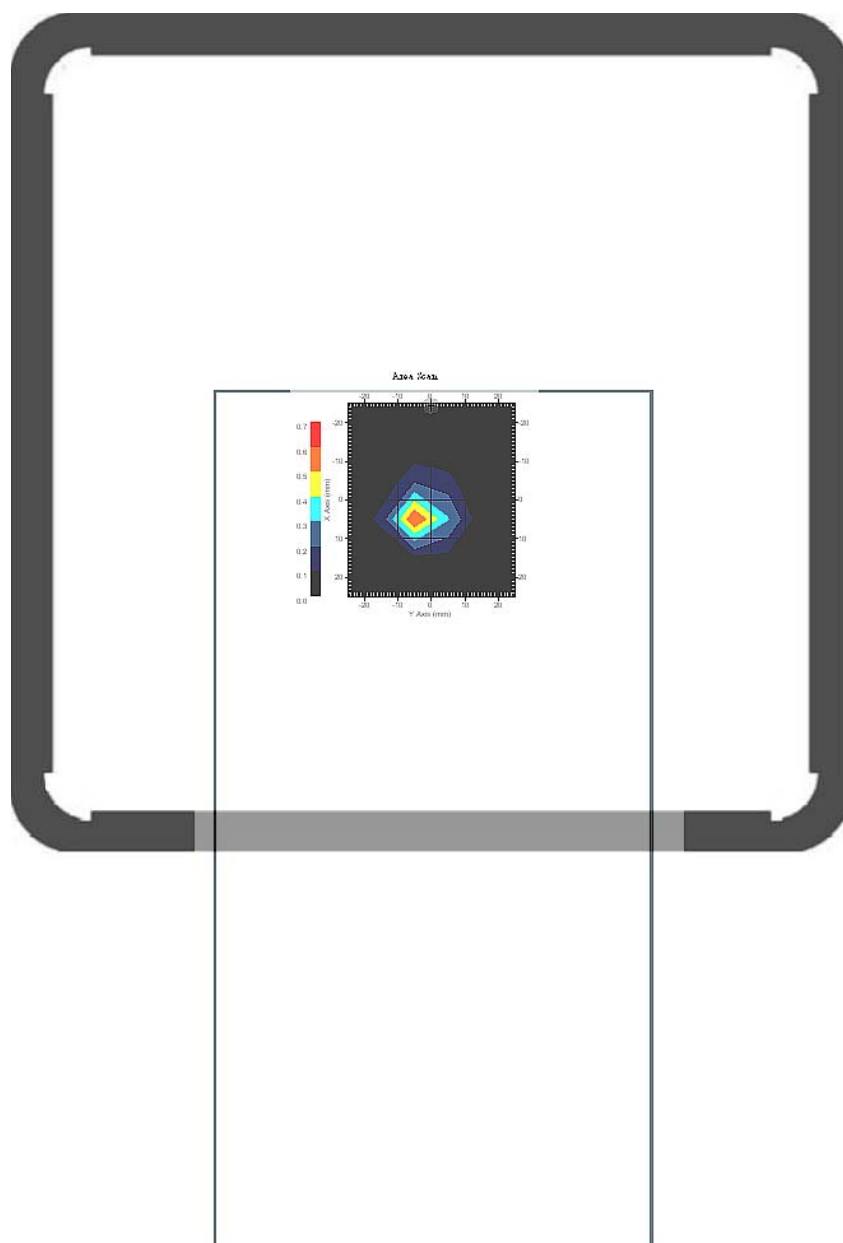


SAR-Z Axis  
at Hotspot x:5.04 y:-5.13

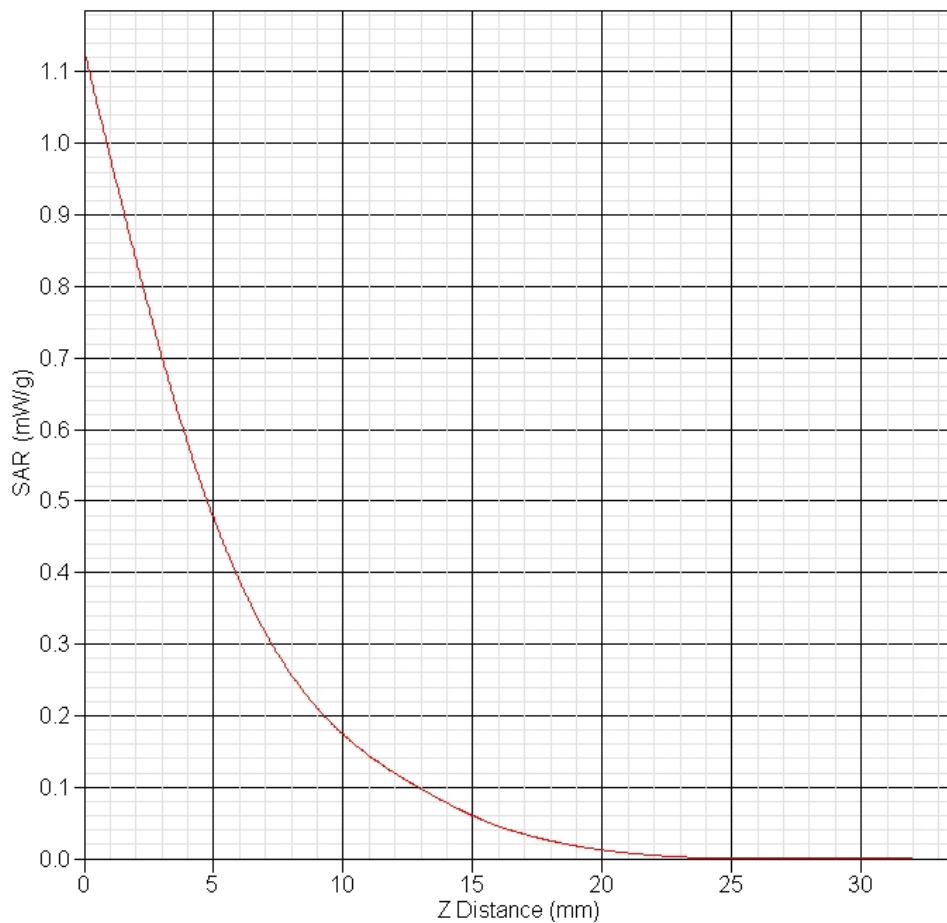


<b>SAR 10g (W/Kg)</b>	<b>0.140</b>
<b>SAR 1g (W/Kg)</b>	<b>0.432</b>

## Topside Towards phantom with 2412MHz

<b>Frequency (MHz)</b>	<b>2412</b>
<b>Relative permittivity (real part)</b>	<b>52.014</b>
<b>Conductivity (S/m)</b>	<b>1.9234</b>
<b>Variation (%)</b>	<b>0.89</b>
<b>Duty Cycle Factor</b>	<b>1</b>
<b>Crest Factor</b>	<b>1</b>
<b>Conversion Factor</b>	<b>3.6</b>
<b>Probe Sensitivity</b>	<b>1.20 1.20 1.20 <math>\mu\text{V}/(\text{V}/\text{m})^2</math></b>
<b>Data</b>	<b>2011-3-15</b>

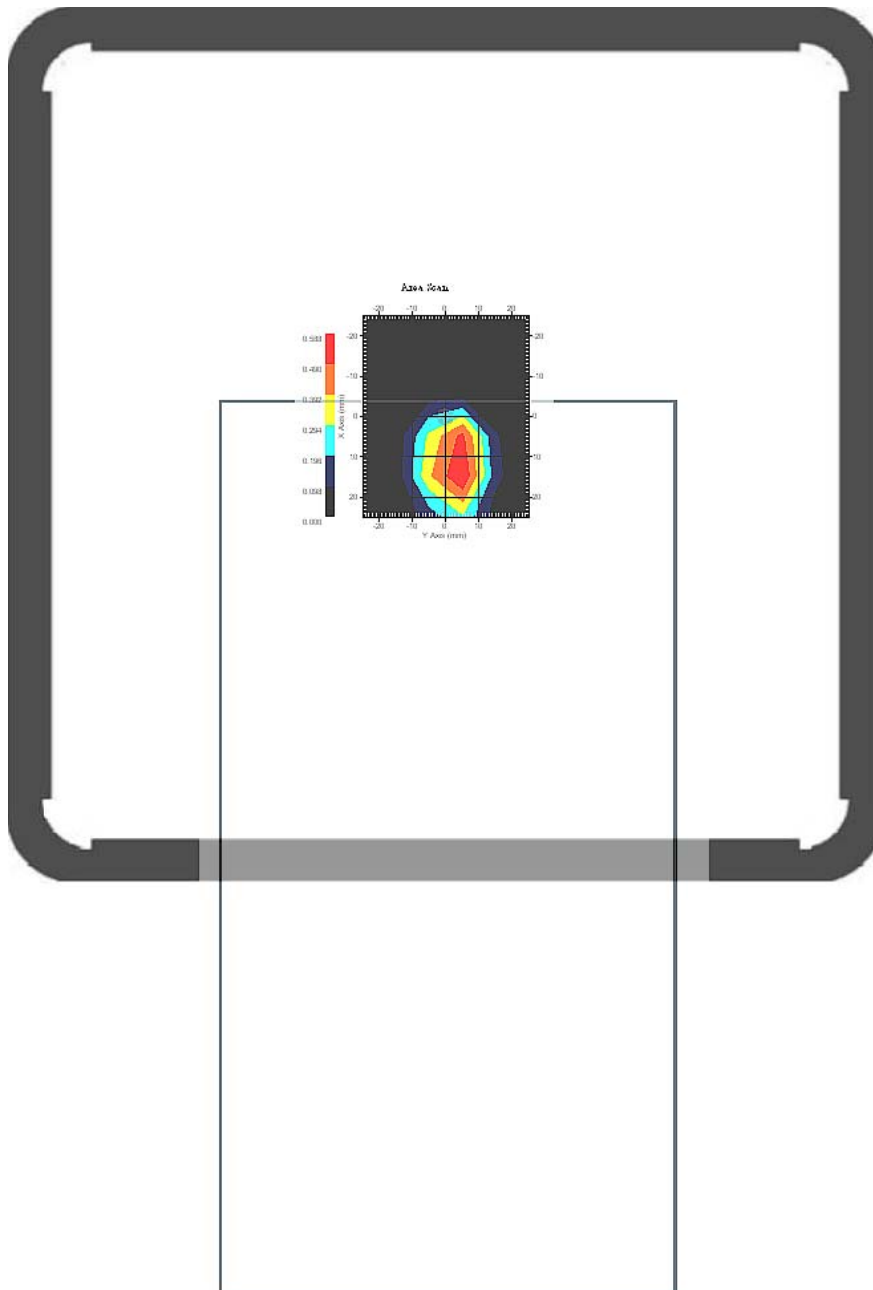


SAR-Z Axis  
at Hotspot x:15.01 y:4.87

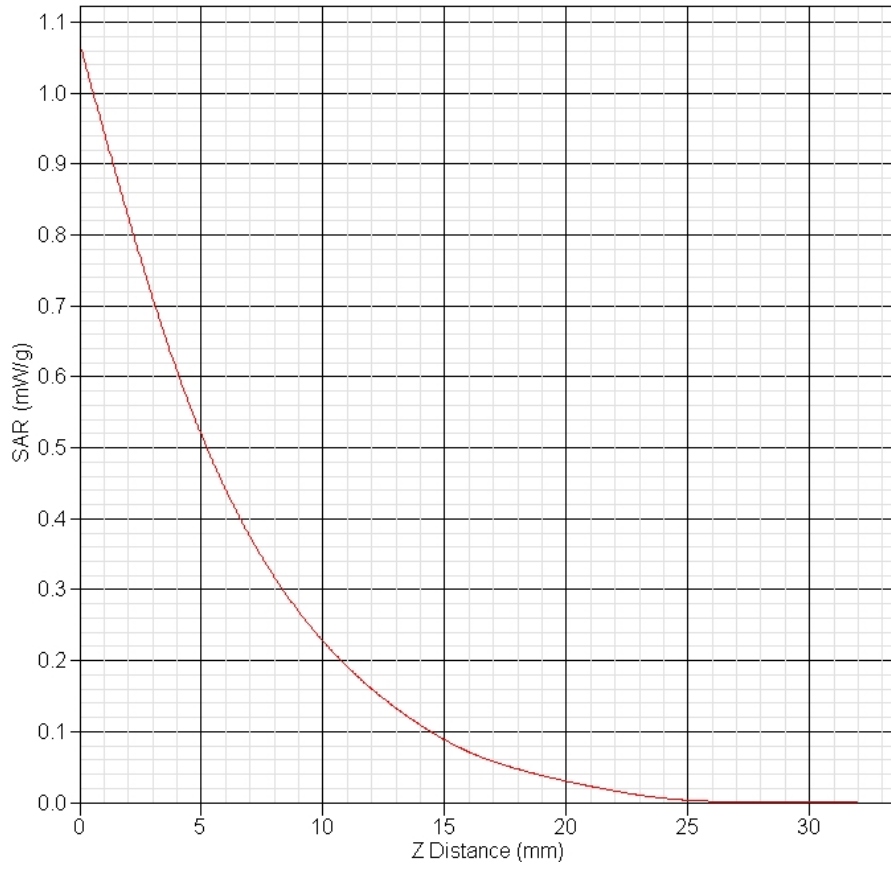

<b>SAR 10g (W/Kg)</b>	<b>0.163</b>
<b>SAR 1g (W/Kg)</b>	<b>0.352</b>


## Topside Towards phantom with 2437MHz

<b>Frequency (MHz)</b>	<b>2437</b>
<b>Relative permittivity (real part)</b>	<b>52.167</b>
<b>Conductivity (S/m)</b>	<b>1.9301</b>
<b>Variation (%)</b>	<b>-1.44</b>
<b>Duty Cycle Factor</b>	<b>1</b>
<b>Crest Factor</b>	<b>1</b>
<b>Conversion Factor</b>	<b>3.6</b>
<b>Probe Sensitivity</b>	<b>1.20 1.20 1.20 <math>\mu\text{V}/(\text{V}/\text{m})^2</math></b>
<b>Data</b>	<b>2011-3-15</b>

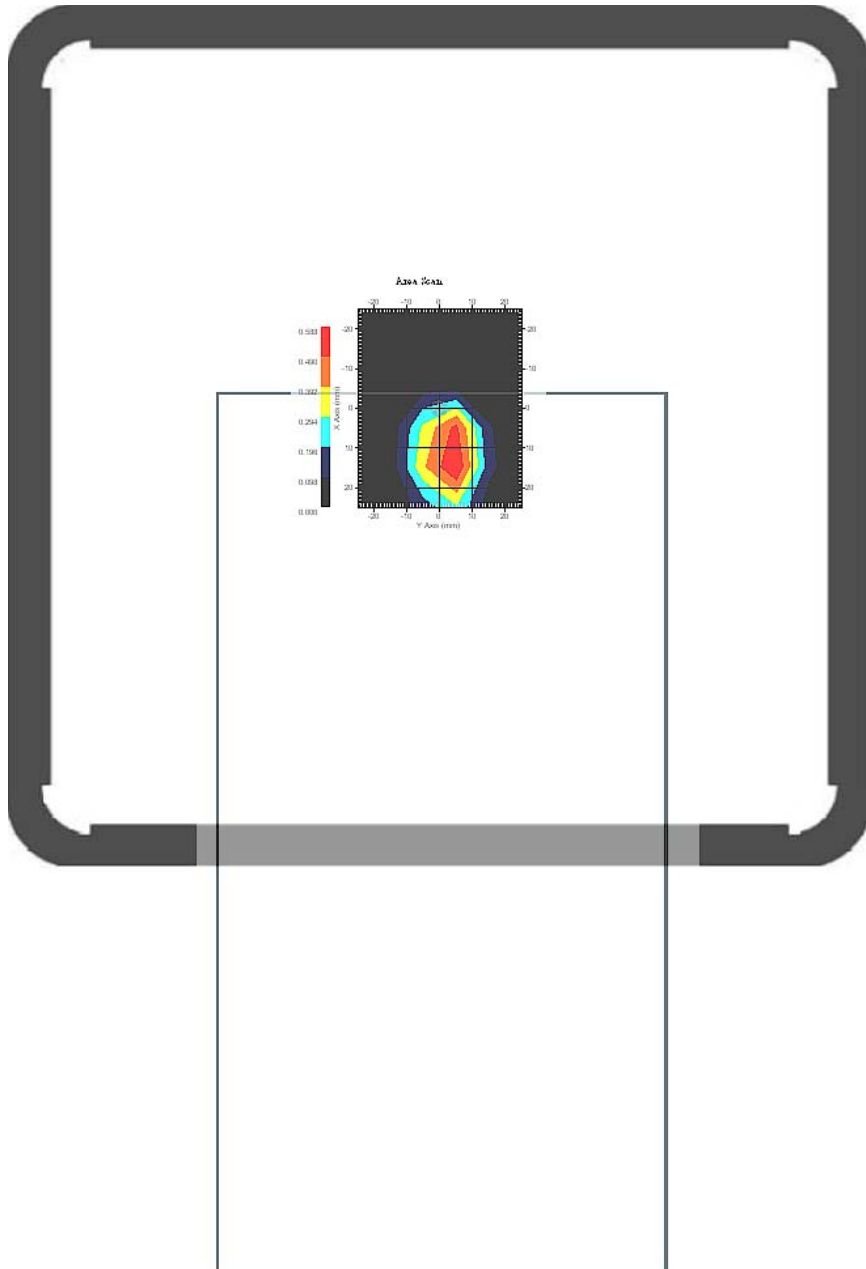




**SAR-Z Axis**  
at Hotspot x:15.01 y:4.87

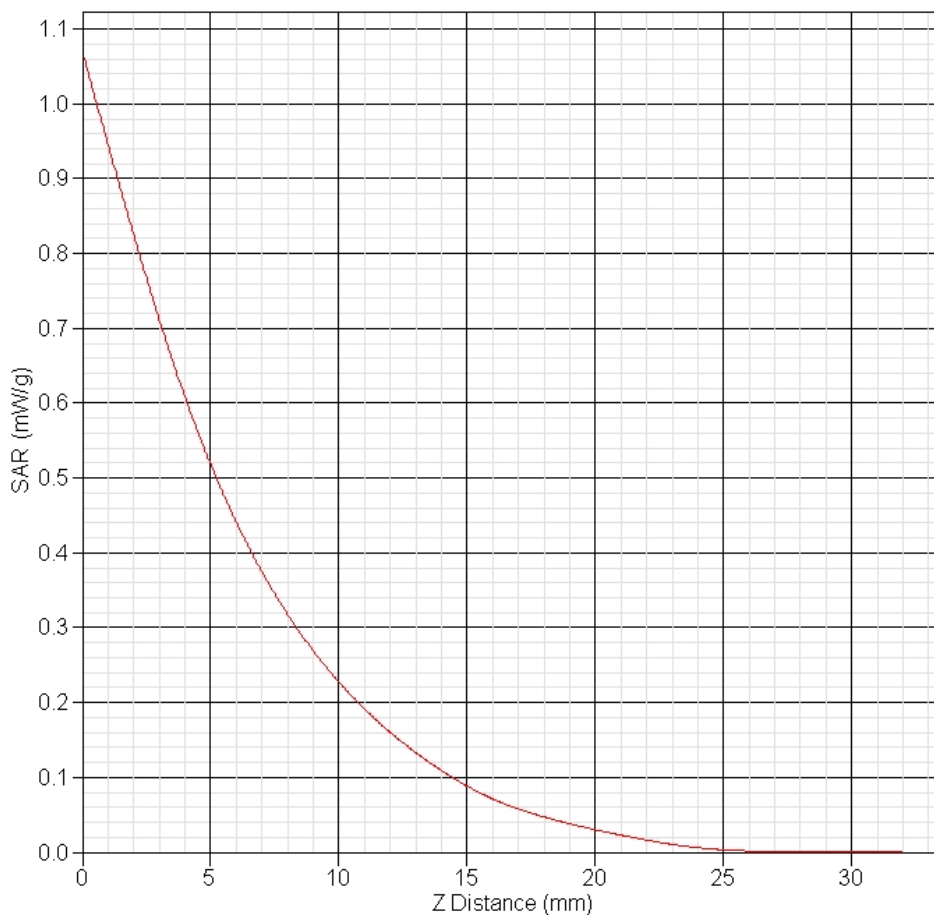


<b>SAR 10g (W/Kg)</b>	<b>0.183</b>
<b>SAR 1g (W/Kg)</b>	<b>0.439</b>

## Topside Towards phantom with 2462MHz

<b>Frequency (MHz)</b>	<b>2462</b>
<b>Relative permittivity (real part)</b>	<b>52.311</b>
<b>Conductivity (S/m)</b>	<b>1.9436</b>
<b>Variation (%)</b>	<b>2.73</b>
<b>Duty Cycle Factor</b>	<b>1</b>
<b>Crest Factor</b>	<b>1</b>
<b>Conversion Factor</b>	<b>3.6</b>
<b>Probe Sensitivity</b>	<b>1.20 1.20 1.20 <math>\mu\text{V}/(\text{V}/\text{m})^2</math></b>
<b>Data</b>	<b>2011-3-15</b>

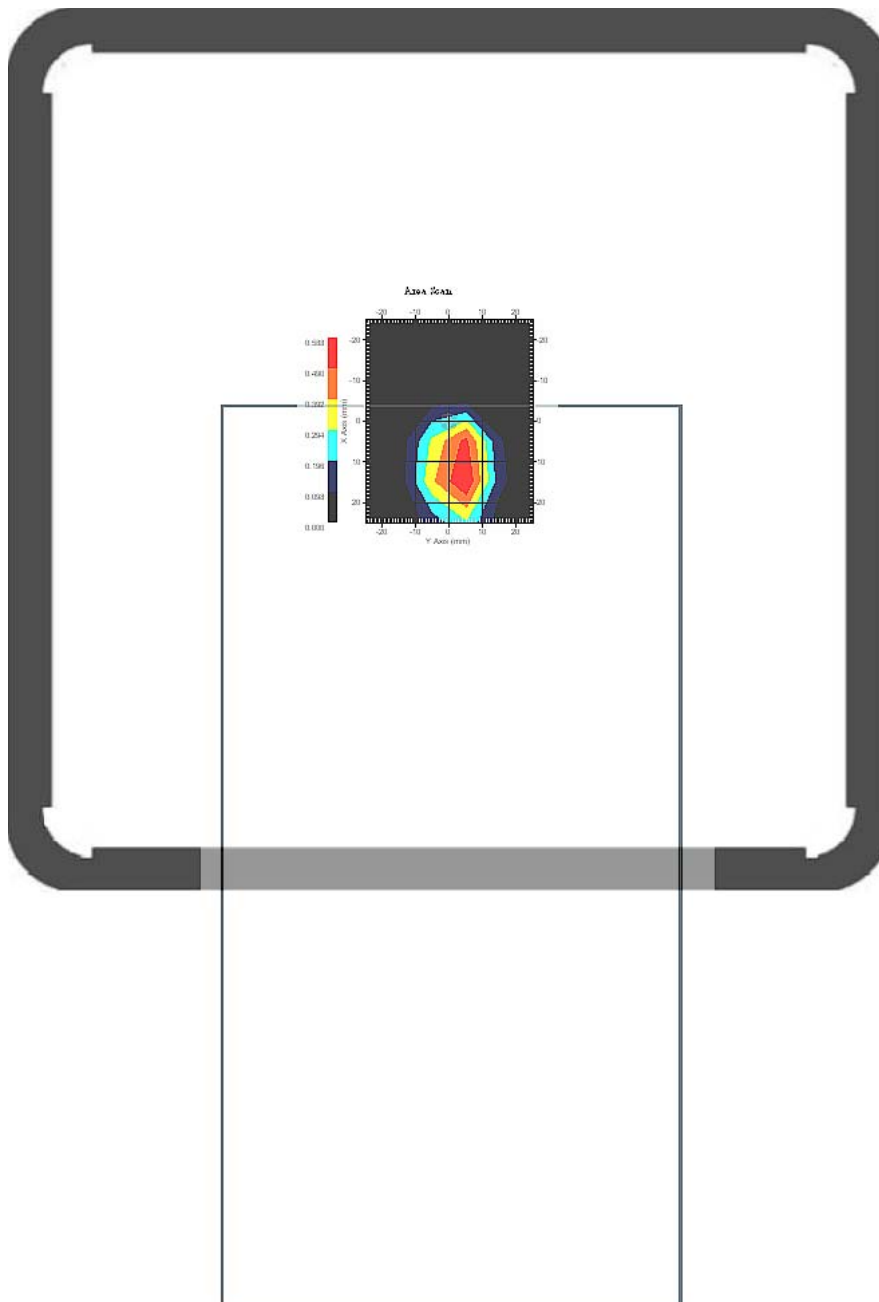


SAR-Z Axis  
at Hotspot x:15.01 y:4.87

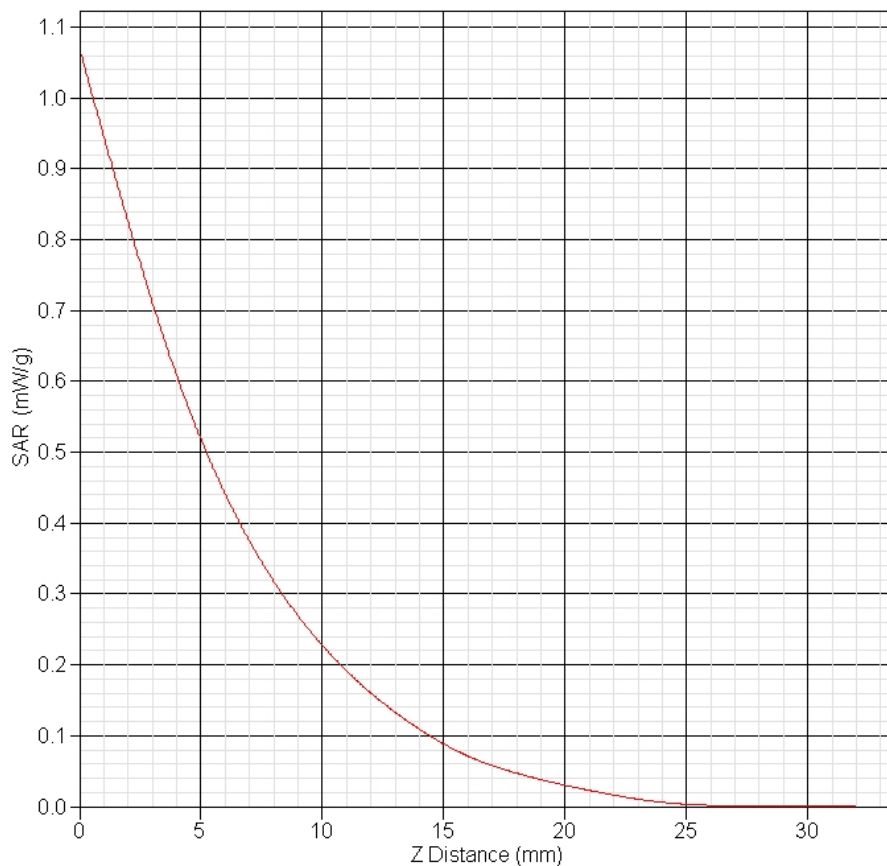


<b>SAR 10g (W/Kg)</b>	<b>0.186</b>
<b>SAR 1g (W/Kg)</b>	<b>0.478</b>

## Backside Towards phantom with 2412MHz

<b>Frequency (MHz)</b>	<b>2412</b>
<b>Relative permittivity (real part)</b>	<b>52.014</b>
<b>Conductivity (S/m)</b>	<b>1.9234</b>
<b>Variation (%)</b>	<b>3.11</b>
<b>Duty Cycle Factor</b>	<b>1</b>
<b>Crest Factor</b>	<b>1</b>
<b>Conversion Factor</b>	<b>3.6</b>
<b>Probe Sensitivity</b>	<b>1.20 1.20 1.20 <math>\mu\text{V}/(\text{V/m})^2</math></b>
<b>Data</b>	<b>2011-3-15</b>

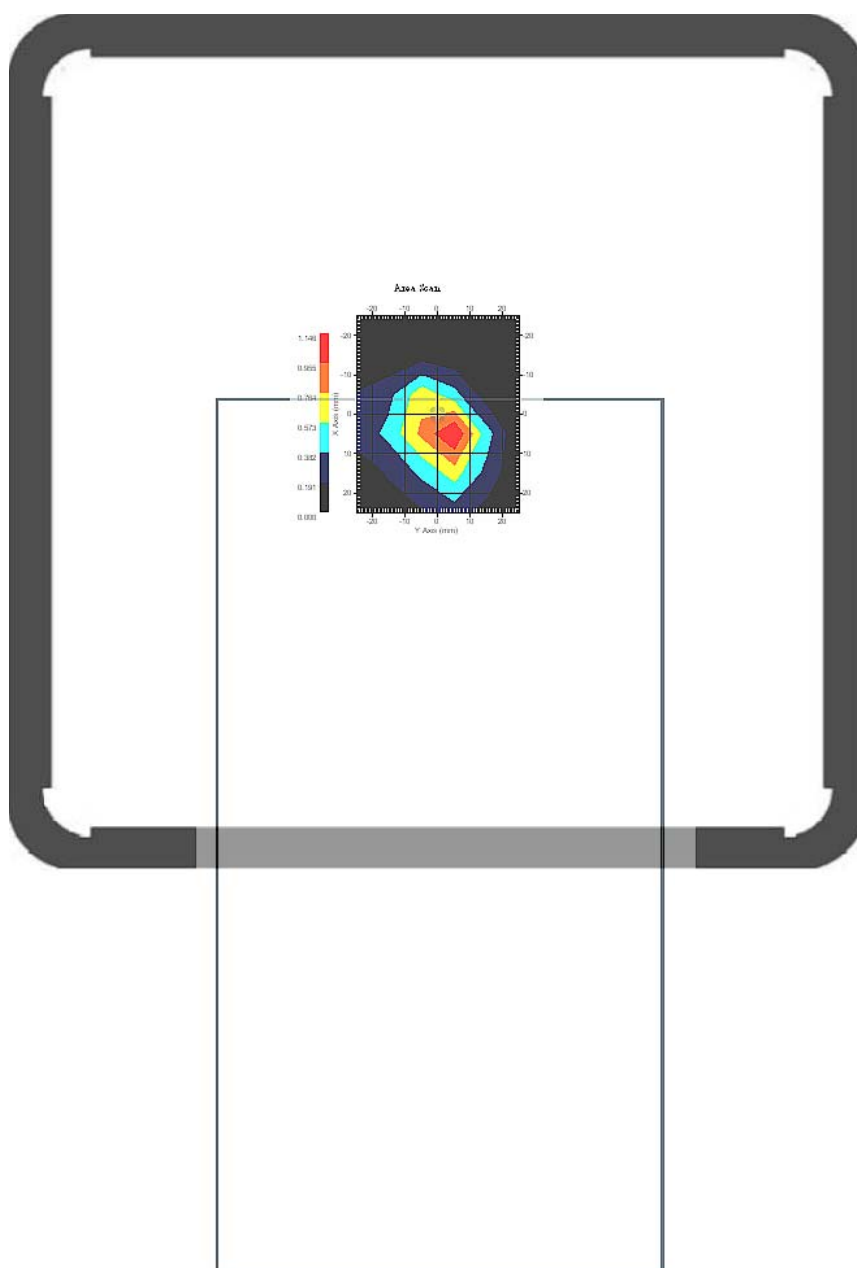


SAR-Z Axis  
at Hotspot x:5.01 y:4.90

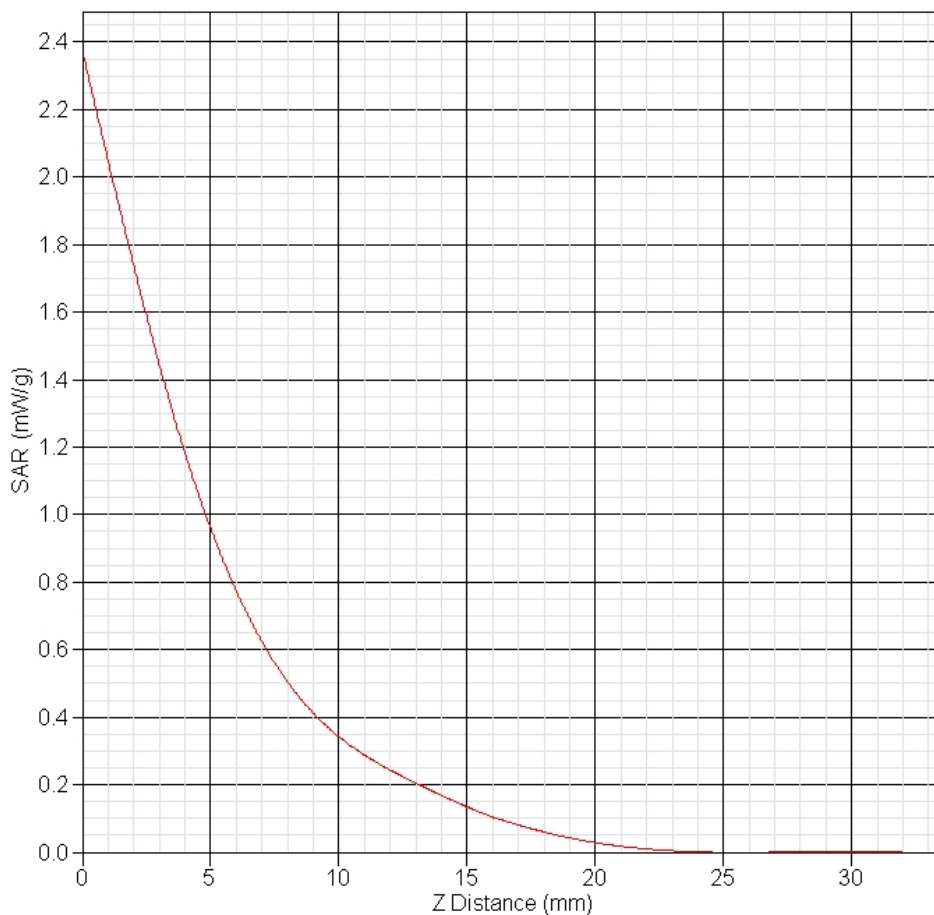


<b>SAR 10g (W/Kg)</b>	<b>0.389</b>
<b>SAR 1g (W/Kg)</b>	<b>1.063</b>

## Backside Towards phantom with 2437MHz

<b>Frequency (MHz)</b>	<b>2437</b>
<b>Relative permittivity (real part)</b>	<b>52.167</b>
<b>Conductivity (S/m)</b>	<b>1.9301</b>
<b>Variation (%)</b>	<b>-2.07</b>
<b>Duty Cycle Factor</b>	<b>1</b>
<b>Crest Factor</b>	<b>1</b>
<b>Conversion Factor</b>	<b>3.6</b>
<b>Probe Sensitivity</b>	<b>1.20 1.20 1.20 <math>\mu\text{V}/(\text{V/m})^2</math></b>
<b>Data</b>	<b>2011-3-15</b>

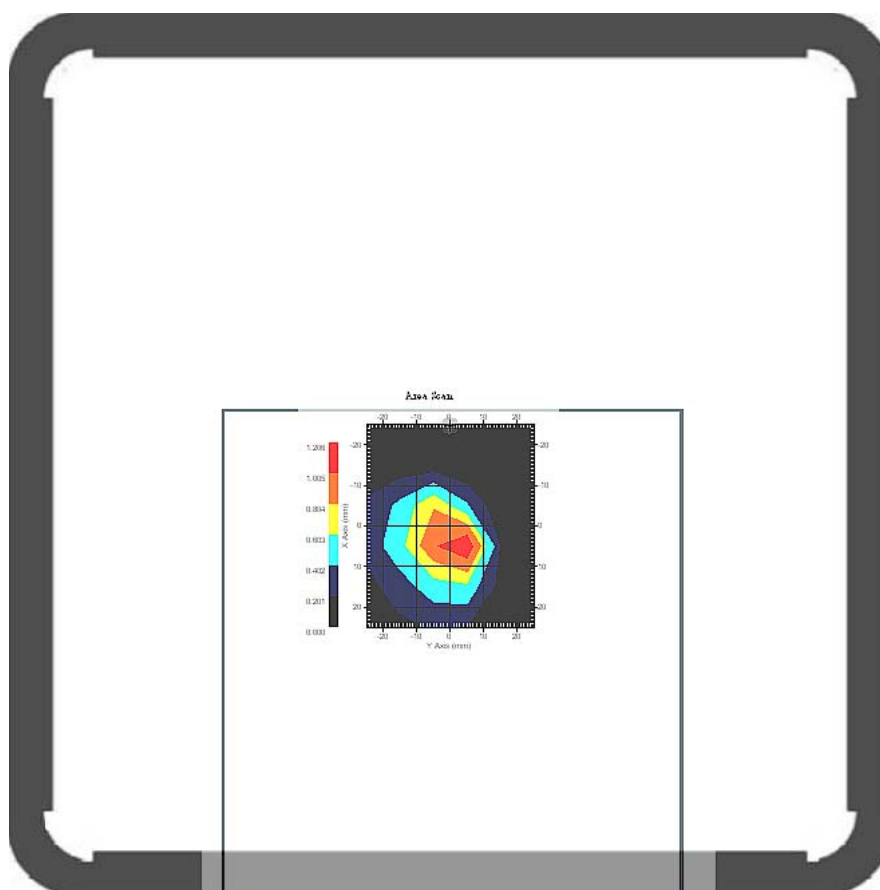


SAR-Z Axis  
at Hotspot x:4.99 y:4.92

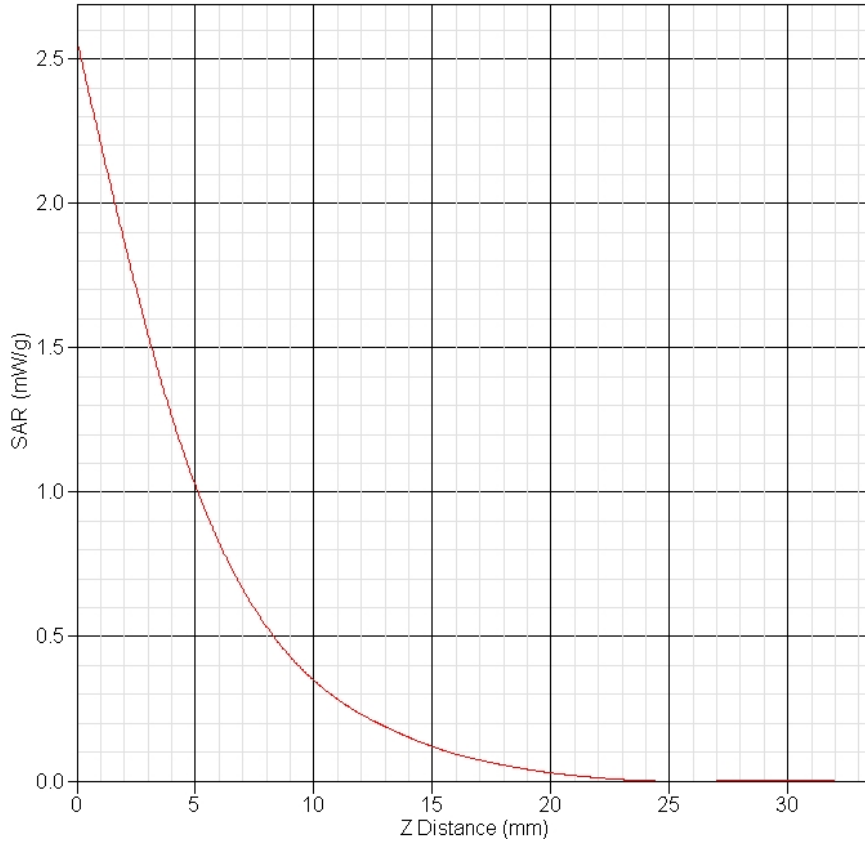

<b>SAR 10g (W/Kg)</b>	<b>0.387</b>
<b>SAR 1g (W/Kg)</b>	<b>1.066</b>


## Backside Towards phantom with 2462MHz

<b>Frequency (MHz)</b>	<b>2462</b>
<b>Relative permittivity (real part)</b>	<b>52.311</b>
<b>Conductivity (S/m)</b>	<b>1.9436</b>
<b>Variation (%)</b>	<b>-1.57</b>
<b>Duty Cycle Factor</b>	<b>1</b>
<b>Crest Factor</b>	<b>1</b>
<b>Conversion Factor</b>	<b>3.6</b>
<b>Probe Sensitivity</b>	<b>1.20 1.20 1.20 <math>\mu\text{V}/(\text{V}/\text{m})^2</math></b>
<b>Data</b>	<b>2011-3-15</b>

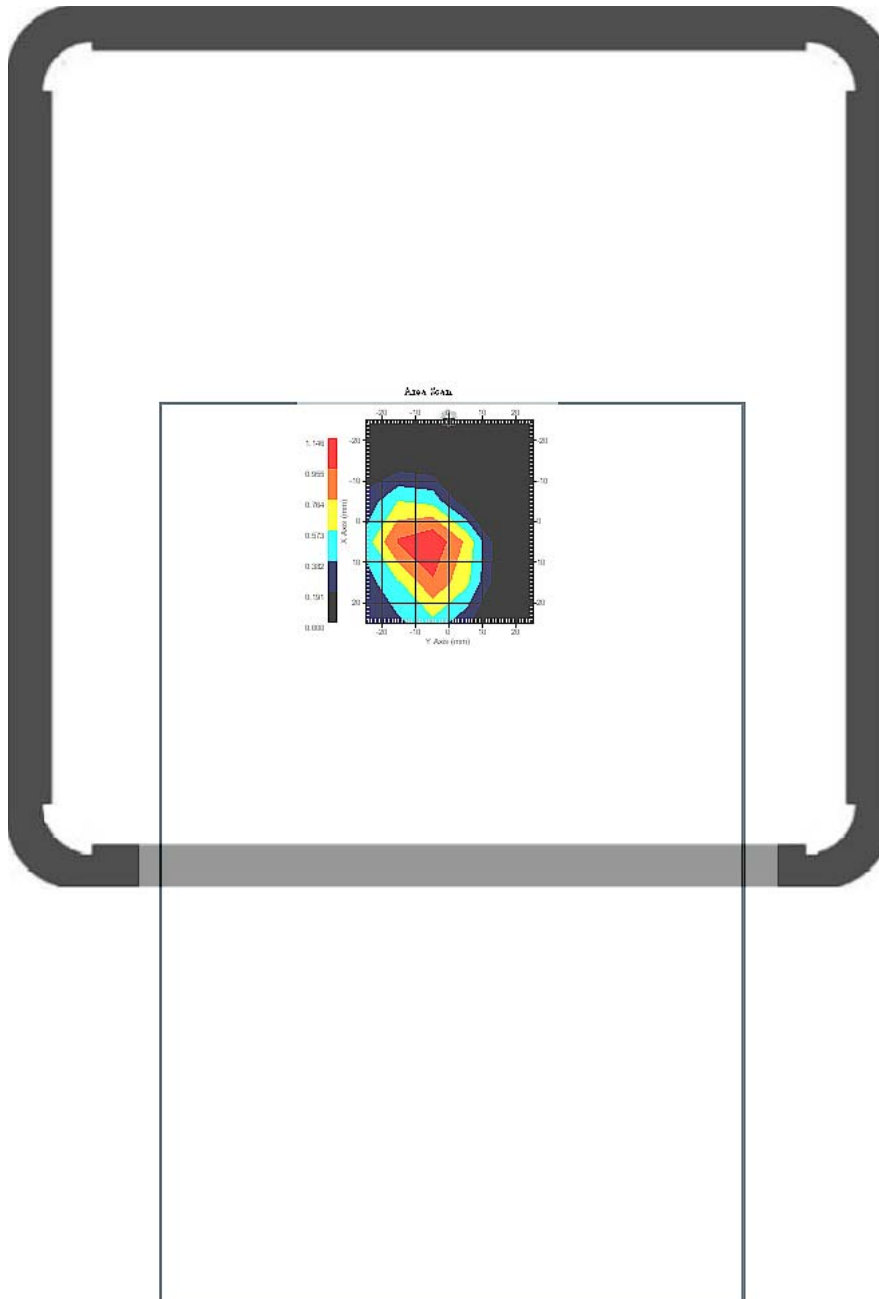




SAR-Z Axis  
at Hotspot x:5.00 y:4.90

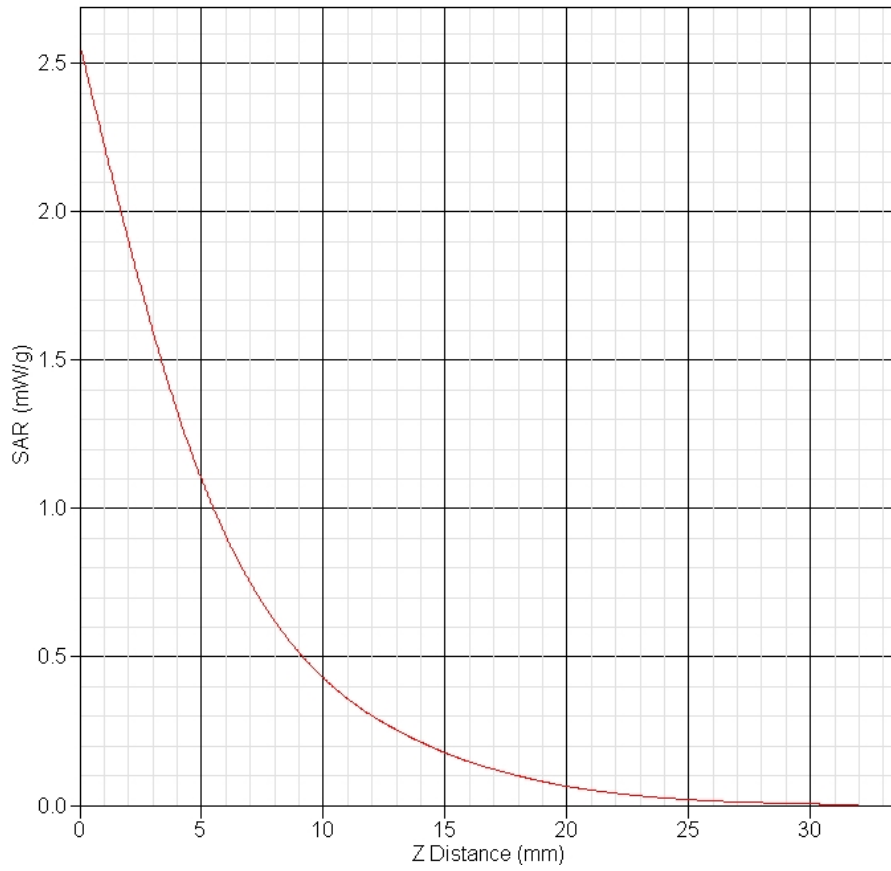


<b>SAR 10g (W/Kg)</b>	<b>0.451</b>
<b>SAR 1g (W/Kg)</b>	<b>1.070</b>

## System Performance Check Data(Body)

<b>Frequency (MHz)</b>	<b>2450</b>
<b>Relative permittivity (real part)</b>	<b>53.123</b>
<b>Conductivity (S/m)</b>	<b>1.902</b>
<b>Variation (%)</b>	<b>-1.11</b>
<b>Duty Cycle Factor</b>	<b>1</b>
<b>Crest Factor</b>	<b>1</b>
<b>Conversion Factor</b>	<b>3.6</b>
<b>Probe Sensitivity</b>	<b>1.20 1.20 1.20 <math>\mu\text{V}/(\text{V}/\text{m})^2</math></b>
<b>Data</b>	<b>2010-3-15</b>

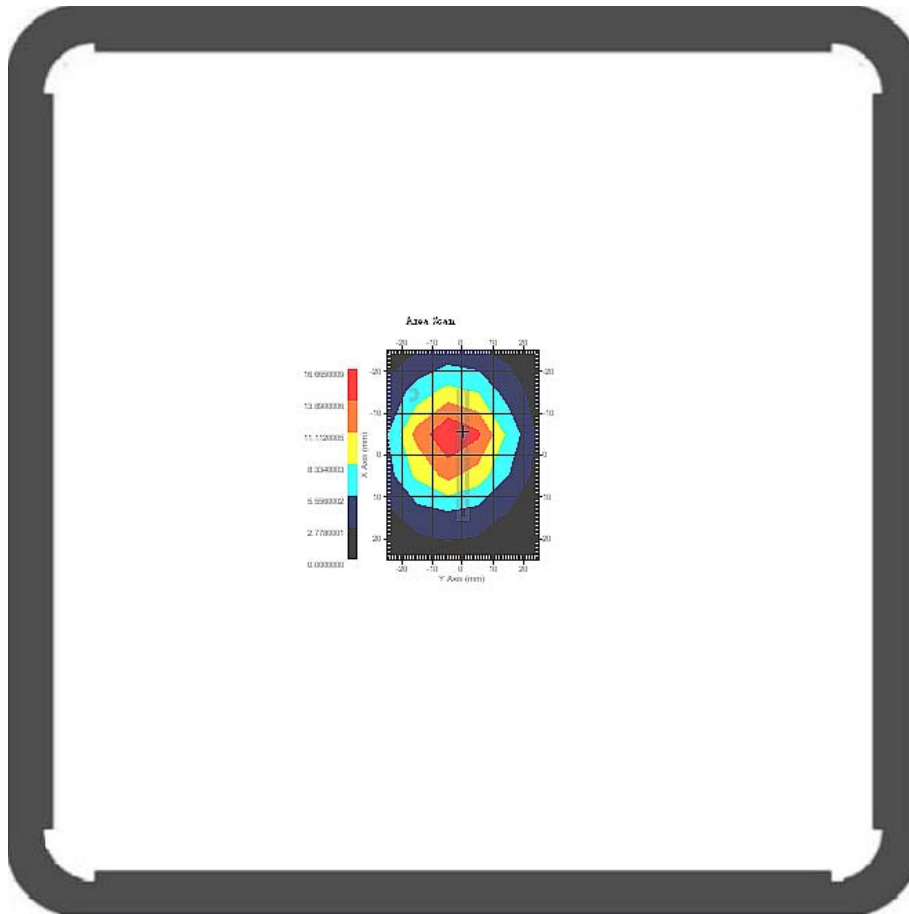

SAR-Z Axis  
at Hotspot x:-4.98 y:-5.10

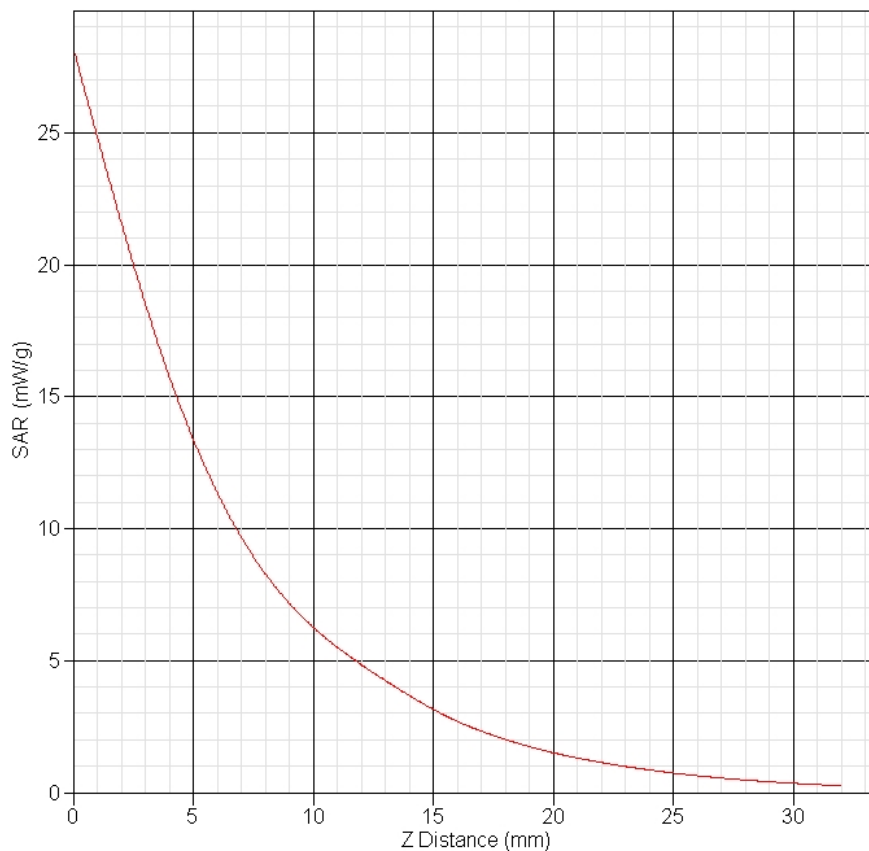

<b>SAR 10g (W/Kg)</b>	<b>6.266</b>
<b>SAR 1g (W/Kg)</b>	<b>13.894</b>

**\*\* END OF REPORT \*\***