



# FCC Part 15.247(Wireless LAN/ WLAN) TEST REPORT

*for*

## **ViewBook 730**

Model Name: VS14145  
Brand Name: ViewSonic  
Report No.: SH11030006W01  
FCC ID: GSS-VS14145  
IC.: 4280A-VS14145

*prepared for*

## **ViewSonic Corporation**

381 Brea Canyon Road Walnut, CA 91789, USA

*prepared by*

## **Shenzhen Electronic Product Quality Testing Center**

### **Morlab Laboratory**

3/F, Electronic Testing Building, Shahe Road, Xili,  
Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 86130398

Fax: +86 755 86130218



**Bluetooth®**



**Authorized Test Lab**

**LAB CODE 20081223-00**

*NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.*

## Table of Contents

<b>1.</b>	<b>TEST REPORT CERTIFICATION .....</b>	<b>4</b>
<b>2.</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
<b>2.1.</b>	<b>DESCRIPTION OF EUT.....</b>	<b>5</b>
<b>2.2.</b>	<b>Objective.....</b>	<b>6</b>
<b>2.3.</b>	<b>Test Standards and Results .....</b>	<b>6</b>
<b>2.4.</b>	<b>List of Equipments Used .....</b>	<b>6</b>
<b>2.5.</b>	<b>Test Facility .....</b>	<b>7</b>
<b>2.6.</b>	<b>Environmental conditions .....</b>	<b>7</b>
<b>2.7.</b>	<b>Setup of Equipment Under Test .....</b>	<b>7</b>
2.7.1.	DESCRIPTION OF SUPPORT UNITS .....	7
2.7.2.	EUT Operating Condition .....	7
<b>3.</b>	<b>CONDUCTED EMISSION TEST .....</b>	<b>8</b>
<b>3.1.</b>	<b>Limits of Conducted Emission.....</b>	<b>8</b>
<b>3.2.</b>	<b>Test Procedure.....</b>	<b>8</b>
<b>3.3.</b>	<b>Test Setup .....</b>	<b>9</b>
<b>3.4.</b>	<b>EUT Setup and Operating Conditions.....</b>	<b>9</b>
<b>3.5.</b>	<b>Test Results.....</b>	<b>10</b>
<b>4.</b>	<b>RADIATED EMISSION TEST .....</b>	<b>12</b>
<b>4.1.</b>	<b>Limits of Radiated Emission.....</b>	<b>12</b>
<b>4.2.</b>	<b>Test Procedure.....</b>	<b>12</b>
<b>4.3.</b>	<b>Test Setup .....</b>	<b>13</b>
<b>4.4.</b>	<b>EUT Setup and Operating Conditions.....</b>	<b>13</b>
<b>4.5.</b>	<b>Test Results.....</b>	<b>14</b>
<b>5.</b>	<b>6DB BANDWIDTH MEASUREMENT .....</b>	<b>15</b>
<b>5.1.</b>	<b>Definition .....</b>	<b>15</b>
<b>5.2.</b>	<b>Test Procedure.....</b>	<b>15</b>
<b>5.3.</b>	<b>Test Setup .....</b>	<b>15</b>
<b>5.4.</b>	<b>Setup and Operating Conditions.....</b>	<b>15</b>
<b>5.5.</b>	<b>Test Results.....</b>	<b>16</b>
<b>6.</b>	<b>MAXIMUM PEAK OUTPUT POWER.....</b>	<b>20</b>



<b>6.1. Requirement of the standard</b> .....	<b>20</b>
<b>6.2. Test Procedure</b> .....	<b>20</b>
<b>6.3. Test Setup</b> .....	<b>20</b>
<b>6.4. EUT Setup and Operating Conditions</b> .....	<b>20</b>
<b>6.5. Test Results</b> .....	<b>20</b>
<b>7. BAND EDGE</b> .....	<b>24</b>
<b>7.1. Requirement of the standard</b> .....	<b>24</b>
<b>7.2. Test Procedure</b> .....	<b>24</b>
<b>7.3. Test Setup</b> .....	<b>24</b>
<b>7.4. EUT Setup and Operating Conditions</b> .....	<b>25</b>
<b>7.5. Test Results</b> .....	<b>26</b>
<b>8. CONDUCTED SPURIOUS EMISSION</b> .....	<b>29</b>
<b>8.1. Requirement of the standard</b> .....	<b>29</b>
<b>8.2. Test Procedure</b> .....	<b>29</b>
<b>8.3. Test Setup</b> .....	<b>29</b>
<b>8.4. EUT Setup and Operating Conditions</b> .....	<b>29</b>
<b>8.5. Test Results</b> .....	<b>29</b>
<b>9. POWER SPECTRUM DENSITY MEASUREMENT</b> .....	<b>33</b>
<b>9.1. Limits of Power Spectrum Density</b> .....	<b>33</b>
<b>9.2. Test Procedure</b> .....	<b>33</b>
<b>9.3. Test Setup</b> .....	<b>33</b>
<b>9.4. EUT Setup and Operating Conditions</b> .....	<b>33</b>
<b>9.5. Test Results</b> .....	<b>33</b>
<b>10. RECEIVER SPURIOUS EMISSIONS</b> .....	<b>37</b>
<b>10.1. Requirement of the standard</b> .....	<b>37</b>
<b>10.2. Test Procedure</b> .....	<b>37</b>
<b>10.3. Test Setup</b> .....	<b>38</b>
<b>10.4. Test Results</b> .....	<b>39</b>

## 1. Test Report Certification

**Equipment under Test:** ViewBook 730  
**Brand Name:** ViewSonic  
**Model Name:** VS14145  
**FCC ID:** GSS-VS14145  
**IC:** 4280A-VS14145  
**Applicant:** ViewSonic Corporation  
381 Brea Canyon Road Walnut, CA 91789, USA  
**Manufacturer:** Technology (China)CO.,LTD.  
4-12Building, No1388, Zhangdong Road, Pudong New District, Shanghai, P.R. China  
**Test Standards:** 47 CFR Part 15, Subpart C,  
RSS 210; RSS-GEN  
**Test Date(s):** Mar 11, 2011 – Mar 11, 2011  
**Test Result:** PASS

### \* We Hereby Certify That:

The equipment under test was tested by Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related European Commission's standards.

The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by: Shi Feng Dated: 2011.3.21  
Shi Feng

Reviewed by: Zhang Jun Dated: 2011.3.21  
Zhang Jun

Approved by: Wei Bei Dated: 2011.3.21  
Wei Bei



## 2. General Information

### 2.1. DESCRIPTION OF EUT

<b>Product</b>	ViewBook 730
<b>Brand Name</b>	ViewSonic
<b>Model Number</b>	VS14145
<b>Wireless LAN/ WLAN module Model name</b>	AW-GH381
<b>Wireless LAN/ WLAN module Brand name</b>	AzureWave
<b>Frequency Range</b>	2412 ~ 2462 MHz
<b>Transmit Power</b>	≤20dBm
<b>Modulation Technique</b>	DSSS /OFDM
<b>Number of Channels</b>	11 Channels
<b>Antenna Information</b>	Manufacturer: Murata Manufacturing Co., Ltd. Part No: LDA313G3313F-243 Gain: -0.3dBd
<b>Temperature Range</b>	0 ~ +45 °C

#### NOTE:

1. The EUT is a BLUETOOTH、Wireless LAN/ WLAN portable device. It provides Wi-Fi (IEEE 802.11b and IEEE 802.11g) wireless interface, operating at 2.4GHz ISM band. The Wi-Fi Modulations are Direct Sequence Spread Spectrum (DSSS) for IEEE 802.11b and Orthogonal Frequency Division Multiplexing (OFDM) for IEEE 802.11g. The Channels and transmitter center frequencies are:

- Channel 1: 2412 MHz (lowest channel)
- Channel 2: 2417 MHz
- Channel 3: 2422 MHz
- Channel 4: 2427 MHz
- Channel 5: 2432 MHz
- Channel 6: 2437 MHz (middle channel)
- Channel 7: 2442 MHz
- Channel 8: 2447 MHz
- Channel 9: 2452 MHz
- Channel 10: 2457 MHz
- Channel 11: 2462 MHz (highest channel)

2. Please refer to Appendix I for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual.

## 2.2. Objective

Perform EMC test according to FCC Part 15 Subpart C (Wi-Fi, 2.4GHz ISM band radiator) and RSS 210, RSS-GEN.

## 2.3. Test Standards and Results

The EUT has been tested according to 47 CFR Part 15, Radio Frequency Devices and RSS 210, RSS-GEN.

Test items and the results are as bellow:

No	FCC Rules	IC Rules	Test Type	Result
1	§15.207	Gen 7.2.2	Conducted Emission	PASS
2	§15.209 §15.247(c)	A8.5	Radiated Emission	PASS
	/	Gen 7.2.3		
3	§15.247(a)	A8.2(a)	6dB Bandwidth	PASS
4	§15.247(b)	A8.4	Maximum Peak Output Power	PASS
5	§15.247(c)	A8.5	Band Edge	PASS
6	§15.247(c)	A8.5	Conducted Spurious Emission	PASS
7	§15.247(d)	A8.5	Power Spectrum Density	PASS

## 2.4. List of Equipments Used

Description	Manufacturer	Model No.	Cal. Date	Serial No.
Test Receiver	Rohde & Schwarz	ESIB26	2010.9	A0304218
Test Receiver	Schwarzbeck	FCKL1528	2010.9	A0304230
Spectrum Analyzer	Rohde & Schwarz	FSP13	2010.9	M-030176
Spectrum Analyzer	Rohde & Schwarz	FSP30	2010.9	101020
Spectrum Analyzer	Agilent	E4440A	2010.9	MY46187763
LISN	Schwarzbeck	NSLK8127	2010.9	A0304233
Loop Antenna	Rohde & Schwarz	HFH2-Z2	2010.9	A0304220
Ultra Broadband Ant.	Rohde & Schwarz	HL562	2010.9	A0304224

Horn Ant.	Rohde & Schwarz	HF906	2010.9	100150
Shield Room	Nanbo Tech	Site 1	2010.9	A0304188
Anechoic Chamber	Albatross	EMC12.8×6.8× 6.4(m)	2010.9	A0304210

## 2.5. Test Facility

Shenzhen Electronic Product Quality Testing Center Morlab Laboratory is a testing organization accredited by China National Accreditation Board for Laboratories (CNAL) according to ISO/IEC 17025. The accreditation certificate number is L1659.

All measurement facilities used to collect the measurement data are located at Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen 518055 CHINA. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

## 2.6. Environmental conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature ( °C):	20 - 25
Relative Humidity (%):	40 - 60
Atmospheric Pressure (kPa):	96

## 2.7. Setup of Equipment Under Test

### 2.7.1. DESCRIPTION OF SUPPORT UNITS

NO	Description	Manufacturer	Model No.
1	Note book PC	DELL	Latitude D610
2	Note book PC	HP	nx6130
3	Wi-Fi wireless router	D-LINK	DI-624+A

### 2.7.2. EUT Operating Condition

1. Use the two Note book PC to Setup the communication system for test
2. Wireless Router to provide IP to the EUT.
3. Notebook PC (1) ping 192.168.1.212 to EUT.
4. Notebook PC (2) ping 192.168.0.151 to EUT.
6. All of the function are under run.
7. Start test.

### 3. Conducted Emission Test

#### 3.1. Limits of Conducted Emission

According to FCC §15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$  H/50 ohms line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

**NOTE:**


1. The lower limit shall apply at the band edges.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

#### 3.2. Test Procedure

- a. The EUT was placed on a 0.8m high insulating table and kept 0.4 meters from the conducting wall of shielded room.
- b. The EUT was connected to the power mains through a line impedance stabilization network (LISN). The LISN provide 50 $\Omega$ /50 $\mu$ H of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150 kHz to 30 MHz was searched using CISPR Quasi-Peak and Average detector.



### 3.3. Test Setup

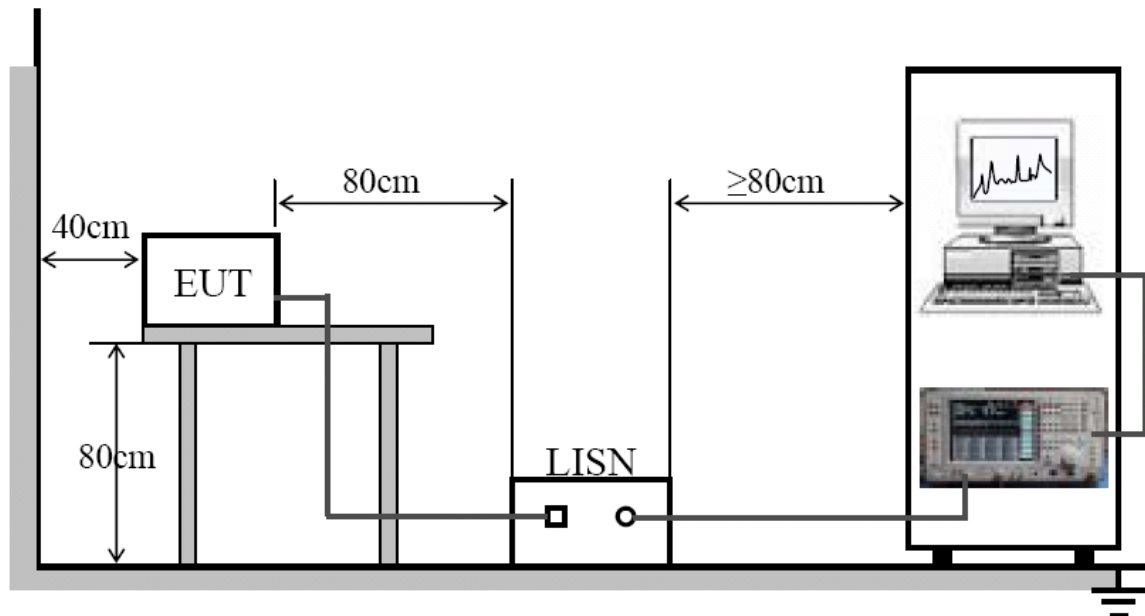

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

### 3.4. EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery + Charger.

During the measurement, the EUT was charging empty battery. The charger was powered by 120V 60Hz AC mains supply.

The Wireless LAN/ WLAN function of the MS was activated. The EUT accessed to the internet through a Wi-Fi wireless router (D-LINK, DI-624+A), and kept transceiving data with a network termination.


### 3.5. Test Results

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Band width (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.150000	59.6	1000.000	9.000	N	9.8	6.4	66.0	PASS
0.172388	55.4	1000.000	9.000	N	9.7	9.4	64.8	PASS
0.191044	53.1	1000.000	9.000	N	9.6	10.8	63.9	PASS
0.205969	52.1	1000.000	9.000	N	9.6	11.1	63.2	PASS
0.224625	51.9	1000.000	9.000	N	9.6	10.6	62.5	PASS
0.265669	49.4	1000.000	9.000	N	9.6	11.6	61.0	PASS
0.157462	60.5	1000.000	9.000	L1	9.5	5.1	65.6	PASS
0.198506	58.2	1000.000	9.000	L1	9.6	5.3	63.5	PASS
0.273131	52.9	1000.000	9.000	L1	9.7	7.9	60.8	PASS
0.411188	54.1	1000.000	9.000	L1	9.7	3.4	57.5	PASS
0.452231	54.4	1000.000	9.000	L1	9.7	2.4	56.8	PASS
0.463425	54.2	1000.000	9.000	L1	9.7	2.4	56.6	PASS

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Band width (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.150000	33.8	1000.000	9.000	N	9.8	22.2	56.0	PASS
0.463425	29.9	1000.000	9.000	N	9.7	16.7	46.6	PASS
0.754462	26.4	1000.000	9.000	N	9.7	19.6	46.0	PASS
1.153706	26.2	1000.000	9.000	N	9.7	19.8	46.0	PASS
1.172362	25.8	1000.000	9.000	N	9.7	20.2	46.0	PASS
1.213406	25.3	1000.000	9.000	N	9.7	20.7	46.0	PASS
0.411188	37.7	1000.000	9.000	L1	9.7	9.8	47.5	PASS
0.448500	36.5	1000.000	9.000	L1	9.7	10.3	46.8	PASS
0.799238	38.1	1000.000	9.000	L1	9.7	7.9	46.0	PASS
1.153706	36.8	1000.000	9.000	L1	9.7	9.2	46.0	PASS
1.194750	36.2	1000.000	9.000	L1	9.7	9.8	46.0	PASS
1.500712	36.9	1000.000	9.000	L1	9.8	9.1	46.0	PASS


**Test Plot:**

EMI\_ENV216 Auto Test-L CISPR22

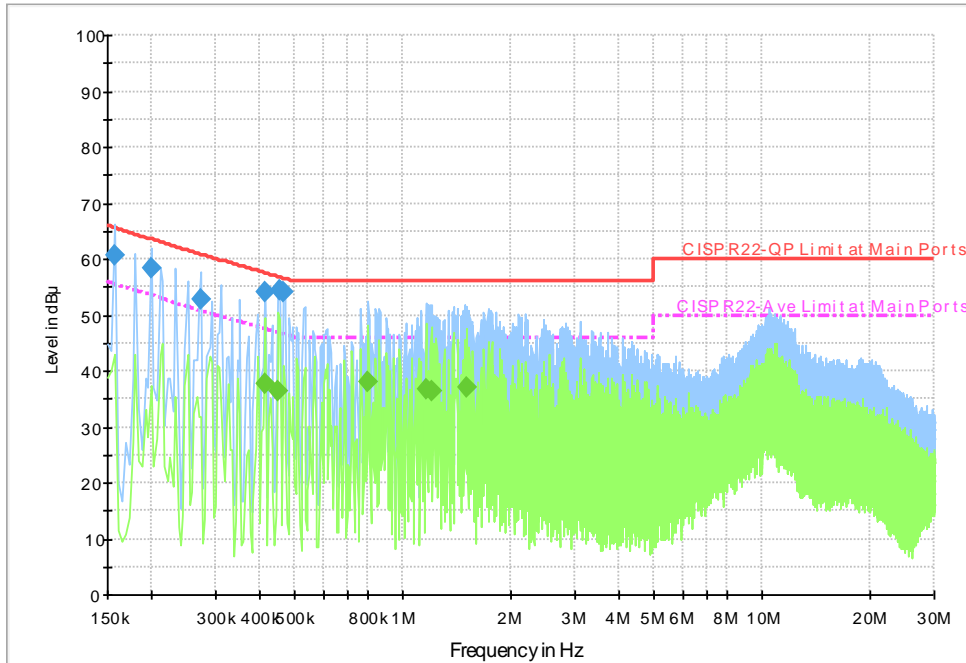

(Plot A: L Phase)

EMI\_ENV216 Auto Test-N CISPR22

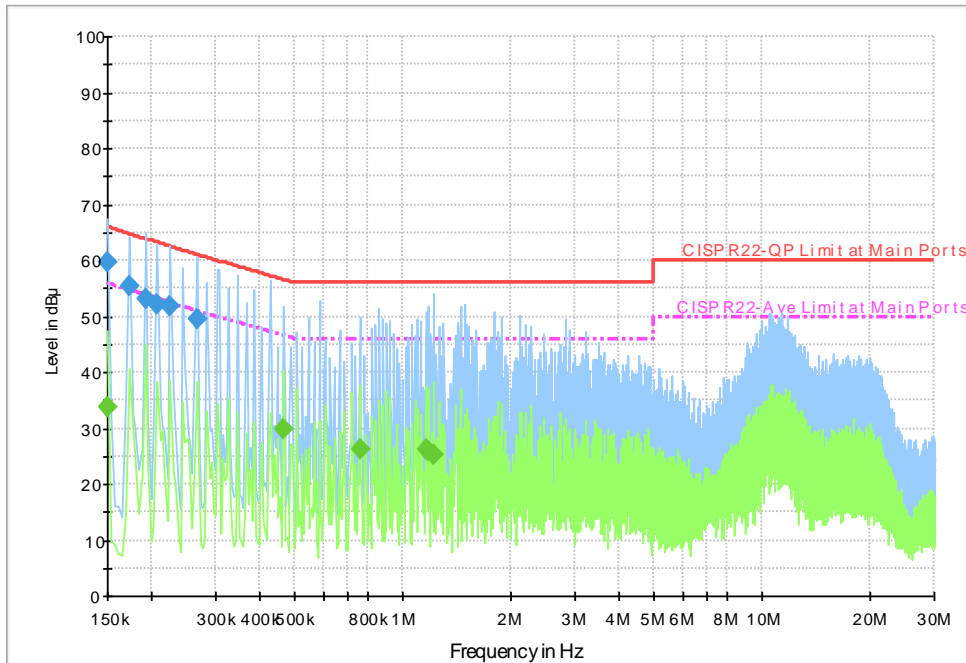

(Plot B: N Phase)

## 4. Radiated Emission Test

### 4.1. Limits of Radiated Emission

According to FCC §15.247(c), radiated emission outside the frequency band attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

According to FCC §15.209 (a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency(MHz)	Field Strength( $\mu$ V/m)	Measurement Distance(m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules,

### 4.2. Test Procedure

- The EUT was placed on the top of a ratable 0.8 meters above the ground at a semi-anechoic chamber.
- In the frequency range of 9 kHz to 30 MHz, magnetic field was measured with loop antenna. The antenna was positioned with its plane vertical at 1 m distance from the EUT. The center of the loop was 1 m above the ground. During the measurement the loop antenna rotated about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, ultra-broadband bi-log antenna (30 MHz to 1 GHz) and horn antenna (above 1GHz) were used. Antenna was 3 meters away from the EUT. Antenna height was varied from one meter to four meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. The test-receiver system was set to Peak Detector Function and Specified Bandwidth with Maximum Hold Mode.
- e. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emission that did not have 10 dB margins would be retested one by one using the quasi-peak method.


### 4.3. Test Setup

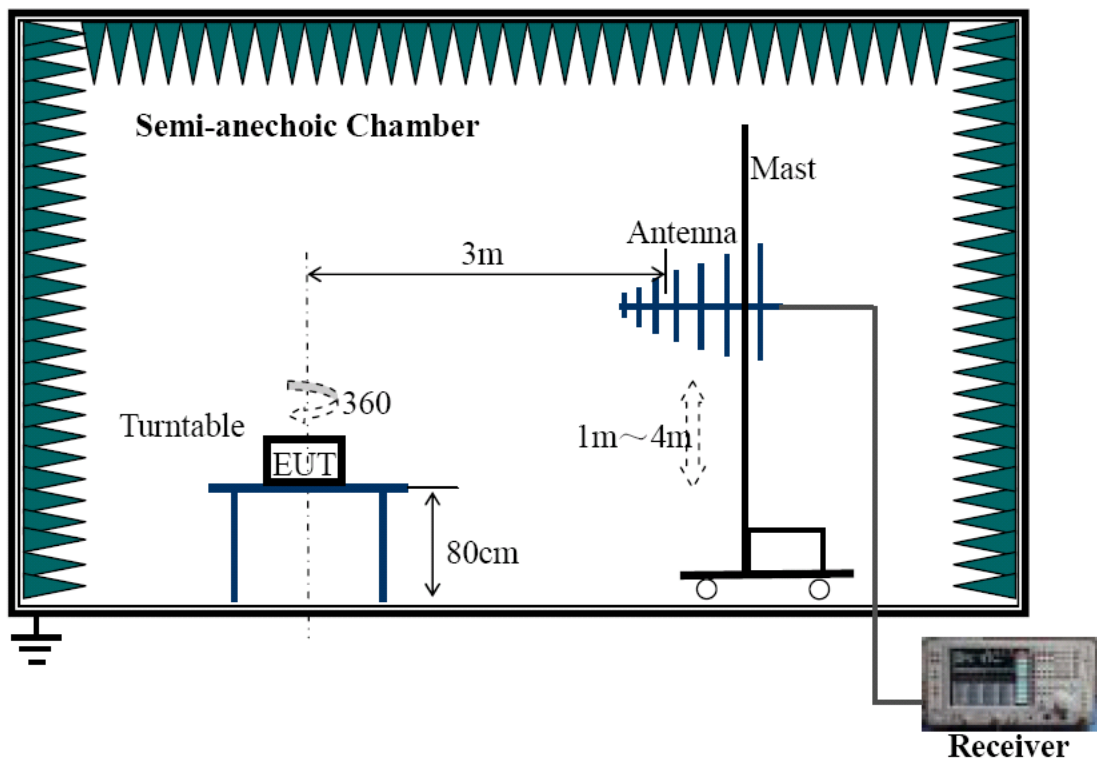

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

### 4.4. EUT Setup and Operating Conditions

The EUT was connected to and controlled by a control unit provided by the applicant.

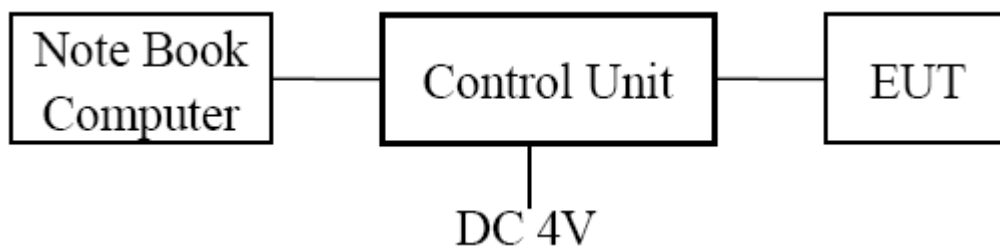

The EUT was set to continuous Wi-Fi transmitting at maximum power and maximum data rate, e.g., 11 Mbps for IEEE802.11b (DSSS) and 54 Mbps for IEEE802.11g (OFDM).

At each operating mode, lowest, middle and highest channels were measured respectively.

## 4.5. Test Results

### I. Fundamental Emissions

EUT Modulation	EUT Operating Freq. (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)	
			PK	AV
DSSS	2412.00	Vertical	110.45	100.79
		Horizontal	109.35	99.49
	2437.00	Vertical	112.48	101.47
		Horizontal	110.56	99.78
	2462.00	Vertical	113.65	102.58
		Horizontal	111.67	101.21
OFDM	2412.00	Vertical	106.11	96.24
		Horizontal	105.32	95.77
	2437.00	Vertical	108.87	98.87
		Horizontal	106.35	96.12
	2462.00	Vertical	109.78	100.82
		Horizontal	107.97	98.87

**NOTE:** Field strength of fundamental emissions were measured and record as a reference for calculation of the band edge emissions according to Marker-Delta Method DA 00-705.

### II. Spurious Emissions

EUT Modulation	EUT Operating Freq. (MHz)	Emissions Falling in Restrict Bands (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		QP Limits (dB $\mu$ V/m)	
				PK	AV	PK	AV
DSSS	2412.00	4824.00	Vertical	41.58	31.81	74	54
			Horizontal	39.42	29.78	74	54
	2437.00	4874.00	Vertical	43.56	32.02	74	54
			Horizontal	40.98	30.11	74	54
	2462.00	4924.00	Vertical	45.01	34.31	74	54
			Horizontal	42.48	32.73	74	54
OFDM	2412.00	4824.00	Vertical	41.07	31.01	74	54
			Horizontal	39.91	29.34	74	54
	2437.00	4874.00	Vertical	42.50	30.83	74	54
			Horizontal	40.78	30.47	74	54
	2462.00	4924.00	Vertical	42.01	30.28	74	54
			Horizontal	41.37	30.19	74	54

**NOTE:** The spurious Emissions from 9 kHz to 10th harmonic of the fundamental frequency were researched. Refer to following test plots.

## 5. 6dB Bandwidth Measurement


### 5.1. Definition

According to FCC §15.247 (a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.2. Test Procedure

- a. The EUT temporary antenna port was coupled to the spectrum analyzer. The loss of the cables the test system is calibrated to correct the reading.
- b. The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode.
- c. The resolution bandwidth of the spectrum analyzer was set to at least 1% of the EUT emission bandwidth. RBW=100 kHz, VBW=300 kHz.

### 5.3. Test Setup

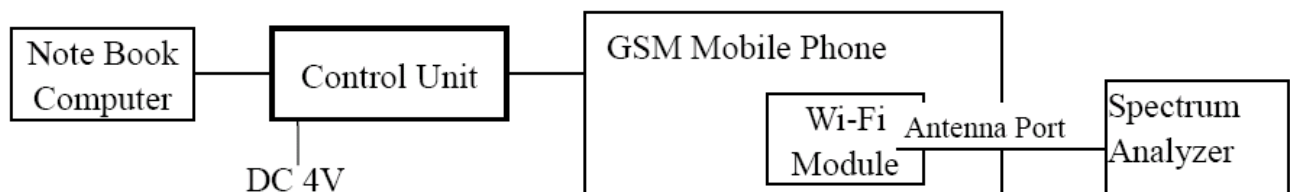

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

### 5.4. Setup and Operating Conditions

The EUT was connected to and controlled by a control unit provided by the applicant.

The EUT was set to continuous Wireless LAN/ WLAN transmitting at maximum power and maximum data rate, e.g., 11 Mbps for IEEE802.11b (DSSS) and 54 Mbps for IEEE802.11g (OFDM).


At each operating mode, lowest, middle and highest channels were measured respectively.

### 5.5. Test Results

EUT Modulation	EUT Operating Frequency ( MHz )	6dB Bandwidth (MHz)	FCC Requirement
DSSS	2412	9.116	>500 kHz
	2437	9.615	
	2462	9.696	
OFDM	2412	16.667	
	2437	16.667	
	2462	16.667	

#### 6dB Bandwidth Test Plots


##### 1. DSSS-2412MHz

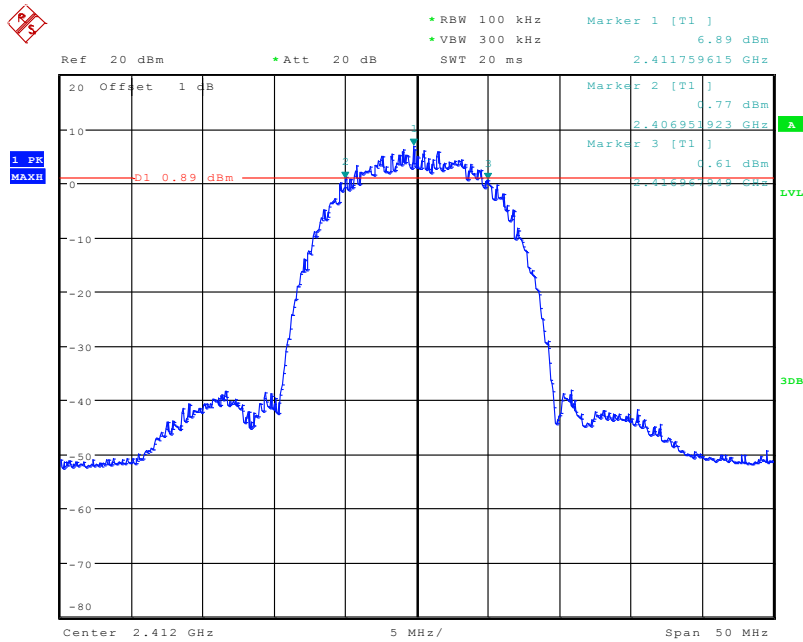

Date: 10.NOV.2010 10:34:29


##### 2. DSSS-2437MHz



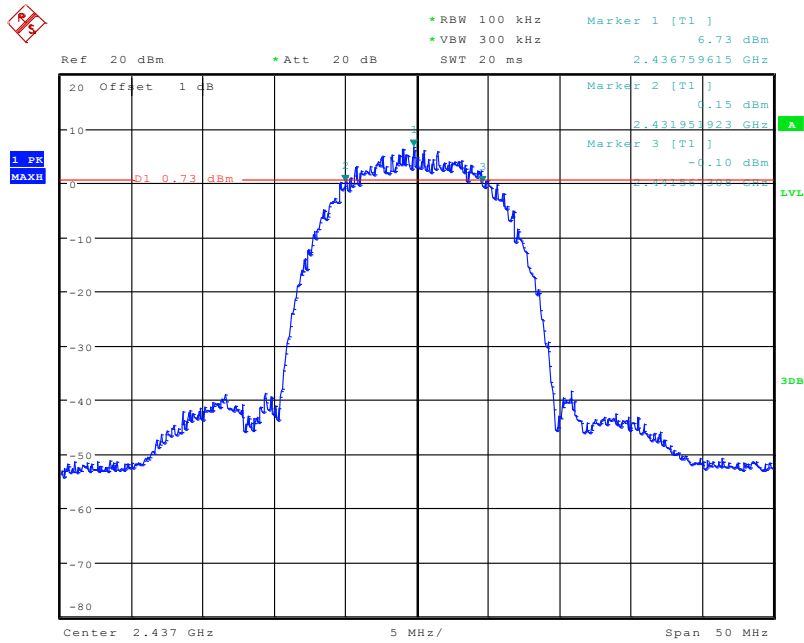


Date: 10.NOV.2010 10:36:07

### 3. DSSS-2462MHz

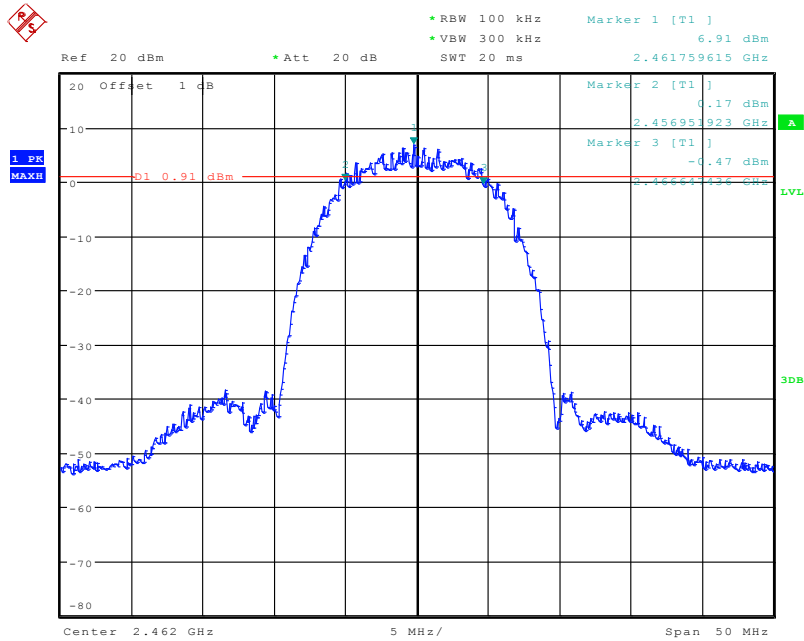


Date: 10.NOV.2010 10:37:21

### 4. OFDM-2412MHz

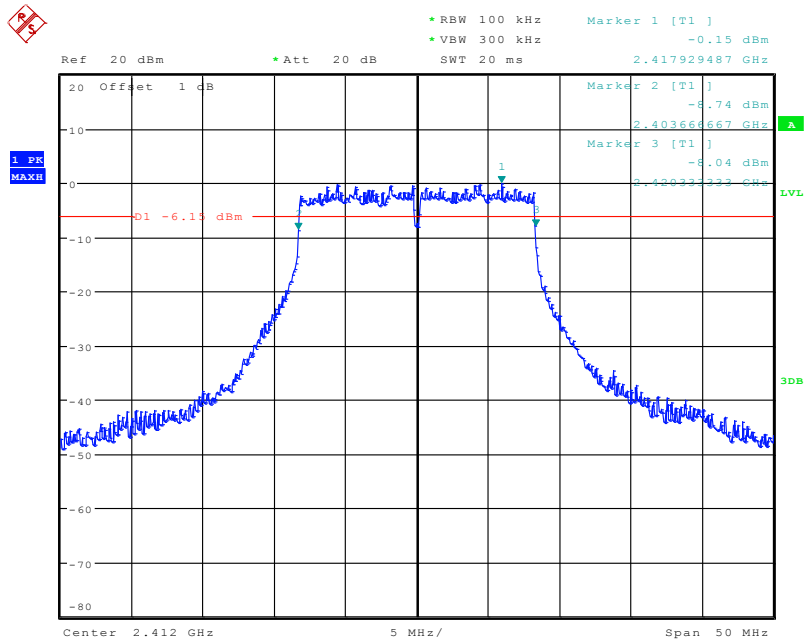


Date: 10.NOV.2010 10:44:10

5. OFDM-2437MHz

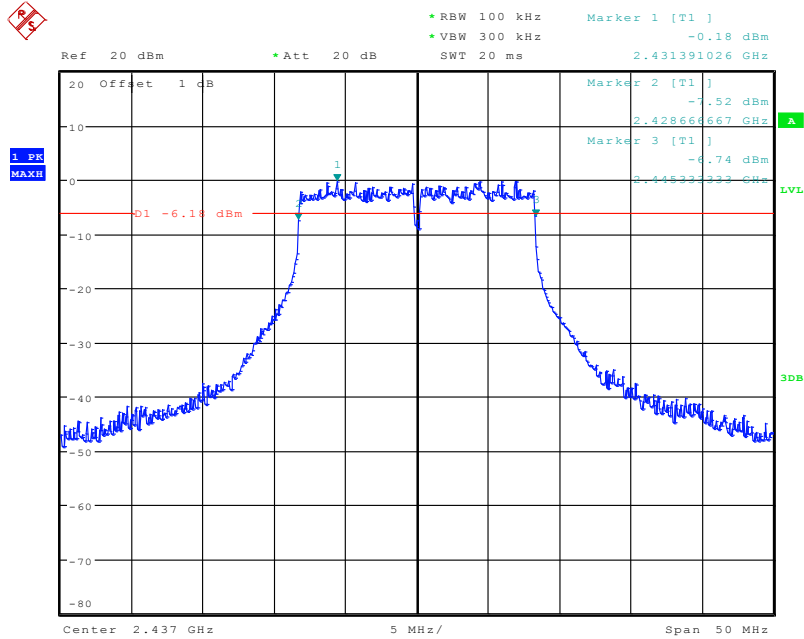

Date: 10.NOV.2010 10:42:35

6. OFDM-2462MHz

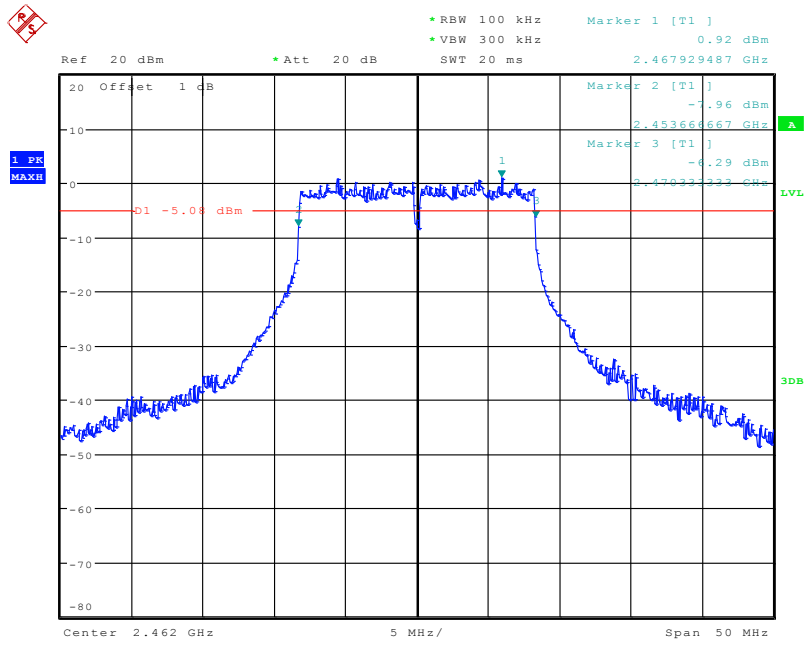

Date: 10.NOV.2010 10:38:50

## 6. Maximum Peak Output Power


### 6.1. Requirement of the standard

According to FCC §15.247 (b) (3), the maximum peak output power of systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands is 1 Watt.

### 6.2. Test Procedure

The EUT temporary antenna port was coupled to the spectrum analyzer. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables the test system is calibrated to correct the reading.

### 6.3. Test Setup

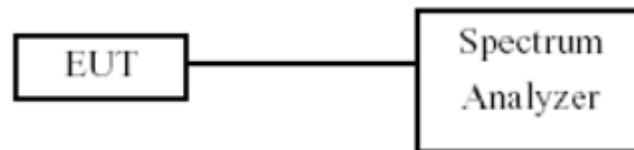

### 6.4. EUT Setup and Operating Conditions


Same as 5.4

### 6.5. Test Results

Modulation	Operating Frequency ( MHz )	Peak Output Power		Limit (W)
		(dBm)	(W)	
DSSS	2412	14.16	0.026	1
	2437	14.26	0.027	1
	2462	14.38	0.027	1
OFDM	2412	11.19	0.013	1
	2437	11.40	0.014	1
	2462	11.49	0.014	1


**Maximum Peak Output Power Test Plots**

### 1. DSSS-2412MHz

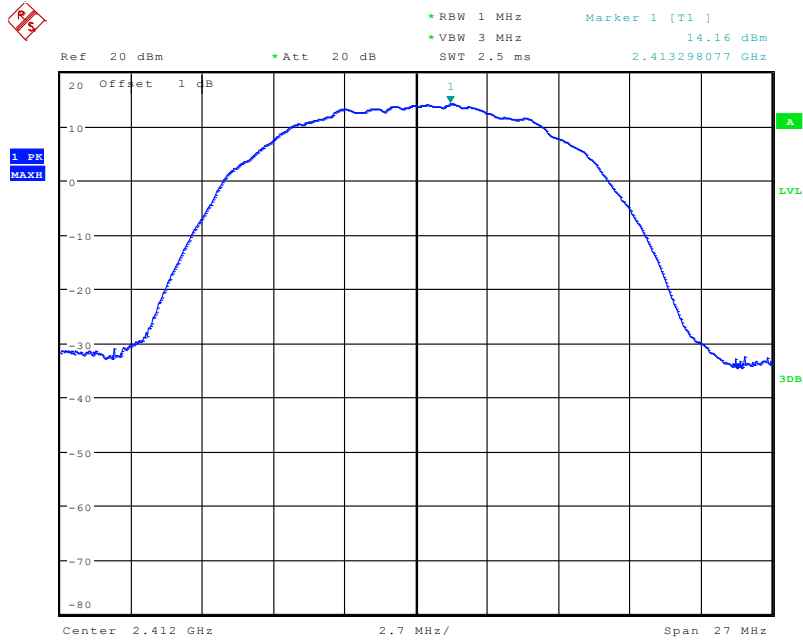


Date: 10.NOV.2010 10:46:53

### 2. DSSS-2437MHz

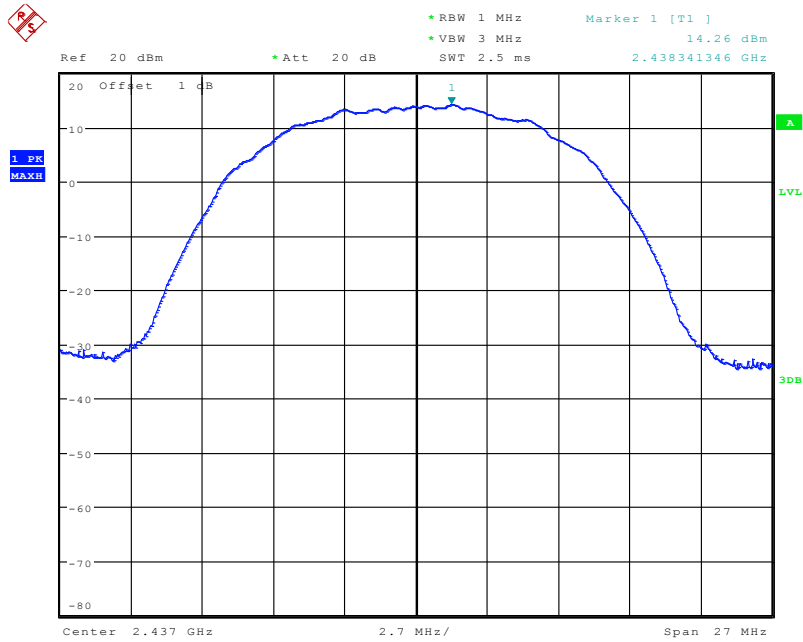


Date: 10.NOV.2010 10:47:42

### 3. DSSS-2462MHz

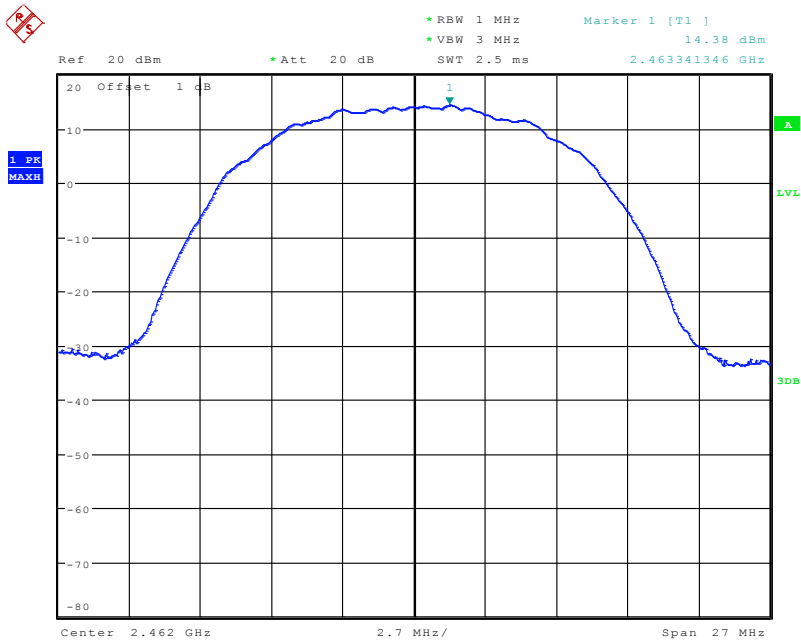


Date: 10.NOV.2010 10:49:52

#### 4. OFDM-2412MHz

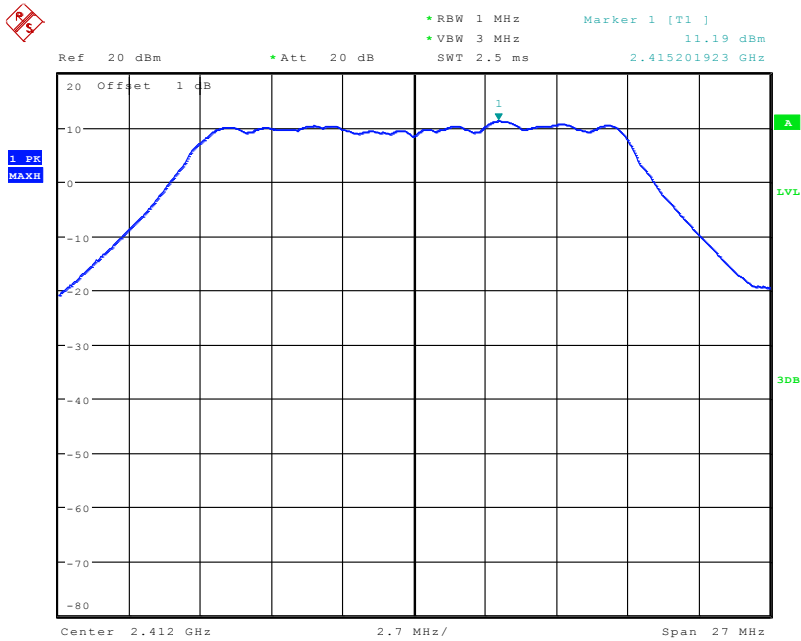


Date: 10.NOV.2010 10:45:57

#### 5. OFDM-2437MHz

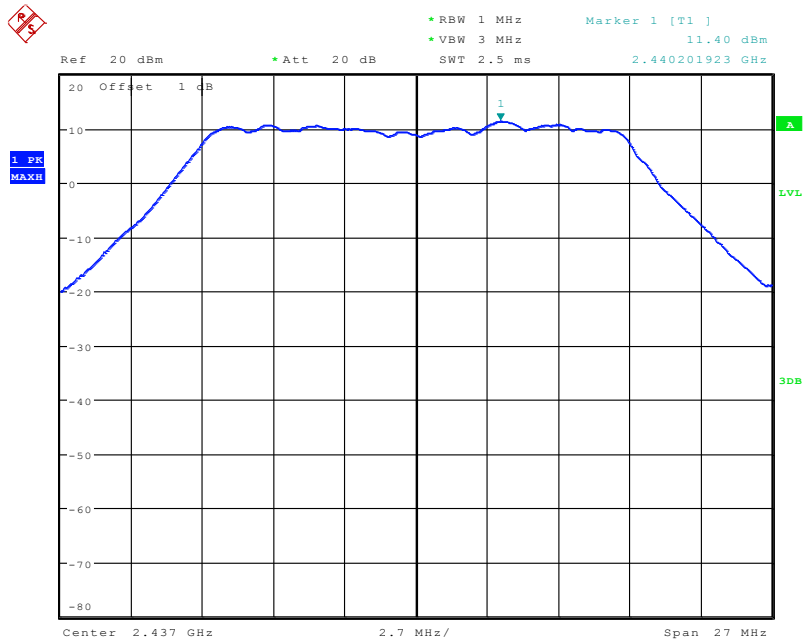

Date: 10.NOV.2010 10:48:22

### 6. OFDM-2462MHz

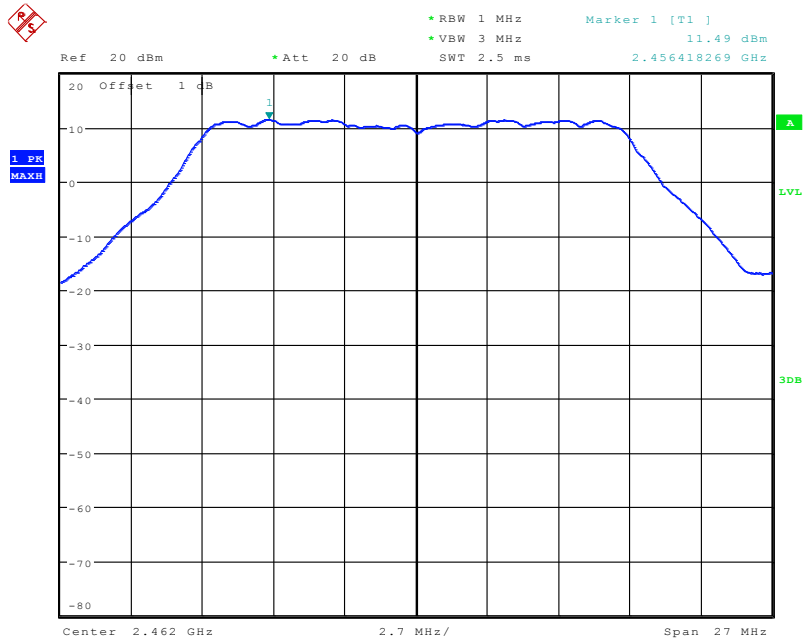

Date: 10.NOV.2010 10:49:04

## 7. Band Edge

### 7.1. Requirement of the standard

According to FCC §15.247(c), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 7.2. Test Procedure

a. For RF Conducted Measurement:

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Span greater than RBW.

b. For RF Radiated Measurement:

The EUT was setup according to ANSI C63.4, 2003 and tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, then the video bandwidth is set to 1MHz for peak measurements and 10Hz for average measurements.


The spectrum from 30MHz to 26GHz is investigated with the transmitter set to the lowest, middle and highest channels in the 2.4GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are Made with the antenna polarized in both the vertical and the horizontal positions.


### 7.3. Test Setup

#### Conducted Band Edge

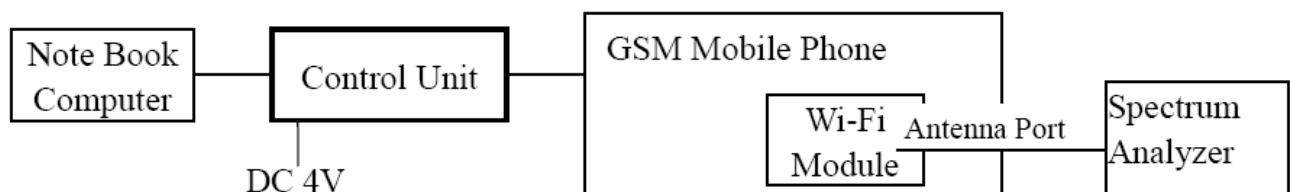



### Radiated Band Edge

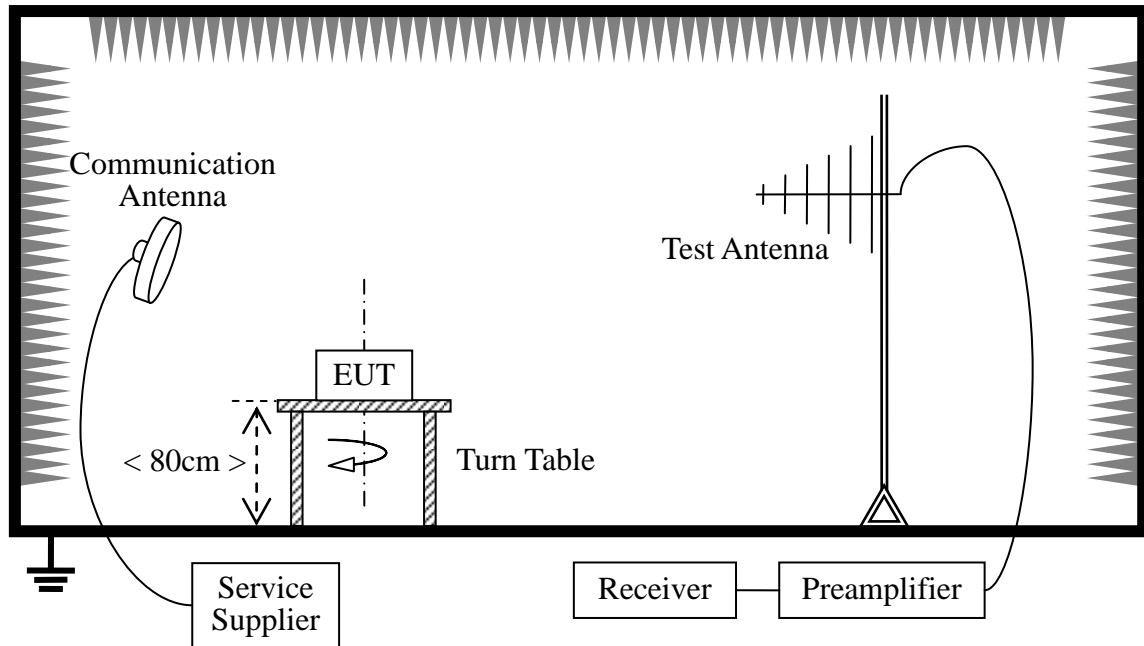


### 7.4. EUT Setup and Operating Conditions

Same as 5.4

## 7.5. Test Results


### Conducted Band Edge

#### 1. DSSS-2412MHz Maxpeak Detector

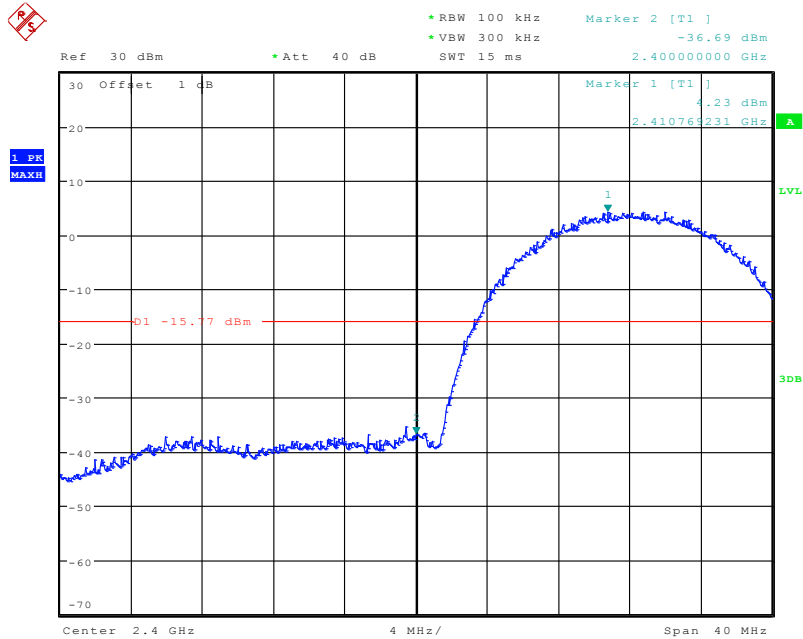


Date: 25.MAR.2011 14:45:24

#### 2. DSSS-2462MHz Maxpeak Detector

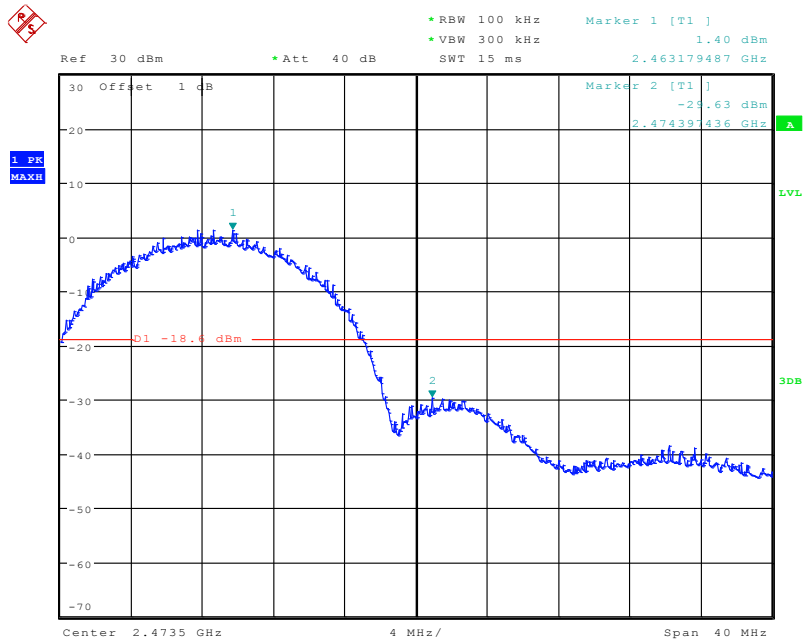


Date: 25.MAR.2011 15:01:07

### 3. OFDM -2412MHz Maxpeak Detector

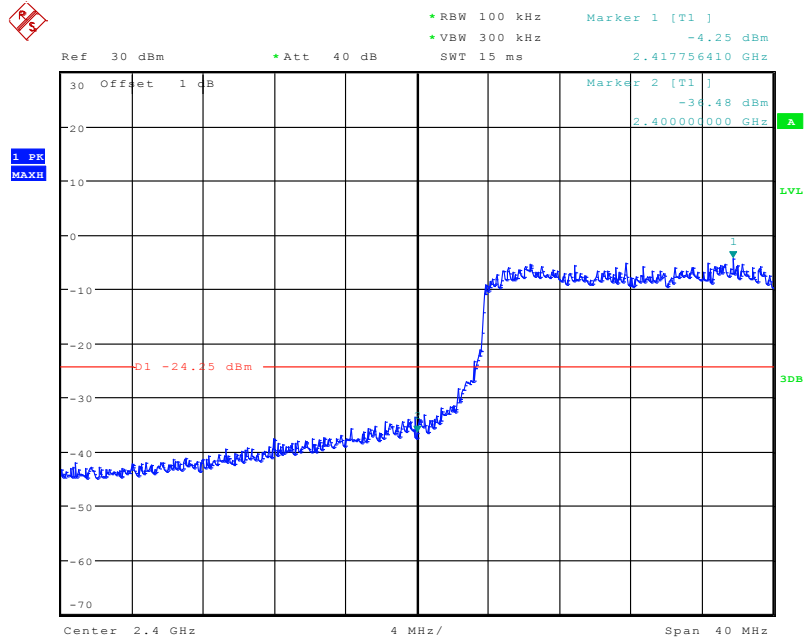

Date: 25.MAR.2011 14:48:12

### 4. OFDM -2462MHz Maxpeak Detector

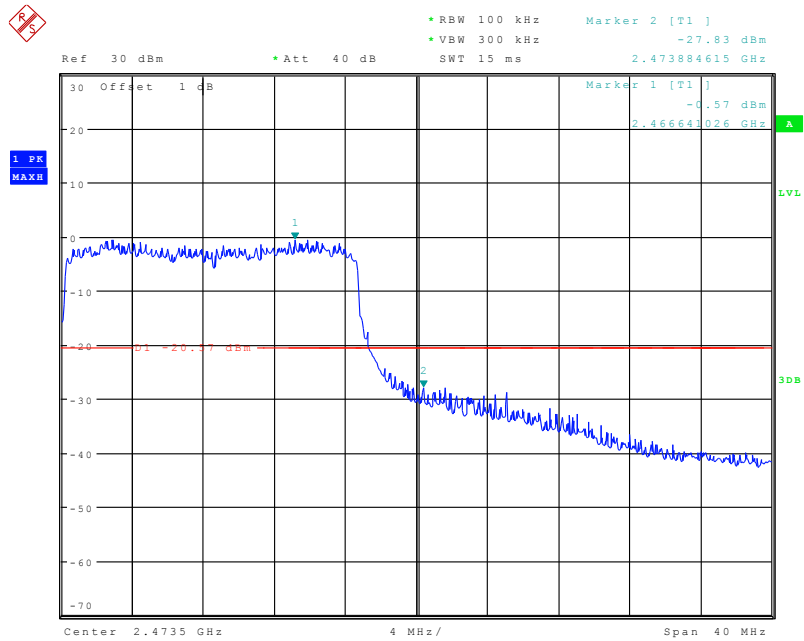

Date: 25.MAR.2011 14:54:21

**Radiated Band Edge**

Modulation	Frequency (MHz)	Measure Level (dBuV/m)	Correct Factor (dB)	Reading Level (dBuV)	Limit (dBuV/m)	Detector Type	Antenna Polarity
DSSS	2400	58.82	0.35	58.47	74	Peak	H
	2400	44.60	0.35	44.25	54	Average	
	2400	57.89	0.35	57.54	74	Peak	V
	2400	43.30	0.35	42.95	54	Average	
	2483.5	61.66	0.64	61.02	74	Peak	H
	2483.5	48.15	0.64	47.51	54	Average	
	2483.5	61.02	0.64	60.38	74	Peak	V
	2483.5	47.26	0.64	46.62	54	Average	
OFDM	2400	58.20	0.35	57.85	74	Peak	H
	2400	43.87	0.35	43.52	54	Average	
	2400	56.62	0.35	56.27	74	Peak	V
	2400	42.43	0.35	42.08	54	Average	
	2483.5	62.99	0.64	62.35	74	Peak	H
	2483.5	49.25	0.64	48.61	54	Average	
	2483.5	61.02	0.64	60.38	74	Peak	V
	2483.5	48.30	0.64	47.66	54	Average	

**NOTE:**

Measurement Level = Reading Level + Correct Factor

## 8. Conducted Spurious Emission

### 8.1. Requirement of the standard

According to FCC §15.247(c), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 8.2. Test Procedure

- a. The EUT was coupled to the spectrum analyzer and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables the test system is calibrated to correct the reading.
- b. The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode.
- c. The spurious Emissions from 9 KHz to 10th harmonic of the fundamental frequency were researched.
- d. According to the standard requirement, the resolution bandwidth of the spectrum analyzer was set to RBW=100 kHz, VBW=300 kHz.

### 8.3. Test Setup

Same as 5.3

### 8.4. EUT Setup and Operating Conditions


Same as 5.4

### 8.5. Test Results

The following test plots shows that spurious emissions in the whole frequency range were below the 20dBc limit line.


#### **Conducted Spurious Emission Test Plots**

### 1. DSSS-2412MHz

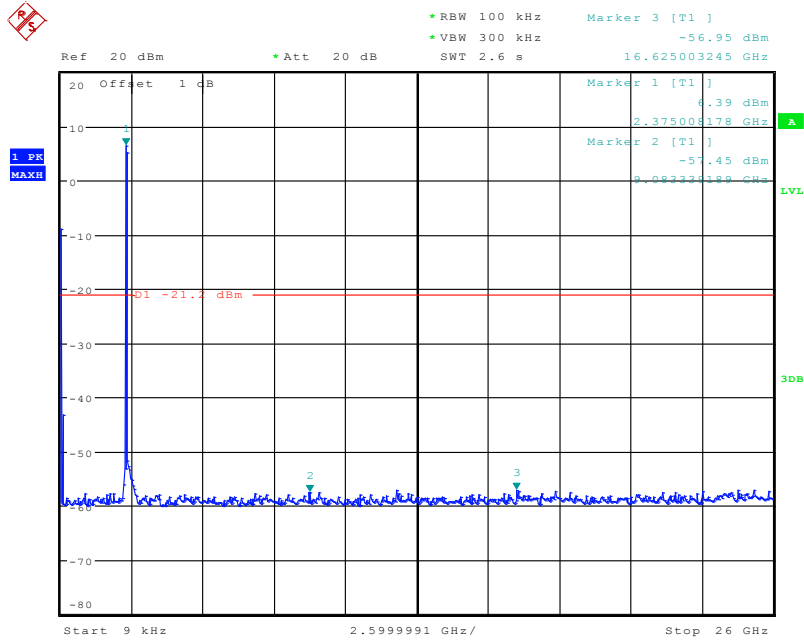


Date: 10.NOV.2010 12:34:25

### 2. DSSS-2437MHz

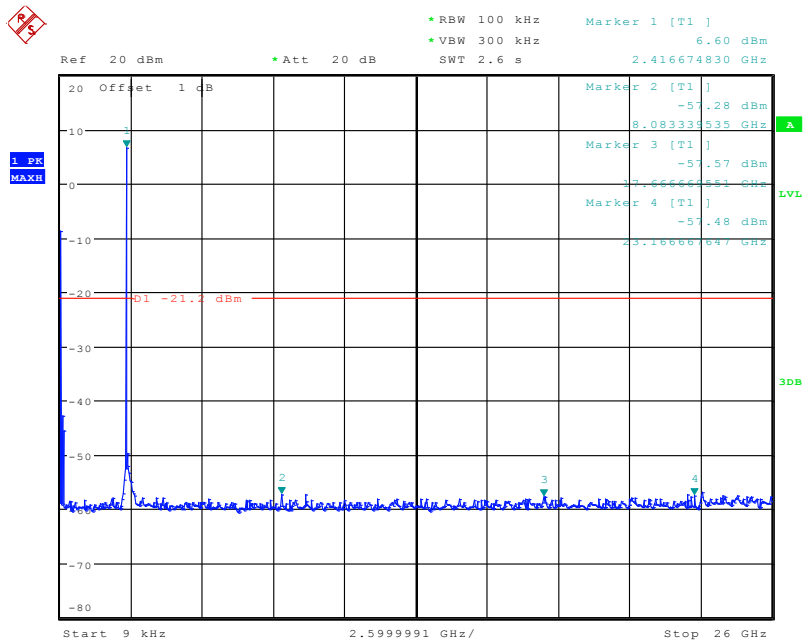


Date: 10.NOV.2010 12:35:34

### 3. DSSS-2462MHz

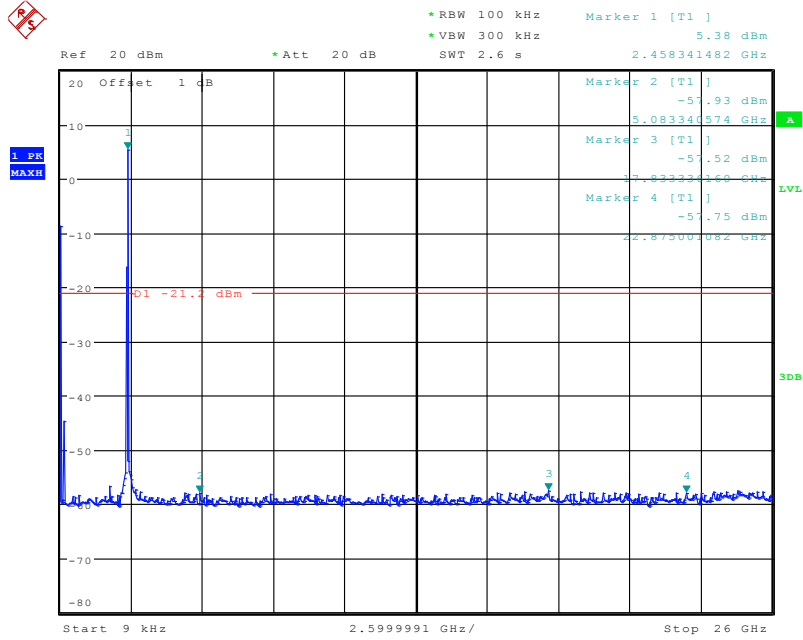


Date: 10.NOV.2010 12:36:54

### 4. OFDM-2412MHz

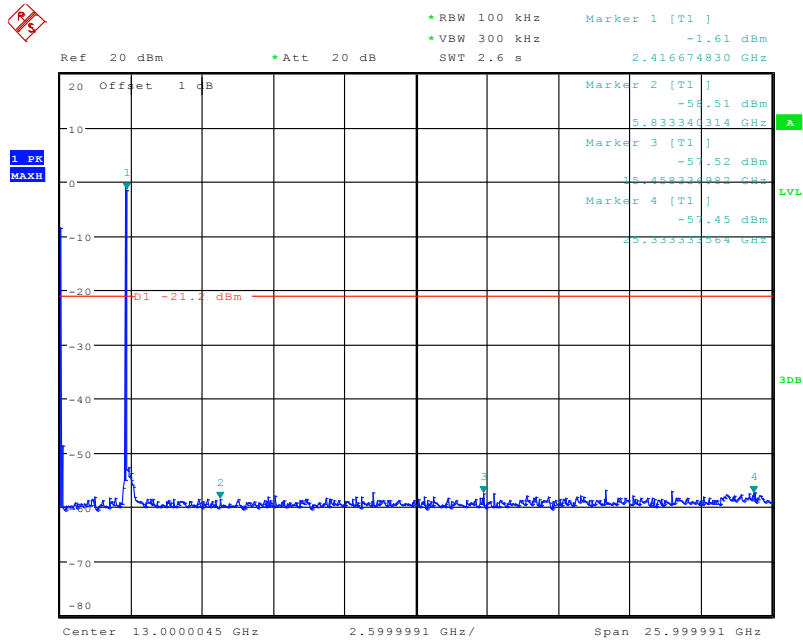


Date: 10.NOV.2010 12:38:10

5. OFDM-2437MHz

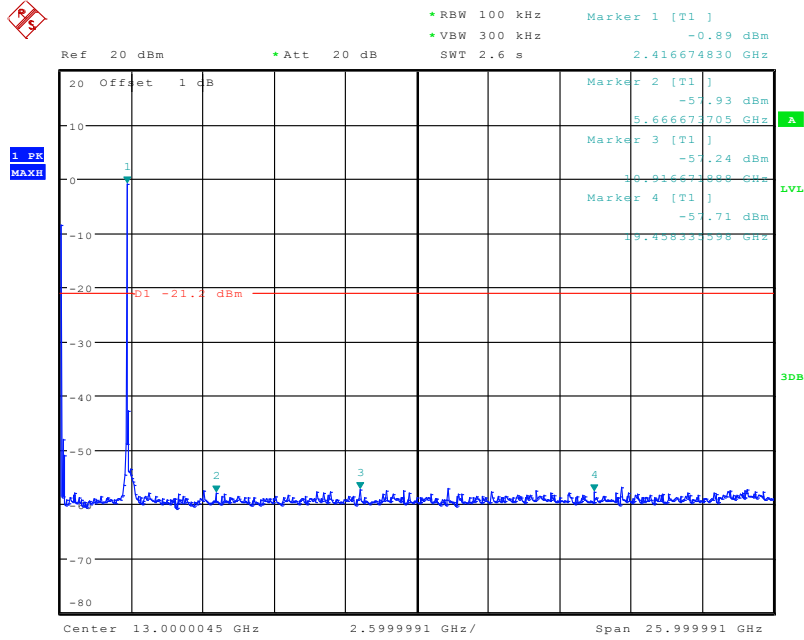

Date: 10.NOV.2010 12:39:41

6. OFDM-2462MHz

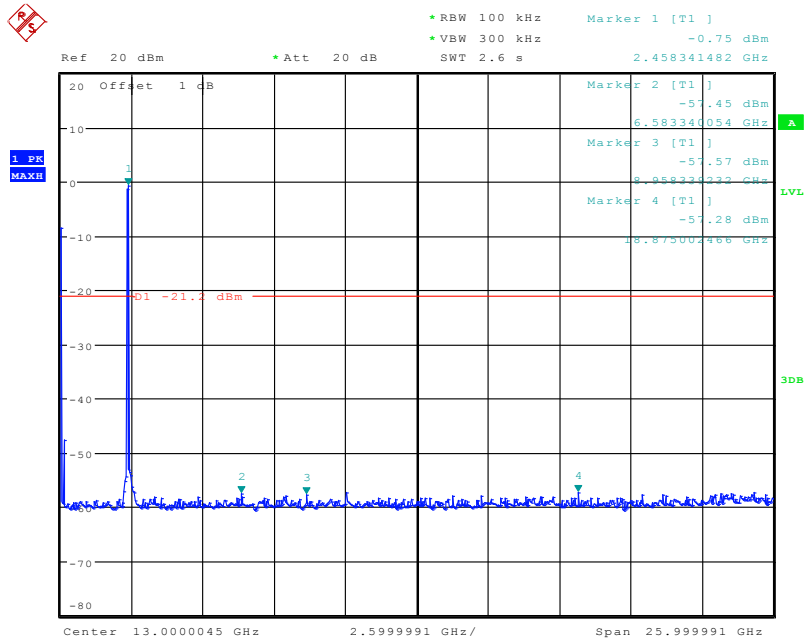

Date: 10.NOV.2010 12:40:37



## 9. Power Spectrum Density Measurement

### 9.1. Limits of Power Spectrum Density

According to FCC §15.247(d), for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 9.2. Test Procedure

- a. The EUT temporary antenna port was coupled to the spectrum analyzer. The loss of the cables in the test system is calibrated to correct the reading.
- b. The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode.
- c. The resolution bandwidth of the spectrum analyzer was set to 3 kHz.

### 9.3. Test Setup

Same as 5.3

### 9.4. EUT Setup and Operating Conditions


Refer to 5.4.

### 9.5. Test Results

EUT Modulation	Operating Frequency ( MHz )	Power spectrum density (dBm/3kHz)	Limit (dBm/3kHz)
DSSS	2412	-7.92	8
	2437	-7.84	
	2462	-8.09	
OFDM	2412	-14.87	
	2437	-15.20	
	2462	-14.62	


### Plots of Power Spectrum Density

#### 1. DSSS-2412MHz

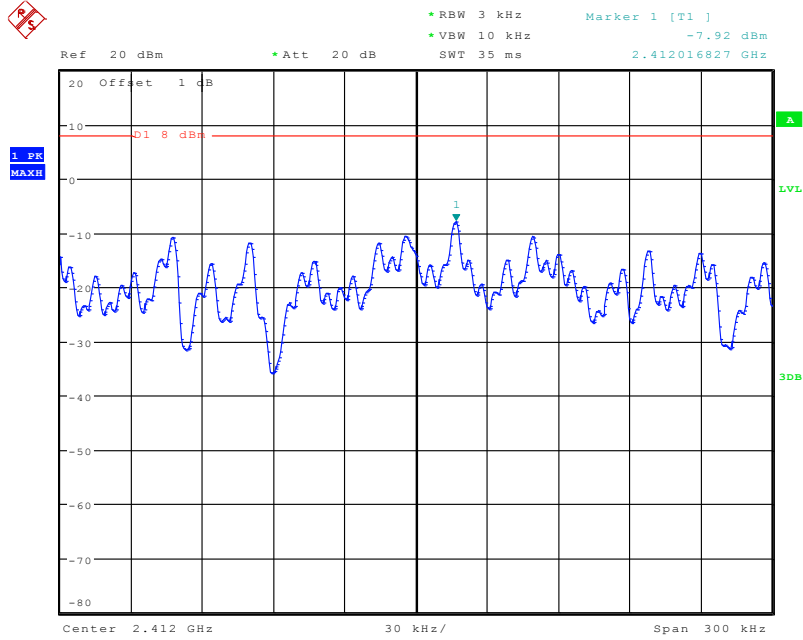


Date: 10.NOV.2010 12:44:21

#### 2. DSSS-2437MHz

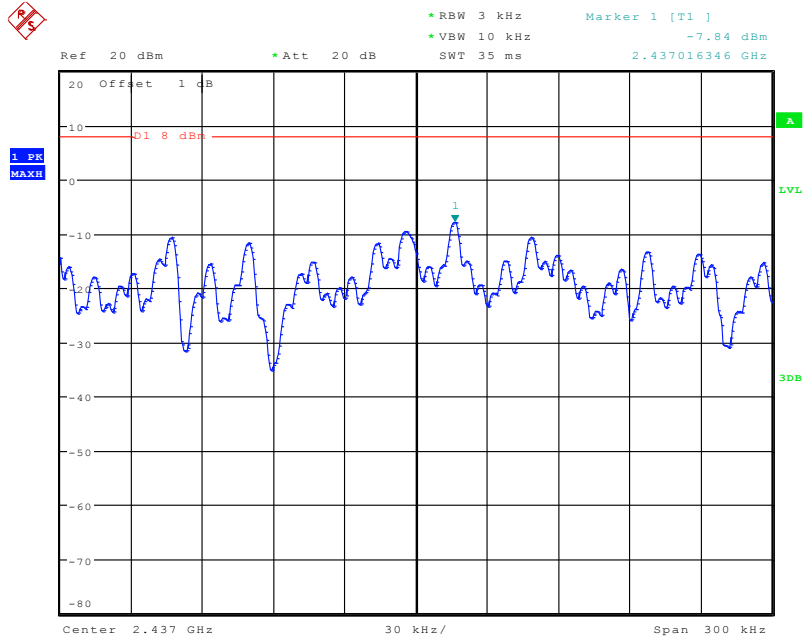


Date: 10.NOV.2010 12:46:20

### 3. DSSS-2462MHz

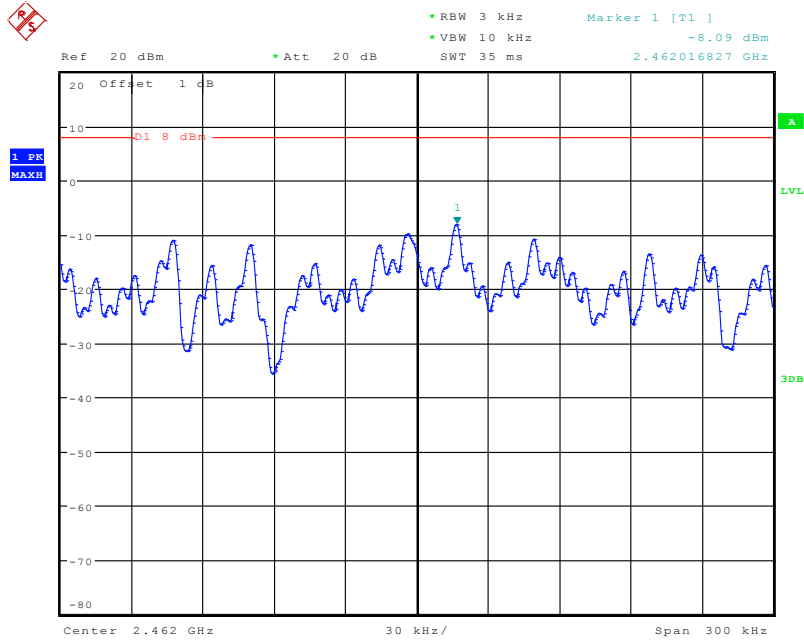


Date: 10.NOV.2010 12:47:27

### 4. OFDM-2412MHz

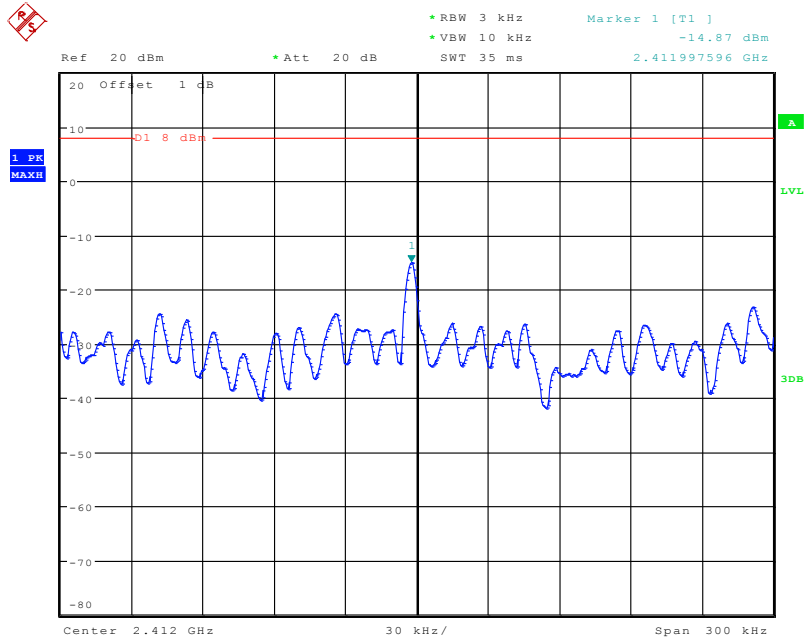


Date: 10.NOV.2010 12:45:07

5. OFDM-2437MHz

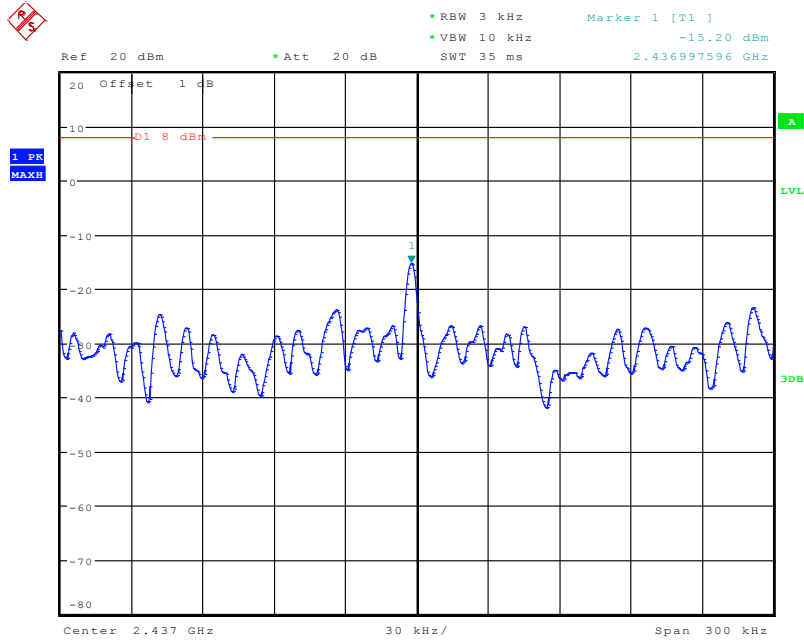

Date: 10.NOV.2010 12:46:49

6. OFDM-2462MHz

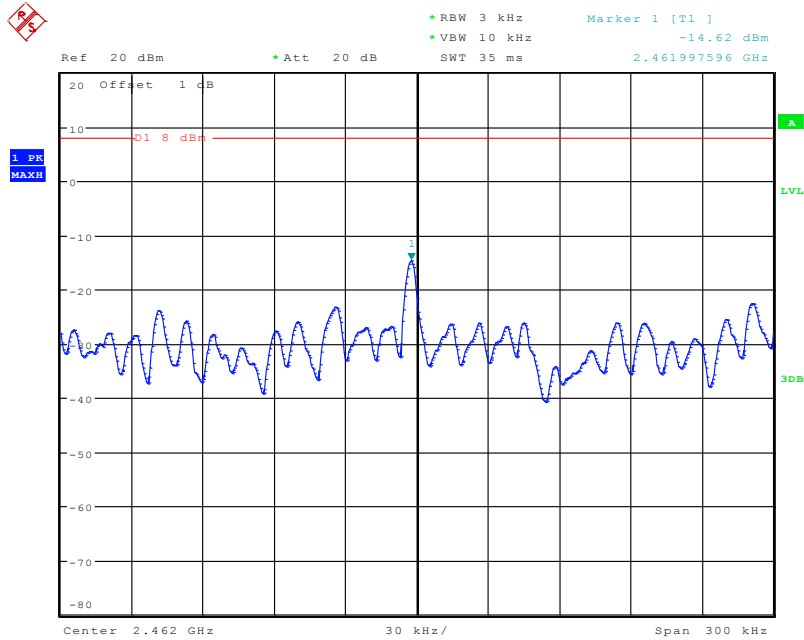

Date: 10.NOV.2010 12:47:55

## 10. Receiver Spurious Emissions

### 10.1. Requirement of the standard

According to RSS-GEN 4.10, the receiver shall be operated in the normal receive mode near the mid-point of the band over which the receiver is designed to operate. The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tuneable or local oscillator frequency, whichever is the higher, without exceeding 40 GHz. According to RSS-GEN 7.2.3.1, If the device has a detachable antenna of known antenna impedance, then the antenna conducted method is permitted in lieu of a radiated measurement.

Receiver spurious emissions at any discrete frequency shall not exceed 2 nanowatts in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

Limits for Conducted Receiver Spurious Emissions	
Frequency(MHz)	Limit
30 – 1000	2nW
Above 1000	5nW

According to RSS-GEN 7.2.3.2, for Radiated Measurement, all spurious emissions shall comply with the limits of Table below:


Limits for Radiated Receiver Spurious Emissions	
Frequency(MHz)	Field Strength( $\mu$ V/m at 3metres)
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

### 10.2. Test Procedure


Please refer to RSS-GEN section 4.10 and section 7.2.3 for the measurement methods.

### 10.3. Test Setup

Below 1GHz

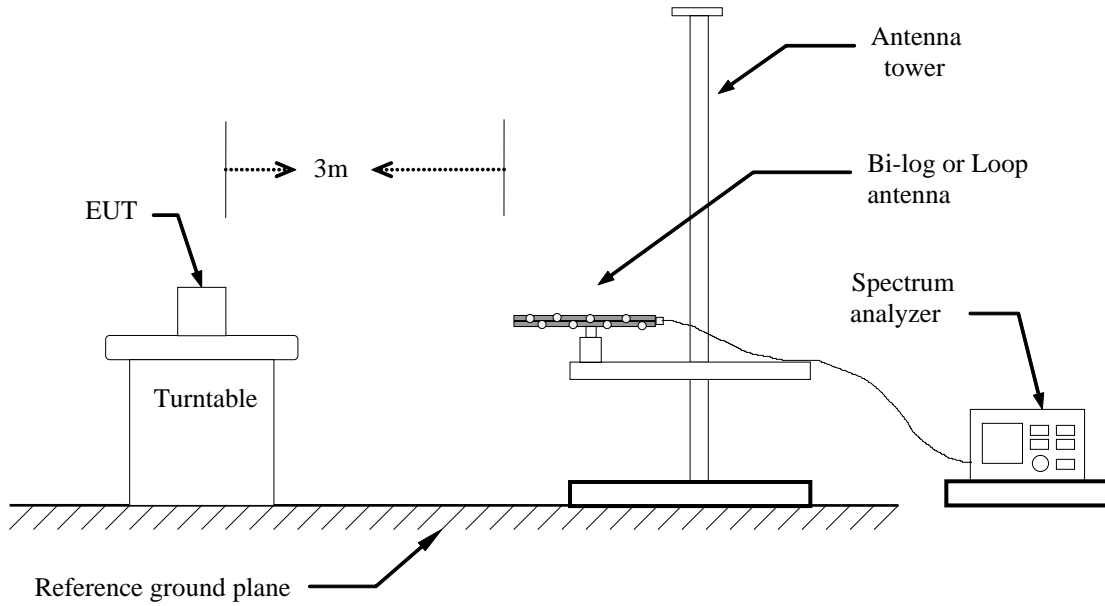

Above 1GHz

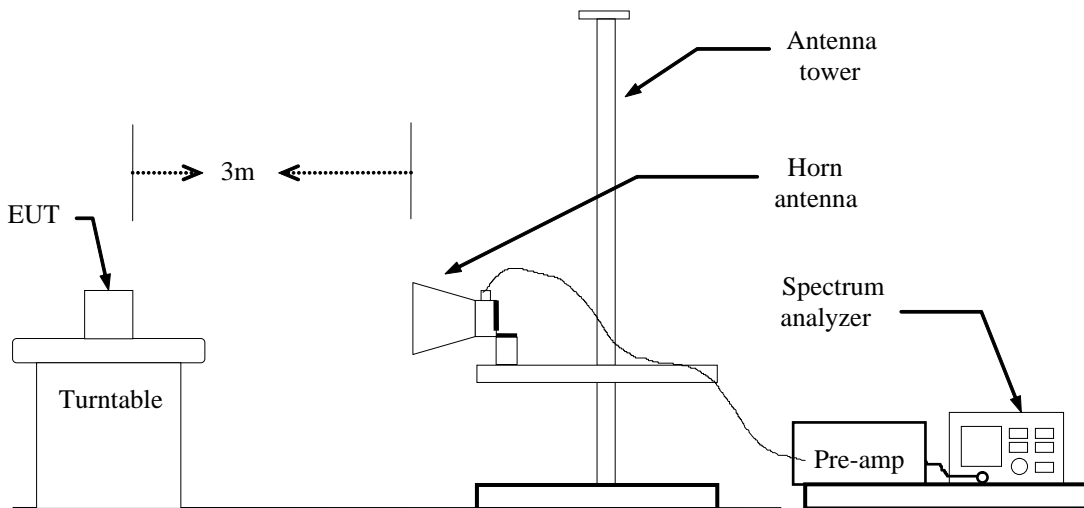

## 10.4. Test Results

### Conducted Receiver Spurious Emissions

#### 1. TEST MODE: 802.11b Transmitter Rx Mode

Frequency(MHz)	Measure Result(nW)	Limit (nW)
30 – 1000	--	2
Above 1000	--	5

#### 2. TEST MODE: 802.11g Transmitter Rx Mode

Frequency(MHz)	Measure Result(nW)	Limit (nW)
30 – 1000	--	2
Above 1000	--	5

### Rradiated Receiver Spurious Emissions

#### 3. TEST MODE: 802.11b Transmitter Rx Mode

No.	Frequency (MHz)	Antenna Polarization	Detector mode	Level ERP(dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
1	30 - 88	Vertical	Peak	--	40	>10
2	88 – 216	Vertical	Peak	--	43.5	>10
3	216 – 960	Vertical	Peak	--	46	>10
4	960 - 1000	Vertical	Peak	--	54	>10
5	1000 – 10000	Vertical	Average	--	54	>10
6	30 - 88	Horizontal	Peak	--	40	>10
7	88 – 216	Horizontal	Peak	--	43.5	>10
8	216 – 960	Horizontal	Peak	--	46	>10
9	960 - 1000	Horizontal	Peak	--	54	>10
10	1000 - 10000	Horizontal	Average	--	54	>10

#### 4. TEST MODE: 802.11g Transmitter Rx Mode

No.	Frequency (MHz)	Antenna Polarization	Detector mode	Level ERP(dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
1	30 - 88	Vertical	Peak	--	40	>10
2	88 – 216	Vertical	Peak	--	43.5	>10
3	216 – 960	Vertical	Peak	--	46	>10
4	960 - 1000	Vertical	Peak	--	54	>10



5	1000 – 10000	Vertical	Average	--	54	>10
6	30 - 88	Horizontal	Peak	--	40	>10
7	88 – 216	Horizontal	Peak	--	43.5	>10
8	216 – 960	Horizontal	Peak	--	46	>10
9	960 - 1000	Horizontal	Peak	--	54	>10
10	1000 - 10000	Horizontal	Average	--	54	>10

**Notes:**

- 1) Both radiated measurement method and conducted measurement method were used. For the radiated method, the antenna polarization was set to vertical and horizontal respectively.
- 2) The measurement was performed at the mid operating frequencies.
- 3) "--" in the table above means that the emissions are too small to be measured and are at least 10 dB below the limit.

**\*\* END OF REPORT \*\***