



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 7**

CERTIFICATION TEST REPORT

FOR

WIRELESS MICROPHONE (Microphone)

MODEL NUMBER: ECM-HW2(T)

FCC ID: GT3FC005

REPORT NUMBER: 08J12240-1

ISSUE DATE: NOVEMBER 26, 2008

Prepared for
**SMK CORPORATION
5-5 TOGOSHI 6-CHOME SHINAGAWA-KU
TOKYO
142-8511 JAPAN**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	11/26/08	Initial Issue	F. Ibrahim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>MEASUREMENT UNCERTAINTY</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	6
5.4. <i>SOFTWARE AND FIRMWARE</i>	6
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	6
5.6. <i>DESCRIPTION OF TEST SETUP</i>	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. ANTENNA PORT TEST RESULTS	10
7.1. <i>BASIC DATA RATE GFSK MODULATION</i>	10
7.1.1. 20 dB AND 99% BANDWIDTH.....	10
7.1.2. HOPPING FREQUENCY SEPARATION	15
7.1.3. NUMBER OF HOPPING CHANNELS.....	17
7.1.4. AVERAGE TIME OF OCCUPANCY.....	20
7.1.5. OUTPUT POWER	22
7.1.6. AVERAGE POWER	25
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	26
8. RADIATED TEST RESULTS	31
8.1. <i>LIMITS AND PROCEDURE</i>	31
8.2. <i>TRANSMITTER ABOVE 1 GHz</i>	32
8.3. <i>RECEIVER ABOVE 1 GHz</i>	37
8.4. <i>WORST-CASE BELOW 1 GHz</i>	38
9. MAXIMUM PERMISSIBLE EXPOSURE	40
10. SETUP PHOTOS	43

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SMK CORPORATION
5-5 TOGOSHI 6-CHOME SHINAGAWA-KU
TOKYO, 142-8511, JAPAN

EUT DESCRIPTION: WIRELESS MICROPHONE (Microphone)

MODEL: ECM-HW2(T)

SERIAL NUMBER: NO.1 (conducted) and 3, 11 (radiated)

DATE TESTED: NOVEMBER 15-25, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



FRANK IBRAHIM
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Tested By:



DEVIN CHANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth transceiver WIRELESS MICROPHONE.

The radio module is manufactured by SMK.

During the course of testing the model number was changed to **ECM-HW2(T)**, all the data sheets in this report belong to the new model number.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	11.78	15.07

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a permanently attached Chip antenna, with a maximum gain of 0.2 dBi.

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was RF Test Tool (ver.1.2.1B /m)

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power.

The EUT is a portable device that has three orientations; therefore X, Y and Z orientations have been investigated. The worst case was found to be Z orientation.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	2	US 115V	Un-shielded	1.8m	No
2	DC	3	DC	Un-shielded	1.8m	No
3	USB	1	3 pins connect	Un-shielded	0.1m	No
4	ear phone	1	jack	Un-shielded	1m	No


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	1.8m	N/A
2	DC	1	DC	Un-shielded	1.8m	N/A
3	USB	1	3 pins connect	Un-shielded	0.1m	N/A
4	Ear phone	1	jack	Un-shielded	1m	N/A

TEST SETUP

The EUT is connected to a laptop computer via USB cable, a test software was used to set up the EUT in TX or RX mode, laptop was removed from the test area, and then the EUT connected to a ear phone was placed on the test table.

SETUP DIAGRAM FOR TESTS

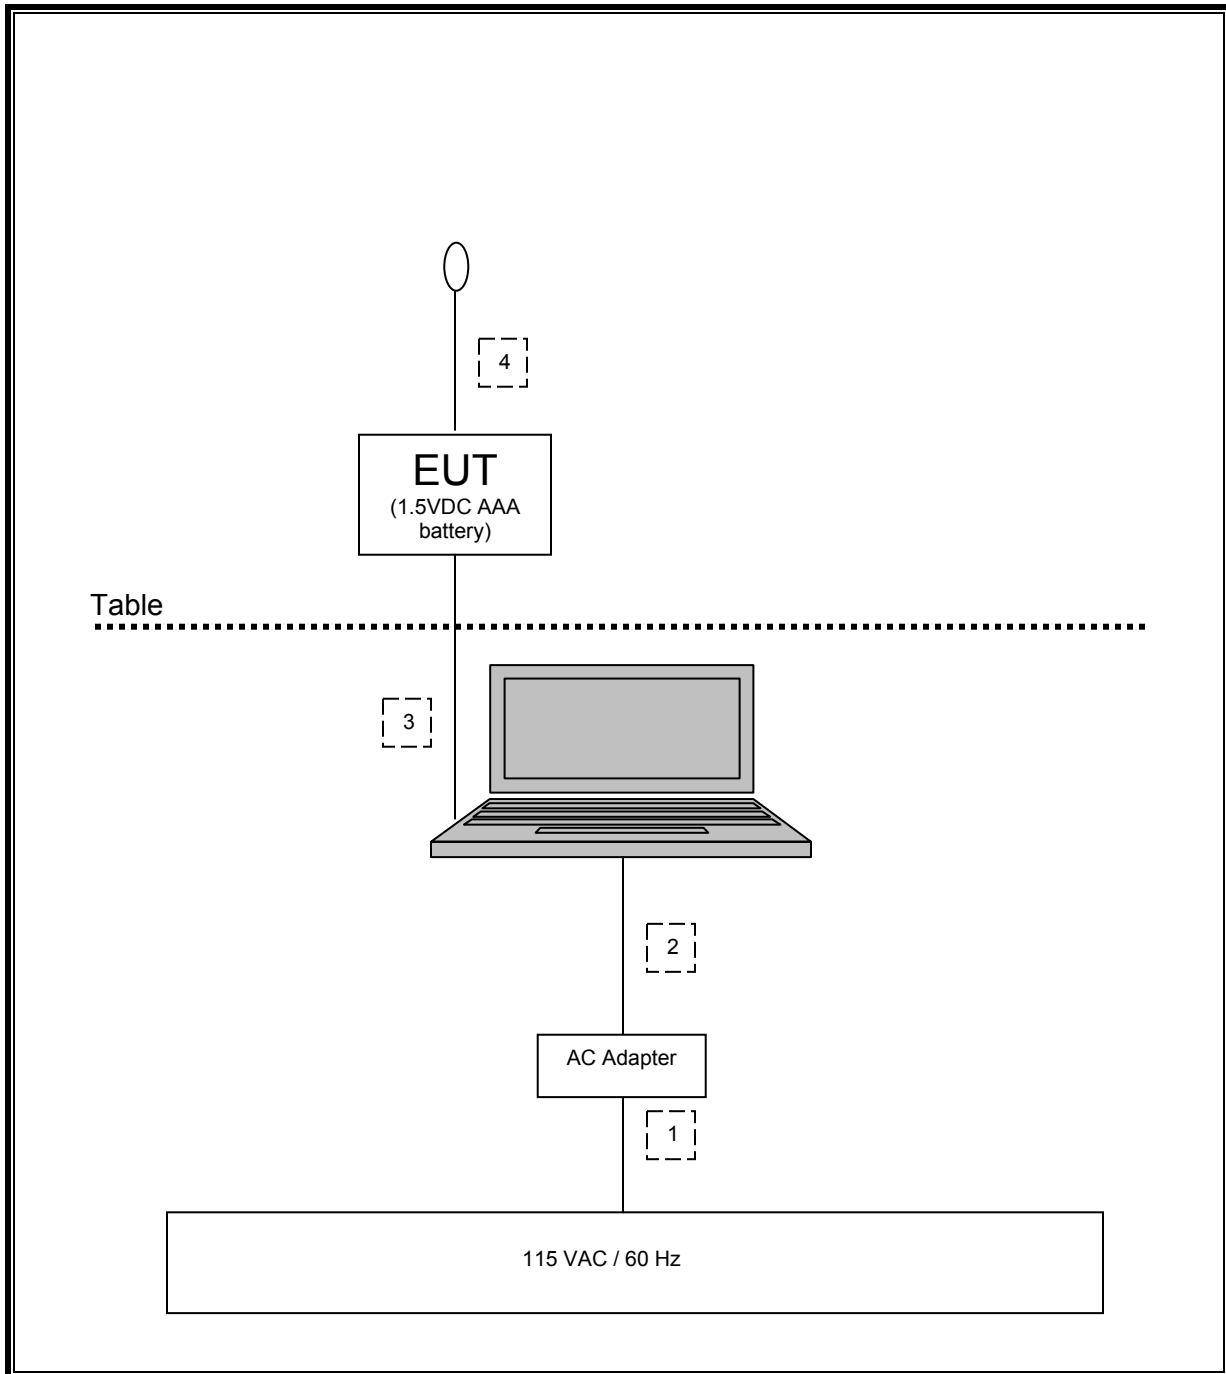

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Antenna, Horn, 18 GHz	EMCO	3115	C00945	4/22/2008	04/22/09
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	9/27/2007	11/27/08
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	2/11/2008	02/11/09
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	4/8/2008	10/08/09
Preamp, 1000MHz	Sonoma	310N	N02891	3/31/2008	03/31/09
Spectrum Analyzer, 40 GHz	Agilent / HP	8564E	C00951	9/5/2007	12/05/08
RF Filter Section, 2.9 GHz	Agilent / HP	85420E	C00958	9/19/2008	09/19/09
EMI Receiver, 2.9 GHz	Agilent / HP	8542E	C00957	9/19/2008	09/19/09
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00980	9/29/2008	09/29/09
Power Meter	Agilent / HP	437B	N02778	11/4/2008	08/04/10
Power Sensor, 18 GHz	Agilent / HP	8481A	N02782	4/22/2008	10/22/09
2.4 GHz High Pass Filter	Micro Tronics	BRC13192	N02683	CNR	CNR
Highpass Filter, 4.0 GHz	Micro-Tronics	HPM13351	N02708	CNR	CNR

7. ANTENNA PORT TEST RESULTS

7.1. BASIC DATA RATE GFSK MODULATION

7.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	922.268	880.5536
Middle	2441	922.177	888.9065
High	2480	970.103	886.9899


20 dB BANDWIDTH

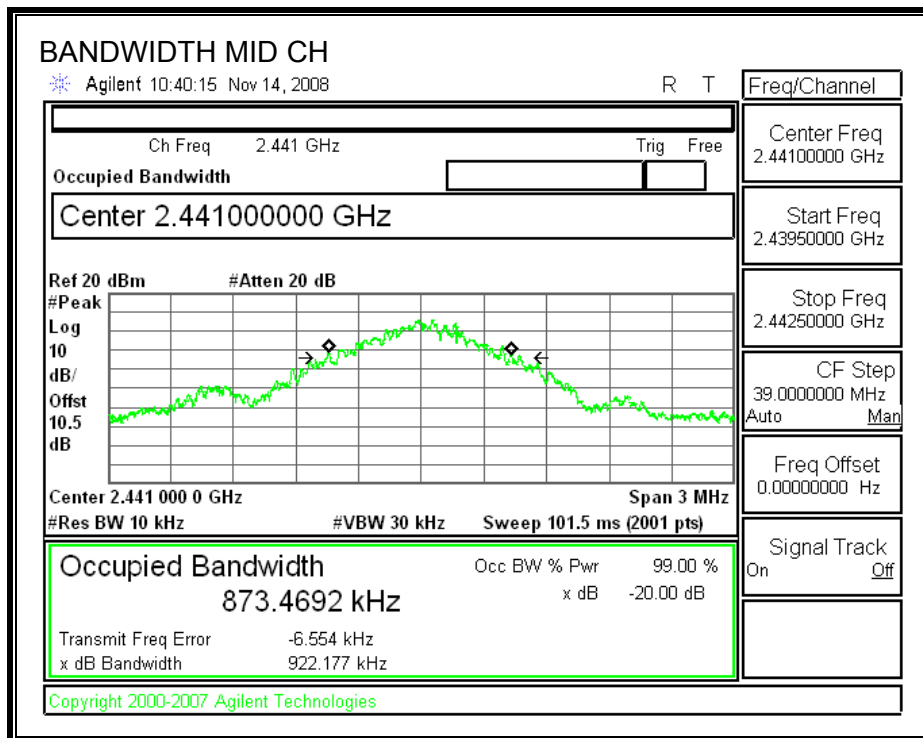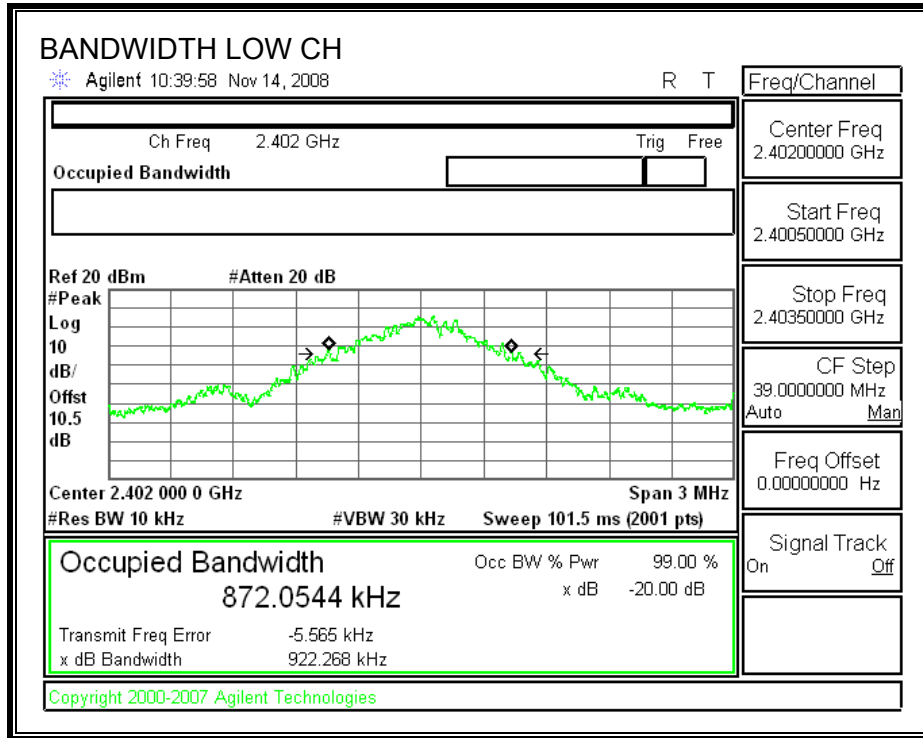

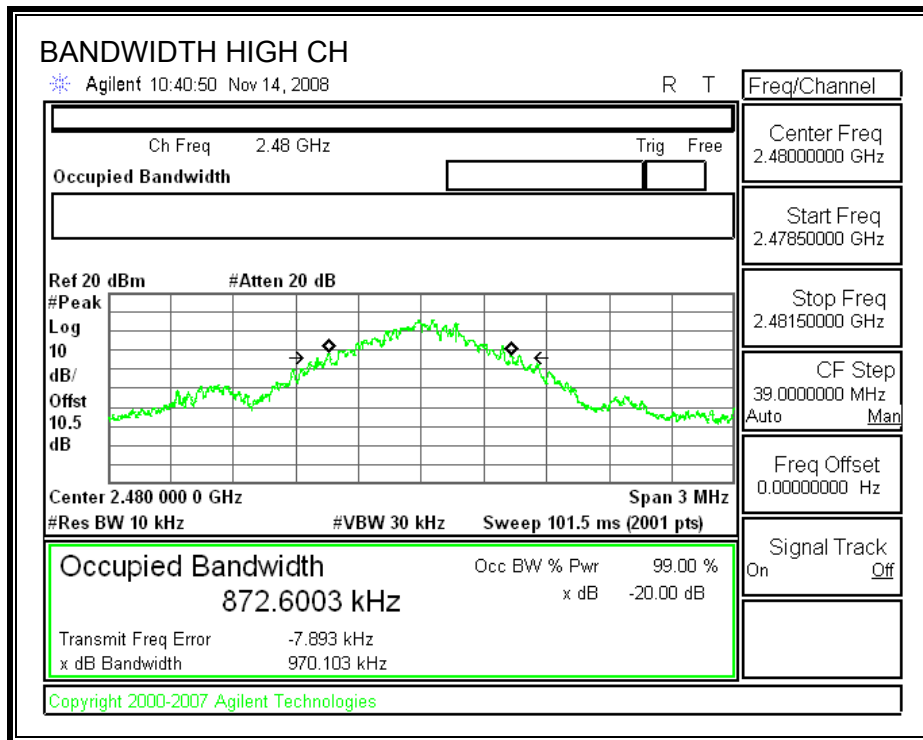

99% BANDWIDTH

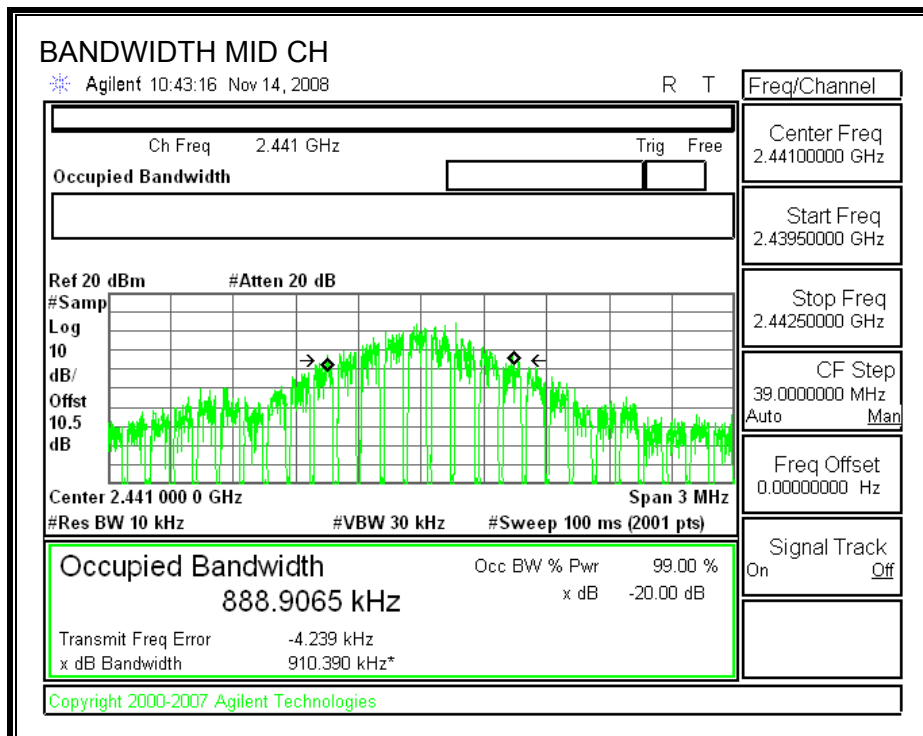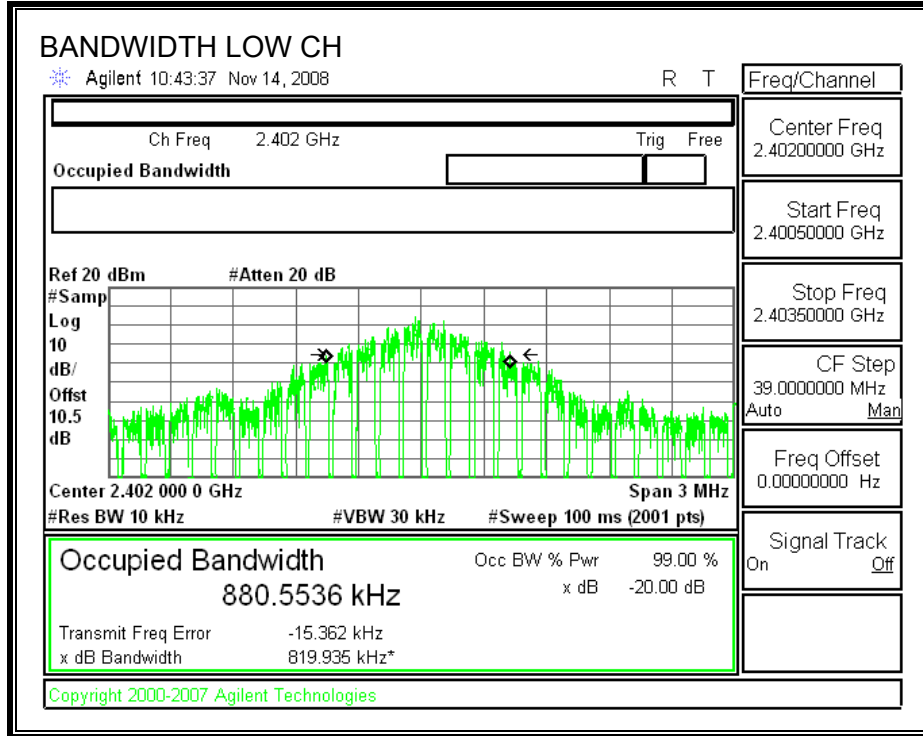

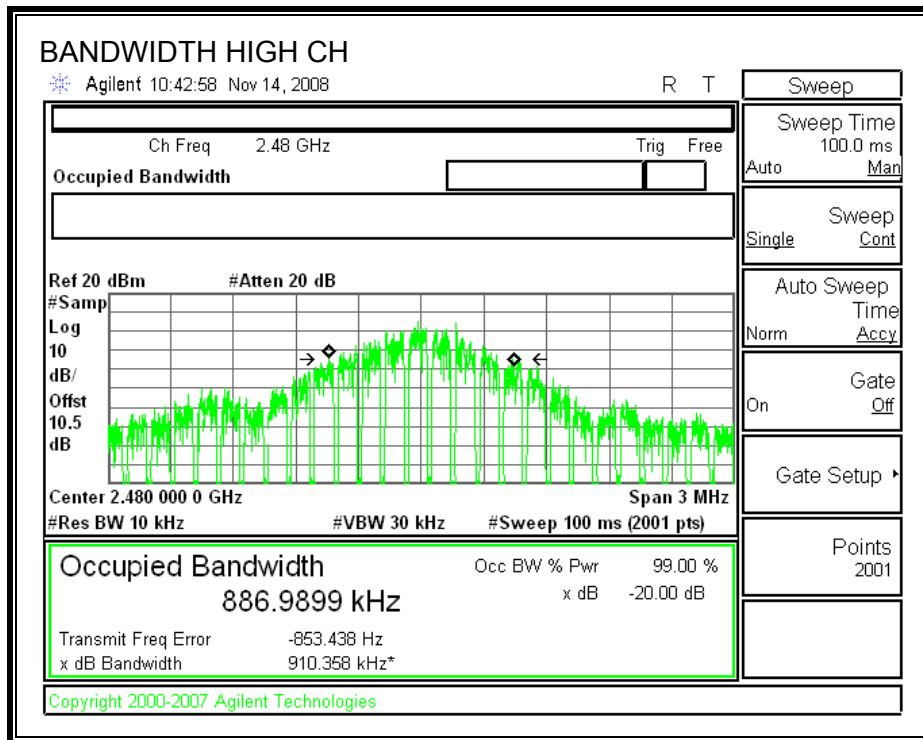

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

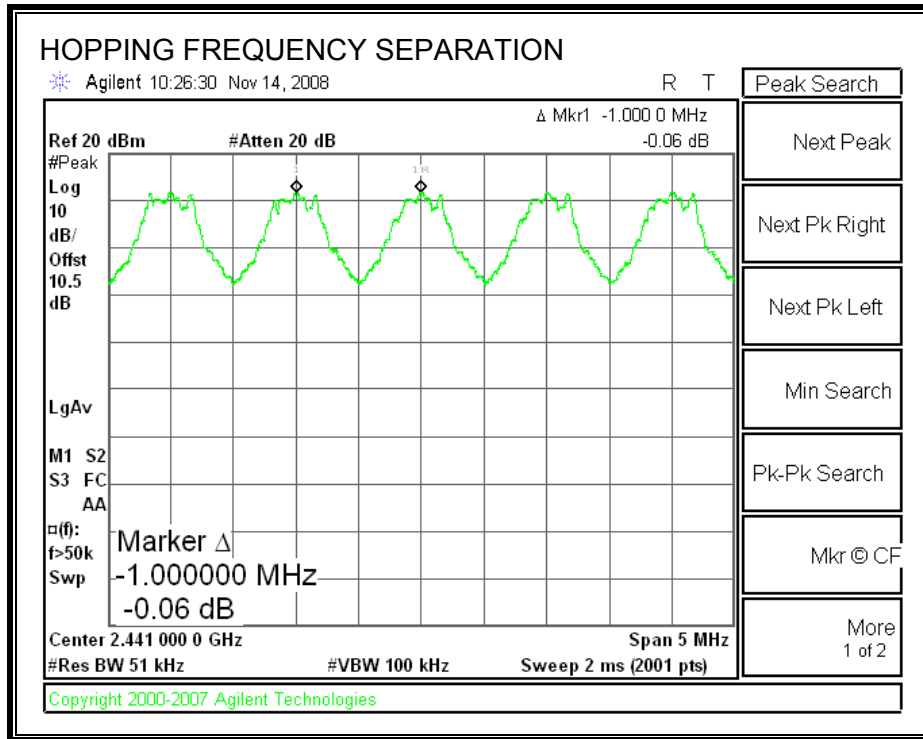

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

79 Channels observed.

NUMBER OF HOPPING CHANNELS

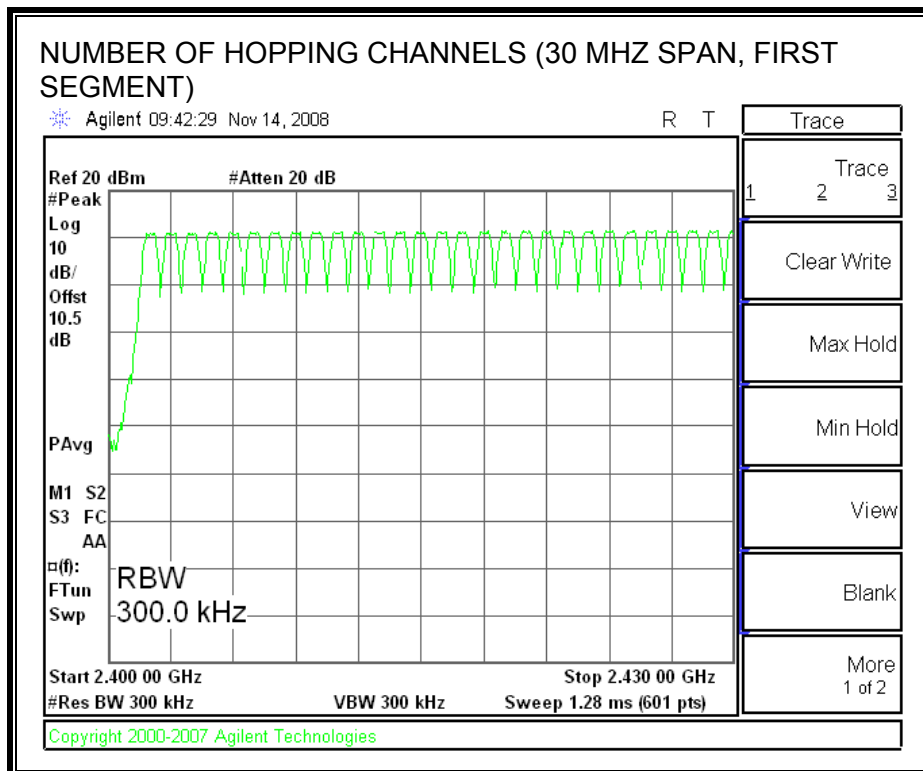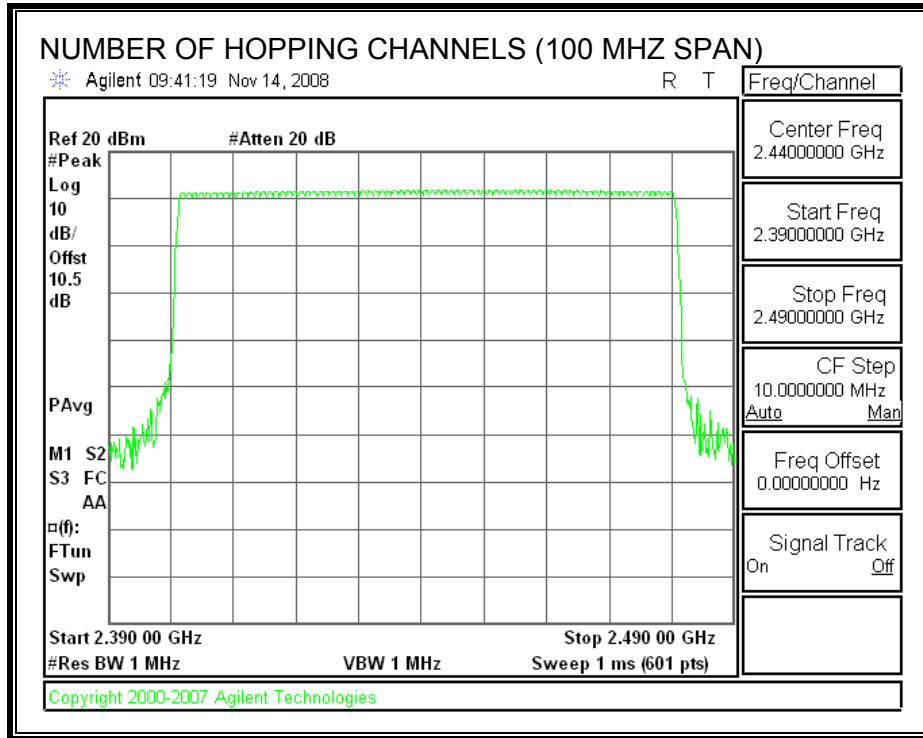

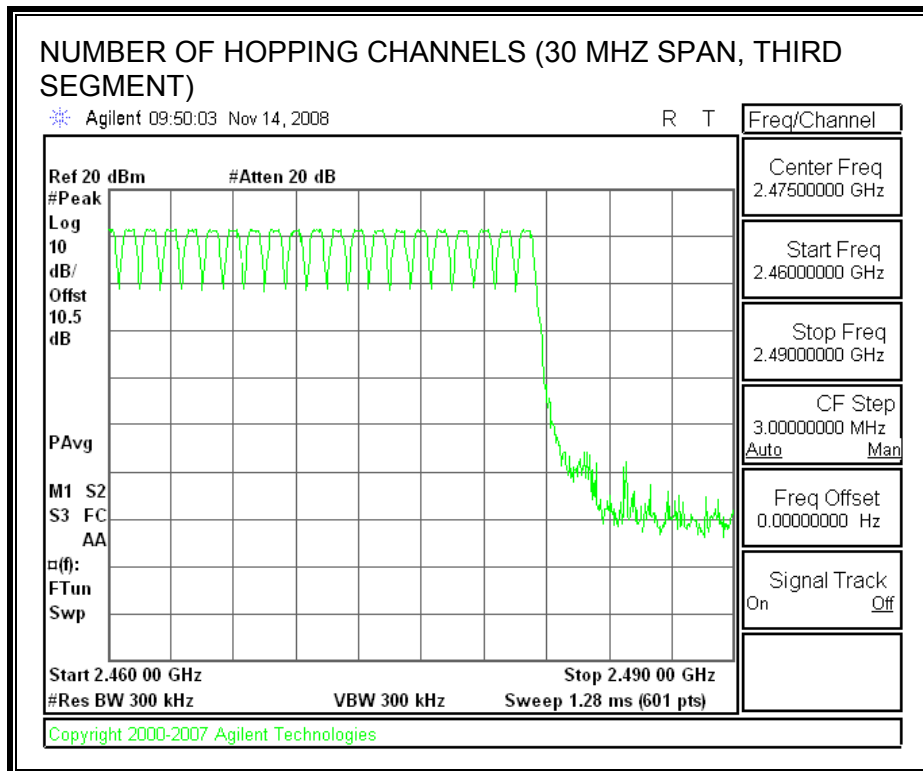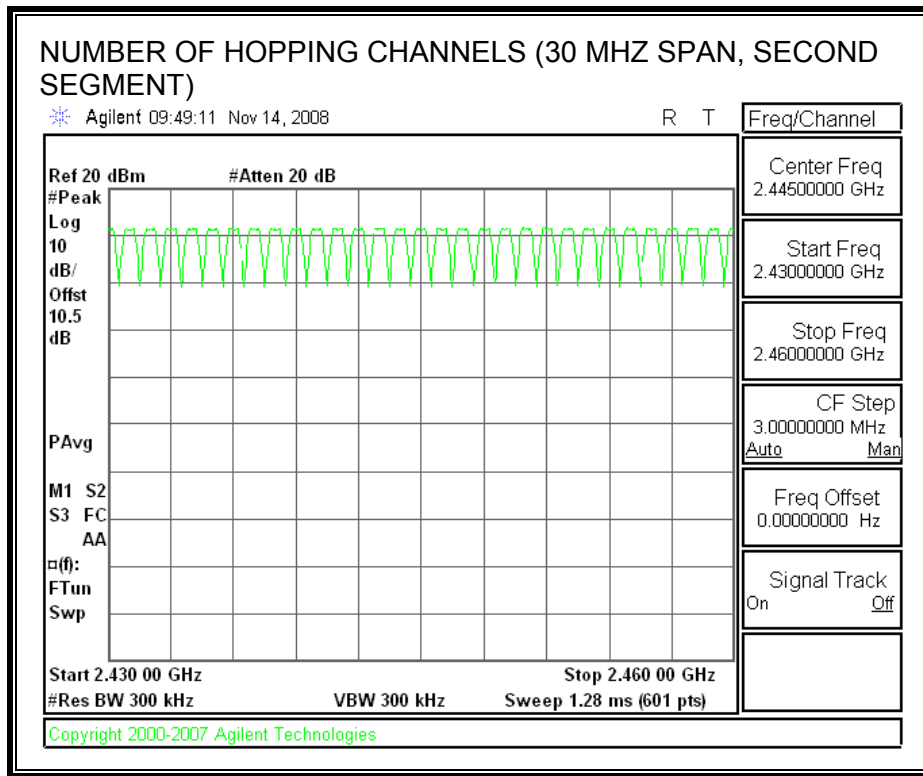

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


RESULTS

Time Of Occupancy = $10 * 11 \text{ pulses} * 2.89 \text{ msec} = 317.9 \text{ msec}$

PULSE WIDTH

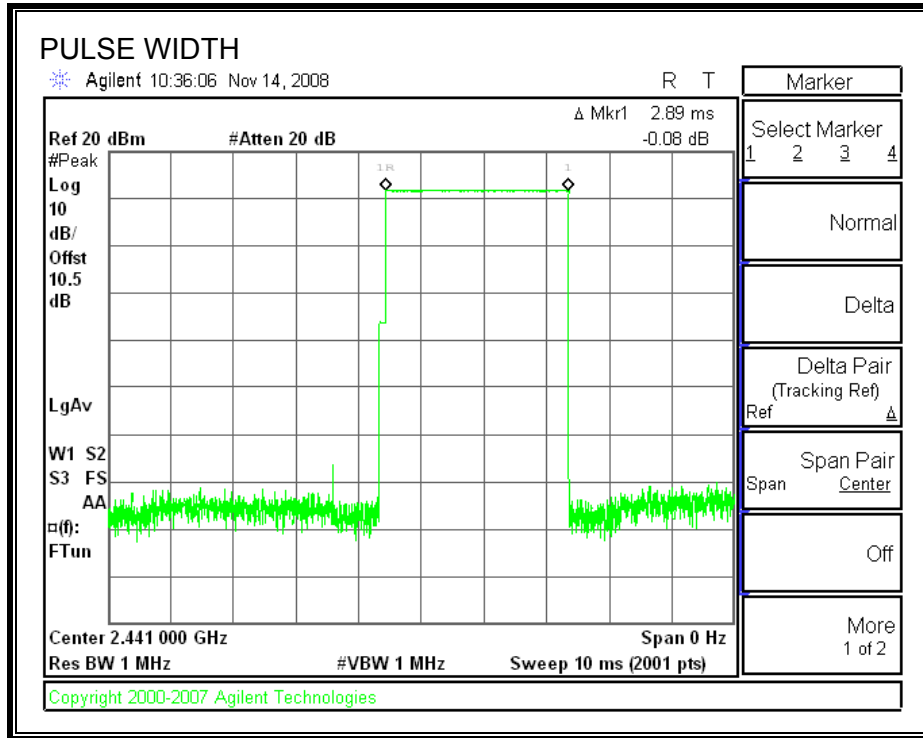

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

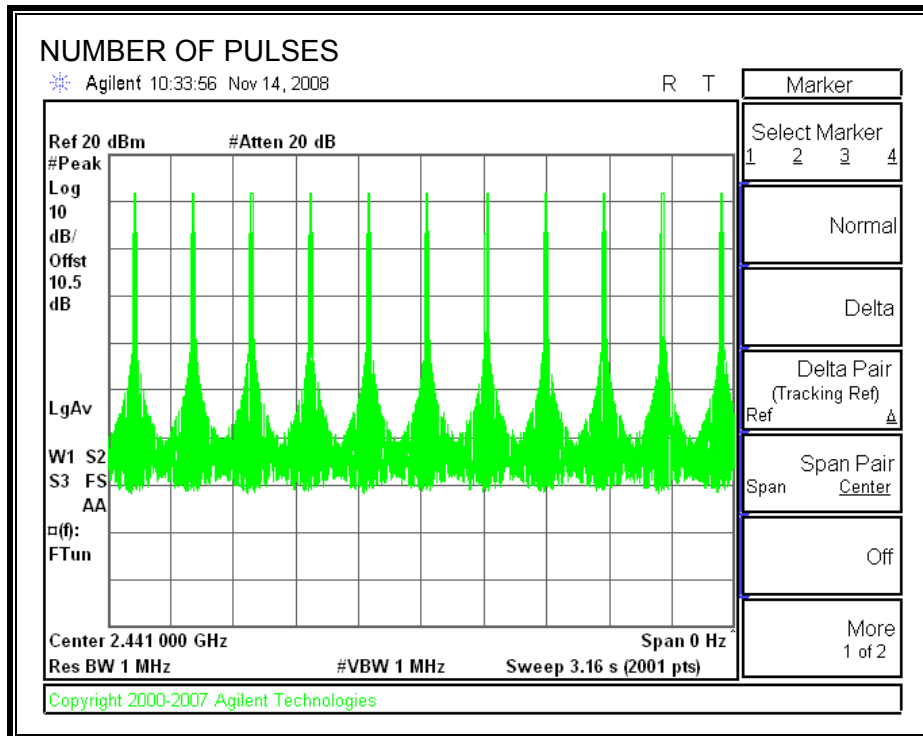

7.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.23	30	-18.77
Middle	2441	11.78	30	-18.22
High	2480	11.60	30	-18.40

OUTPUT POWER

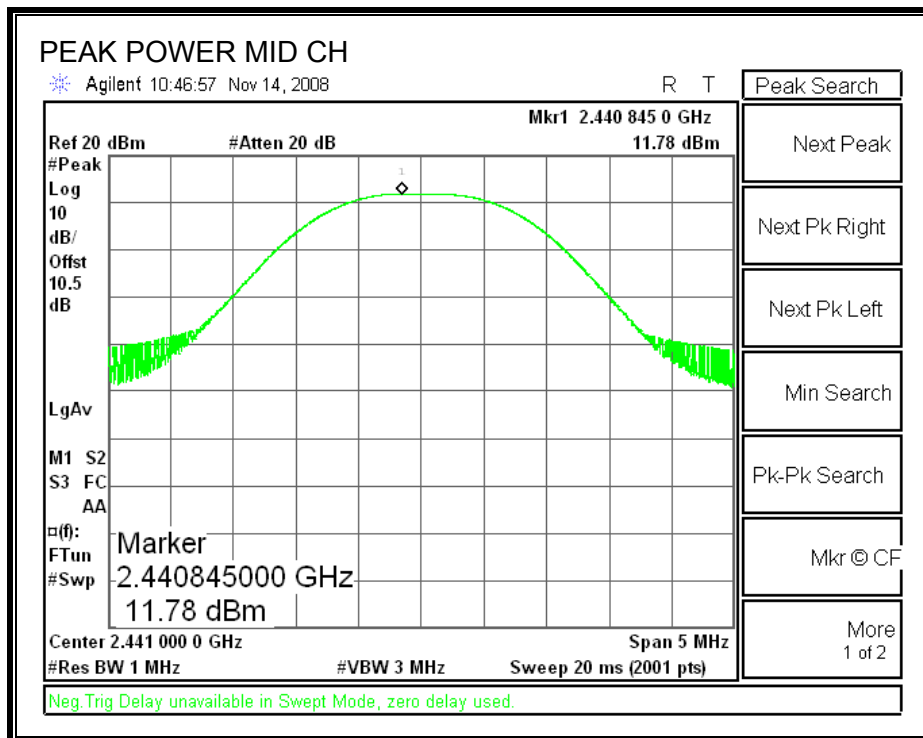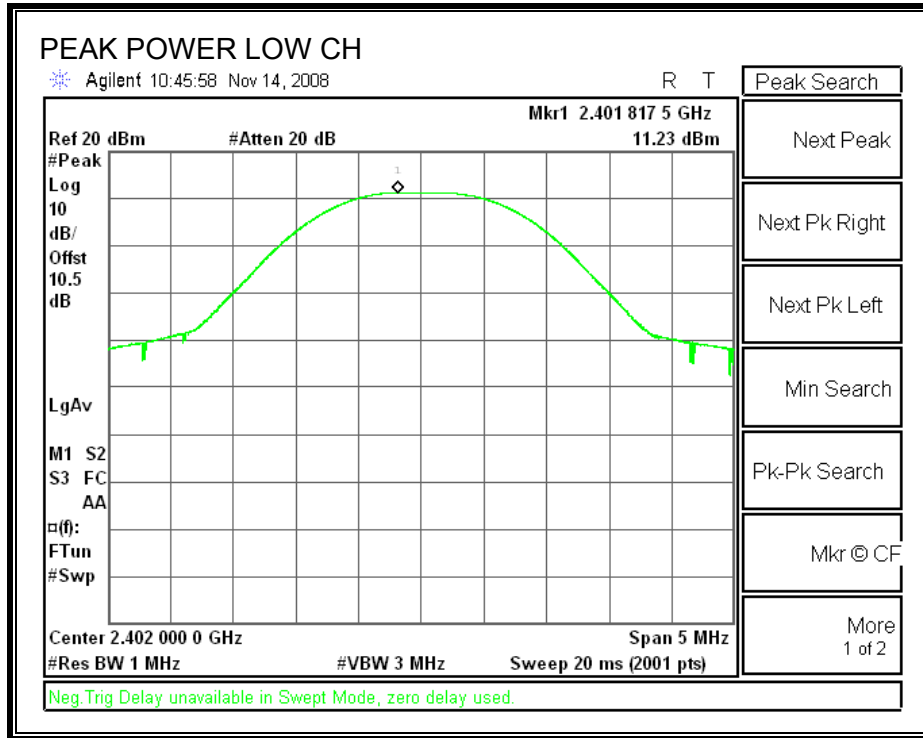

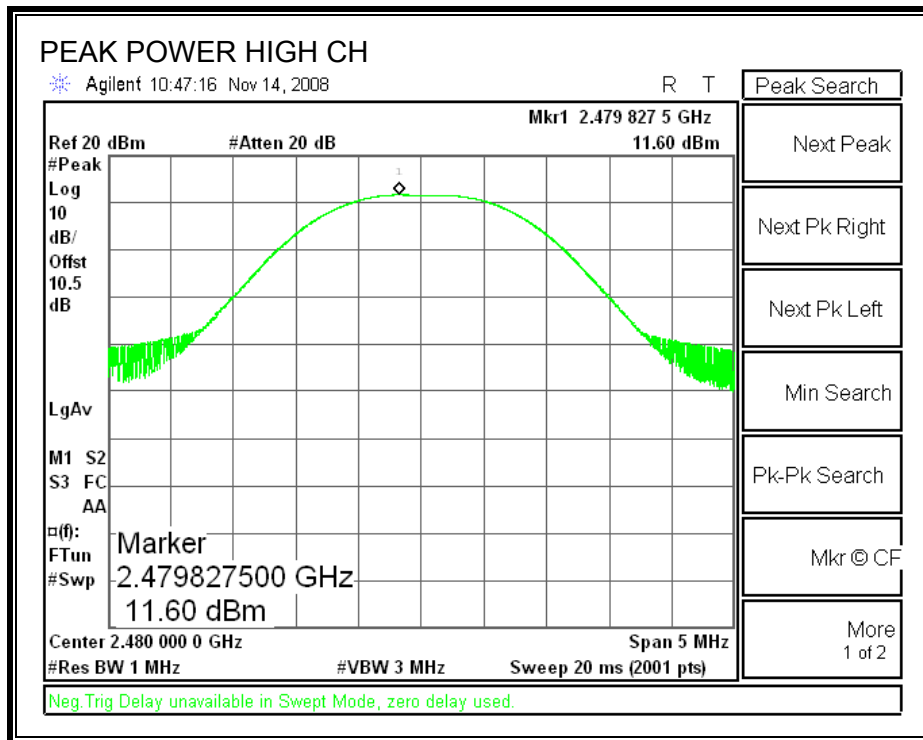

7.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	9.64
Middle	2441	10.12
High	2480	9.91

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

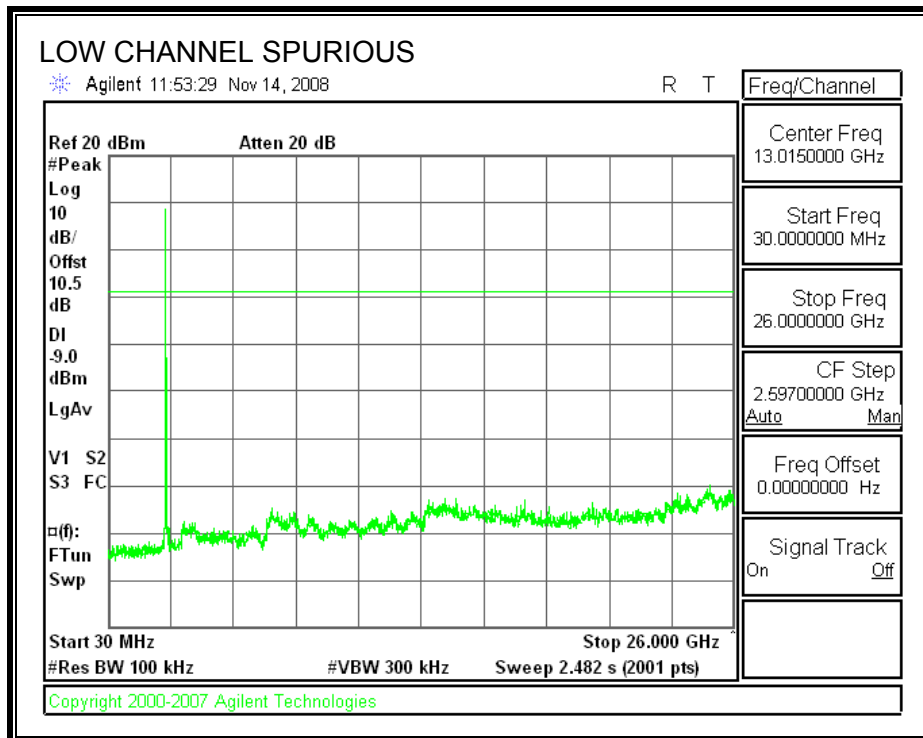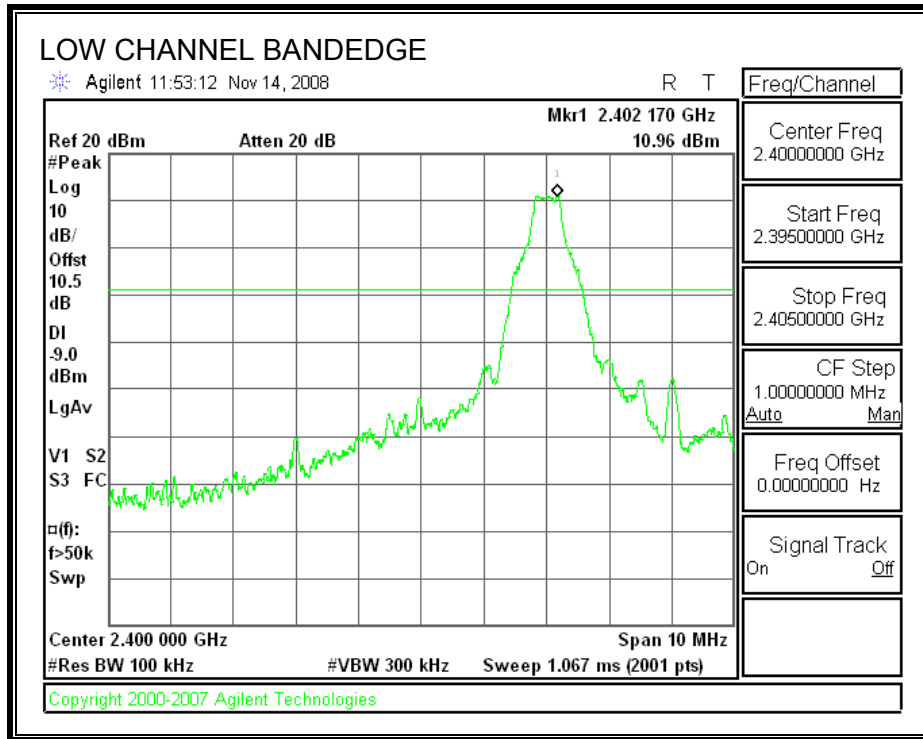



SPURIOUS EMISSIONS, MID CHANNEL

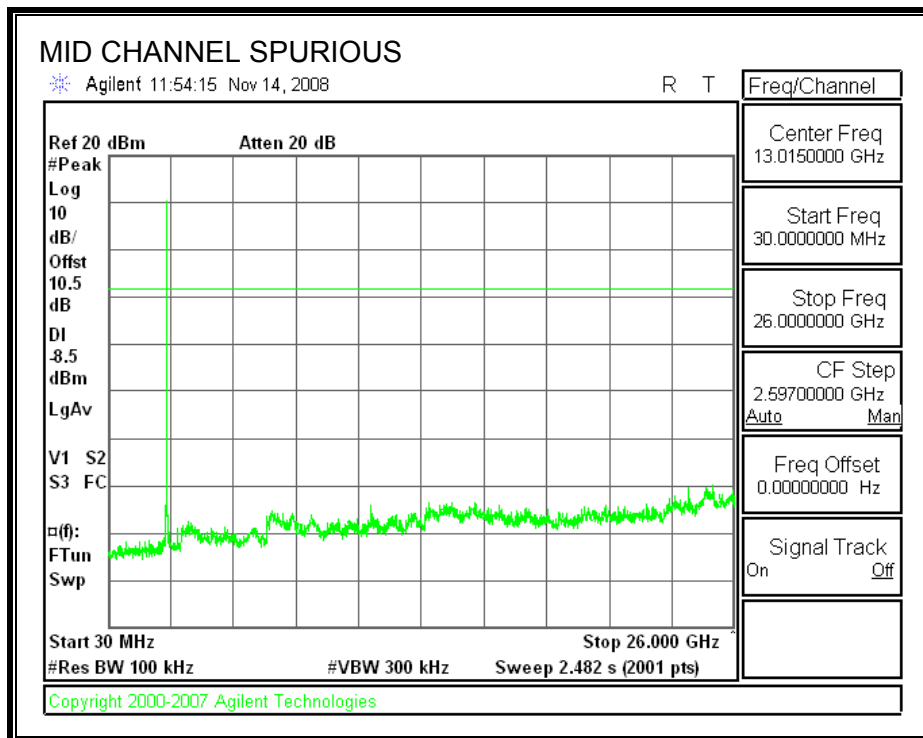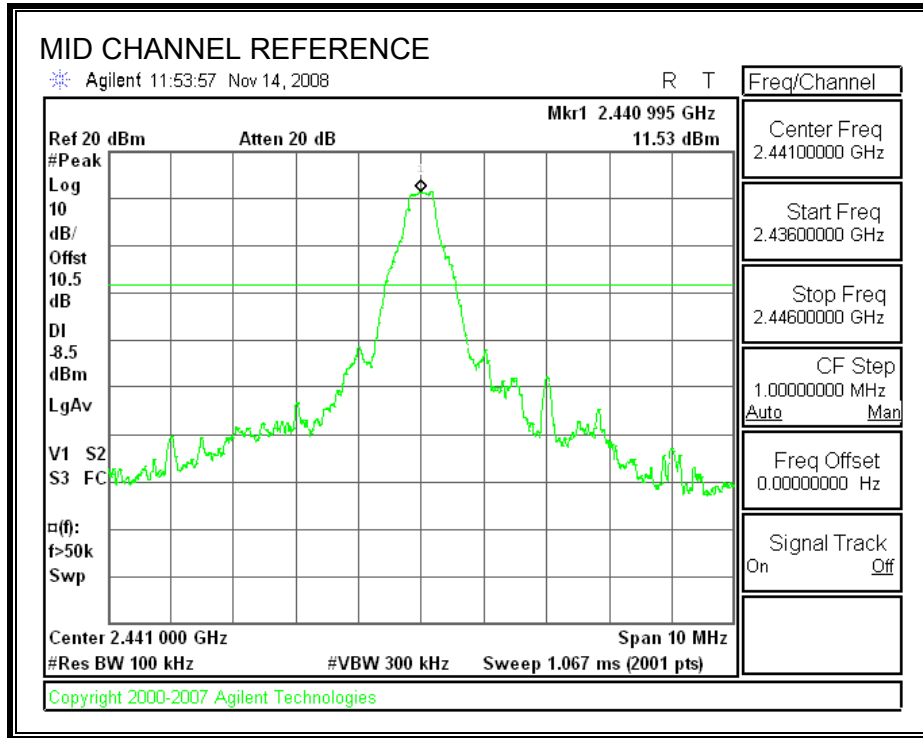

SPURIOUS EMISSIONS, HIGH CHANNEL

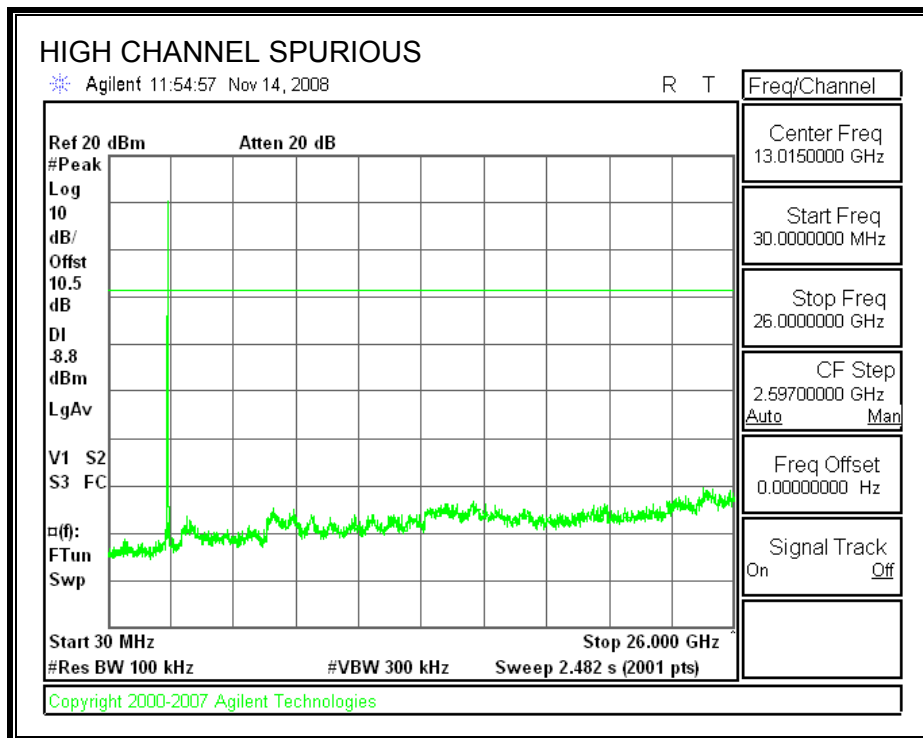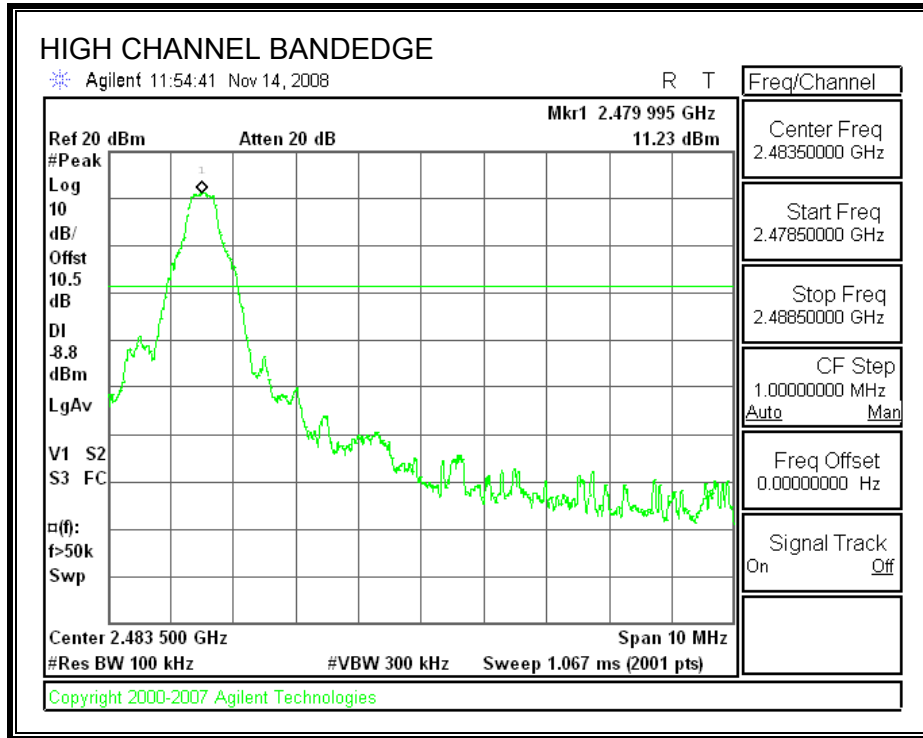

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

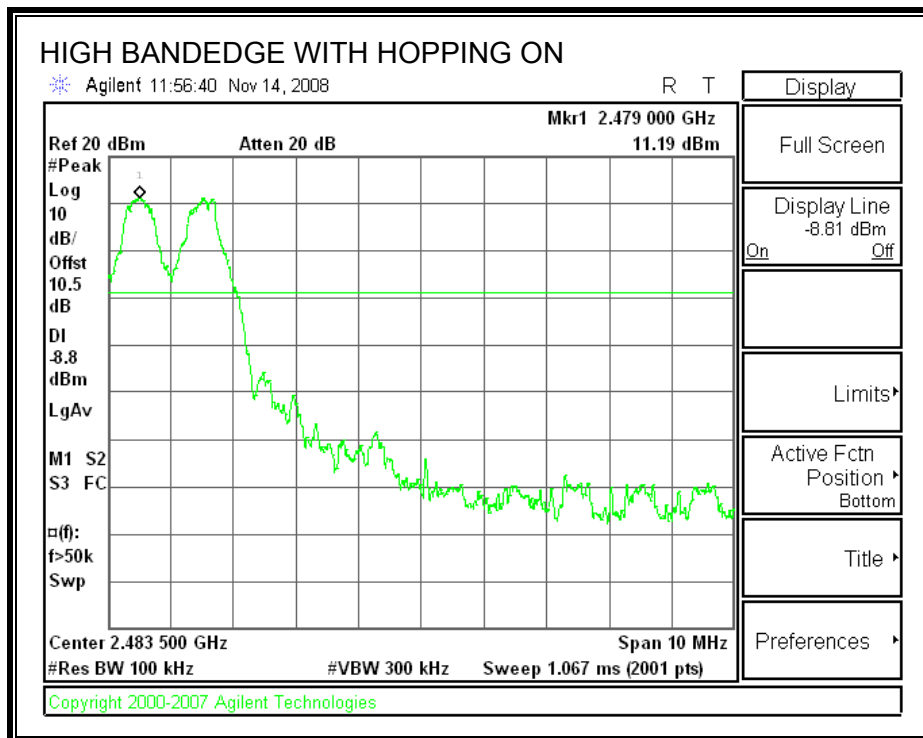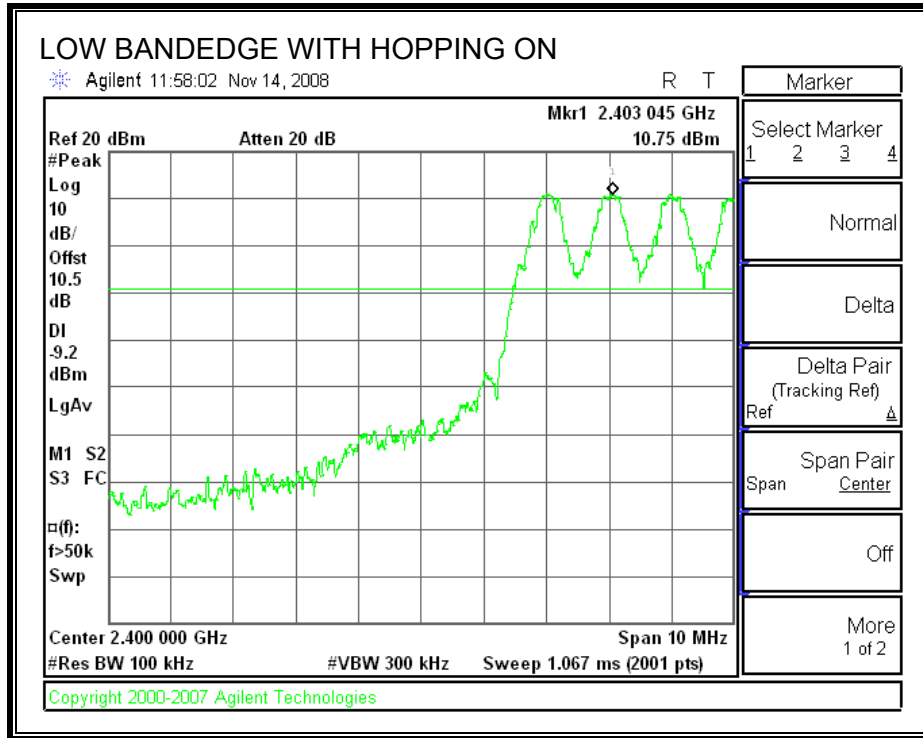

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.



For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



8.2. TRANSMITTER ABOVE 1 GHz
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

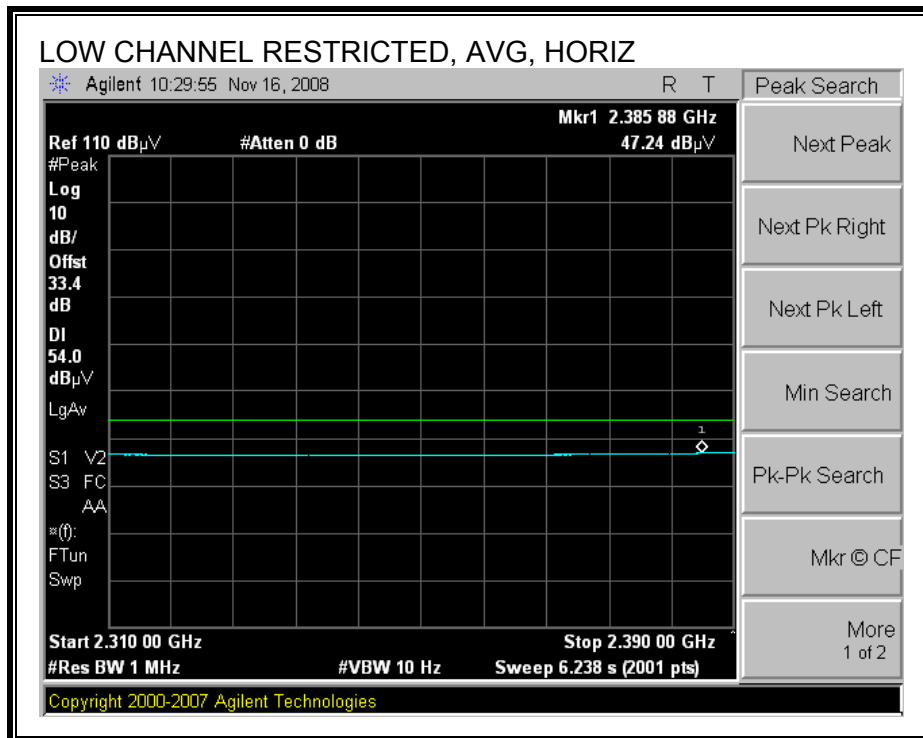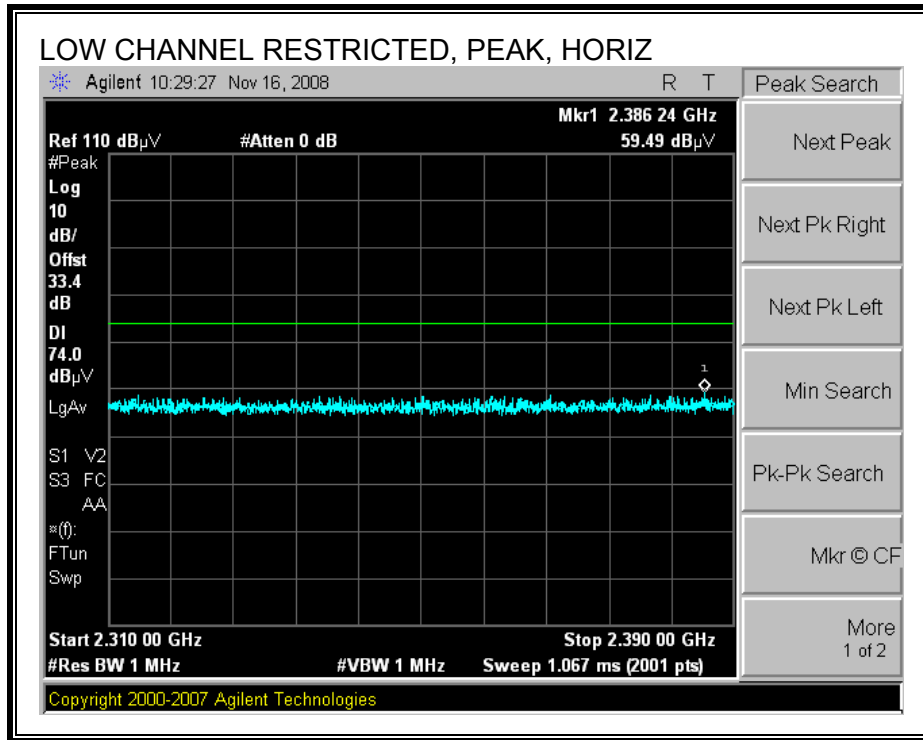



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

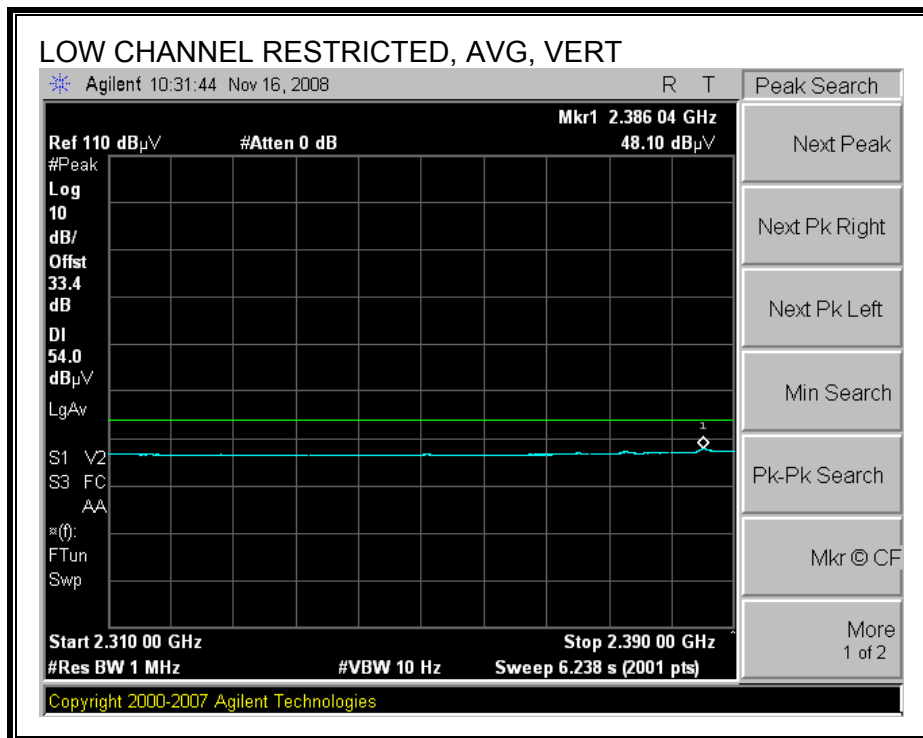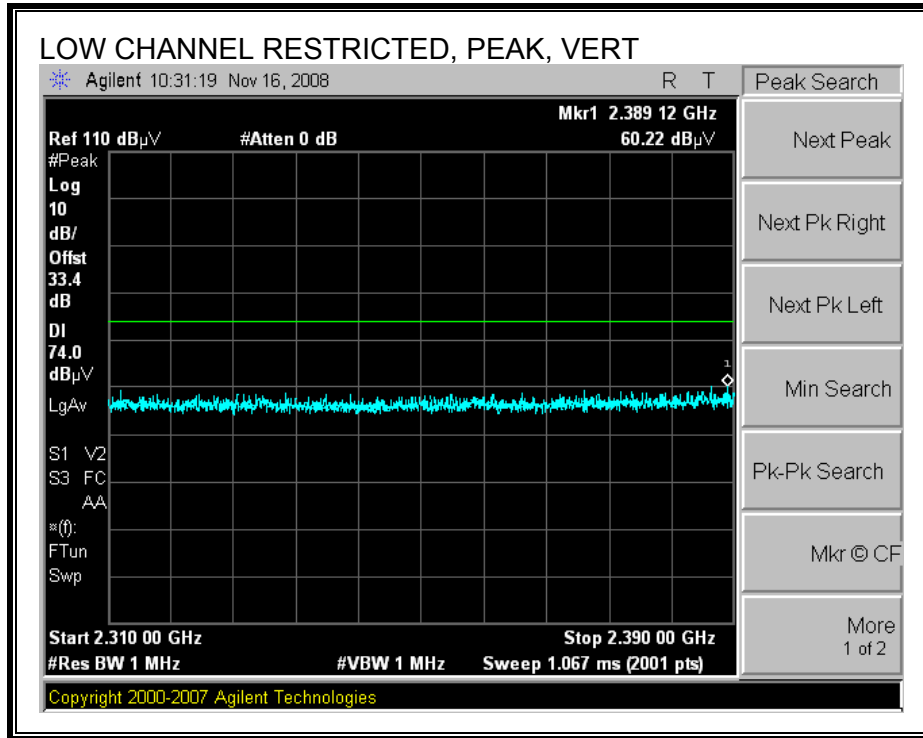

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

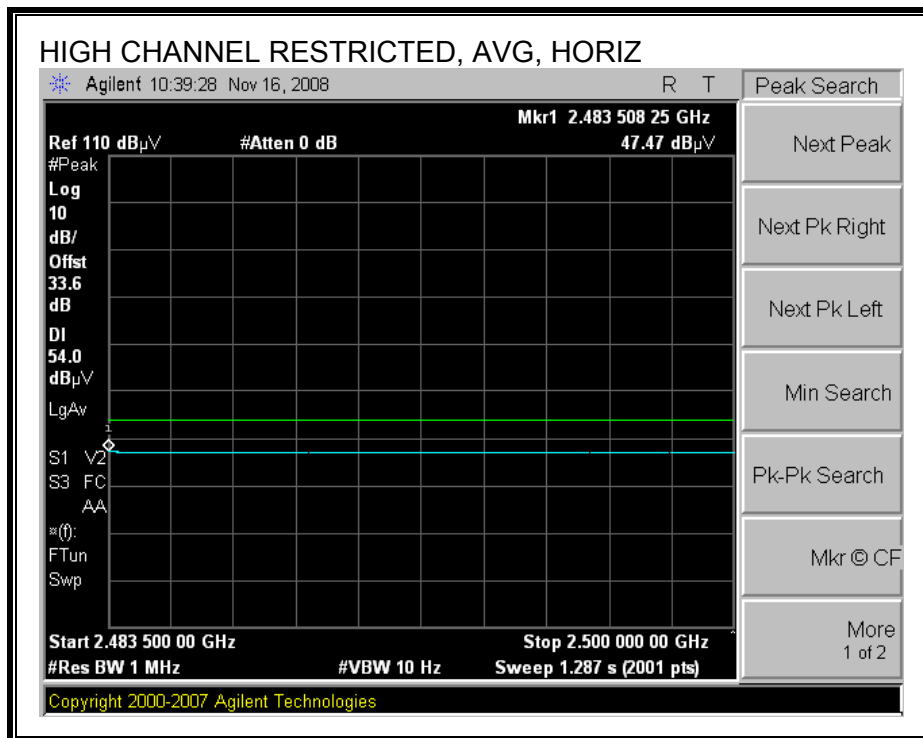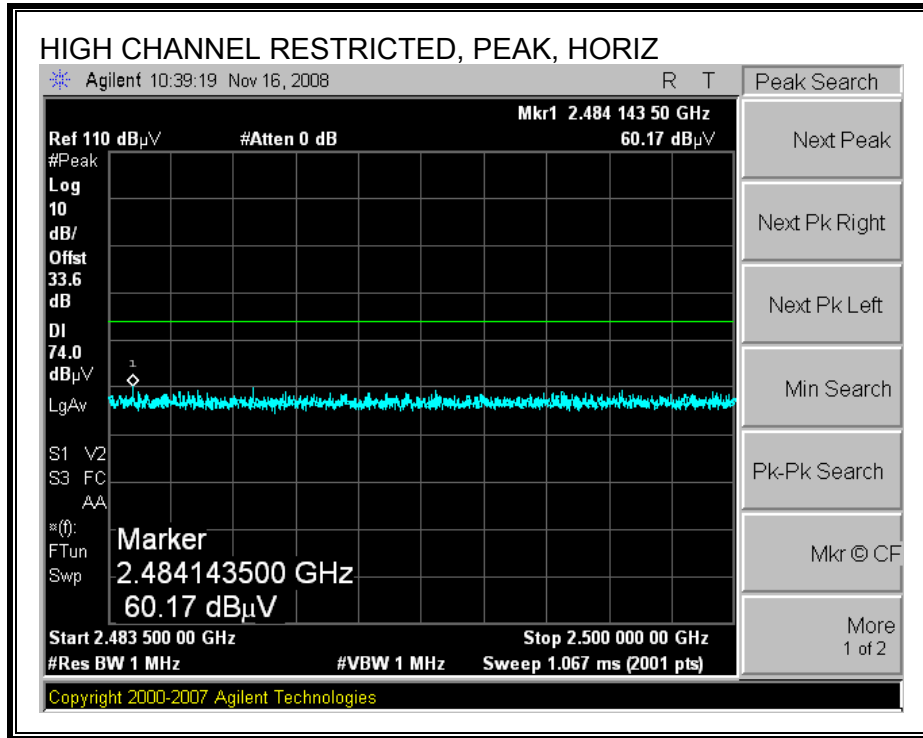

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

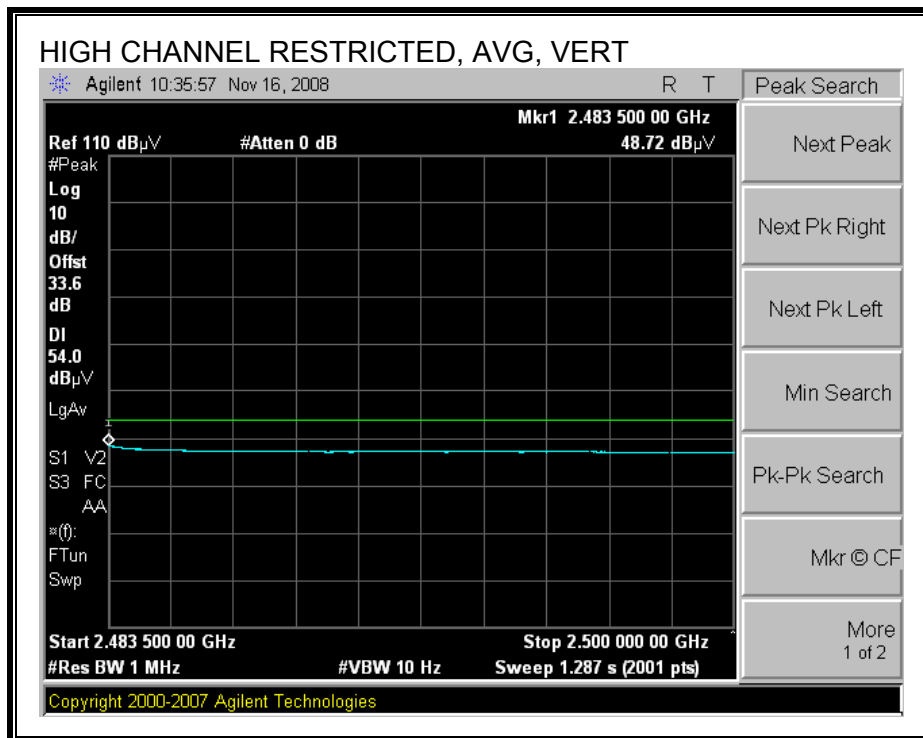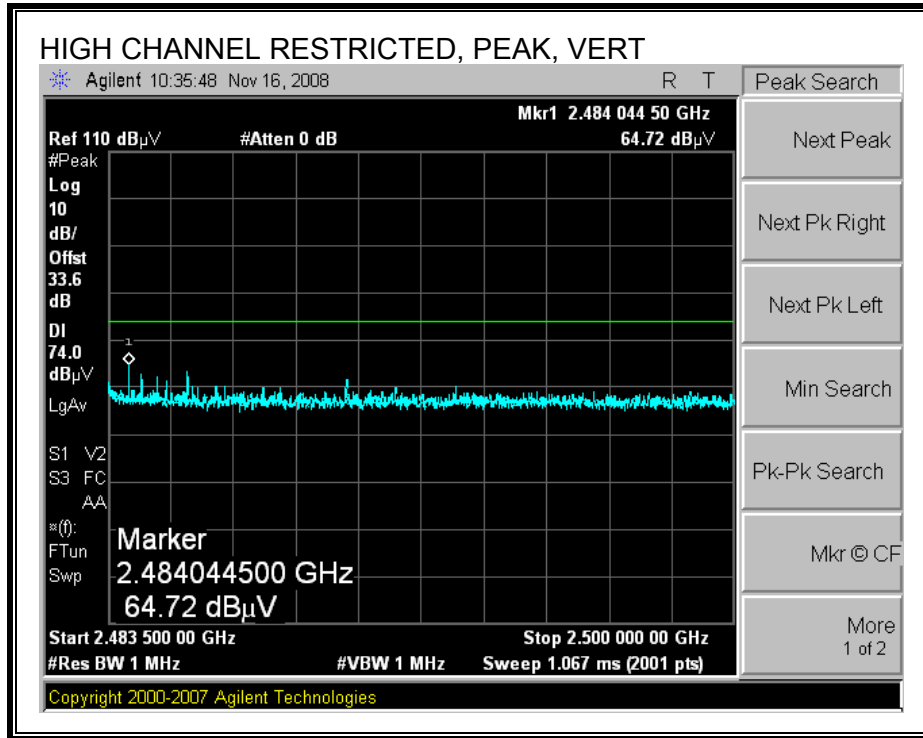

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber

Devin Chang
 Date: 11/25/08
 Project #: 08J12240
 Company: SMK
 EUT Description: EUT only Sample # 11
 EUT M/N: ECM-HW2T
 Test Target: FCC part 15.205
 Mode Oper: Tx mode / Z axis

f Measurement Frequency Amp Preamp Gain Average Field Strength Limit
 Dist Distance to Antenna D Corr Distance Correct to 3 meters Peak Field Strength Limit
 Read Analyzer Reading Avg Average Field Strength @ 3 m Margin vs. Average Limit
 AF Antenna Factor Peak Calculated Peak Field Strength Margin vs. Peak Limit
 CL Cable Loss HPF High Pass Filter

f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant.High cm	Table Angle Degree	Notes
2402MHz															
4.804	3.0	45.1	33.7	3.5	-34.8	0.0	0.0	47.4	74.0	-26.6	V	P	100.0	131.7	
4.804	3.0	36.6	33.7	3.5	-34.8	0.0	0.0	38.9	54.0	-15.1	V	A	100.0	131.7	
4.804	3.0	51.2	33.7	3.5	-34.8	0.0	0.0	53.5	74.0	-20.5	H	P	178.0	162.8	
4.804	3.0	43.1	33.7	3.5	-34.8	0.0	0.0	45.4	54.0	-8.6	H	A	178.0	162.8	
2441MHz															
4.882	3.0	48.6	33.7	3.5	-34.9	0.0	0.0	51.0	74.0	-23.0	V	P	100.0	131.0	
4.882	3.0	40.7	33.7	3.5	-34.9	0.0	0.0	43.1	54.0	-10.9	V	A	100.0	131.0	
7.323	3.0	45.1	35.2	4.5	-34.7	0.0	0.0	50.1	74.0	-23.9	V	P	100.4	52.4	
7.323	3.0	35.8	35.2	4.5	-34.7	0.0	0.0	40.8	54.0	-13.2	V	A	100.4	52.4	
4.882	3.0	54.4	33.7	3.5	-34.9	0.0	0.0	56.9	74.0	-17.1	H	P	177.9	189.5	
4.882	3.0	46.5	33.7	3.5	-34.9	0.0	0.0	48.9	54.0	-5.1	H	A	177.9	189.5	
7.323	3.0	44.0	35.2	4.5	-34.7	0.0	0.0	49.0	74.0	-25.0	H	P	146.7	171.6	
7.323	3.0	34.5	35.2	4.5	-34.7	0.0	0.0	39.5	54.0	-14.5	H	A	146.7	171.6	
2480MHz															
4.960	3.0	52.5	33.8	3.6	-34.9	0.0	0.0	55.0	74.0	-19.0	V	P	119.2	344.8	
4.960	3.0	44.7	33.8	3.6	-34.9	0.0	0.0	47.2	54.0	-6.8	V	A	119.2	344.8	
7.440	3.0	51.2	35.2	4.5	-34.6	0.0	0.0	56.2	74.0	-17.8	V	P	116.2	53.8	
7.440	3.0	42.3	35.2	4.5	-34.6	0.0	0.0	47.4	54.0	-6.6	V	A	116.2	53.8	
4.960	3.0	56.3	33.8	3.6	-34.9	0.0	0.0	58.8	74.0	-15.2	H	P	196.3	175.9	
4.960	3.0	48.1	33.8	3.6	-34.9	0.0	0.0	50.6	54.0	-3.4	H	A	196.3	175.9	
7.440	3.0	54.2	35.2	4.5	-34.6	0.0	0.0	59.2	74.0	-14.8	H	P	184.0	52.5	
7.440	3.0	44.8	35.2	4.5	-34.6	0.0	0.0	49.8	54.0	-4.2	H	A	184.0	52.5	


Rev. 4.1.2.7
 Note: No other emissions were detected above the system noise floor.

8.3. RECEIVER ABOVE 1 GHz

High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber															
Test Engr:		Devin Chang													
Date:		10/15/08													
Project #:		08J12240													
Company:		SMK													
EUT Description:		EUT only													
EUT M/N:		ECM-HW2T													
Test Target:		FCC part 15.205													
Mode Oper:		Tx mode / Z axis													
f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit											
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit											
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit											
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit											
CL	Cable Loss	HPF	High Pass Filter												
f	Dist	Read	AF	CL	Amp	D Corr	Filtr	Corr.	Limit	Margin	Ant. Pol.	Det.	Ant.High	Table Angle	Notes
GHz	(m)	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dB	V/H	P/A/QP	cm	Degree	
2402MHz															
1.602	3.0	46.0	26.0	4.0	-35.7	0.0	0.0	40.3	74.0	-33.7	V	P	111.7	137.7	
1.602	3.0	38.1	26.0	4.0	-35.7	0.0	0.0	32.4	54.0	-21.6	V	A	111.7	137.7	
1.602	3.0	49.4	26.0	4.0	-35.7	0.0	0.0	43.7	74.0	-30.3	H	P	103.8	57.0	
1.602	3.0	44.8	26.0	4.0	-35.7	0.0	0.0	39.1	54.0	-14.9	H	A	103.8	57.0	
2441MHz															
1.628	3.0	44.4	26.1	4.0	-35.7	0.0	0.0	38.8	74.0	-35.2	V	P	122.0	313.5	
1.628	3.0	34.8	26.1	4.0	-35.7	0.0	0.0	29.2	54.0	-24.8	V	A	122.0	313.5	
1.628	3.0	47.9	26.1	4.0	-35.7	0.0	0.0	42.3	74.0	-31.7	H	P	100.0	37.7	
1.628	3.0	42.7	26.1	4.0	-35.7	0.0	0.0	37.2	54.0	-16.8	H	A	100.0	37.7	
2480MHz															
1.654	3.0	43.6	26.2	4.1	-35.7	0.0	0.0	38.2	74.0	-35.8	V	P	175.7	265.8	
1.654	3.0	32.8	26.2	4.1	-35.7	0.0	0.0	27.4	54.0	-26.6	V	A	175.7	265.8	
1.654	3.0	47.7	26.2	4.1	-35.7	0.0	0.0	42.2	74.0	-31.8	H	P	102.2	41.5	
1.654	3.0	42.8	26.2	4.1	-35.7	0.0	0.0	37.4	54.0	-16.6	H	A	102.2	41.5	
Rev. 4.1.2.7															
Note: No other emissions were detected above the system noise floor.															

8.4. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

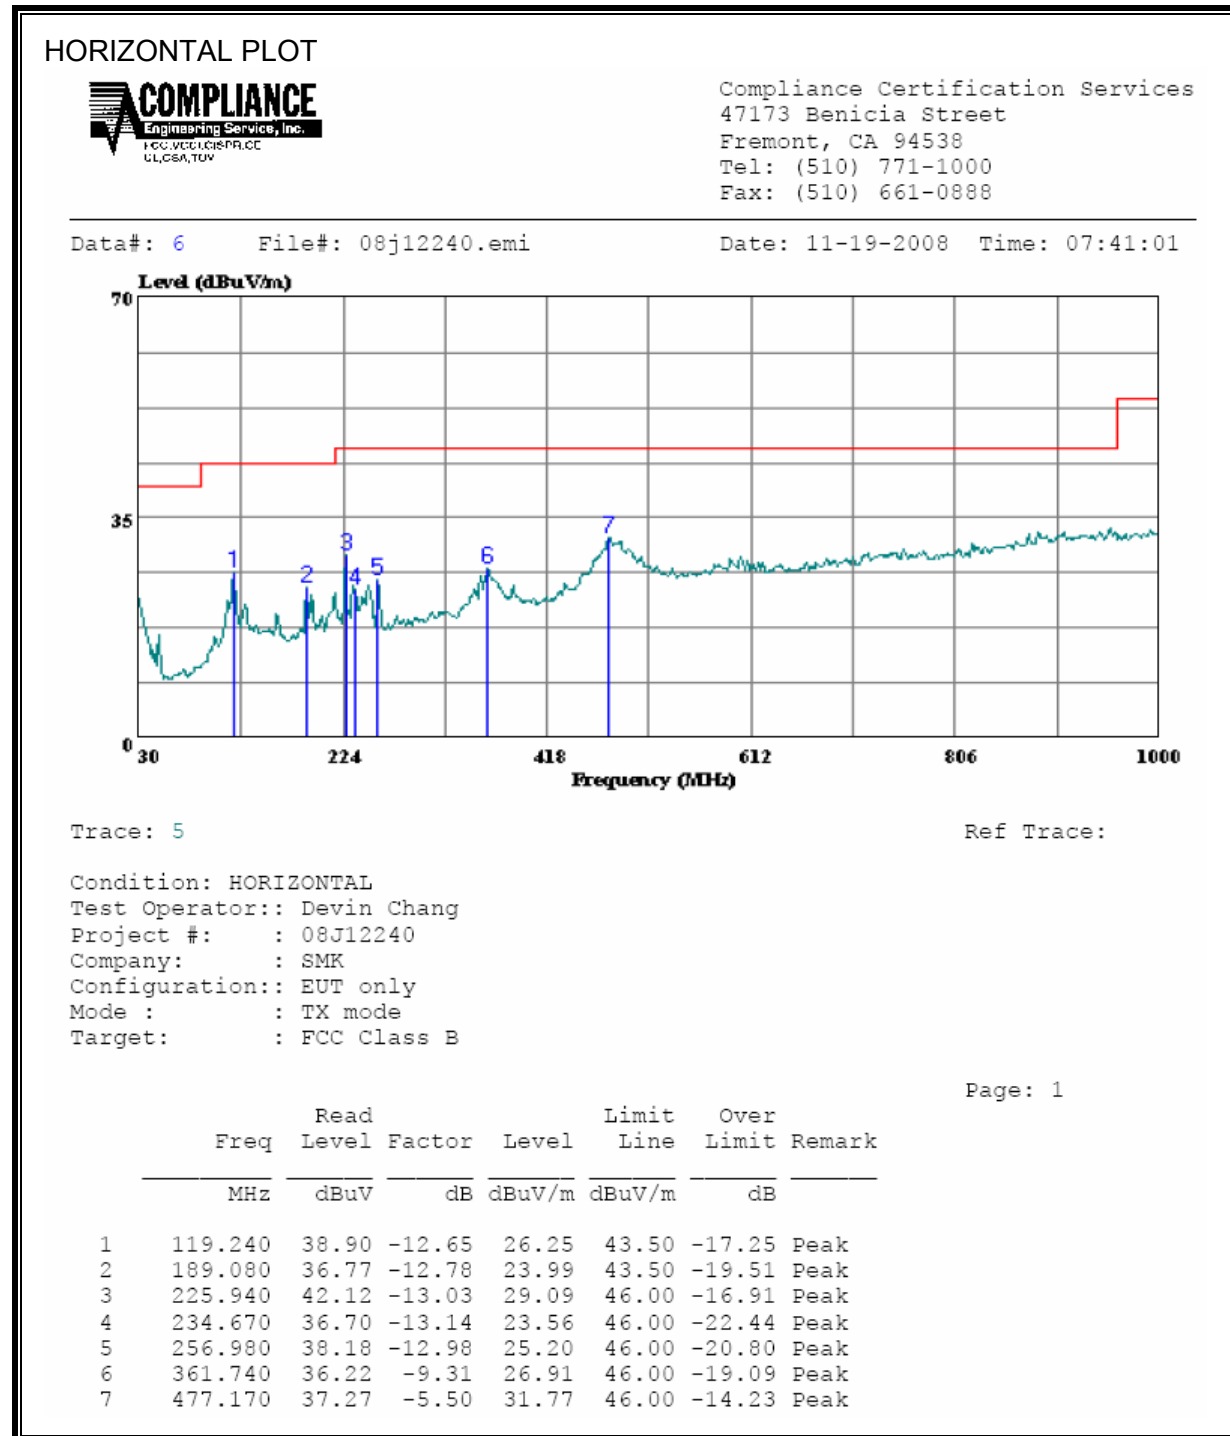


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



Compliance Certification Services
 47173 Benicia Street
 Fremont, CA 94538
 Tel: (510) 771-1000
 Fax: (510) 661-0888

Data#: 4 File#: 08j12240.emi Date: 11-19-2008 Time: 07:35:56

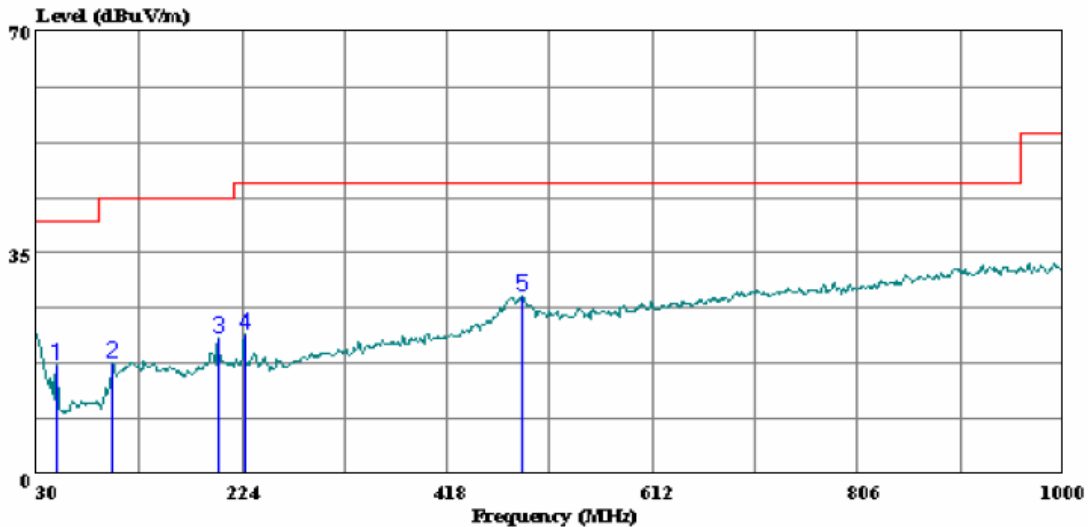

Trace: 3

Ref Trace:

Condition: VERTICAL
 Test Operator:: Devin Chang
 Project #: : 08J12240
 Company: : SMK
 Configuration:: EUT only
 Mode : : TX mode
 Target: : FCC Class B

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	48.430	35.99	-18.77	17.22	40.00	-22.78	Peak
2	101.780	33.67	-16.05	17.62	43.50	-25.88	Peak
3	201.690	34.21	-12.78	21.43	43.50	-22.07	Peak
4	225.940	35.29	-13.03	22.26	46.00	-23.74	Peak
5	489.780	33.14	-5.08	28.06	46.00	-17.94	Peak

9. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5
 Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> ^{1.2}
150 000–300 000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616 000 / <i>f</i> ^{1.2}

* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, *f*, is in MHz.
 2. A power density of 10 W/m² is equivalent to 1 mW/cm².
 3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations, rearranging the terms to express the distance as a function of the remaining variables, changing to units of Power to mW and Distance to cm, and substituting the logarithmic form of power and gain yields:

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

The power density in units of mW/cm² is converted to units of W/m² by multiplying by a factor of 10.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Mode	Band	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	FCC Power Density (mW/cm ²)	IC Power Density (W/m ²)
Bluetooth	2.4 GHz	20.0	11.78	0.20	0.0031	0.0314