



RADIO TEST REPORT

Test Report No.: 32FE0117-SH-02-A

Applicant : SMK Corporation
Type of Equipment : WLAN Complete Module
Model No. : VRL4149-0601F
FCC ID : GT3FC016
Test regulation : FCC Part15 Subpart C: 2012
Test result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test: June 14 to 26, 2012

Tested by: S. Takano
Shinichi Takano
Engineer of WiSE Japan, UL
Verification Service

Approved by : T. Imamura
Toyokazu Imamura
Leader of WiSE Japan, UL
Verification Service

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".



UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

13-EM-F0429

Contents

	<u>Page</u>
SECTION 1: Customer information.....	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results.....	4
SECTION 4: Operation of E.U.T. during testing.....	7
SECTION 5: Conducted emission	9
SECTION 6: Radiated emission	10
SECTION 7: Out of band emissions (Antenna port conducted)	12
SECTION 8: 6dB bandwidth & Occupied bandwidth (99%)	12
SECTION 9: Maximum peak output power	12
SECTION 10: Peak power density.....	12
Contents of APPENDIXES.....	13
APPENDIX 1: Test data.....	14
APPENDIX 2: Test instruments	83
APPENDIX 3: Photographs of test setup	85

SECTION 1: Customer information

Company Name : SMK Corporation
Address : 5-6, Togoshi 6-chome, Shinagawa-ku, Tokyo 142-8511, Japan
Telephone Number : +81-3-3785-2804
Facsimile Number : +81-3-3785-2877
Contact Person : Nobuhide Ninomiya

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : WLAN Complete Module
Model Number : VRL4149-0601F
Serial Number : Refer to Section 4.2
Rating : DC 1.8V (DC 1.71V to 1.89V)
DC 3.3V (DC 3.0V to 3.6V)
Country of Mass-production : Japan
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Receipt Date of Sample : June 14, 2012
Modification of EUT : The test lab did not make the modification to the EUT supplied from the customer to have it pass the tests.

2.2 Product description

Model: VRL4149-0601F (referred to as the EUT in this report) is a WLAN Complete Module.

Clock frequency(ies) in the system : 38.4MHz

<Radio part>

Equipment type : Transceiver
Frequency of operation : 2412MHz to 2462MHz, 5180MHz to 5320MHz,
5500MHz to 5700MHz, 5745MHz to 5825MHz
Radio part clock frequency : 38.4MHz
Channel spacing : 5MHz (for 2412MHz to 2462MHz), 20MHz (for 5180MHz to 5825MHz)
Type of modulation : DSSS, OFDM
Antenna type : Printed wire
Antenna connector type : None
Antenna gain (maximum) : +1.47dBi (for 2412MHz to 2462MHz), -0.5dBi (for 5180MHz to 5260MHz),
+1.15dBi (for 5260MHz to 5320MHz), -0.2dBi (for above 5500MHz)
ITU code : G1D, D1D
Operating Voltage (Radio part) : DC 1.8V (DC 1.71V to 1.89V)
DC 3.3V (DC 3.0V to 3.6V)
Operation temperature range : -20 deg.C to +70 deg.C

Refer to 32FE0117-SH-02-B is FCC part 15 subpart E report and 32FE0117-SH-02-C is FCC part 15 DFS report.

FCC 15.31 (e) / 212

This EUT provides stable voltage (DC1.8V and DC3.3V) constantly to RF Module regardless of input voltage from host device. Therefore, this EUT complies with the requirement.

FCC Part 15.203 / 212

It is impossible for end users to replace the antenna, because it is soldered on the circuit board. Therefore the equipment complies with the requirement of 15.203/212.

UL Japan, Inc.
Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

SECTION 3: Test specification, procedures & results**3.1 Test specification**

Test specification : FCC Part 15 Subpart C: 2012, final revised on May 17, 2012
and effective June 18, 2012

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.209 Radiated emission limits, general requirements
Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz,
and 5725-5850MHz

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted Emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC 15.207	-	N/A	20.6dB (0.44469MHz, QP, L1, 11g, Tx, 2437MHz)	Complied
6dB Bandwidth	ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.247 (a)(2)	Conducted	N/A	* See data	Complied
Maximum Peak Output Power	ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.247 (b)(3)	Conducted	N/A		Complied
Out of Band Emission & Restricted Band Edges	ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.109, 15.247 (d) & 15.209	Conducted / Radiated	N/A	2.9dB (7660.000MHz, AV, Horizontal, 11a, Tx, 5745MHz)	Complied
Power Density	ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.247 (e)	Conducted	N/A	* See data	Complied
Note: UL Japan's EMI Work Procedures No.13-EM-W0420 and 13-EM-W0422. These tests were also referred to "Guidance on Measurement for Digital Transmission Systems Section15.247".						

UL Japan, Inc.**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied Bandwidth (99%)	ANSI C63.4:2003 13. Measurement of intentional radiators, RSS-Gen 4.6.1	RSS-Gen 4.6.1	Conducted	-	N/A

Note: UL Japan's EMI Work Procedures No.13-EM-W0420 and 13-EM-W0422.

* Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Item	Frequency range	No.1 SAC*1/SR*2 (±)	No.2 SAC/SR (±)	No.3 SAC/SR (±)
Conducted emission (AC Mains) LISN	150kHz-30MHz	3.6 dB	3.6 dB	3.5 dB
Radiated emission (Measurement distance: 3m)	30MHz-300MHz	4.9 dB	5.1 dB	4.9 dB
	300MHz-1GHz	5.0 dB	5.2 dB	4.9 dB
	1GHz-18GHz	4.8 dB	4.8 dB	4.9 dB
	18GHz-26.5GHz	4.8 dB	4.5 dB	4.5 dB
Radiated emission (Measurement distance: 10m)	30MHz-300MHz	4.9 Db	5.1 dB	-
	300MHz-1GHz	4.9 dB	5.0 dB	-
Radiated emission (Measurement distance: 1m)	1GHz-18GHz	5.6 dB	5.6 dB	5.6 dB
	18GHz-40GHz	4.6 dB	4.3 dB	4.4 dB

*1: SAC=Semi-Anechoic Chamber

*2: SR= Shielded Room is applied besides radiated emission.

Conducted emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test

The data listed in this test report meets the limits unless the uncertainty is taken into consideration.

Power Measurement uncertainty above 1GHz for this test was: (±) 1.9dB

Conducted emissions, Power Density Measurement (below 1GHz) uncertainty for this test was: (±) 1.8dB

Conducted emissions, Power Density Measurement (1G-3GHz) uncertainty for this test was: (±) 2.3dB

Conducted emissions, Power Density Measurement (3G-18GHz) uncertainty for this test was: (±) 3.0dB

Conducted emissions Measurement (18G-26.5GHz) uncertainty for this test was: (±) 2.9dB

Conducted emissions Measurement (26.5G-50GHz) uncertainty for this test was: (±) 2.8dB

Bandwidth Measurement uncertainty for this test was: (±) 5.4%

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.5 Test location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number : +81 463 50 6400

Facsimile number : +81 463 50 6401

JAB Accreditation No. : RTL02610

	FCC Registration No.	IC Registration No.	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
<input checked="" type="checkbox"/> No.1 Semi-anechoic chamber	697847	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
<input type="checkbox"/> No.2 Semi-anechoic chamber	697847	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
<input checked="" type="checkbox"/> No.3 Semi-anechoic chamber	697847	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5m
<input type="checkbox"/> No.4 Semi-anechoic chamber	-	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
<input checked="" type="checkbox"/> No.1 shielded room	-	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
<input type="checkbox"/> No.2 shielded room	-	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
<input type="checkbox"/> No.3 shielded room	-	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
<input type="checkbox"/> No.4 shielded room	-	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
<input checked="" type="checkbox"/> No.5 shielded room	-	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
<input checked="" type="checkbox"/> No.6 shielded room	-	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-

3.6 Test setup, Data of EMI & Test instruments

Refer to APPENDIX 3 to 3.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 4: Operation of E.U.T. during testing**4.1 Operating mode**

Test item	Operating mode	Tested frequency
Conducted emission, Spurious emission (below 1GHz) *4)	Transmitting (Tx)	11g, 6Mbps, 2437MHz, 11a, 6Mbps, 5745MHz
Spurious emission (above 1GHz), 6dB bandwidth Maximum peak output power Power density 99% occupied bandwidth	Transmitting (Tx)	11b, 11Mbps, 2412MHz, 11b, 11Mbps, 2437MHz, 11b, 11Mbps, 2462MHz, 11g, 6Mbps, 2412MHz, 11g, 6Mbps, 2437MHz, 11g, 6Mbps, 2462MHz, 11n (HT20), MCS3(26Mbps), 2412MHz, 11n (HT20), MCS3(26Mbps), 2437MHz, 11n (HT20), MCS3(26Mbps), 2462MHz, 11a, 6Mbps, 5745MHz, 11a, 6Mbps, 5785MHz, 11a, 6Mbps, 5825MHz, 11n (HT20), MCS3(26Mbps), 5745MHz, 11n (HT20), MCS3(26Mbps), 5785MHz, 11n (HT20), MCS3(26Mbps), 5825MHz
Restricted band edge	Transmitting (Tx)	11b, 11Mbps, 2412MHz, 11b, 11Mbps, 2462MHz, 11g, 6Mbps, 2412MHz, 11g, 6Mbps, 2462MHz, 11n (HT20), MCS3(26Mbps), 2412MHz, 11n (HT20), MCS3(26Mbps), 2462MHz, 11a, 6Mbps, 5745MHz, 11a, 6Mbps, 5825MHz, 11n (HT20), MCS3(26Mbps), 5745MHz, 11n (HT20), MCS3(26Mbps), 5825MHz
<p>*1) Transmitting duty was 100% on all tests.</p> <p>*2) Software for testing : WiFi Control Application Ver.3.0 Power settings: Fixed *Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p> <p>*3) The worst Antenna and condition was determined based on the test result of Maximum peak output power. As a result of preliminary test, the formal test was performed with the above modes, which had the maximum power.</p> <p>*4) Test operating mode was determined as follows according to "Section 1 of 6 802.11 a/b/g/n testing- Managing Complex Regulatory Approvals - "of TCB Council Workshop October 2009.</p>		


UL Japan, Inc.**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

4.2 Configuration of tested system

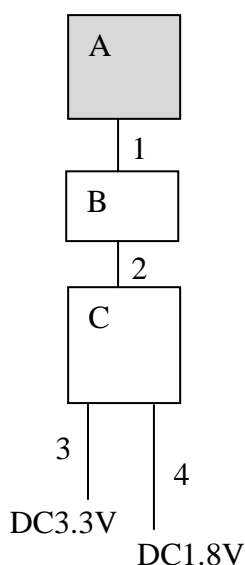

* Test data was taken under worst case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	FCC ID (Remarks)
A	WLAN Complete Module	VRL4149-0601F	1	SMK Corporation	GT3FC016
B	Jig A	-	-	SMK Corporation	-
C	Jig B	-	-	SMK Corporation	-

List of cables used

No.	Cable Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Signal	0.025	Unshielded	Unshielded	-
2	Signal	0.025	Unshielded	Unshielded	-
3	DC	1.3	Unshielded	Unshielded	-
4	DC	1.3	Unshielded	Unshielded	-

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 5: Conducted emission

5.1 Operating environment

Test place : See test data (APPENDIX 1)
Temperature : See test data (APPENDIX 1)
Humidity : See test data (APPENDIX 1)

5.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals was aligned and was flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from LISN and excess AC cable was bundled in center. I/O cables that were connected to the peripherals were bundled in center. They were folded back and for the forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN to the input power source. All unused 50ohm connectors of the LISN were resistively terminated in 50ohm when not connected to the measuring equipment. Photographs of the set up are shown in APPENDIX 3.

5.3 Test conditions

Frequency range : 0.15 - 30MHz
EUT position : Table top
EUT operation mode : Refer to SECTION 4.1

5.4 Test procedure

The AC Mains Terminal Continuous disturbance Voltage had been measured with the EUT via host device within a Shielded room. The host device was connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection has been performed. The measurements had been performed with a quasi-peak detector and if required, an average detector. The conducted emission measurements were made with the following detection of the test receiver.

Detection Type : Quasi-Peak/ Average
IF Bandwidth : 9kHz

5.5 Results

Summary of the test results : Pass
Refer to APPENDIX 1

SECTION 6: Radiated emission

6.1 Operating environment

Test place : See test data (APPENDIX 1)
 Temperature : See test data (APPENDIX 1)
 Humidity : See test data (APPENDIX 1)

6.2 Test configuration

EUT was placed on a platform of nominal size, 0.5m by 0.5m, raised 80cm above the conducting ground plane.

The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity.

The configuration was set in accordance with ANSI C63.4: 2009.

The rear of EUT, including its peripherals was aligned and flushed with rear of tabletop. I/O cables that were connected to the peripherals were bundled in center. They were folded back and for the forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Photographs of the set up are shown in APPENDIX 3.

6.3 Test conditions

Frequency range : 30MHz to 40GHz
 Test distance : 3m(below 15GHz) / 1m(above15GHz)
 EUT position : Table top
 EUT operation mode : Refer to SECTION 4.1

6.4 Test procedure

The Radiated Electric Field Strength intensity has been measured on a semi-anechoic chamber with a ground plane and at a distance of 3m(below 15GHz) / 1m(above 15GHz) (Refer to Figure 1). Measurements were performed with quasi-peak, peak and average detector. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detection of the test receiver.

Frequency	:	30M-1000MHz	1000M-40000MHz	
Detection Type	:	Quasi-Peak	Peak	* Average
IF Bandwidth	:	120kHz	RBW:1MHz/VBW:1MHz	RBW:1MHz/VBW:10Hz

* When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

* The test was performed with VBW 10Hz since the EUT had no intervals during which the transmitter was off (see APPENDIX 1).

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Combinations of the worst case

2.4GHz band

	Frequency Antenna polarization	Carrier *2)	Spurious			
			Below 1GHz	1-15GHz	15-18GHz	18-25GHz
Module	Horizontal	X	Y	Y	Y	Y
	Vertical	Y	Y	Z	Z	Z

5GHz band

	Frequency Antenna polarization	Carrier *2)	Spurious			
			Below 1GHz	1-15GHz	15-18GHz	18-40GHz
Module	Horizontal	Z	Y	Y	Y	Y
	Vertical	Y	Y	Y	Y	Y

*2) with spurious emissions near carrier frequency.

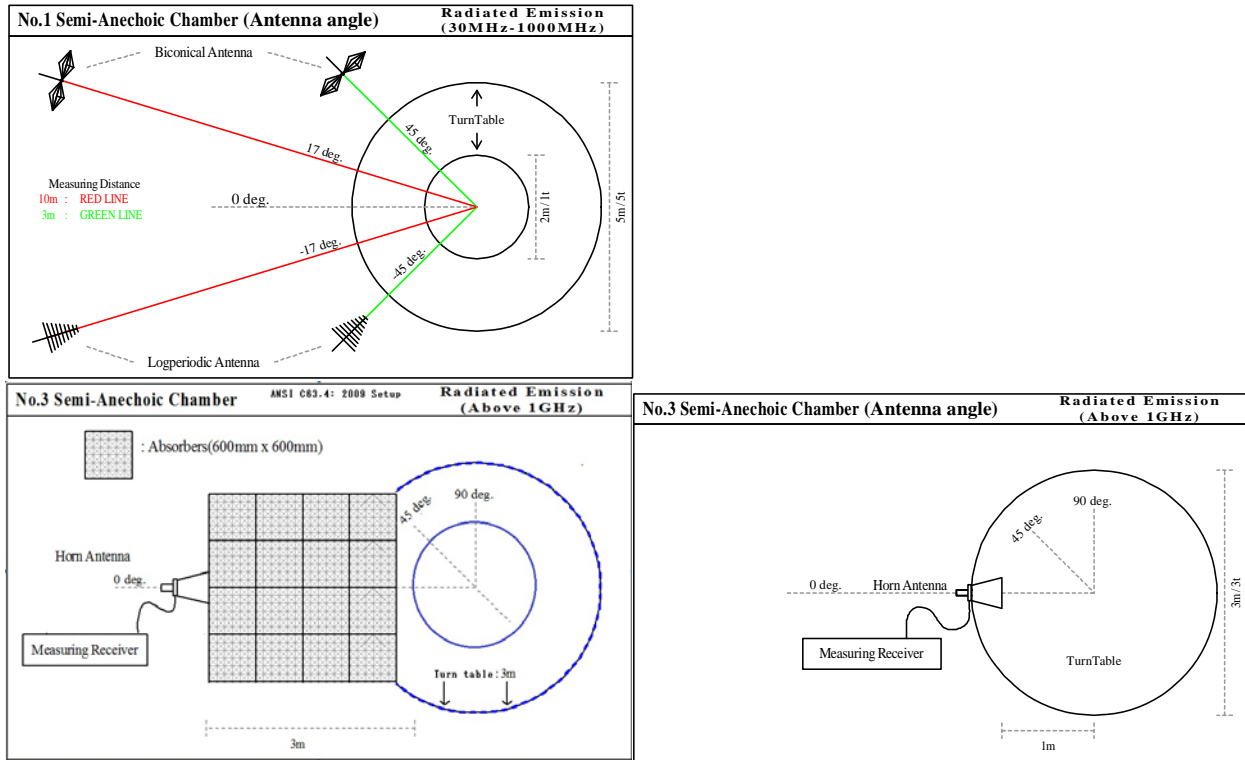


Figure 1. Antenna angle

6.5 Band edge

Band edge level at 2400MHz, 2397.670MHz, 2398.920MHz, 2397.830MHz, 5725MHz and 5850MHz is less than 20dB of peak point of the carrier. Refer to the data of Out of Band Emissions (Antenna Port Conducted). Band edge level at 2390MHz and 2483.5MHz is below the limits of FCC 15.209. Refer to the data of Radiated emission.

6.6 Results

Summary of the test results : Pass *No noise was detected above the 5th order harmonics (2.4GHz bands).
*No noise was detected above the 2nd order harmonics (5GHz bands).

Refer to APPENDIX 1

**UL Japan, Inc.
Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

SECTION 7: Out of band emissions (Antenna port conducted)

Test procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port. In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

In the frequency range below 30MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart.(9kHz-150kHz:RBW=200Hz, 150kHz-30MHz:RBW=10kHz). Since the margin is more than about 40dB, the EUT complies with the limit of FCC15.209 if the measurement is performed with RBW=100kHz.

Summary of the test results: Pass

Refer to APPENDIX 1

SECTION 8: 6dB bandwidth & Occupied bandwidth (99%)

Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

Refer to APPENDIX 1

SECTION 9: Maximum peak output power

Test procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass

Refer to APPENDIX 1

SECTION 10: Peak power density

Test procedure

The peak power density was measured with a spectrum analyzer connected to the antenna port.

Instrument used : Spectrum Analyzer *1)

RBW / VBW : 30kHz / 100kHz *2)

*1) PSD Option 1 of " Measurement of Digital Transmission Systems Operating under Section 15.247".

*2) The test was not performed at RBW : 3kHz that was stated in the Regulation.

However, the measurement value with RBW: 3kHz is less than the value of RBW: 30kHz and the test data met the limit with RBW: 30kHz.

Summary of the test results: Pass

Refer to APPENDIX 1

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Contents of APPENDIXES

APPENDIX 1: Data of EMI test

Conducted emission
6dB Bandwidth
Maximum peak output power
Radiated emission
Spurious emission (Antenna port conducted)
Peak power density
Occupied Bandwidth

APPENDIX 2: Test instruments

Test instruments

APPENDIX 3: Photographs of test setup

Conducted emission
Radiated emission
Pre-check of worst position