



Engineering and Testing for EMC and Safety Compliance

APPLICATION FOR FCC CERTIFICATION DIRECT SEQUENCE SPREAD SPECTRUM TRANSMITTER

Part 15 Unlicensed Modular Transmitter Approval (DA00-1407 June 26, 2000)

**CISCO Systems, Inc.
3875 Embassy Parkway
Suite 350
Akron, OH 44333
330-664-7362 (Jim Nicholson)**

**Model: AIR-MPI352
FCC ID:LDK102042**

February 28, 2001

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 1999	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 1999	RADIO FREQUENCY DEVICES
FCC 97-114	GUIDANCE ON MEASUREMENTS FOR DIRECT SEQUENCE SPREAD SPECTRUM SYSTEMS
ANSI C63.4-1992	STANDARD FORMAT MEASUREMENT / TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
RSS-210, Issue 3: 2000	LOW POWER LICENCE-EXEMPT RADIOCOMMUNICATION DEVICES (ALL FREQUENCY BANDS)
RSS-102, Issue 1: 1999	EVALUATION PROCEDURE FOR MOBILE AND PORTABLE RADIO TRANSMITTERS

FCC Rules Parts	Frequency Range	Output Power (W)	Freq. Tolerance	Emission Designator
Part 15.247	2412 to 2462 MHz	0.109		
Canadian Sections	Frequency Range	Output Power (W)	Freq. Tolerance	Emission Designator
6.2.2 (o)	2412 to 2462 MHz	0.109		

This report concerns (check one): Equipment Type: PCI Board Original Grant: <input checked="" type="checkbox"/> Class II Change:
Deferred grant requested per 47 CFR 0.457 (d) (1) (ii) Yes: No: <input checked="" type="checkbox"/> If yes, defer until: _____
Company name agrees to notify the Commission by: _____ (date) of the intended date of announcement of the product so that the grant can be issued on that date.
Transition Rules Request per 15.37? Yes: No: <input checked="" type="checkbox"/> If no, assumed Part 15, subpart B for unintentional radiators - the new 47 CFR. [10-1-90 Edition] provision.

REPORT PREPARED BY:

EMC Engineer: Rachid Sehb Signature: 

Supervising Engineer: Desmond A. Fraser Signature: 

Document Number:2001041

No part of this report may be reproduced without the full written approval of Rhein Tech Laboratories, Inc.

360 Herndon Parkway, Suite 1400
Herndon, VA 20170
Phone: 703-689-0368; Fax: 703-689-2056; Metro: 703-471-6441



TABLE OF CONTENTS

1	INTRODUCTION	4
1.1	RELATED SUBMITTAL (S)/GRANT (S)	4
1.2	TEST METHODOLOGY	4
1.3	TEST FACILITY	4
1.4	EMISSIONS EQUIPMENT LIST.....	5
2	SYSTEM TEST CONFIGURATION	8
2.1	JUSTIFICATION.....	8
2.2	EUT EXERCISE SOFTWARE	8
2.3	SPECIAL ACCESSORIES	8
2.4	TEST SYSTEM DETAILS	9
2.5	CONFIGURATION OF TESTED SYSTEM	10
3	CONFORMANCE STATEMENT	11
4	FIELD STRENGTH CALCULATION	12
5	CONDUCTED EMISSIONS MEASUREMENTS	13
5.1	CONDUCTED EMISSIONS TEST.....	14
5.1.1	<i>CONDUCTED EMISSIONS (CHANNEL 1 WITH THE EXTERNAL ANTENNA)</i>	15
6	RADIATED EMISSIONS MEASUREMENTS	16
6.1	RADIATED EMISSIONS TEST	17
6.1.1	<i>Radiated EMISSION DIGITAL noise (Channel 1 with the external Antenna)</i>	17
7	MODULATED BANDWIDTH	18
8	CONDUCTED POWER OUTPUT	18
9	ANTENNA CONDUCTED SPURIOUS EMISSIONS.....	19
10	RADIATED SPURIOUS EMISSIONS.....	20
10.1.1	<i>Radiated Emissions Harmonics/spurious (Channel 1)</i>	20
10.1.2	<i>Radiated Emissions Harmonics/spurious (Channel 6)</i>	20
10.1.3	<i>Radiated Emissions Harmonics/spurious (Channel 11)</i>	21
11	POWER SPECTRAL DENSITY.....	22
12	COMPLIANCE WITH THE RESTRICTED BAND EDGE.....	22
13	RECIEVER.....	23
14	ANTENNA SPECIFICATIONS	24
15	BANEDGE PLOTS	25
16	SPECTRAL DENSITY PLOTS.....	29
17	6dB PLOTS	32



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

18	RF EXPOSURE CALCULATIONS FOR HIGH GAIN ANTENNAS	35
19	PROCESSING GAIN REPORT.....	36
20	PRODUCT DESCRIPTION.....	37
21	LABEL INFORMATION.....	38
22	SCHEMATICS	39
23	MANUAL	40
24	TEST PHOTOGRAPHS	41
24.1	CONDUCTED MEASUREMENT PHOTOS.....	41
24.2	RADIATED MEASUREMENT PHOTOS	42
25	INTERNAL PHOTOGRAPHS.....	43
26	EXTERNAL PHOTOGRAPHS.....	46
27	ANTENNA PHOTOGRAPHS.....	47
28	SAR REPORT	48



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

1 INTRODUCTION

The following Application for FCC Certification for a Direct Sequence Spread Spectrum transmitter is prepared on behalf of Cisco System in accordance with Part 15.247 of the Federal Communications Commissions. The Equipment Under Test (EUT) was the **AIR-MPI352, FCC ID: LDK102042**. The test results reported in this document relate only to the item that was tested. The afore mentioned device fulfills the requirement for a Part 15 Unlicensed Modular Transmitter per FCC public notice DA 00-1407 released in June 26, 2000.

All measurements contained in this Application were conducted in accordance with ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 1992. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Some accessories are used to increase sensitivity and prevent overloading of the measuring instrument. These are explained in the appendix of this report. Calibration checks are performed regularly on the instruments, and all accessories including the high pass filter, preamplifier and cables.

1.1 RELATED SUBMITTAL (S)/GRANT (S)

This is an original application for certification.

1.2 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 1992. Radiated testing was performed at an antenna to EUT distance of 3 meters. Emissions above 1 GHz were video averaged.

1.3 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report dated March 3, 1994, submitted to and approved by the Federal Communication Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).



1.4 EMISSIONS EQUIPMENT LIST

RTL Asset Number	Manufacturer	Model	Part Type	Serial Number	Calibration due date
900969	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz – 40 GHz)	2412A00414	03/23/01
900929	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz – 40 GHz)	2811A01276	03/28/01
900901	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz – 40 GHz)	3145A01599	11/02/01
900339	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz – 40 GHz)	2521A00743	03/27/01
900042	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz – 40 GHz)	2521A01032	11/05/01
900924	Amplifier Research	75A220	Amplifier (10 kHz – 220 MHz)		N/A
900933	Hewlett Packard	11975A	Power Amplifier (2 - 8 GHz)	2304A00348	11/15/01
901067	Hewlett Packard	8903B	Audio Analyzer	2303A00307	06/28/01
901055	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2545A04102	06/08/01
900718	Voltech	PM3000A	Power Analyzer	6836-002-10	11/08/01
900397	Associated Research, Inc.	6554SA	Electrical Safety Compliance Analyzer	940281	11/08/01
900926	Hewlett Packard	8753D	RF Vector Network Analyzer	3410A09659	03/28/01
901089	Hewlett Packard	HP875SET	Transmission/Reflection Network Analyzer	US39170052	N/A
900968	Hewlett Packard	8567A	Spectrum Analyzer (10 kHz – 1.5 GHz)	2602A00160	03/23/01
900903	Hewlett Packard	8567A	Spectrum Analyzer (10 kHz – 1.5 GHz)	2841A00614	11/02/01
900897	Hewlett Packard	8567A	Spectrum Analyzer (10 kHz – 1.5 GHz)	2727A00535	11/08/01
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	03/27/01
900912	Hewlett Packard	8568A	RF Spectrum Analyzer (100 Hz – 1.5 GHz)	2634A02704	08/02/01
900824	Hewlett Packard	8591E	RF Spectrum Analyzer (9 KHz – 1.8 GHz)	3710A06135	11/14/01
900724	ARA	LPB-2520	Log Periodic / Biconical Antenna (25-1000 MHz)	1037	2/1/01
900725	ARA	LPB-2520	Log Periodic / Biconical Antenna (25-1000 MHz)	1036	07/12/01
900967	A.H. Systems	TDS-206/535-1 through TDS-206/535-4	Tuned Dipole set (30 – 1000 MHz)	126, 128, 129, 132	12/15/00
900154	Compliance Design	Roberts Dipole	Adjustable Elements Dipole antenna (30-1000MHz)	N/A	7/26/01
900814	Electro-Metrics	RGA -60	Double Ridges Guide Antenna (1-18 GHz)	2310	2/26/01
900081	EMCO	3146	Log-Periodic Antenna (200-1000 MHz)	1850	
900800	EMCO	3301B	Active Monopole (Rod antenna) (30 Hz – 50 MHz)	9809-4071	05/02/01
900151	Rohde@Schwarz	HFH@-Z2	Loop Antenna (9kHz-30 MHz)	82825/019	05/26/01
900791	Schaffner –Chase	CSL6112	Bilog antenna (30 MHz – 2GHz)	2099	2/22/01
901053	Schaffner –Chase	CBL6112B	Bilog Chase antenna (200 MHz – 2 GHz)	2648	05/24/01
900060	Hewlett Packard	86634B	Auxiliary Section for External Pulse Modulator	1314A02913	11/08/01
901041	ACO Pacific	511E	Sound Level Calibrator	028751	In calibration
900970	Hewlett Packard	85662A	Spectrum Analyzer Display	254211239	03/23/01
900930	Hewlett Packard	85662A	Spectrum Analyzer Display	3144A20839	03/28/01
900911	Hewlett Packard	85662A	Spectrum Analyzer Display	2542A12739	08/02/01
900902	Hewlett Packard	85662A	Spectrum Analyzer Display	2848A17585	11/02/01
900896	Hewlett Packard	85662A	Spectrum Analyzer Display	2816A16471	11/02/01



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

RTL Asset Number	Manufacturer	Model	Part Type	Serial Number	Calibration due date
900914	Hewlett Packard	8546OA	RF Filter Section, (100 KHz to 6.5 GHz)	3330A00107	11/07/01
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	06/21/01
900059	Hewlett Packard	8660C	Signal Generator (9 KHz – 3200 MHz)	1947A02956	11/08/01
900960	Hewlett Packard	8444A	Tracking Generator (0.5 – 1500MHz)	2325A07827	03/08/01
900917	Hewlett Packard	8648C	Synthesized. Signal Generator (9 KHz – 3200 MHz)	3537A01741	03/28/01
900821	Hewlett Packard	33120A	15 MHz Function / Arbitrary Waveform Generator	US36029992	11/14/01
900059	Hewlett Packard	8660C	Synthesized. Signal Generator (9 kHz – 3200 MHz)	1947A02956	11/08/01
900560	Haefely	PESD 1600	ESD Generator	H 703146	10/05/01
900099	Marconi	52022-910E	Signal Generator (10 kHz – 1 GHz)	119044-189	11/14/01
900195	Tektronix	CFG280	Function Generator (0.1 Hz – 11 MHz)	TW12167	N/A
900927	Tektronix	ASG 100	Audio Signal Generator	B03274 V2.3	N/A
900935	Wavetek	3510B	Signal Generator	5372160	03/28/00
900660	Philips	PM5418TDS	TV Generator	LO 604891	11/21/01
900369	Philips	PM5418TDS	TV Generator	LR81436C	N/A
900268	Taylor	5565	Hygrometer / Thermometer	N/A	09/05/01
901056	Hewlett Packard	8954A, Opt.H03	Transceiver Interface	2924A00830	06/02/01
901088	Hewlett Packard	8954A	Transceiver Interface	2146A00139	07/28/01
901082	AFJ International	AFJ LS16	LISN (9 kHz – 30 MHz)	16010020081	06/16/01
901083	AFJ International	AFJ LS16	LISN (9 kHz – 30 MHz)	16010020082	06/16/01
901084	AFJ International	AFJ LS16	LISN (9 kHz – 30 MHz)	16010020080	06/16/01
901090	Bajog electronic	4V-100/200	LISN (150 kHz – 30 MHz)	00-44-007	08/03/01
900726	Solar	7225-1	LISN	N/A	03/29/01
900727	Solar	7225-1	LISN	N/A	03/29/01
900078	Solar	7225-1	LISN	N/A	03/29/01
900077	Solar	7225-1	LISN	N/A	03/29/01
901054	Hewlett Packard	HP 3586B	Selective Level Meter	1928A01892	06/08/01
900770	Hewlett Packard	437B	Power Meter	2949A02966	In cal.
900793	Hewlett Packard	432A	Thermistor Power Meter	1848a22632	N/A
900126	Hewlett Packard	11970A	Harmonic Mixer (26-40 GHz)	2332A01199	11/10/02
900396	Hewlett Packard	11970K	Harmonic Mixer (18-26 GHz)	2332A00563	11/00/02
900921	Haefely	IP 6.2	Coupling Network	083-334-13	11/10/01
900918	Voltech	IEC Standard 555	Reference Impedance Network (rented)	7701	11/08/01
900061	Hewlett Packard	86603A	RF Plug-in (1 to 2600 MHz)	2221A02967	11/08/01
900160	Pacific	112-AMX	AC Power Source (rented)	0187	11/15/01
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1-26.5 GHz)	3008A00505	09/15/01
900045	Hewlett Packard	8447F	Preamplifier	2944A03783	N/A
901040	Industrial	SMX100	Wide Band Preamplifier (0.01-1000 MHz)	1736-0696	11/17/01
900721	Hewlett Packard	8447D	Preamplifier (0.1-1300 MHz)	2727A05397	N/A
900889	Hewlett Packard	85685A	RF Preselector for HP 8566B or 8568B (20Hz-2GHz)	3146A01309	11/14/01
900566	Amplifier Research	FP 2000	Isotropic Field Probe	20760	08/29/01
900174	FCC	F-120-9A	RF Injection Probe (10 kHz – 300 MHz)	N/A	05/31/01
901044	FCC	F-120-5	Bulk Current Injection Probe (10 kHz – 150 MHz)	17	05/12/01
901042	FCC	F-72-1	RF Current Probe (10 Hz – 100 MHz)	44	05/11/01
900704	FCC	F-14-1	Current Probe (10 Hz – 500 kHz)	33	05/12/01



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

RTL Asset Number	Manufacturer	Model	Part Type	Serial Number	Calibration due date
900894	FCC	F-33-1	RF Current Probe (10 kHz – 250 MHz)	303	05/30/01
900854	Solar Electronics Co	9119-IN	RF Current Probe	972501	
900849	Solar Electronics Co	9121-IN	Injection Probe (10 MHz – 1 GHz)	953501	
900848	Solar Electronics Co	9320-IN	RF Current Probe	990521	
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159	03/29/01
900769	Hewlett Packard	8481B	Power Sensor	2702A05059	In cal.
900937	Hewlett Packard	8482H	3-watt Power Sensor (100 KHz to 4.2 GHz)	3318A08961	12/02/01
900928	Hewlett Packard	83752A	Synthesized Sweeper, 0.01 to 20 GHz	3610A00866	03/28/01
900946	Tenney Engineering, Inc.	TH65	Temperature Chamber with Humidity	11380	11/07/01
900111	Omega Engineering	DP41-TC-DSS	Temperature Monitor	2060123	In cal.
901043	FCC		Terminator for RF Current Probe F-72-1		05/12/01
900731	Haefely	PEFT.1	Burst Tester with Coupling Network	082 106-29	11/10/01
900402	BAPCO Electro-Com	IEC 601 L	Safety Tester	000028	11/10/01
900720	Haefely	Psurge 4.1	Surge Tester	083-342-02	11/10/01
900839	Bird	43P	Peak Reading Wattmeter	3110	11/10/01
901137	Par Electronics	Notch	Notch Filter (2.3 GHz to 2.5 GHz)	N/A	N/A



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

2 SYSTEM TEST CONFIGURATION

2.1 JUSTIFICATION

The EUT was tested in all three orthogonal planes in order to determine worst-case emission. Channel 1 at 2.412 GHz, Channel 6 at 2.442 GHz and Channel 11 at 2.462 GHz were tested and investigated from 9kHz to 24GHz. All three channels were investigated and tested. Data for all three channels are presented in this report.

To complete the configuration required by the FCC, the transmitter was tested in a full computer with an external antenna connected to the antenna port similar to its intended use.

The EUT was investigated with the external antenna. The worst-case data taken in this report represents the highest data rate at 11 MBPS. Data rates of 5.5MBPS, 2 MBPS and 1 MBPS were investigated and found to be in compliance.

2.2 EUT EXERCISE SOFTWARE

The EUT was provided with the software to continuously transmit during testing. The carrier was also checked to verify that the information was being transmitted.

2.3 SPECIAL ACCESSORIES

N/A.



2.4 TEST SYSTEM DETAILS

The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

EXTERNAL COMPONENTS


PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
MOUSE	MICROSOFT	INTELLIMOUSE 1.1A	00332324	C3KKMP5	SHIELDED I/O	900589
KEYBOARD	NMB TECHNOLOGIES	PCB:44J	PS2	SAMPLE	SHIELDED I/O	012728
MONITOR	LG ELECTRONICS	EVF700 17"	N/A	SAMPLE	SHIELDED, FERRITE BOTH ENDS I/O UNSHIELDED POWER	011929
SYSTEM	CISCO SYSTEM, VA	N/A	253886	N/A	UNSHIELDED POWER	012956

Internal Components

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
ANTENNA	CISCO SYSTEM, VA	ANTENNA FOR WIRELESS CARD	N/A	N/A	N/A	013055
CONTROLLER CARD	CATALYST COMMUNICATIONS TECHNOLOGIES, INC.	PCIA564	384-0030-002 REV B	N/A	N/A	013047
MINI PCI CARD	CATALYST COMMUNICATIONS TECHNOLOGIES, INC.	TYPE III	WIRELESS LAN SUPPORT	N/A	N/A	013053
WIRELESS LAN CARD (EUT)	CISCO SYSTEM, VA	AIR-MP1350 (100mW)	LDK102042 (001)	DOC	N/A	013054
MODEM	CISCO SYSTEM, VA	V1456VQH-R7	00V237C0013548 0	DOC	N/A	013048
MOTHERBOARD	CISCO SYSTEM, VA	EP-693A	N/A	N/A	INTERNAL I/O INTERNAL POWER	013049
CD-ROM DRIVE	DELTA PRODUCTS CORPORATION, CA	CD5200A	011039052161	DOC	INTERNAL I/O INTERNAL POWER	013058
POWER SUPPLY	ASTECH CUSTOM POWER	SA320-3505-1412	99-3578	N/A	UNSHIELDED POWER	011211
FLOPPY DRIVE	MITSUMI	D359M3D	0J15AX0837	N/A	INTERNAL I/O INTERNAL POWER	013057



2.5 CONFIGURATION OF TESTED SYSTEM

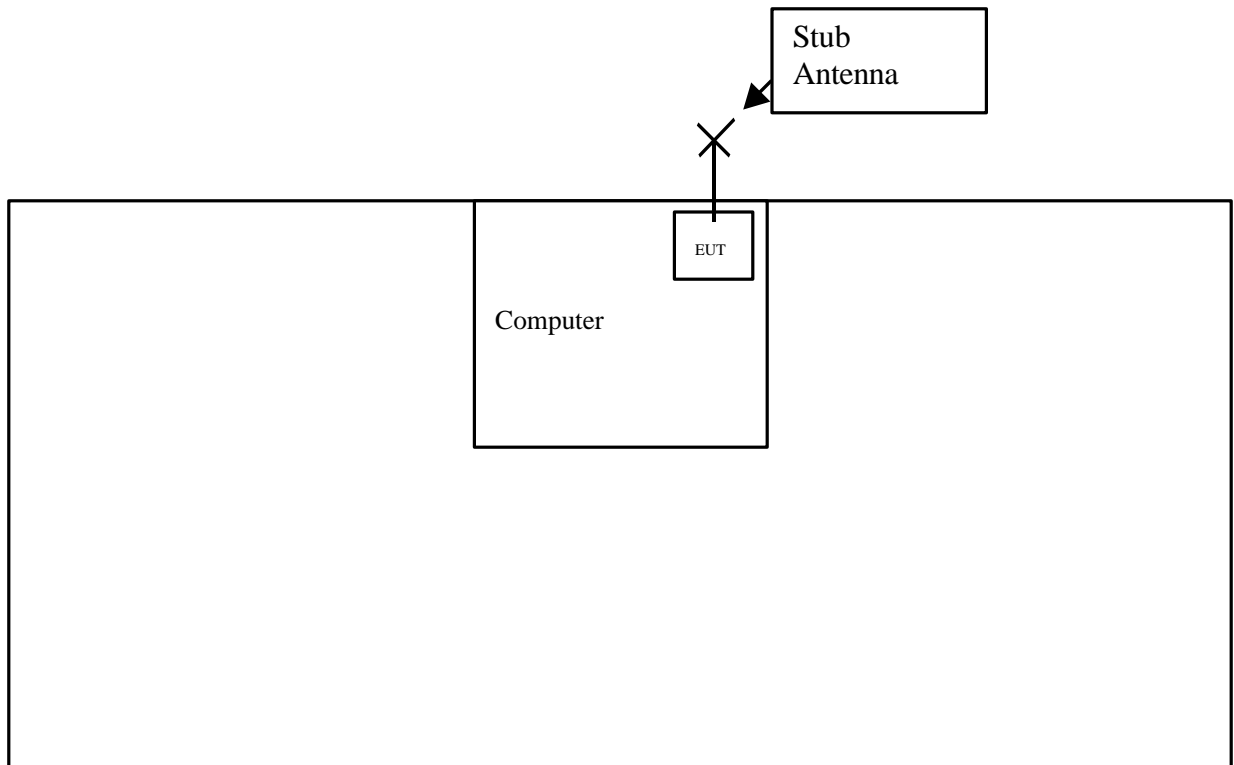



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

3 CONFORMANCE STATEMENT

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 1999	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 1999	RADIO FREQUENCY DEVICES
FCC 97-114	GUIDANCE ON MEASUREMENTS FOR DIRECT SEQUENCE SPREAD SPECTRUM SYSTEMS
ANSI C63.4-1992	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
RSS-210, Issue 3: 2000	LOW POWER LICENSE-EXEMPT RADIOCOMMUNICATION DEVICES (ALL FREQUENCY BANDS)
RSS-102, Issue 1: 1999	EVALUATION PROCEDURE FOR MOBILE AND PORTABLE RADIO TRANSMITTERS

FCC Rules Parts	Frequency Range	Output Power (W)	Freq. Tolerance	Emission Designator
Part 15.247	2412 to 2462 MHz	0.109		
Canadian Sections	Frequency Range	Output Power (W)	Freq. Tolerance	Emission Designator
6.2.2 (o)	2412 to 2462 MHz	0.109		

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described above. Modifications were not made during testing to the equipment in order to achieve compliance with these standards.

Furthermore, there was no deviation from, additions to or exclusions from the ANSI C63.4 test methodology.

Signature: 

Date: *February 28, 2001*

Typed/Printed Name: Desmond A. Fraser

Position: President
(NVLAP Signatory)



Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 20061-0.

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



4 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\text{FI(dBuV/m)} = \text{SAR(dBuV)} + \text{SCF(dB/m)}$$

FI = Field Intensity
SAR = Spectrum Analyzer Reading
SCF = Site Correction Factor

The Site Correction Factor (SCF) used in the above equation is determined empirically, and is expressed in the following equation:

$$\text{SCF(dB/m)} = -\text{PG(dB)} + \text{AF(dB/m)} + \text{CL(dB)}$$

SCF = Site Correction Factor
PG = Pre-amplifier Gain
AF = Antenna Factor
CL = Cable Loss

The field intensity in microvolts per meter can then be determined according to the following equation:

$$\text{FI(uV/m)} = 10^{\text{FI(dBuV/m)}/20}$$

For example, assume a signal at a frequency of 125 MHz has a received level measured as 49.3 dBuV. The total Site Correction Factor (antenna factor plus cable loss minus preamplifier gain) for 125 MHz is -11.5 dB/m. The actual radiated field strength is calculated as follows:

$$49.3 \text{ dBuV} - 11.5 \text{ dB/m} = 37.8 \text{ dBuV/m}$$
$$10^{37.8/20} = 10^{1.89} = 77.6 \text{ uV/m}$$

EIRP calculation: Power from power meter in (dBm) + antenna gain in (dBi)



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

5 CONDUCTED EMISSIONS MEASUREMENTS

The power line conducted emission measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50 ohm / 50 microhenry Line Impedance Stabilization Network (EUT LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the A.C. line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 7 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 7 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or average mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. No video filter less than 10 times the resolution bandwidth was used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The range of the frequency spectrum to be investigated is specified in FCC Part 15. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in this report.



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

5.1 CONDUCTED EMISSIONS TEST

The following table lists worst-case conducted emission data. Specifically: Emission Frequency, Test Detector, Analyzer Reading, Site Correction Factor, corrected Emission Level, Quasi Peak Limit and Margin, and the Average Limit and Margin.

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emissions exceed the limit with the instrument set to the quasi-peak mode, then measurements are made in the average mode.

The conducted test was performed with the EUT exercise program loaded, and the emissions were scanned between 150 kHz to 30 MHz on the NEUTRAL SIDE and HOT SIDE, herein referred to as L1 and L2, respectively.



5.1.1 CONDUCTED EMISSIONS (CHANNEL 1 WITH THE EXTERNAL ANTENNA)

NEUTRAL SIDE (Line 1)


Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBmV)	Site Correction Factor (dB)	Emission Level (dBmV)	FCC B Limit (dBmV)	FCC B Margin (dB)
11.781	Pk	47.6	-3.0	44.6	48.0	-3.4
14.727	Pk	47.4	-3.3	44.1	48.0	-3.9
20.617	Pk	48.1	-3.9	44.2	48.0	-3.8
29.454	Pk	45.4	-4.5	40.9	48.0	-7.1

HOT SIDE (Line 2)

Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBmV)	Site Correction Factor (dB)	Emission Level (dBmV)	FCC B Limit (dBmV)	FCC B Margin (dB)
11.781	Pk	47.8	-3.0	44.8	48.0	-3.2
20.617	Pk	48.8	-3.9	44.9	48.0	-3.1
26.507	Pk	43.3	-4.3	39.0	48.0	-9.0
29.453	Pk	45.3	-4.5	40.8	48.0	-7.2

⁽¹⁾Pk = Peak; QP = Quasi-Peak; Av = Average

TEST PERSONNEL: ELIZABETH BAUMAN



Typed/Printed Name :

Date: February 28, 2001



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

6 RADIATED EMISSIONS MEASUREMENTS

Before final measurements of radiated emissions were made on the open-field three/ten meter range; the EUT was scanned indoor at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to insure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. The spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. No video filter less than 10 times the resolution bandwidth was used. The range of the frequency spectrum to be investigated is specified in FCC Part 15. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report. . **For radiated measurements above 1 GHz, a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz are used.**

Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

6.1 RADIATED EMISSIONS TEST

The following data lists the significant emission frequencies, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, plus the limit.


6.1.1 RADIATED EMISSION DIGITAL NOISE (CHANNEL 1 WITH THE EXTERNAL ANTENNA)

Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBmV)	Site Correction Factor (dB/m)	Emission Level (dBmV/m)	Limit (dBmV/m)	Margin (dB)
263.998	Qp	H	190	1.0	38.2	-13.5	24.7	46.0	-21.3
352.006	Qp	H	160	1.0	44.3	-11.4	32.9	46.0	-13.1
483.998	Qp	H	25	1.3	27.4	-8.3	19.1	46.0	-26.9
747.998	Qp	H	150	1.0	29.1	-4.5	24.6	46.0	-21.4
835.998	Qp	H	145	1.0	25.8	-3.4	22.4	46.0	-23.6
923.998	Qp	H	140	1.0	25.2	-2.4	22.8	46.0	-23.2

QUASI PEAK =120 KHZ

TEST PERSONNEL: ELIZABETH BAUMAN

Typed/Printed Name :



Date: February 28, 2001



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

7 MODULATED BANDWIDTH

The minimum 6 dB bandwidth per FCC 15.247(a)(2) was measured using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The Minimum 6 dB modulated bandwidths are the following:

Channel	6(dB) Bandwidth (MHz)
1	11.0
6	11.5
11	11.4

The 6dB bandwidth is listed in figures Section 26 of this report.

8 CONDUCTED POWER OUTPUT

The conducted and radiated output power per FCC 15.247(b) was measured on the EUT using a power meter. The radiated EIRP measurement data are results from our outdoor 3-meter range.

Channel	Radiated EIRP (dBm)*	Power conducted output (dBm)
1	22.5	19.4
6	22.5	20.4
11	20.4	18.4

*Measurement accuracy is +/- 1.5 dB



9 ANTENNA CONDUCTED SPURIOUS EMISSIONS

Antenna spurious emission per FCC 15.247(c) was measured from the EUT antenna port using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The modulated carrier was identified at 2.413GHz for Channel 1, 2.443GHz for Channel 6 and 2.462GHz for Channel 11. No other harmonics or spurs were found within 20 dB of the carrier level, and from 9kHz to the carriers 10th harmonic. See antenna conducted spurious noise table.

FCC 97 114 appendix C specifies 100KHz/300KHz resolution and video bandwidth for the authorized band up to the 10th harmonic. All spurs and harmonic must be 20 dB down from the carrier within the authorized band. A 2.4 GHz notch filter was used to attenuate the carrier so that the spectrum analyzer would not be overloaded. The insertion loss of the notch filter was added to the spurious level on the table below.

Channel 1		
Frequency (MHz)	Spurious level (dBm)	FCC Margin (dB)
18.990	-45.0	-30.0
602.300	-28.0	-13.0
801.760	-33.0	-18.0
951.954	-46.0	-31.0
1808.600	-35.0	-20.0
2445.510	-49.0	-34.0
2548.070	-55.0	-40.0
2785.510	-51.0	-36.0
4824.060	-41.7	-26,7

Channel 6		
Frequency (MHz)	Spurious level (dBm)	FCC Margin (dB)
8.000	-28.8	-14.8
10.990	-28.5	-14.5
27.440	-37.0	-23.0
82.300	-37.6	-23.6
631.320	-19.6	-5.6
841.735	-31.7	-17.7
946.950	-52.0	-38.0
2815.510	-54.0	-40.0
4884.030	-36.1	-22.1

Channel 11		
Frequency (MHz)	Spurious level (dBm)	FCC Margin (dB)
8.020	-41.0	-24.4
144.500	-48.0	-31.4
650.800	-28.5	-11.9
850.100	-38.7	-22.1
1880.000	-42.7	-26.1
2407.489	-57.0	-40.4
2440.940	-50.0	-33.4
2835.000	-59.0	-42.4
4922.000	-43.0	-26.4
4927.000	-57.0	-40.4



10 RADIATED SPURIOUS EMISSIONS

Radiated Spurious Emissions applies to harmonics and spurious emissions that fall in the restricted and non-restricted bands. The restricted bands are listed in Section 15.205. The maximum permitted average field strength for the restricted band is listed in Section 15.209. A 2.4 GHz notch filter was used to attenuate the carrier so that the spectrum analyzer would not be overloaded. The insertion loss of the notch filter was added to the spurious level on the table below.

10.1.1 RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 1)

Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBmV)	Site Correction Factor (dB/m)	Level in (dBmV/m)	Limit in (dBmV/m)	Margin (dB)
2413.07	AV	V	90	1.5	98.5	8.9	107.4	Fundamental	
2413.07	PK	V	90	1.5	108.4	8.9	117.3	Fundamental	
2785.51	AV	V	95	1.5	37.0	9.0	46.0	54.0	-8
4824.33	AV	V	90	1.5	33.5			54.0	
7239.21	AV	V	90	1.5	NF			87.4	
9652.28	AV	V	90	1.5	NF			87.4	
12065.35	AV	V	90	1.5	NF			54.0	
14478.42	AV	V	90	1.5	NF			54.0	
16891.49	AV	V	90	1.5	NF			87.4	
19304.56	AV	V	90	1.5	NF			54.0	
21717.63	AV	V	90	1.5	NF			87.4	
24130.7	AV	V	90	1.5	NF			87.4	

Average Measurement (AV: resolution bandwidth. =1 MHz, video bandwidth = 10 Hz; NF = noise floor
 Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz
 NF = Noise Floor

10.1.2 RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 6)

Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBmV)	Site Correction Factor (dB/m)	Level in (dBmV/m)	Limit in (dBmV/m)	Margin (dB)
2442.97	AV	V	95	1.	98.7	8.9	107.6	Fundamental	
2442.97	PK	V	95	1.	108.8	8.9	117.7	Fundamental	
4884.13	AV	V	95	1.	34.7		NF	54.0	
7328.91	AV	V	95	1.	NF			87.6	
9771.88	AV	V	95	1.	NF			54.0	
12214.85	AV	V	95	1.	NF			54.0	
14657.82	AV	V	95	1.	NF			87.6	
17100.79	AV	V	95	1.	NF			87.6	
19543.76	AV	V	95	1.	NF			54.0	
21986.73	AV	V	95	1.	NF			87.6	
24429.70	AV	V	95	1.	NF			87.6	

Average Measurement (AV: resolution bandwidth. =1 MHz, video bandwidth = 10 Hz; NF = noise floor



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz
 NF = Noise Floor

10.1.3 RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 11)

Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBmV)	Site Correction Factor (dB/m)	Level in (dBmV/m)	Limit in (dBmV/m)	Margin (dB)
2462.9	AV	V	95	1.	98.5	7.5	106.0	Fundamental	
2462.9	PK	V	95	1.	108.3	7.5	115.8	Fundamental	
4925.8	AV	V	95	1.	NF			54.0	
7388.7	AV	V	95	1.	NF			54.0	
9851.6	AV	V	95	1.	NF			86.0	
12314.5	AV	V	95	1.	NF			54.0	
14777.4	AV	V	95	1.	NF			86.0	
17240.3	AV	V	95	1.	NF			86.0	
19703.2	AV	V	95	1.	NF			54.0	
22166.1	AV	V	95	1.	NF			86.0	
24629.0	AV	V	95	1.	NF			86.0	

Average Measurement (AV: resolution bandwidth. =1 MHz, video bandwidth = 10 Hz; NF = noise floor
 Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz
 NF = Noise Floor

TEST PERSONNEL:

Typed/Printed Name: Rachid SEHB

Date: February 28, 2001



11 POWER SPECTRAL DENSITY

The Power spectral density per FCC 15.247(d) was measured from the antenna port of the EUT using a 50 ohm spectrum analyzer with the resolution bandwidth set at 3kHz, the video bandwidth set at 3kHz, and the sweep time set at 17 second. The spectral lines were resolved for the modulated carriers at 2.412GHz, 2.442GHz and 2.462GHz respectively. These levels are well below the +8 dBm limit. See power spectral density table below and the plots in Section 16 of this report.

Channel	Power Spectral Density limit = +8dBm
1	-12.3
6	-11.6
11	-13.9

12 COMPLIANCE WITH THE RESTRICTED BAND EDGE

Compliance with the band edges was performed using the FCC's "Radiated Measurement at a Band Edge" guidance document. The final data derived below were from radiated measurements only. The data taken in this report represents the worst case at 11 MBPS. Data rates of 5.5MBPS, 2 MBPS and 1 MBPS were investigated and found to be in compliance. Both absolute and delta method were performed with the same results.

Band edge Measurement						
Antenna	Channel	Delta (dB)	Field Strength Level (dBmV/m)	Corrected level (dBmV/m)	FCC Limit (dBmV/m)	FCC Margin (dB)
External	1	-54.3	107.4	53.1	54	-0.9
External	11	-52.1	106.0	53.9	54	-0.1



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

13 RECIEVER DATA

Radiated Test

Temperature: 47°F Humidity: 41%									
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
263.998	Qp	H	185	1.2	42.5	-13.5	29.0	46.0	-17.0
351.998	Qp	H	180	1.0	43.5	-11.4	32.1	46.0	-13.9
747.998	Qp	H	150	1.0	29.8	-4.5	25.3	46.0	-20.7
791.998	Qp	H	160	1.0	27.8	-3.7	24.1	46.0	-21.9
835.998	Qp	H	145	1.0	30.4	-3.4	27.0	46.0	-19.0
923.998	Qp	H	165	1.0	26.1	-2.4	23.7	46.0	-22.3



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

14 ANTENNA SPECIFICATIONS

External antenna

Electrical Specifications:

Model No.	Dual pattern antenna with diversity support
Frequency Range	2.4-2.5GHz
Bandwidth	100MHz
Gain	2.2dBi
V.S.W.R	<1.9
Radiation Pattern	Omni-Directional
Polarization	Vertical
Impedance	50ohms
Operating Temperature	

Electrical Specifications:


Dimension	N/A
Pulling Strength	N/A
Swivel Torque	N/A
Input Connector	



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>


15 BANDEDGE PLOTS

CHANNEL 1

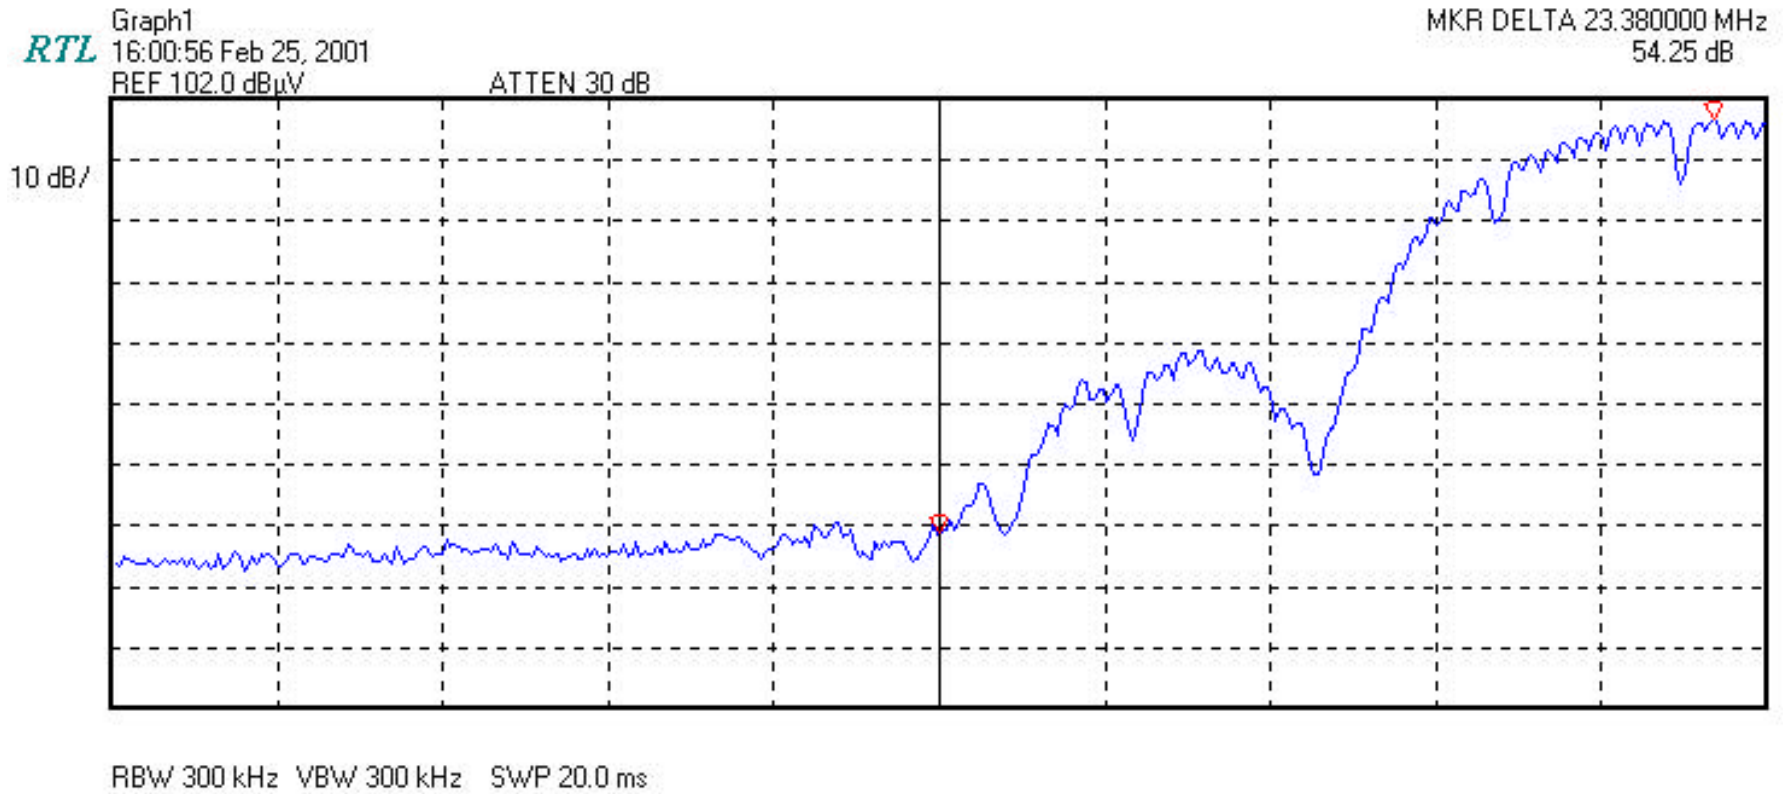



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

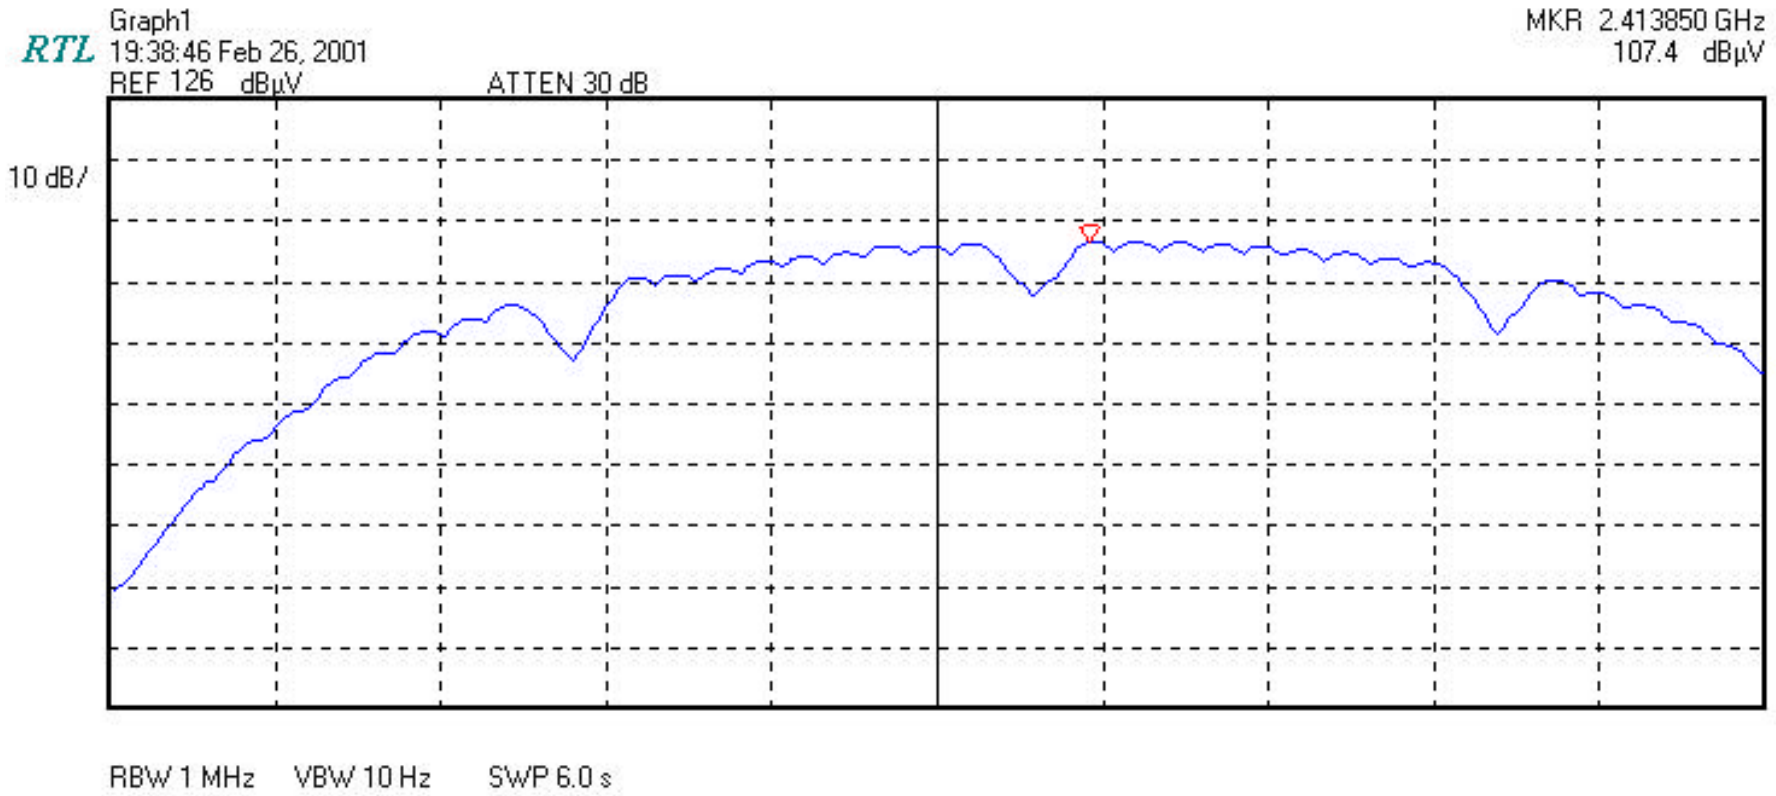


Note site factor entered into analyzer register for corrected final result.




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

CHANNEL 11

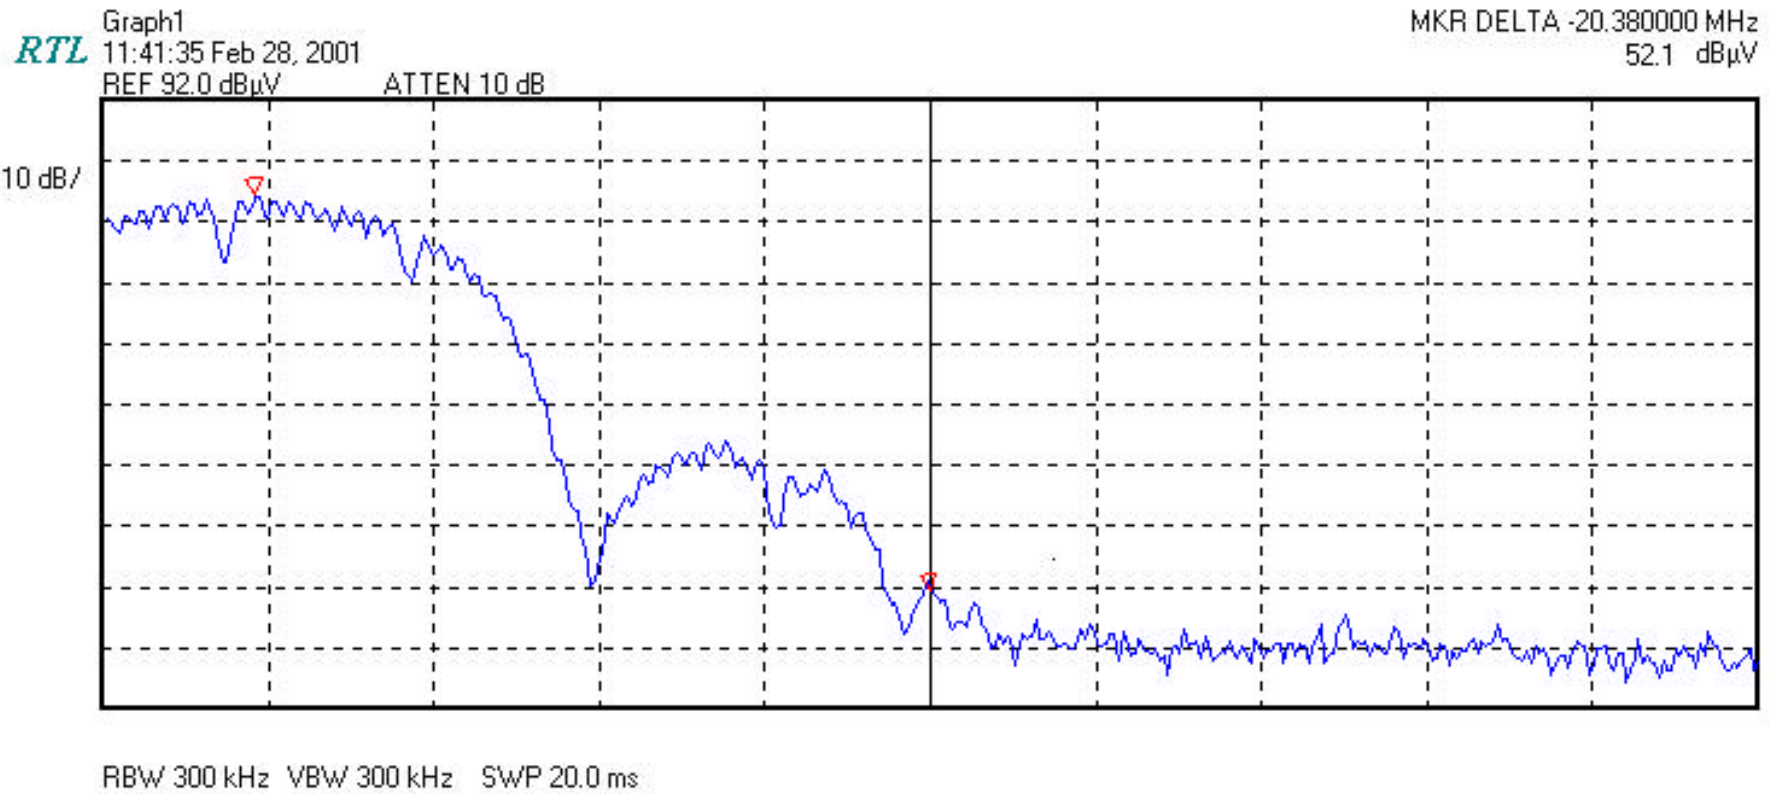



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

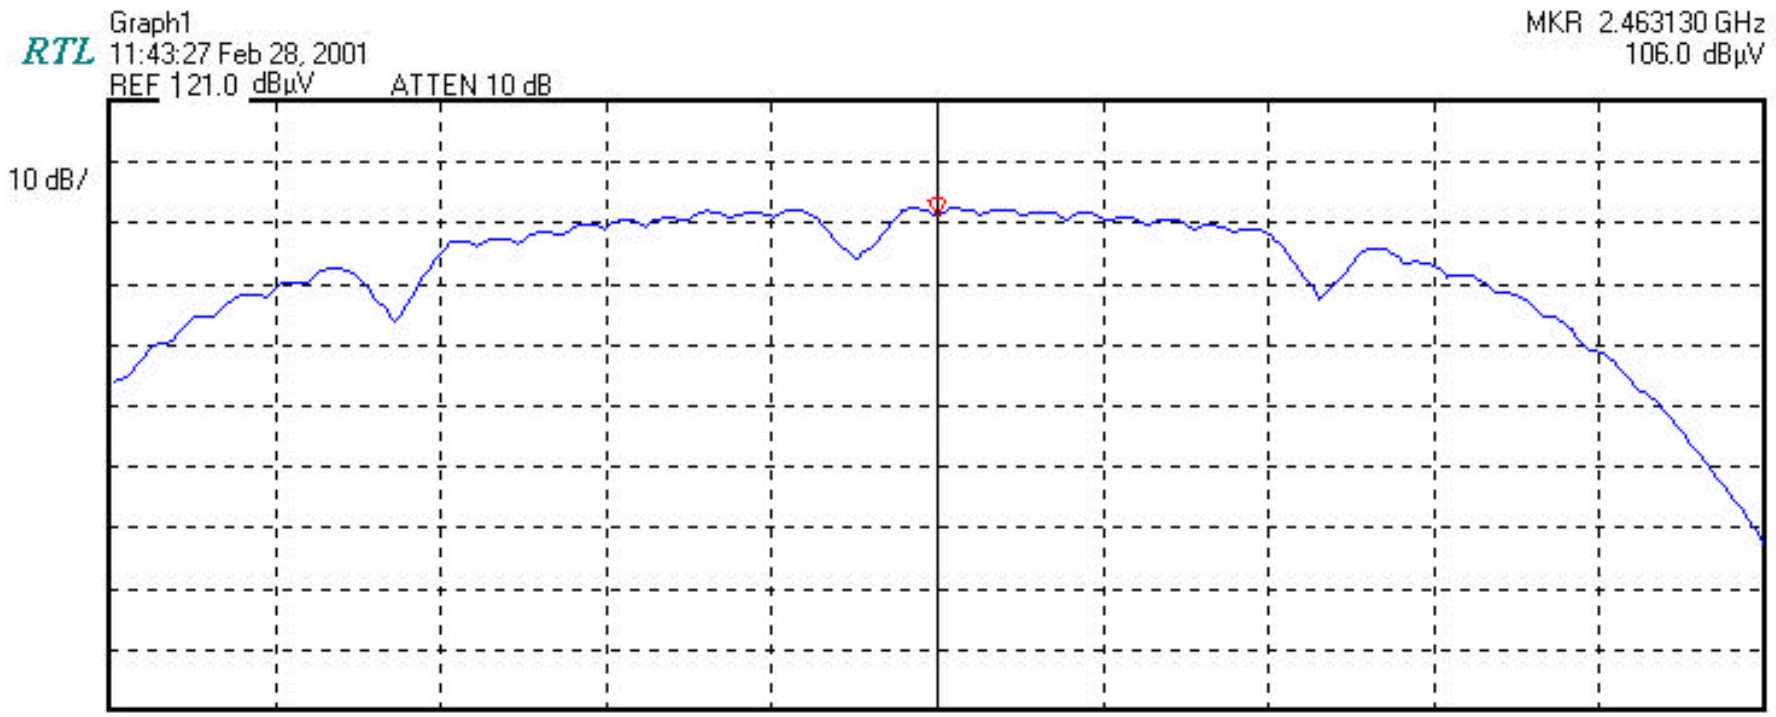

RBW 1 MHz VBW 10 Hz SWP 6.0 s


Note site factor entered into analyzer register for corrected final result.



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

16 SPECTRAL DENSITY PLOTS


CHANNEL 1

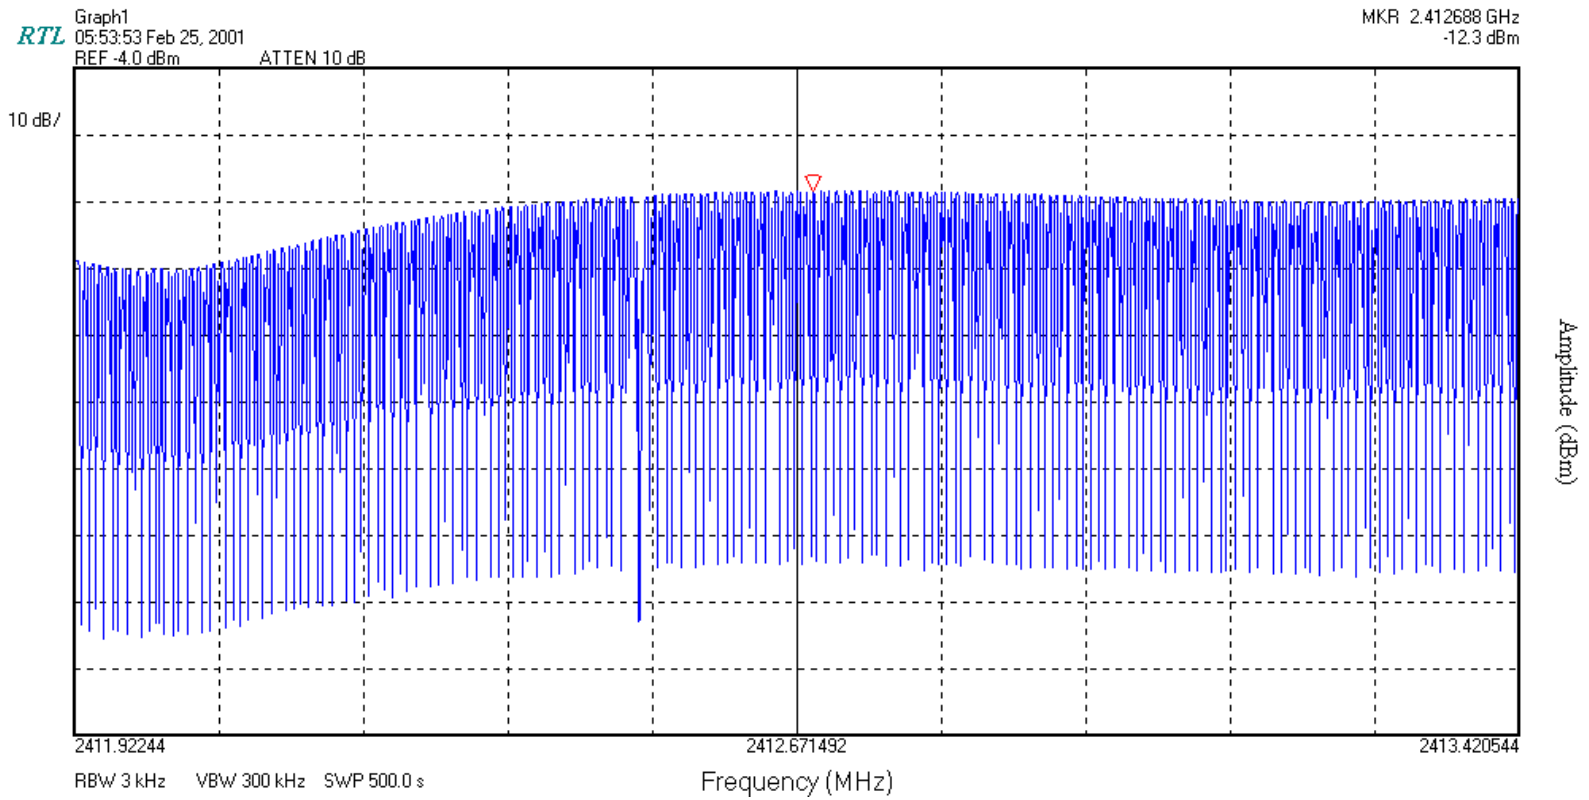



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>


CHANNEL 6

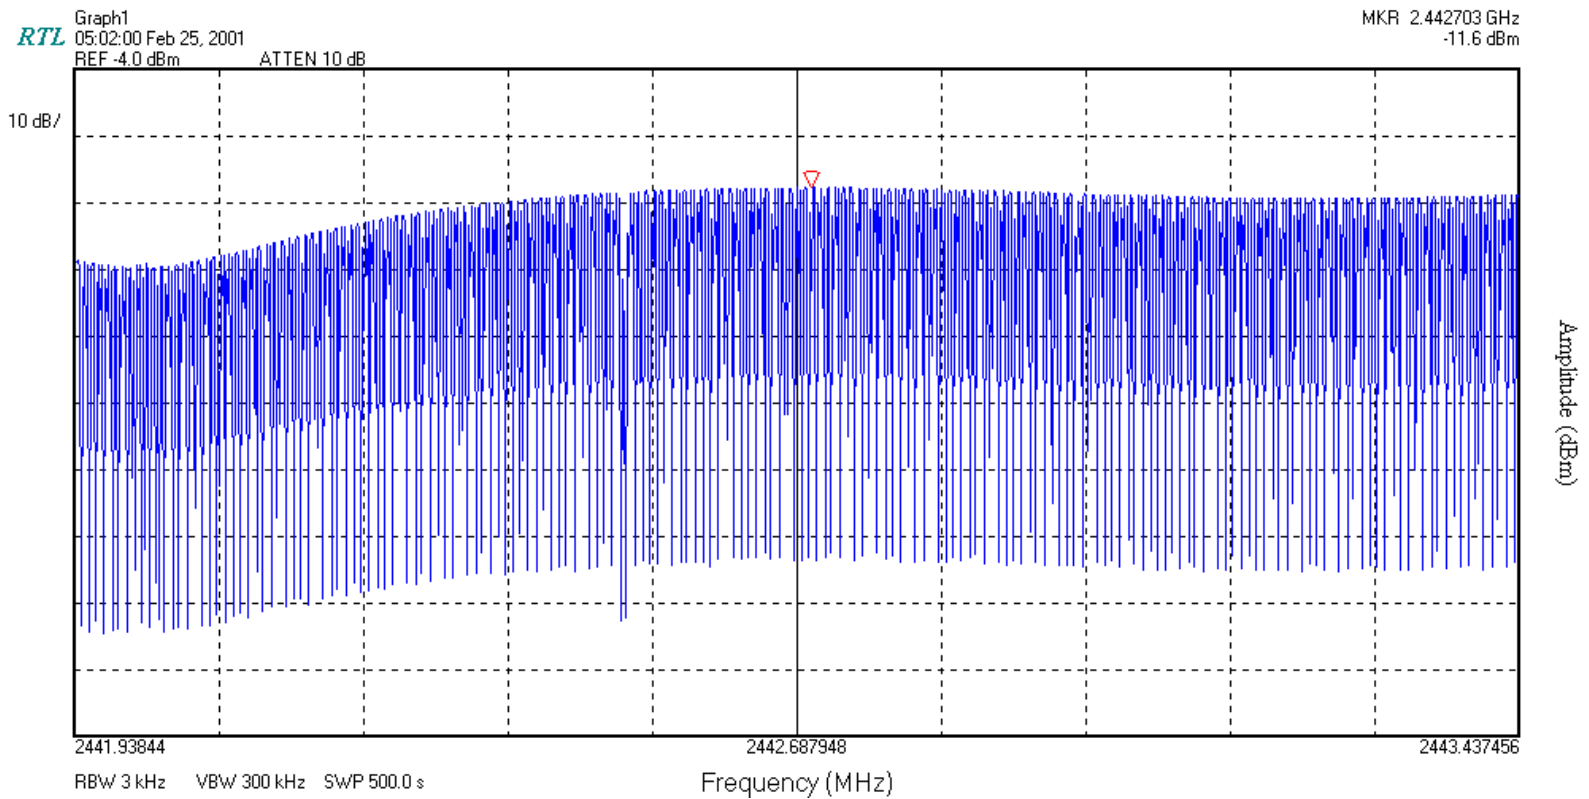



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

CHANNEL 11

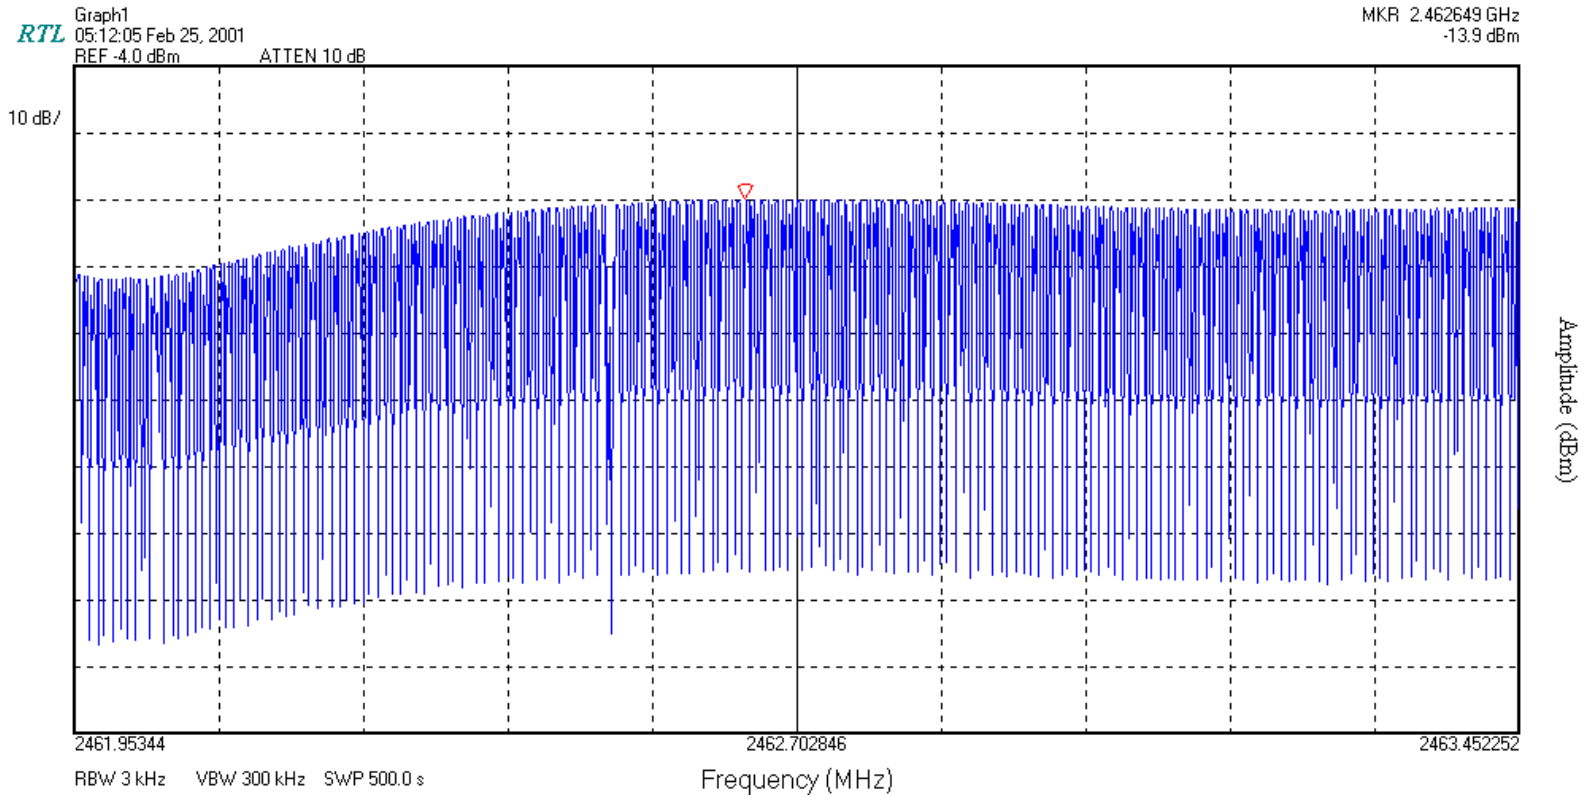




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

17 6dB PLOTS


CHANNEL 1

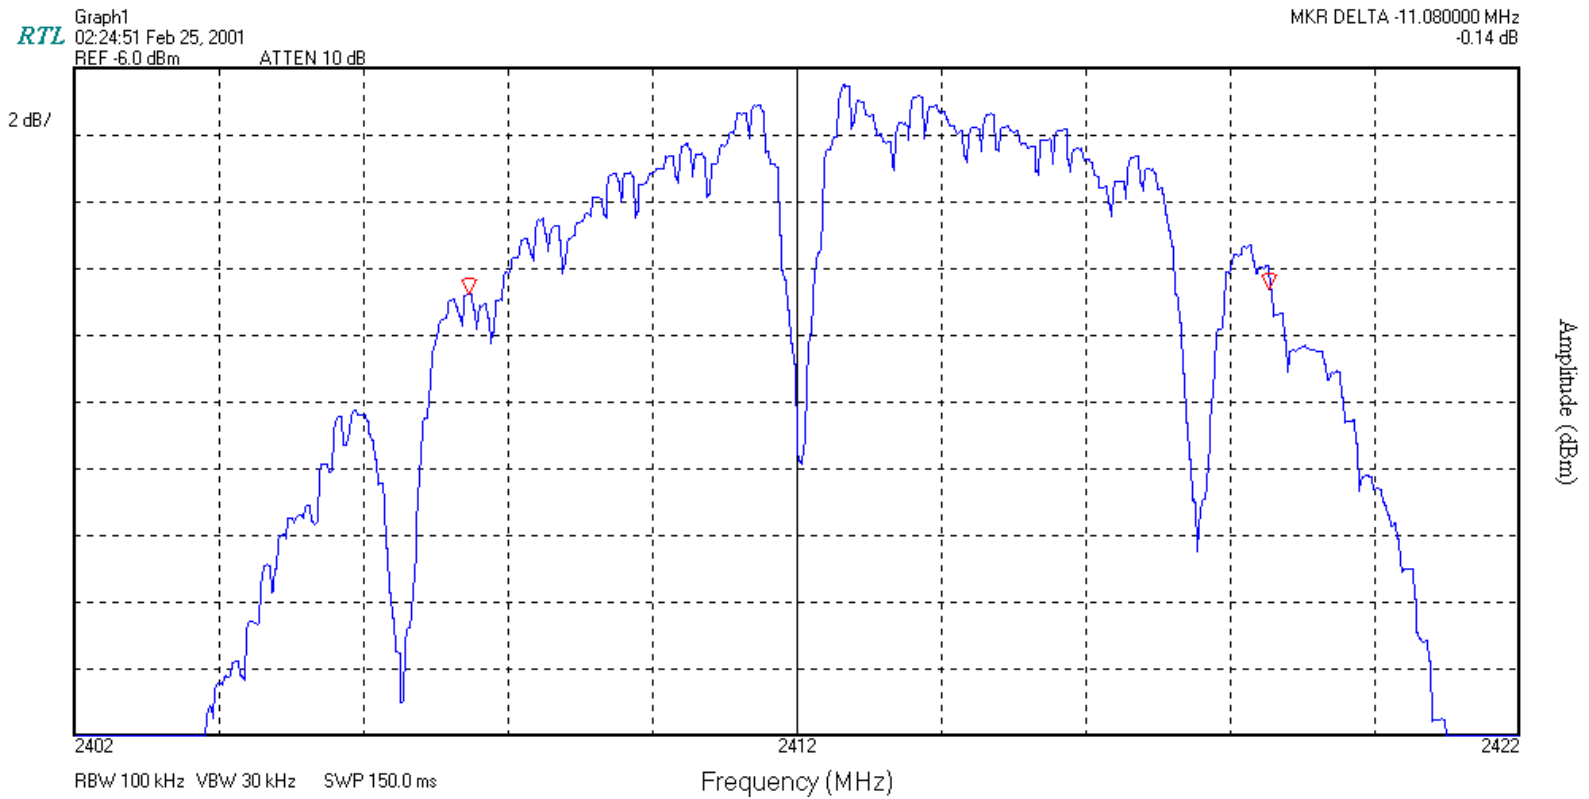



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>


CHANNEL 6

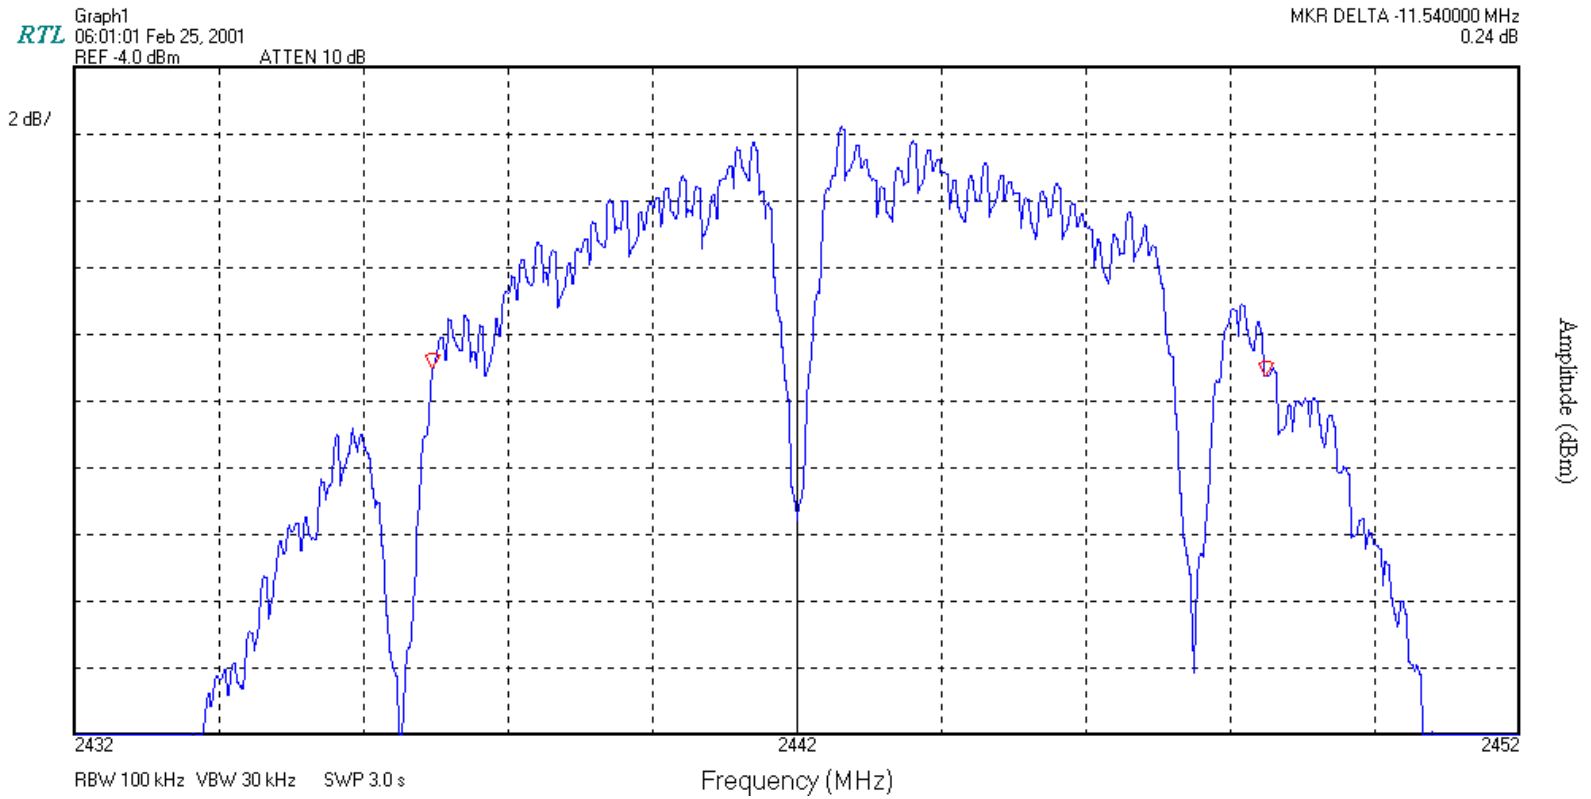



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

CHANNEL 11

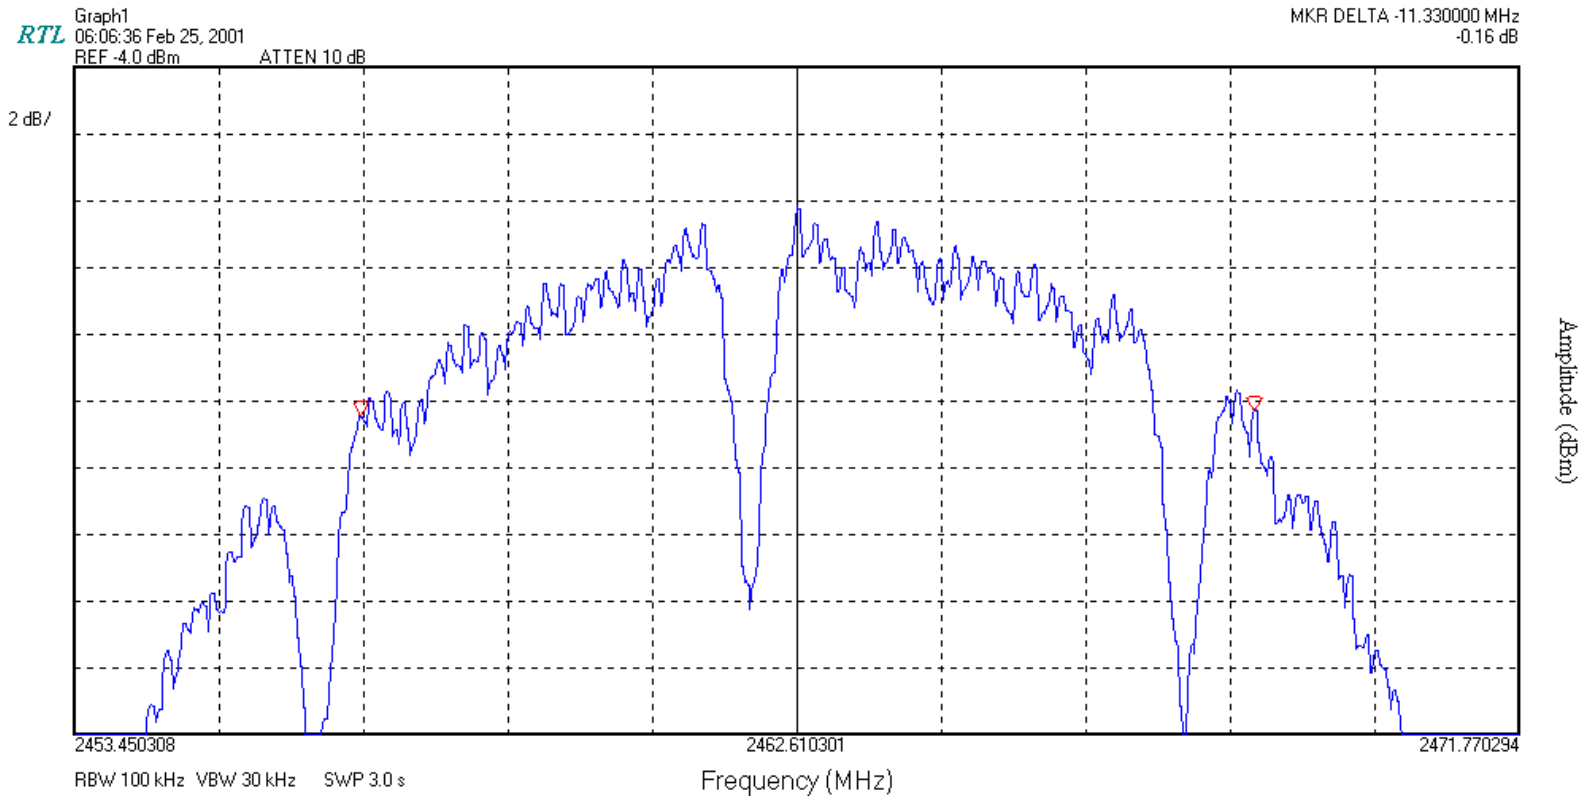

ATTACHMENT A – RADIATED DATA

EXHIBIT A – Test Results (Cont.)

Radiated Measurements

§15.247(b) / §15.205 & §15.209

Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Channel: 01

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
4824	-98.4	40.4	V	49.0	281.5	5.0
7236	-104.3	47.4	V	50.1	320.6	3.9
9648	-115.8	50.3	V	41.5	118.8	12.5
12060	-135.0	53.7	V	25.7	19.3	28.3

Table A-6. Radiated Measurements @ 3 meters

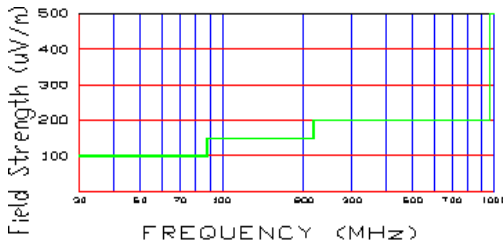


Figure A-5. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μV/m (54dBμ/m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner
FCC ID: GU66037LMC352		Page 1 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Channel: 06

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
4874	-98.1	40.5	V	49.4	295.1	4.6
7311	-104.1	48.0	V	50.9	350.7	3.1
9748	-115.7	50.3	V	41.6	120.2	12.4
12185	-135.0	53.7	V	25.7	19.3	28.3

Table A-7. Radiated Measurements @ 3 meters

NOTES:

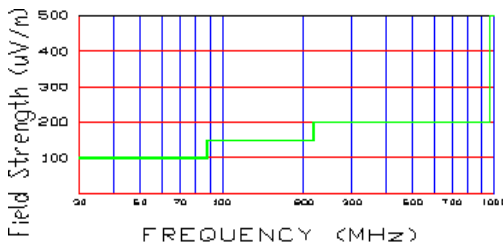


Figure A-6. Radiated limits at 3 meters.

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 µV/m (54dBµ/m) at 3 meters radiated.


PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT PAXAR	Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner
	FCC ID: GU66037LMC352	Page 2 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Channel: 11

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
4924	-99.1	40.7	V	48.6	269.1	5.4
7386	-104.7	48.2	V	50.5	335.0	3.5
9848	-116.1	50.4	V	41.3	116.1	12.7
12310	-135.0	53.8	V	25.8	19.5	28.2

Table A-8. Radiated Measurements @ 3 meters

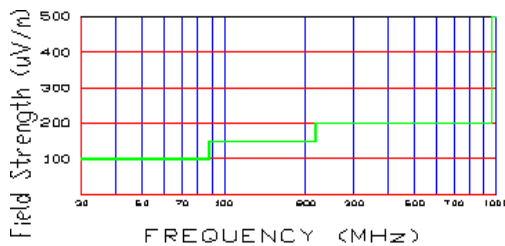


Figure A-7. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 µV/m (54dBµ/m) at 3 meters radiated.


PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT PAXAR	Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner
	FCC ID: GU66037LMC352	Page 3 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 2 Mbps
Distance of Measurements: 3 Meters
Channel: 01

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
4824	-98.6	40.4	V	48.8	275.1	5.2
7236	-104.8	47.4	V	49.6	302.7	4.4
9648	-115.9	50.3	V	41.4	117.5	12.6
12060	-135.0	53.7	V	25.7	19.3	28.3

Table A-9. Radiated Measurements @ 3 meters

NOTES:

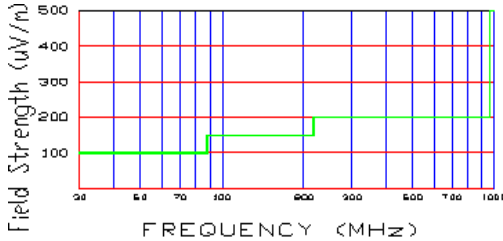


Figure A-8. Radiated limits at 3 meters.

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 $\mu\text{V/m}$ (54dB μm) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner
FCC ID: GU66037LMC352		Page 4 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 2 Mbps
Distance of Measurements: 3 Meters
Channel: 06

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
4874	-98.4	40.5	V	49.1	285.1	4.9
7311	-104.3	48.0	V	50.7	342.8	3.3
9748	-115.9	50.3	V	41.4	117.5	12.6
12185	-135.0	53.7	V	25.7	19.27	28.3

Table A-10. Radiated Measurements @ 3 meters

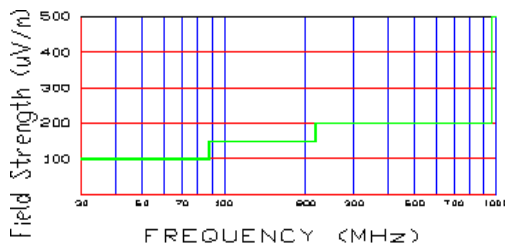


Figure A-9. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 µV/m (54dBµ/m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner
FCC ID: GU66037LMC352		Page 5 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 2 Mbps
Distance of Measurements: 3 Meters
Channel: 11

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
4924	-99.2	40.7	V	48.5	266.1	5.5
7386	-104.8	48.2	V	50.4	331.1	3.6
9848	-117.1	50.4	V	40.3	103.5	13.7
12310	-135.0	53.8	V	25.8	19.5	28.2

Table A-11. Radiated Measurements @ 3 meters

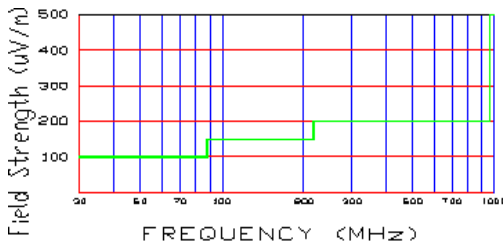


Figure A-10. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner
	FCC ID: GU66037LMC352	Page 6 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 5.5 Mbps
Distance of Measurements: 3 Meters
Channel: 01

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
4824	-98.8	40.4	V	48.6	268.8	5.4
7236	-105.1	47.4	V	49.3	282.4	4.7
9648	-117.7	50.3	V	39.6	95.5	14.4
12060	-135.0	53.7	V	25.7	19.3	28.3

Table A-12. Radiated Measurements @ 3 meters

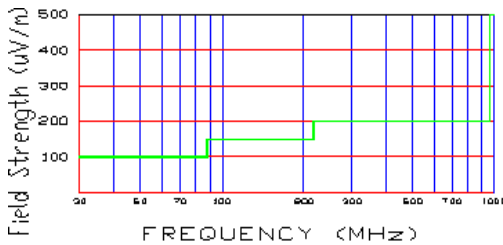


Figure A-11. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner
FCC ID: GU66037LMC352		Page 7 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 5.5 Mbps
Distance of Measurements: 3 Meters
Channel: 06

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
4874	-98.1	40.5	V	49.5	295.1	4.6
7311	-104.5	48.0	V	50.5	335.0	3.5
9748	-115.7	50.3	V	41.6	120.2	12.4
12185	-135.0	53.7	V	25.7	19.3	28.3

Table A-13. Radiated Measurements @ 3 meters

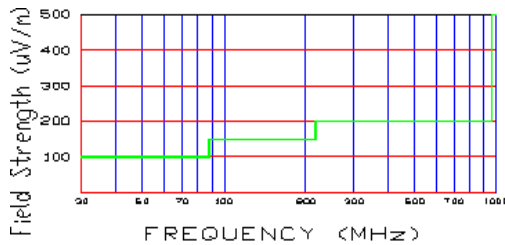


Figure A-12. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner
FCC ID: GU66037LMC352		Page 8 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 5.5 Mbps
Distance of Measurements: 3 Meters
Channel: 11

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
4924	-99.1	40.7	V	48.6	269.1	5.4
7386	-105.7	48.2	V	49.5	298.5	4.5
9848	-118.1	50.4	V	39.3	92.2	14.7
12310	-135.0	53.8	V	25.8	19.5	28.2

Table A-14. Radiated Measurements @ 3 meters

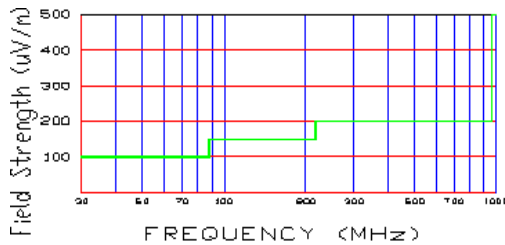


Figure A-13. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 µV/m (54dBµ/m) at 3 meters radiated.


PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT PAXAR		Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner	FCC ID: GU66037LMC352 Page 9 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 11 Mbps
Distance of Measurements: 3 Meters
Channel: 01

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
4824	-99.1	40.4	V	48.3	259.7	5.7
7236	-104.8	47.4	V	49.6	302.7	4.4
9648	-117.7	50.3	V	39.6	95.5	14.4
12060	-135.0	53.7	V	27.1	19.3	28.3

Table A-15. Radiated Measurements @ 3 meters

NOTES:

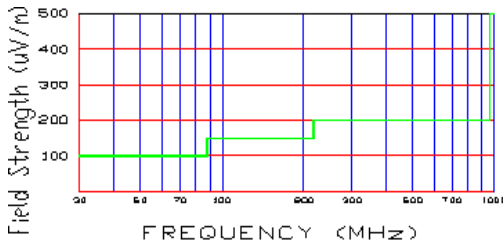


Figure A-14. Radiated limits at 3 meters.

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μV/m (54dBμ/m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner
FCC ID: GU66037LMC352		Page 10 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 11 Mbps
Distance of Measurements: 3 Meters
Channel: 06

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
4874	-98.1	40.5	V	49.4	295.1	4.6
7311	-105.3	48.0	V	49.7	305.5	4.3
9748	-115.7	50.3	V	41.6	120.2	12.4
12185	-133.6	53.7	V	27.1	22.6	26.9

Table A-16. Radiated Measurements @ 3 meters

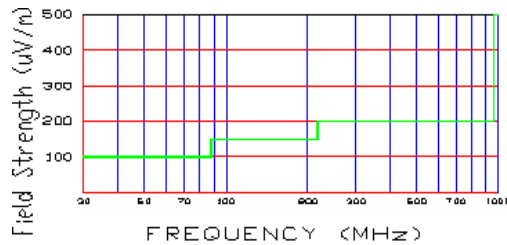


Figure A-15. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 µV/m (54dBµ/m) at 3 meters radiated.


PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT PAXAR	Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner
	FCC ID: GU66037LMC352	Page 11 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 11 Mbps
Distance of Measurements: 3 Meters
Channel: 11

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
4924	-99.1	40.7	V	48.6	269.1	5.4
7386	-106.2	48.2	V	49.0	281.8	5.0
9848	-18.1	50.4	V	39.3	92.2	14.7
12310	-135.0	53.8	V	25.8	19.5	28.2

Table A-17. Radiated Measurements @ 3 meters

NOTES:

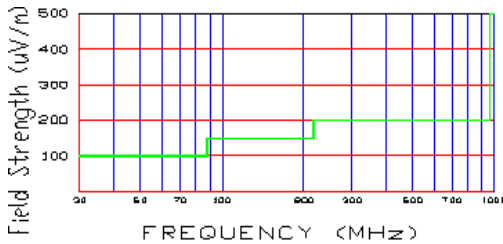


Figure A-16. Radiated limits at 3 meters.

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 µV/m (54dBµ/m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT 		Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner	FCC ID: GU66037LMC352 Page 12 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Spurious Measurements

§15.205 / §15.209

Distance of Measurements: 3 Meters

FREQ (MHz)	Level (dBm)	AFCL (dB/m)	POL (H/V)	Height (m)	Azimuth (° angle)	F/S (uV/M)	Margin (dB)
125.0	-84.3	11.9	V	2.3	100	53.8	-8.9
250.0	-90.0	18.8	V	2.1	200	61.7	-10.2
345.0	-90.0	22.2	H	2.1	180	91.3	-6.8
420.0	-91.2	24.2	H	2	90	100.1	-6.0
474.1	-95.6	25.5	V	1.2	80	70.0	-9.1
505.8	-95.1	26.2	V	1.2	50	80.4	-3.8

Table A-17. Radiated Measurements at 3-meters

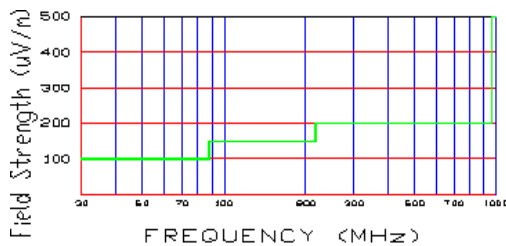


Figure A-17. Radiated limits at 3 meters

NOTES:

1. All emissions were investigated and the worst-case emissions are reported.
2. For hand-held devices, the EUT is rotated through three orthogonal axes to determine which configuration produces the maximum emissions.
3. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
4. The EUT was tested up to the 10th harmonic (25GHz) and no significant emission was found.
5. Above 1 GHz the limit is 500µV/m at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT 		Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner	FCC ID: GU66037LMC352 Page 13 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Restricted Band Measurements

§15.205 / §15.209

Special attention is made for the EUT’s harmonic and spurious radiated emission in the restricted bands of operations. The EUT was tested from 9kHz and up to the tenth harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHZ. Above 1 GHz, average measurement was used, using RBW 1MHz – VBW 10Hz and linearly polarized horn antennas. All harmonics/spurs are at least 20dB below the highest emission in the authorized band using RBW = 100kHz. In addition, peak measurements were taken to ensure that the peak levels are not more than 20dB above the average limit. All out of band emissions, other than those created by the spreading sequence, data sequence, and the carrier modulation must not exceed the limits show in Table G-1 per Section 15.209.

Frequency	F/S (mV/m)	Measured Distance (Meters)
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table A-18. Restricted Band Limits

TEST MEASUREMENT EQUIPMENT

Agilent E4448A	PSA Spectrum Analyzer 3 Hz - 50GHz
HP 8566B	Spectrum Analyzer 100Hz – 22GHz
HP 83017A	Microwave Analyzer 40dB Gain (0.5 – 26.5GHz)
HP 3784A	Digital Transmission Analyzer
EMCO 3115	Horn Antenna (1 – 18GHz)
HP 8495A	20dB Attenuator (DC-40GHz) 0 –70dB
HP 8493B	10dB Attenuator
MicroCoax Cables	Low Loss Microwave Cables (1 – 26.5GHz)
CDI Dipoles	Dipole Antennas (30 – 1000MHz)
EMCO 3116	Horn Antenna (18 – 40GHz)



PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner
	FCC ID: GU66037LMC352	Page 14 of 15

EXHIBIT A – Test Results (Cont.)
Radiated Restricted Band Measurements (Cont.)

§15.205 /§15.209 courtesy



Operating Frequency: 2462 MHz
Distance of
Measurements: 3 Meters

FREQ (MHz)	Level (dBm)	AFCL (dB/m)	POL (H/V)	F/S (dB μ V/m)	F/S (μ V/M)	Margin (dB)
2483.7	-98.4	33.0	V	41.6	120.2	12.4
2484.2	-98.5	33.0	V	41.5	118.9	12.5
2484.4	-96.0	33.1	V	44.1	160.3	12.5
2486.0	-93.9	33.1	V	462.0	204.2	7.8
2490.0	-99.0	33.2	V	41.2	114.8	12.8
2490.2	-97.5	33.2	V	42.7	136.5	11.3

Table A-19. Radiated Restricted Band Measurements at 3-meters

NOTES:

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9kHz up to the 10th harmonic and the worst-case emissions are reported.
4. The conducted limits are shown on Figure A-14. Above 1 GHz the limit is 500 μ V/m.
5. < -135 dBm is below the analyzer measurement floor level.

PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: 15.220520313.GU6	Test Dates: May 21, 2002	EUT Type: Wireless Scanner
FCC ID: GU66037LMC352		Page 15 of 15