

MONARCH Model: 9460IP -- 2.4GHz Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(4.00,4.00,4.00)

Med. Parameters 2450 MHz Muscle: $\sigma = 1.98$ mho/m $\epsilon_r = 52.2$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.0120 mW/g, SAR (10g): 0.0042 mW/g

Monarch 2.4GHz DSSS Wireless Printer Model: 9460IP

Low Channel, 2412MHz [CW Mode]; Standard Battery; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 23mW; Spacing = Touch LCD side of EUT to flat phantom, No Holster/No BeltClip

Test Date -- 05/21/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

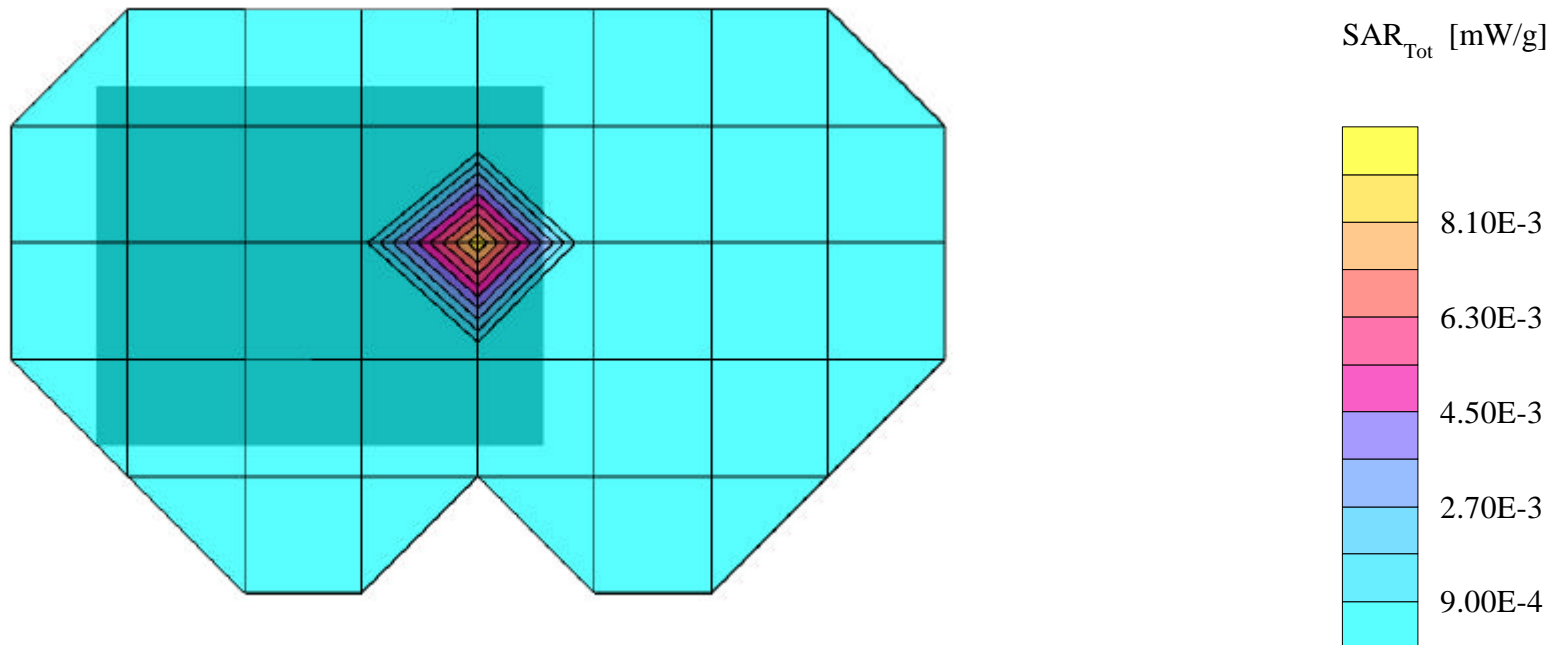

MONARCH Model: 9460IP -- 2.4GHz Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(4.00,4.00,4.00)

Med. Parameters 2450 MHz Muscle: $\sigma = 1.98$ mho/m $\epsilon_r = 52.2$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.0132 mW/g, SAR (10g): 0.0047 mW/g

Monarch 2.4GHz DSSS Wireless Printer Model: 9460IP

Mid Channel, 2437MHz [CW Mode]; Standard Battery; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 23mW; Spacing = Touch LCD side of EUT to flat phantom, No Holster/No BeltClip

Test Date -- 05/21/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

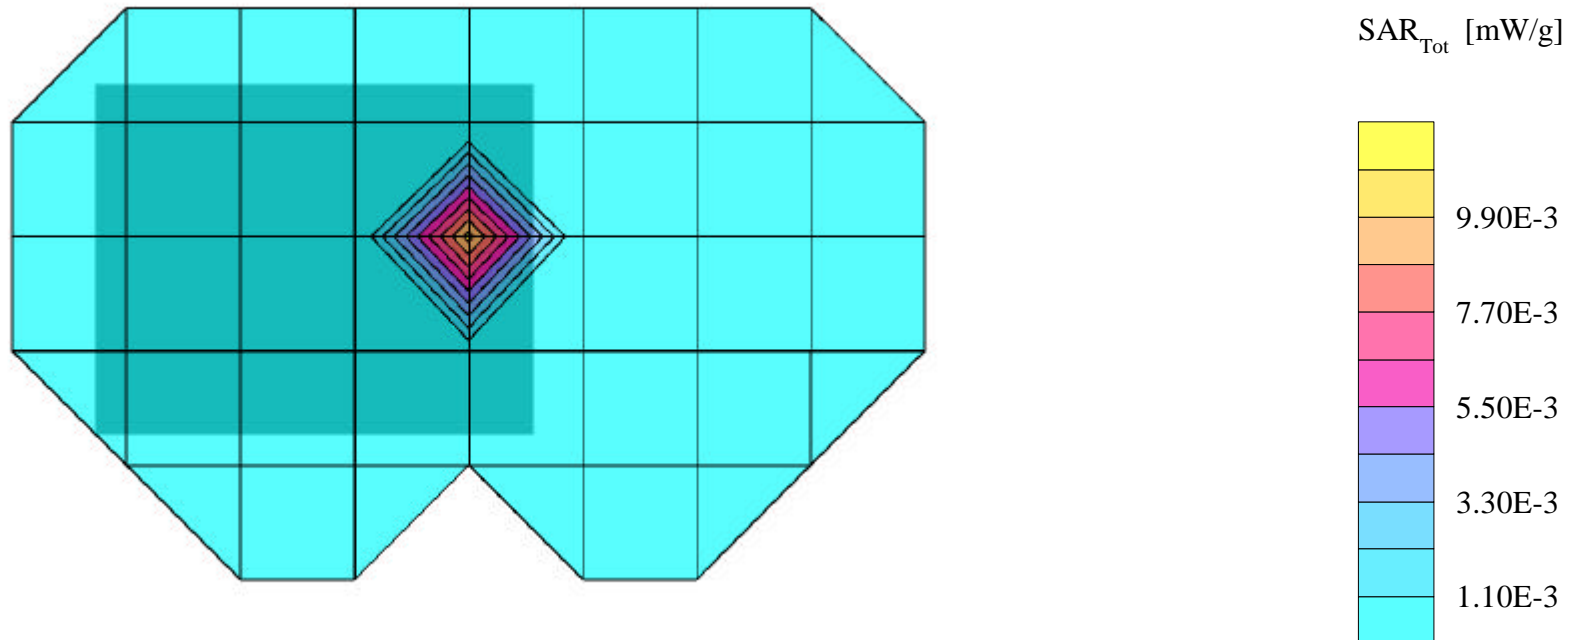

MONARCH Model: 9460IP -- 2.4GHz Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(4.00,4.00,4.00)

Med. Parameters 2450 MHz Muscle: $\sigma = 1.98$ mho/m $\epsilon_r = 52.2$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.0131 mW/g, SAR (10g): 0.0042 mW/g

Monarch 2.4GHz DSSS Wireless Printer Model: 9460IP

High Channel, 2462MHz [CW Mode]; Standard Battery; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 23mW; Spacing = Touch LCD side of EUT to flat phantom, No Holster/No BeltClip

Test Date -- 05/21/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

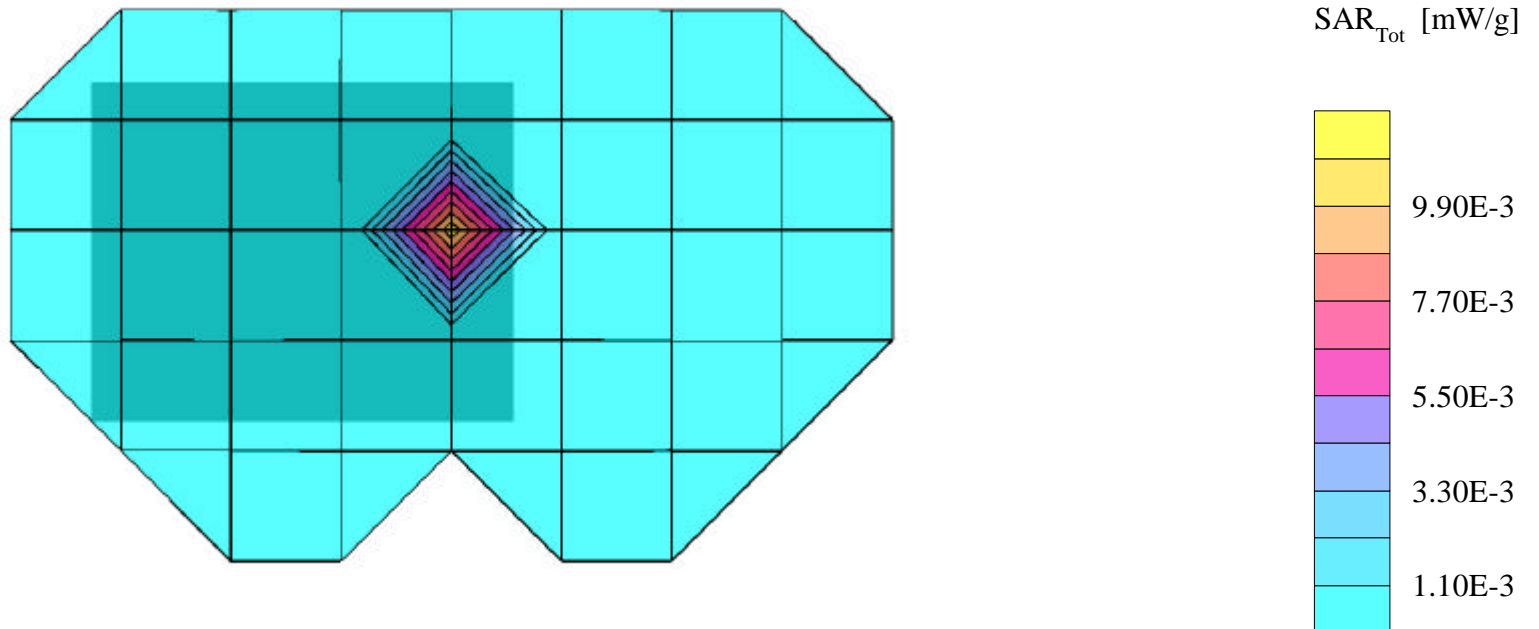

MONARCH Model: 9460IP -- 2.4GHz Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(4.00,4.00,4.00)

Med. Parameters 2450 MHz Muscle: $\sigma = 1.98$ mho/m $\epsilon_r = 52.2$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.0008 mW/g, SAR (10g): -0.00 mW/g

Monarch 2.4GHz DSSS Wireless Printer Model: 9460IP

Low Channel, 2412MHz [CW Mode]; Standard Battery; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 23mW; Spacing = Touch printer side of EUT to flat phantom, No Holster/No BeltClip

Test Date -- 05/21/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

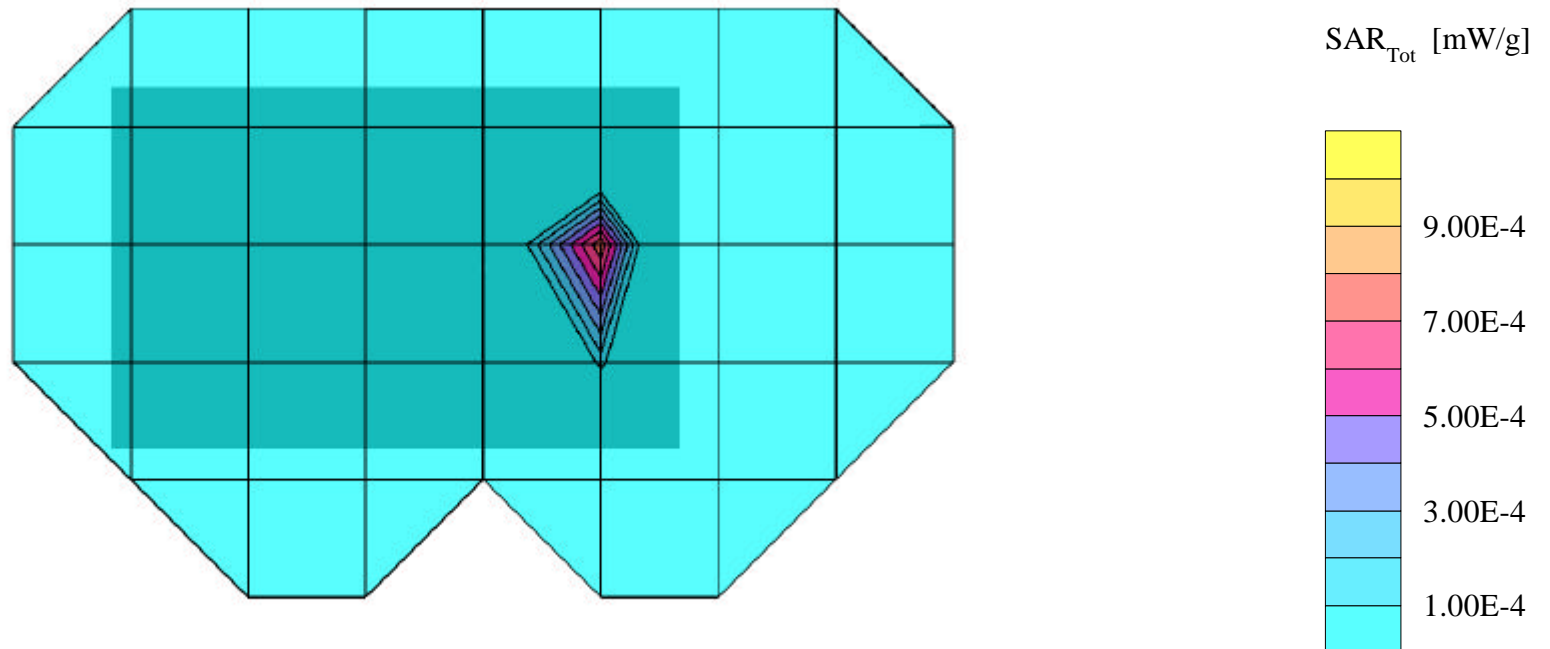

MONARCH Model: 9460IP -- 2.4GHz Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(4.00,4.00,4.00)

Med. Parameters 2450 MHz Muscle: $\sigma = 1.98$ mho/m $\epsilon_r = 52.2$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.0011 mW/g, SAR (10g): 0.0000 mW/g

Monarch 2.4GHz DSSS Wireless Printer Model: 9460IP

Mid Channel, 2437MHz [CW Mode]; Standard Battery; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 23mW; Spacing = Touch printer side of EUT to flat phantom, No Holster/No BeltClip

Test Date -- 05/21/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

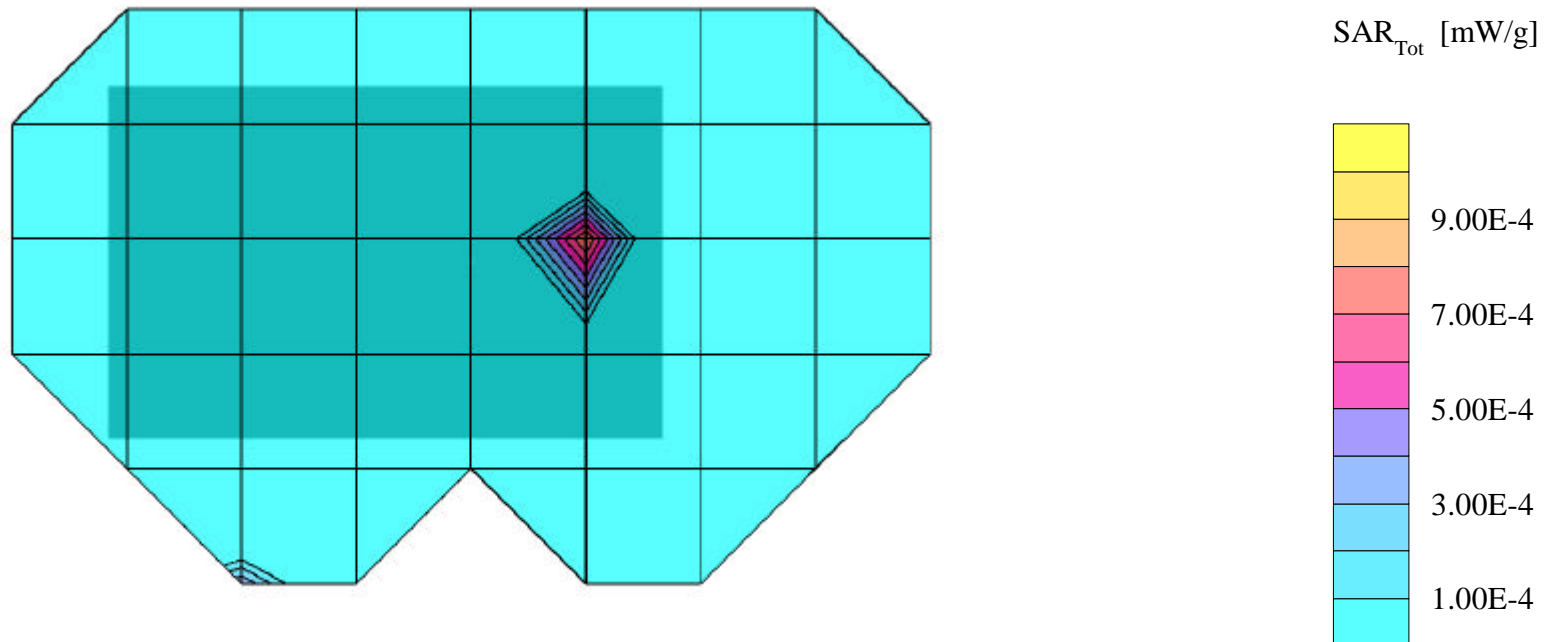

MONARCH Model: 9460IP -- 2.4GHz Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(4.00,4.00,4.00)

Med. Parameters 2450 MHz Muscle: $\sigma = 1.98$ mho/m $\epsilon_r = 52.2$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 0.0013 mW/g, SAR (10g): 0.0002 mW/g

Monarch 2.4GHz DSSS Wireless Printer Model: 9460IP

High Channel, 2462MHz [CW Mode]; Standard Battery; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 23mW; Spacing = Touch printer side of EUT to flat phantom, No Holster/No BeltClip

Test Date -- 05/21/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

