

# FCC RF Test Report


APPLICANT : ATELIER HAUTE COMMUNICATION SAS  
EQUIPMENT : Mobile phone  
BRAND NAME : TAG Heuer  
MODEL NAME : TH04M  
MARKETING NAME : MERIDIIST  
FCC ID : GUOTH04M  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on May 16, 2013 and completely tested on May 28, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



---

Reviewed by: Joseph Lin / Manager

---

Approved by: Jones Tsai / Manager

**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT .....	6
1.6 Testing Site.....	6
1.7 Applied Standards .....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1 Descriptions of Test Mode.....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system.....	10
2.5 Description of RF Function Operation Test Setup.....	10
2.6 Measurement Results Explanation Example.....	10
<b>3 TEST RESULT .....</b>	<b>11</b>
3.1 Number of Channel Measurement .....	11
3.2 Hopping Channel Separation Measurement .....	13
3.3 Dwell Time Measurement.....	20
3.4 20dB Bandwidth Measurement .....	22
3.5 Peak Output Power Measurement .....	29
3.6 Conducted Band Edges Measurement .....	31
3.7 Conducted Spurious Emission Measurement .....	38
3.8 Radiated Band Edges and Spurious Emission Measurement .....	42
3.9 AC Conducted Emission Measurement.....	55
3.10 Antenna Requirements.....	59
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>60</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>61</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT</b>	
<b>APPENDIX B. SETUP PHOTOGRAPHS</b>	

## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR351601	Rev. 01	Initial issue of report	Jun. 27, 2013

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass	-
3.5	15.247(b)(1)	Peak Output Power	$\leq 1\text{ w}$ for 1Mbps $\leq 125\text{ Mw}$ for 2, 3Mbps	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 15.79 dB at 36.790 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.54 dB at 0.620 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**ATELIER HAUTE COMMUNICATION SAS**

100 avenue des Champs Elysées 75008 PARIS-FRANCE

## 1.2 Manufacturer

**ATELIER HAUTE COMMUNICATION SAS**

100 avenue des Champs Elysées 75008 PARIS-FRANCE

## 1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile phone
Brand Name	TAG Heuer
Model Name	TH04M
Marketing Name	MERIDIIST
FCC ID	GUOTH04M
EUT supports Radios application	GSM/GPRS/EGPRS/Bluetooth 2.1
HW Version	P1.0
SW Version	LP2_M6235L_1317_00_V109A_WW
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR (1Mbps) : 2.88 dBm (0.0019 W) Bluetooth 2.1 EDR (2Mbps) : 2.37 dBm (0.0017 W) Bluetooth 2.1 EDR (3Mbps) : 2.55 dBm (0.0018 W)
Antenna Type	FPC Antenna with gain -0.63 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth 2.1 EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth 2.1 EDR (3Mbps) : 8-DPSK

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.		
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	CO01-KS	03CH01-KS	149928/4086E-1

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.		
<b>Test Site Location</b>	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755- 3320-2398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	TH01-SZ		831040/4086F-1

The test site complies with ANSI C63.4 2003 requirement.

## 1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC Public Notice DA 00-705
- ANSI C63.10-2009

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	2.67 dBm	2.25 dBm	2.44 dBm
Ch39	2441MHz	2.45 dBm	1.93 dBm	2.23 dBm
Ch78	2480MHz	2.88 dBm	2.37 dBm	2.55 dBm

**Remark:**

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.

- a. The EUT has been associated with peripherals pursuant to ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Z plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report. AC power line Conducted Emission was tested under maximum output power.

## 2.2 Test Mode


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth ER 1Mbps GFSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
	Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Link + USB Cable (Charging from Adapter)		
<b>Remark:</b> For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.			




## 2.3 Connection Diagram of Test System

### <Bluetooth Tx Mode>

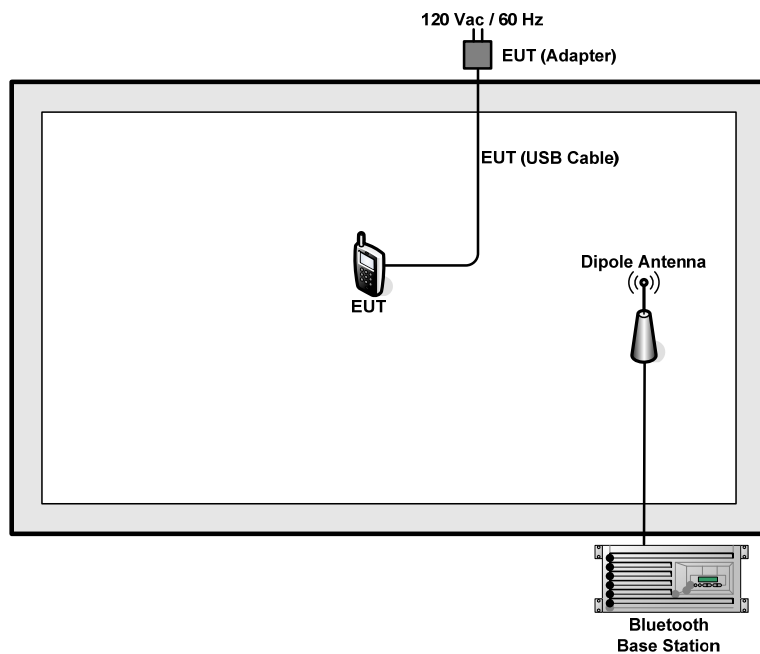

### <AC Conducted Emission Mode>

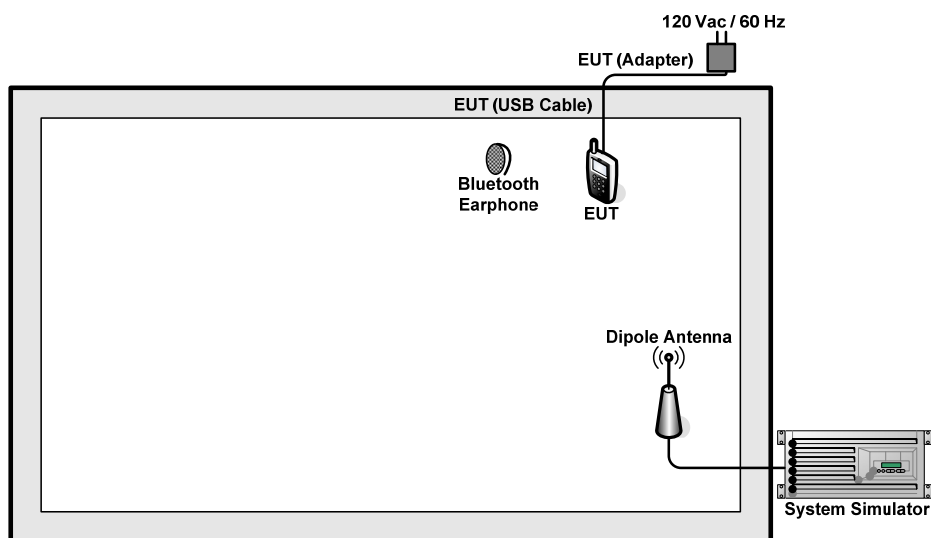

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT	FCC DoC	N/A	Unshielded, 1.8 m
3.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A

## 2.5 Description of RF Function Operation Test Setup

For Bluetooth function, key in “\* # 3646633 #” on the EUT directly. Then, the EUT will get into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

**For conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following table shows an offset computation example with cable loss 5.6 dB.

Example :

*Offset(dB) = RF cable loss(dB) + attenuator factor(dB).*

*= 5.6 + 10 = 15.6 (dB)*

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW  $\geq$  1% of the span; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.


##### 3.1.4 Test Setup

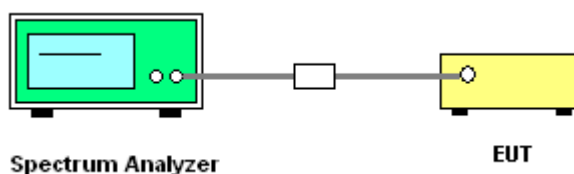


##### 3.1.5 Test Result of Number of Hopping Frequency

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Fly Chen	<b>Relative Humidity :</b>	50~53%
<b>Number of Hopping (Channel)</b>	<b>Adaptive Frequency Hopping (Channel)</b>	<b>Limits (Channel)</b>	<b>Pass/Fail</b>
79	$\geq 20$	$> 15$	Pass

## Number of Hopping Channel Plot on Channel 00 - 78

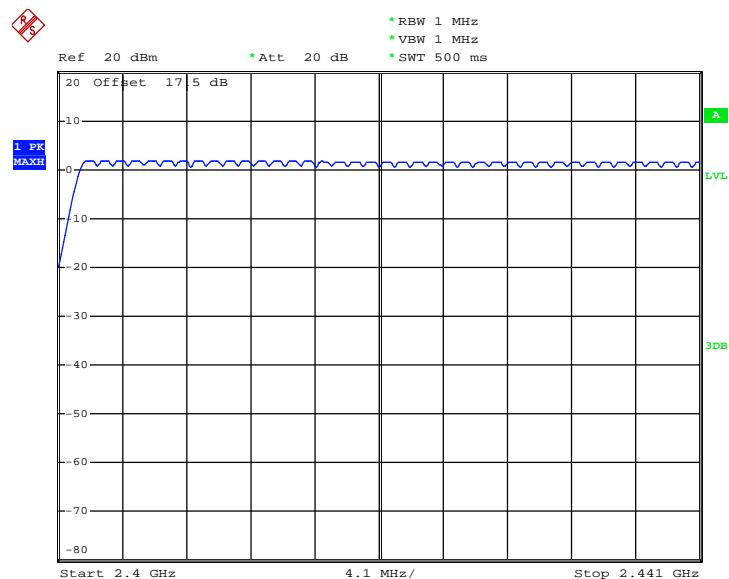

Date: 21.MAY.2013 11:22:05

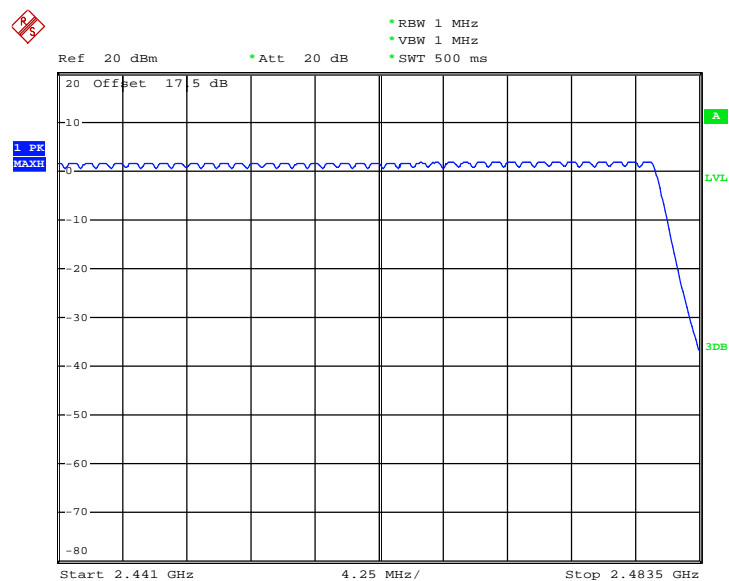

Date: 21.MAY.2013 11:26:47

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  $RBW \geq 1\%$  of the span;  
 $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

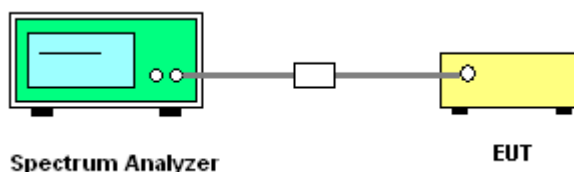


### 3.2.5 Test Result of Hopping Channel Separation


Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.5680	Pass
39	2441	1.002	0.5680	Pass
78	2480	1.002	0.6080	Pass


**Channel Separation Plot on Channel 00 - 01**

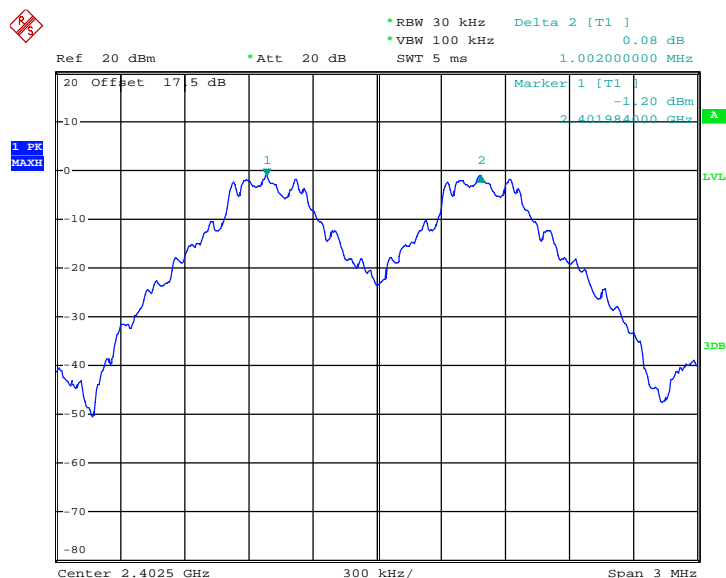

Date: 21.MAY.2013 10:29:11

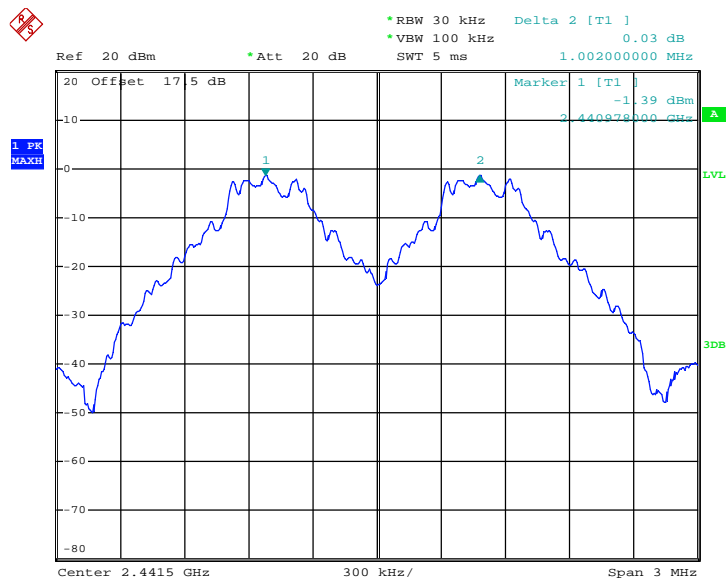**Channel Separation Plot on Channel 39 - 40**


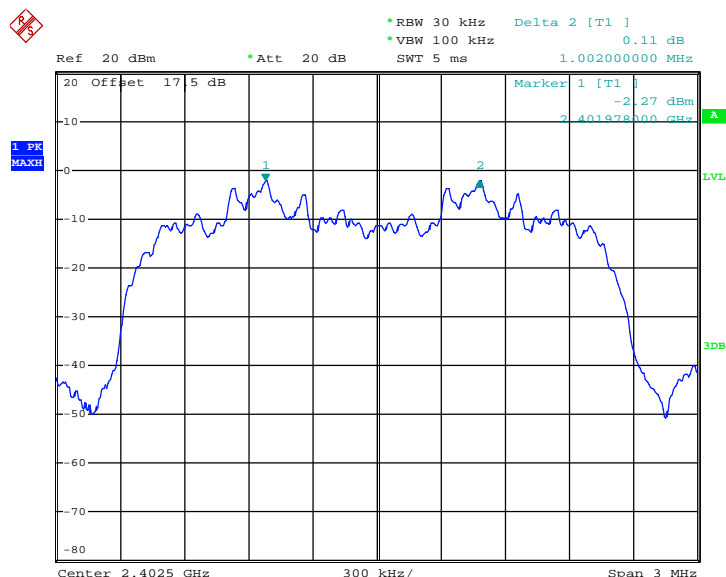
Date: 21.MAY.2013 10:29:51

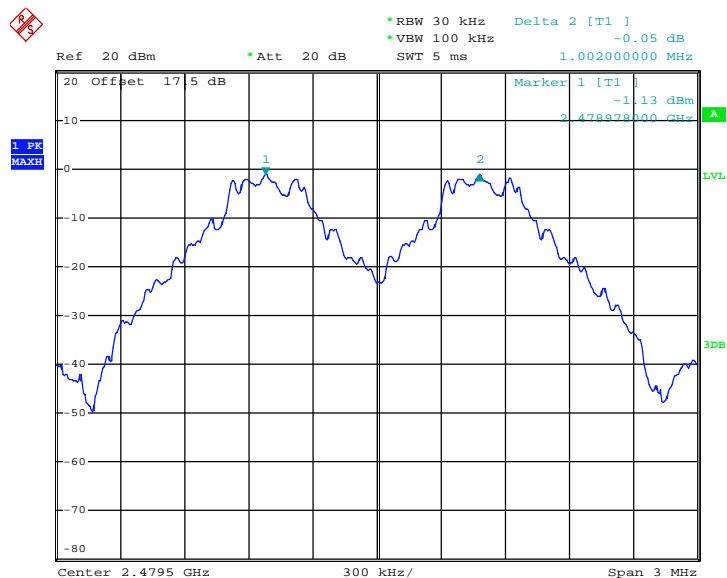**Channel Separation Plot on Channel 77 - 78**


Date: 21.MAY.2013 10:30:37


<b>Test Mode :</b>	2Mbps	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Fly Chen	<b>Relative Humidity :</b>	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8133	Pass
39	2441	1.008	0.8160	Pass
78	2480	1.002	0.8160	Pass


**Channel Separation Plot on Channel 00 - 01**


Date: 21.MAY.2013 10:33:24

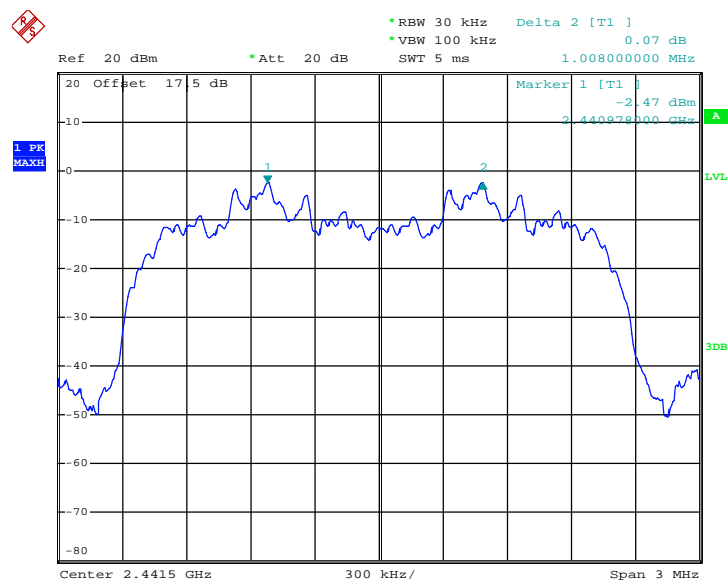

**Channel Separation Plot on Channel 39 - 40**


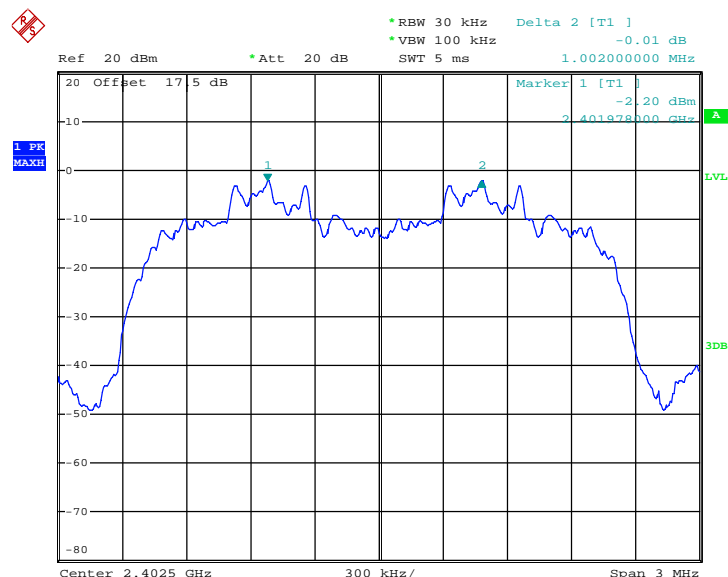
Date: 21.MAY.2013 10:34:19

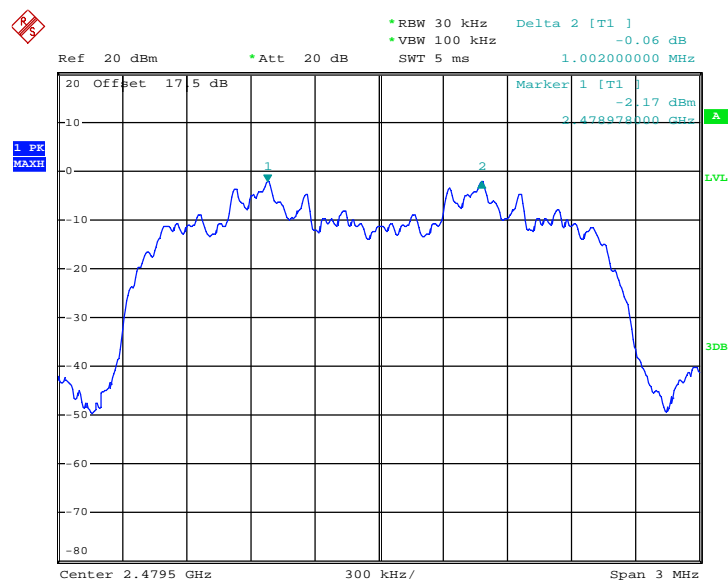**Channel Separation Plot on Channel 77 - 78**


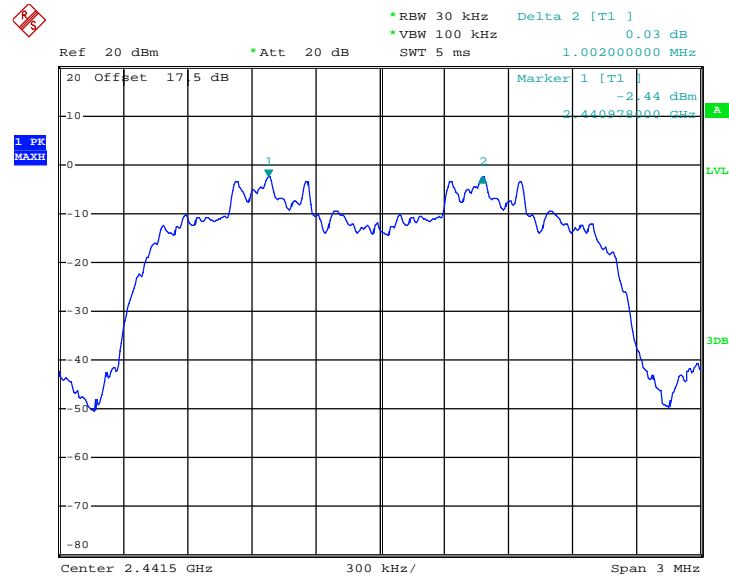
Date: 21.MAY.2013 10:35:42

<b>Test Mode :</b>	3Mbps	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Fly Chen	<b>Relative Humidity :</b>	50~53%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8187	Pass
39	2441	1.002	0.8187	Pass
78	2480	1.002	0.8187	Pass

**Channel Separation Plot on Channel 00 - 01**


Date: 21.MAY.2013 10:36:37

**Channel Separation Plot on Channel 39 - 40**


Date: 21.MAY.2013 10:37:34

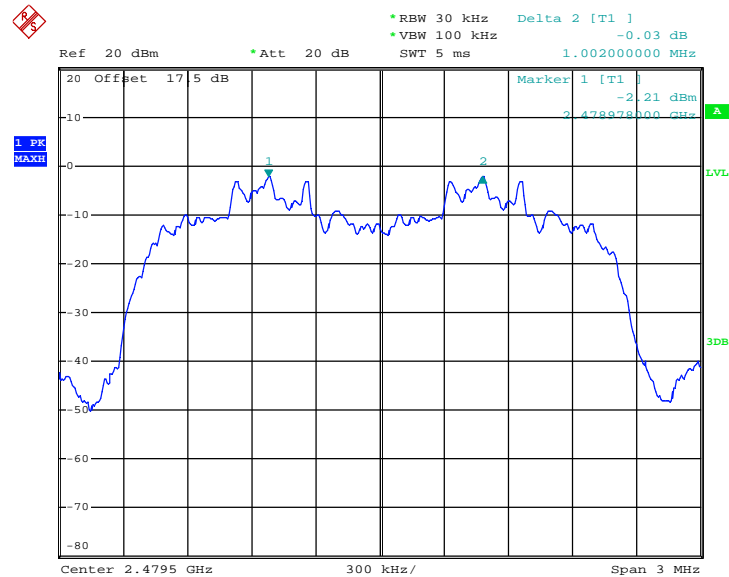**Channel Separation Plot on Channel 77 - 78**


Date: 21.MAY.2013 17:53:37

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

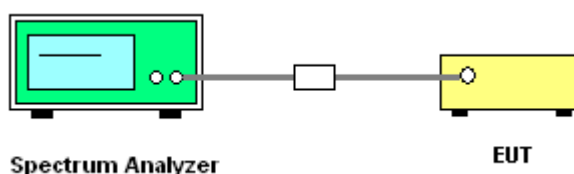

#### 3.3.5 Test Result of Dwell Time


<b>Test Mode :</b>	DH5	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Fly Chen	<b>Relative Humidity :</b>	50~53%

Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.900	0.31	0.4	Pass
AFH	20	53.34	2.900	0.15	0.4	Pass

**Remark:**

1. In normal mode, hopping rate is 1600hops/s with 6 slots in 79 hopping channels.  
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),  
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800hops/s with 6 slots in 20 hopping channels.  
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),  
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.34 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

**Package Transfer Time Plot**

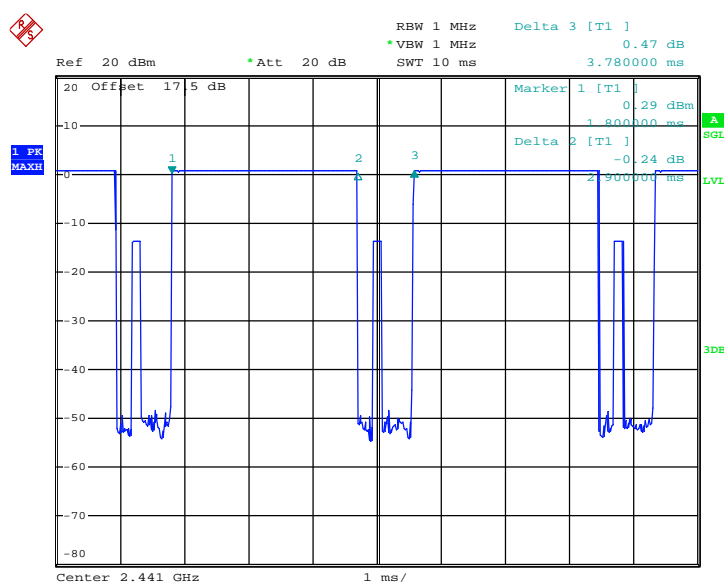
Date: 20.MAY.2013 15:51:57

### 3.4 20dB Bandwidth Measurement

#### 3.4.1 Limit of 20dB Bandwidth

Reporting only


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Measure and record the results in the test report.

#### 3.4.4 Test Setup

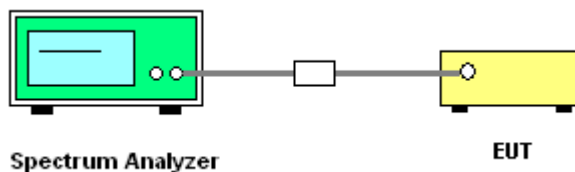


### 3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.852
39	2441	0.852
78	2480	0.912


**20 dB Bandwidth Plot on Channel 00**

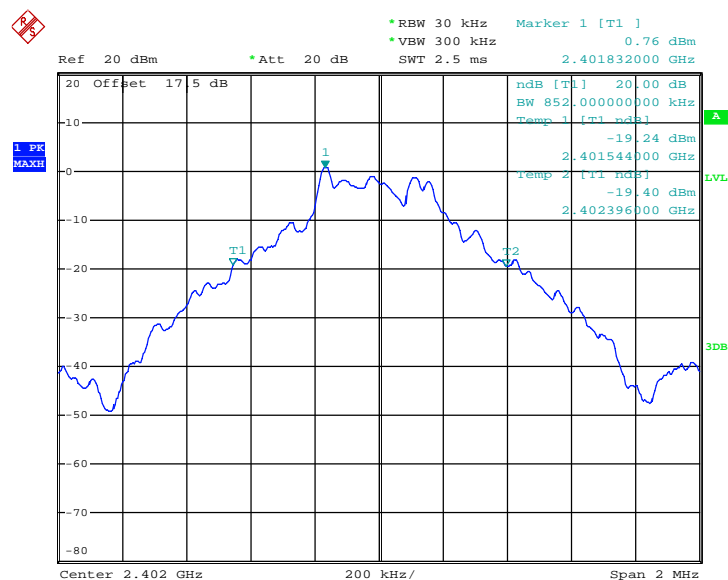

Date: 21.MAY.2013 10:18:34




### 20 dB Bandwidth Plot on Channel 39

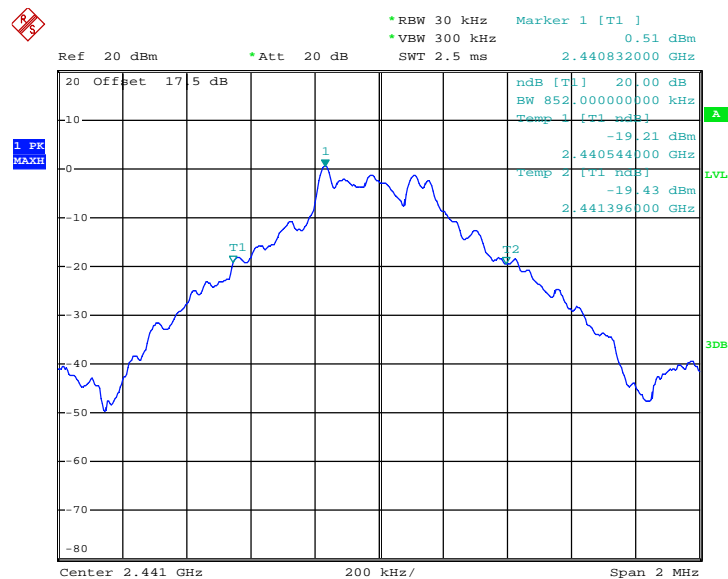

Date: 21.MAY.2013 10:24:10

### 20 dB Bandwidth Plot on Channel 78

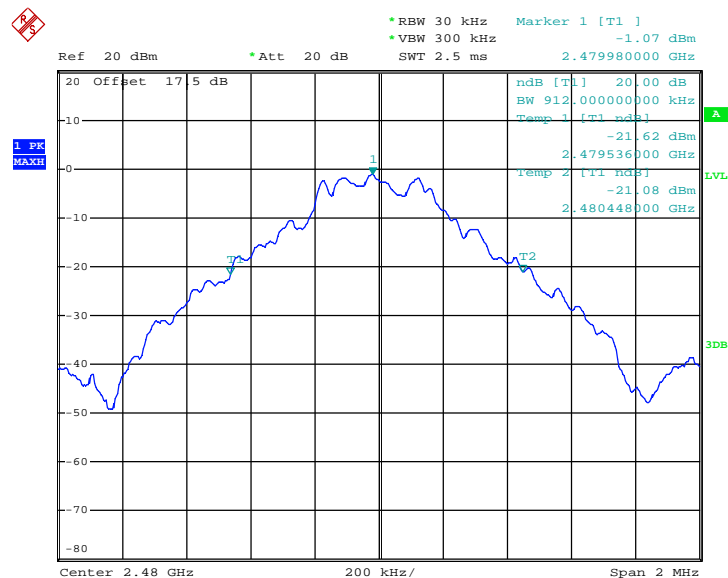


Date: 21.MAY.2013 10:25:07




<b>Test Mode :</b>	2Mbps	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Fly Chen	<b>Relative Humidity :</b>	50~53%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.220
39	2441	1.224
78	2480	1.224

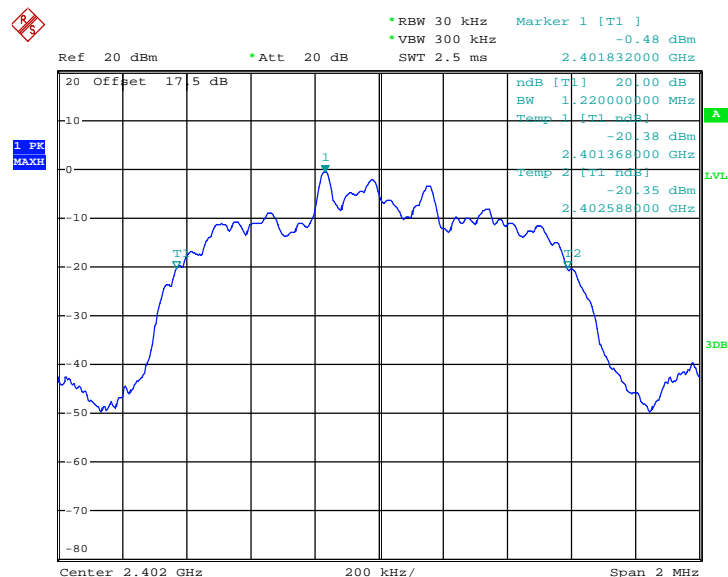**20 dB Bandwidth Plot on Channel 00**


Date: 21.MAY.2013 10:19:25

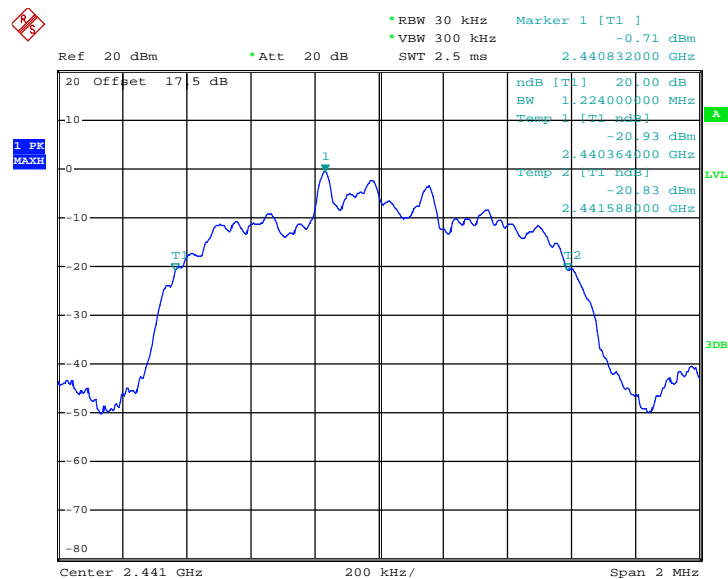**20 dB Bandwidth Plot on Channel 39**


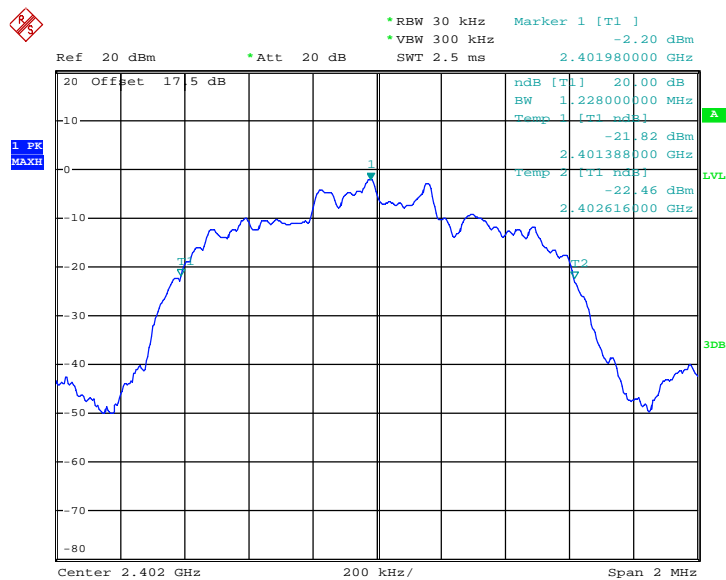
Date: 21.MAY.2013 10:23:08

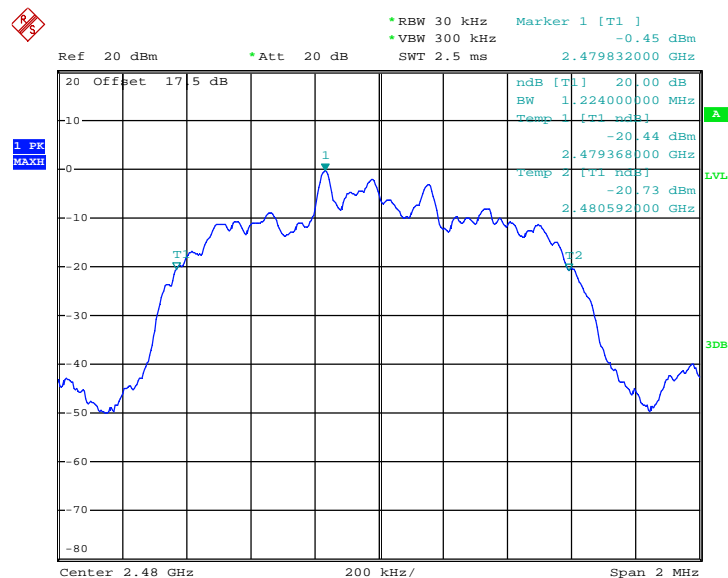**20 dB Bandwidth Plot on Channel 78**


Date: 21.MAY.2013 10:25:38


<b>Test Mode :</b>	3Mbps	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Fly Chen	<b>Relative Humidity :</b>	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.228
39	2441	1.228
78	2480	1.228

**20 dB Bandwidth Plot on Channel 00**


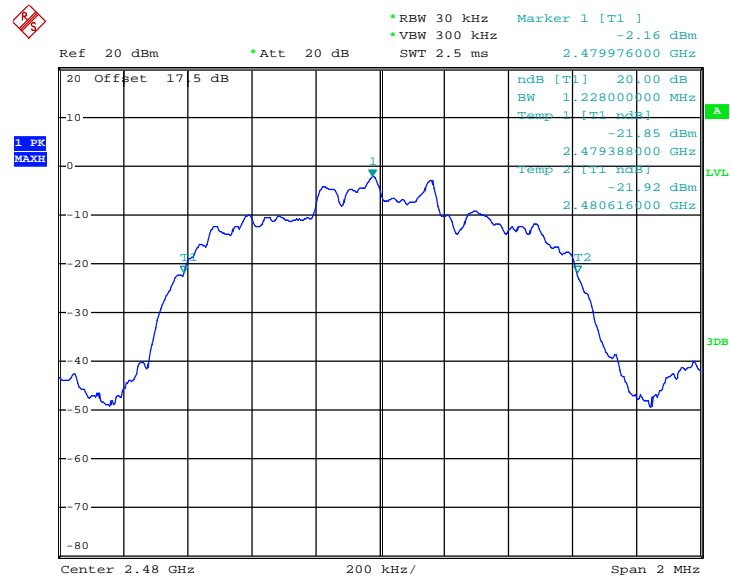
Date: 21.MAY.2013 10:20:07

### 20 dB Bandwidth Plot on Channel 39

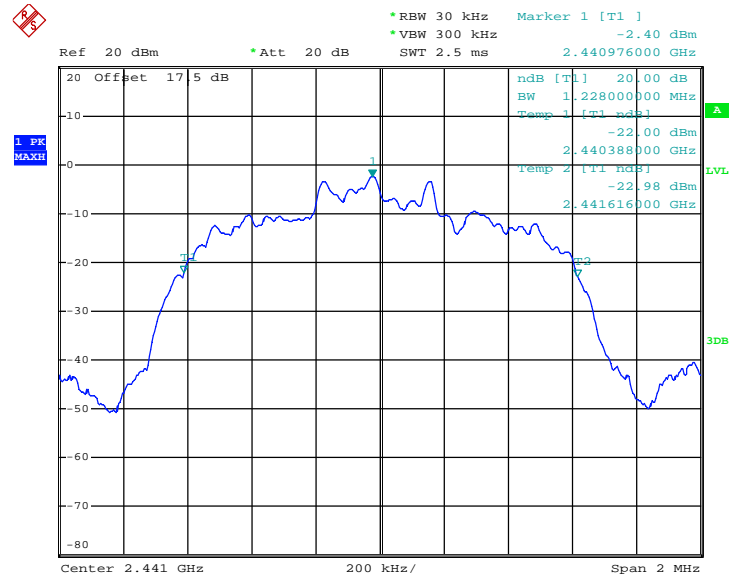

Date: 21.MAY.2013 10:22:42

### 20 dB Bandwidth Plot on Channel 78



Date: 21.MAY.2013 10:26:13

### 3.5 Peak Output Power Measurement

#### 3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, and 3Mbps are 0.125 watts.


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

#### 3.5.4 Test Setup

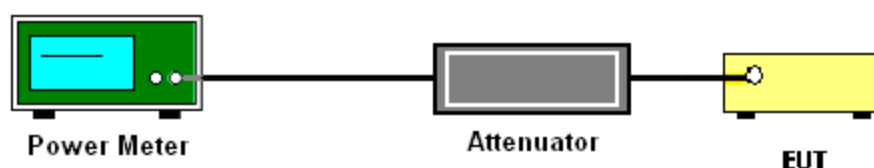

### 3.5.5 Test Result of Peak Output Power

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Fly Chen	<b>Relative Humidity :</b>	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	2.67	30.00	Pass
39	2441	2.45	30.00	Pass
78	2480	2.88	30.00	Pass

**Note:** For AFH mode using 20 hopping channels, the maximum output power limit is 20.97 dBm.

<b>Test Mode :</b>	2Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Fly Chen	<b>Relative Humidity :</b>	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	2.25	20.97	Pass
39	2441	1.93	20.97	Pass
78	2480	2.37	20.97	Pass

<b>Test Mode :</b>	3Mbps	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Fly Chen	<b>Relative Humidity :</b>	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	2.44	20.97	Pass
39	2441	2.23	20.97	Pass
78	2480	2.55	20.97	Pass

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 300KHz ( $\geq 1\%$  span=30MHz ), VBW = 300KHz ( $\geq$  RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300KHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.


### 3.6.4 Test Setup

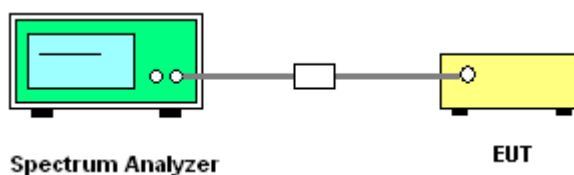

### 3.6.5 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Fly Chen

**Low Band Edge Plot on Channel 00**

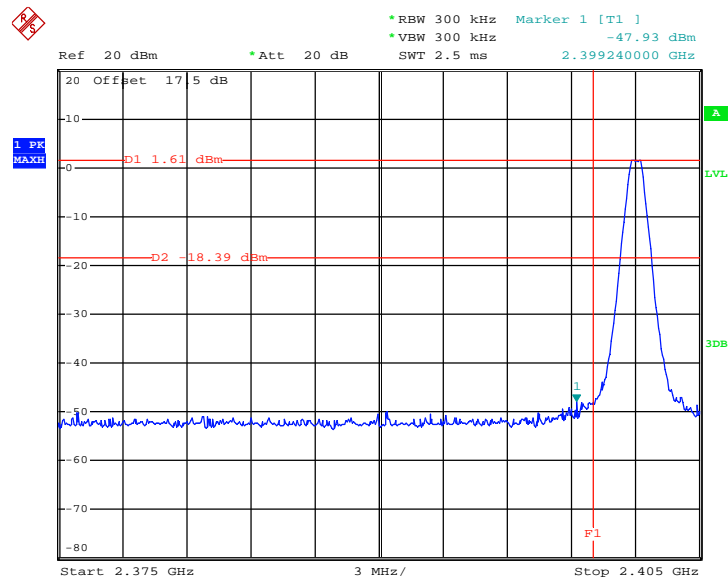

Date: 21.MAY.2013 10:48:44

**High Band Edge Plot on Channel 78**

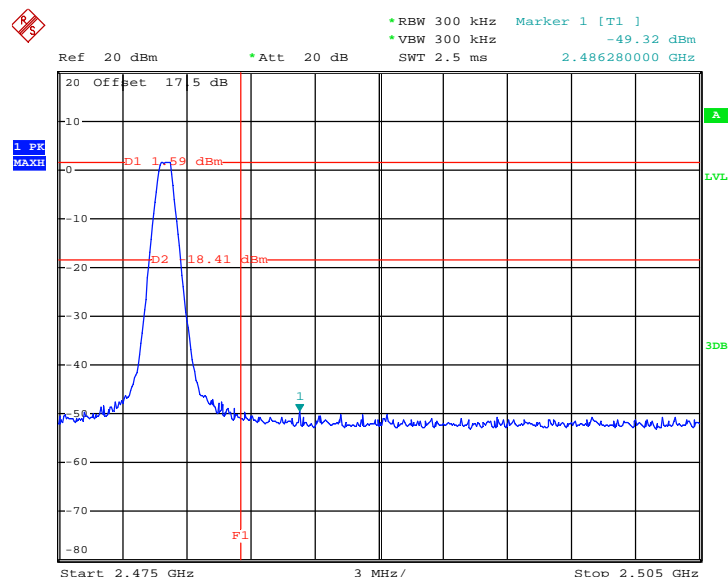


Date: 21.MAY.2013 10:47:48




<b>Test Mode :</b>	2Mbps	<b>Temperature :</b>	24~26℃
<b>Test Channel :</b>	00 and 78	<b>Relative Humidity :</b>	50~53%
		<b>Test Engineer :</b>	Fly Chen

### Low Band Edge Plot on Channel 00

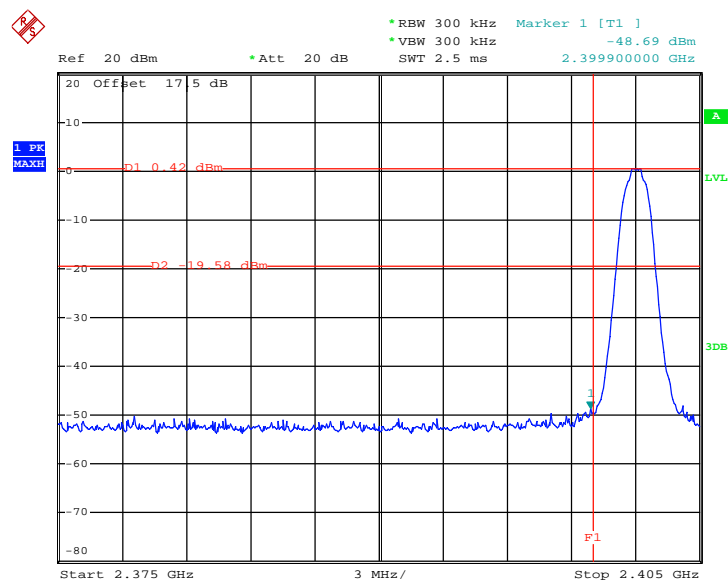


Date: 21.MAY.2013 10:51:32

### High Band Edge Plot on Channel 78

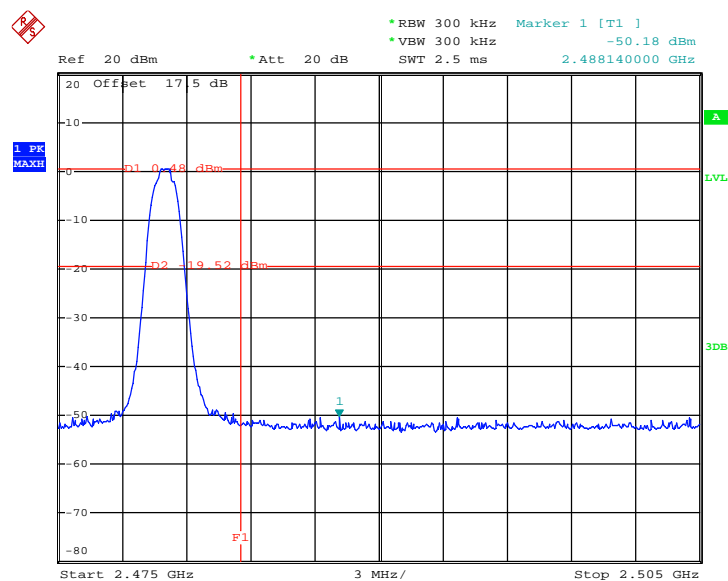


Date: 21.MAY.2013 10:50:32

<b>Test Mode :</b>	3Mbps	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	00 and 78	<b>Relative Humidity :</b>	50~53%
		<b>Test Engineer :</b>	Fly Chen

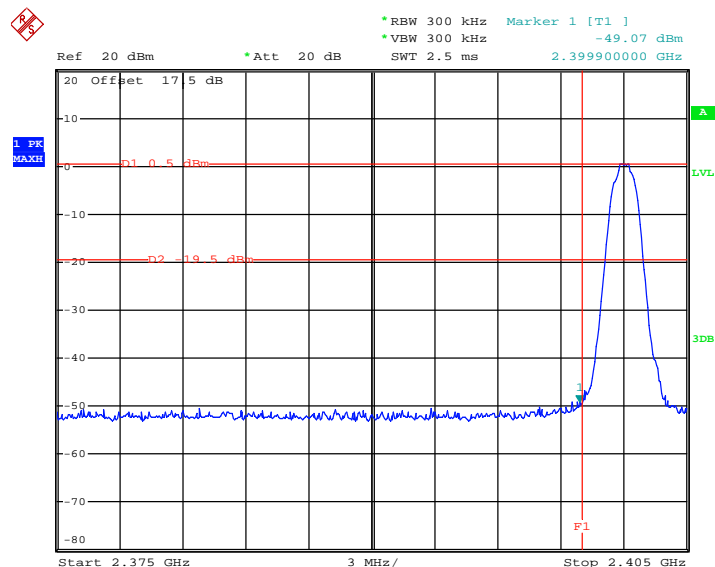**Low Band Edge Plot on Channel 00**


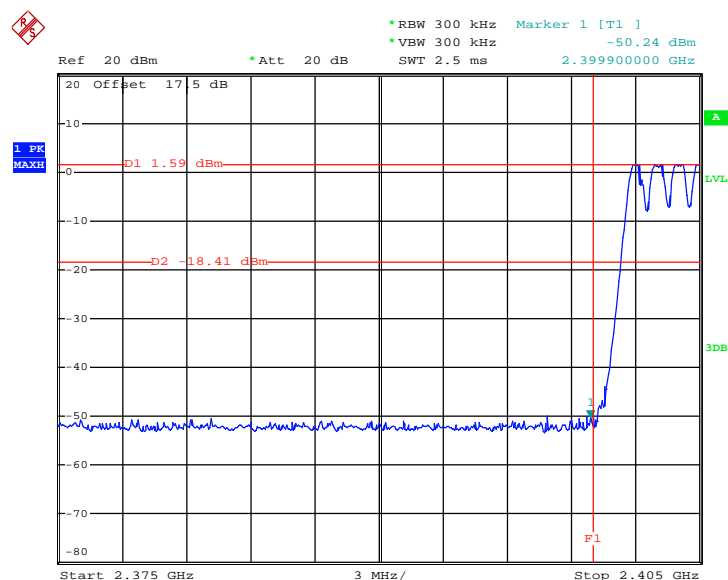
Date: 21.MAY.2013 10:59:07

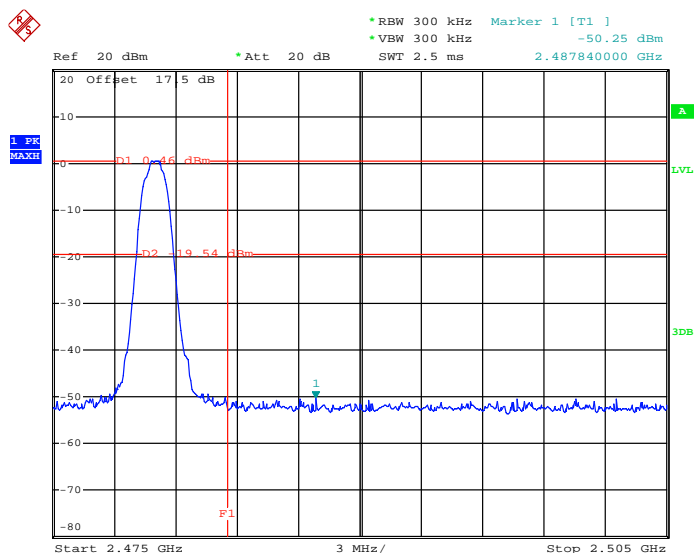**High Band Edge Plot on Channel 78**


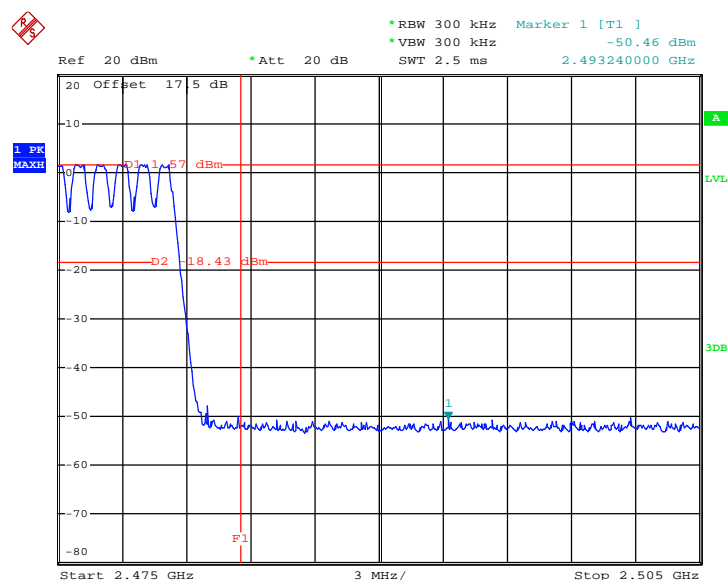
Date: 21.MAY.2013 10:52:54

### 3.6.6 Test Result of Conducted Hopping Mode Band Edges

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Fly Chen	Relative Humidity :	50~53%


**Hopping Mode Low Band Edge Plot on Channel 00**


Date: 21.MAY.2013 11:08:45


**Hopping Mode High Band Edge Plot on Channel 78**


Date: 21.MAY.2013 11:07:34

<b>Test Mode :</b>	2Mbps	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Fly Chen	<b>Relative Humidity :</b>	50~53%

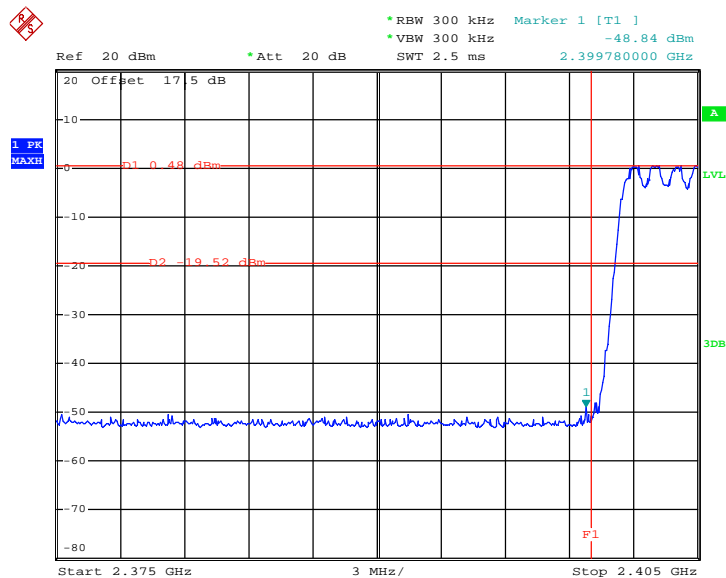
**Hopping Mode Low Band Edge Plot on Channel 00**


Date: 21.MAY.2013 11:05:57

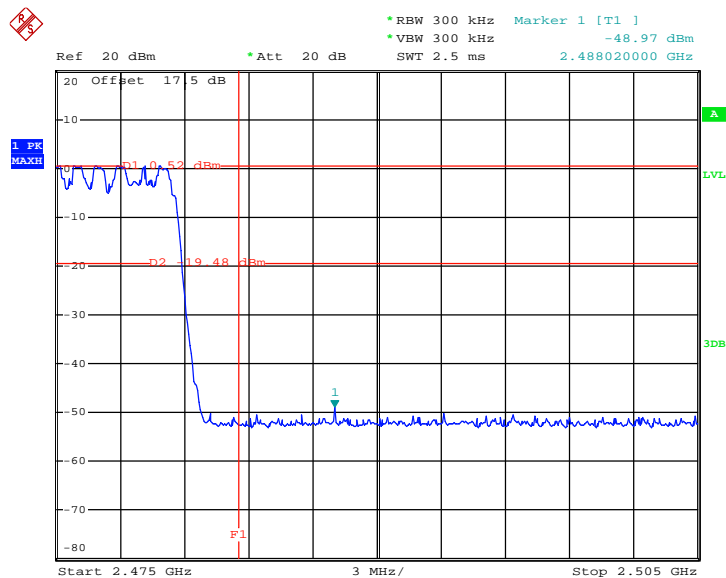
**Hopping Mode High Band Edge Plot on Channel 78**


Date: 21.MAY.2013 11:04:49

<b>Test Mode :</b>	3Mbps	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Fly Chen	<b>Relative Humidity :</b>	50~53%

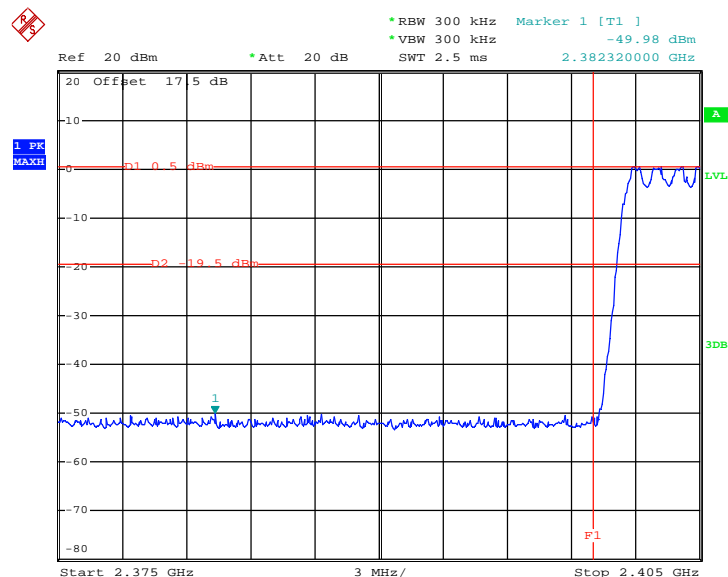**Hopping Mode Low Band Edge Plot on Channel 00**


Date: 21.MAY.2013 11:03:09

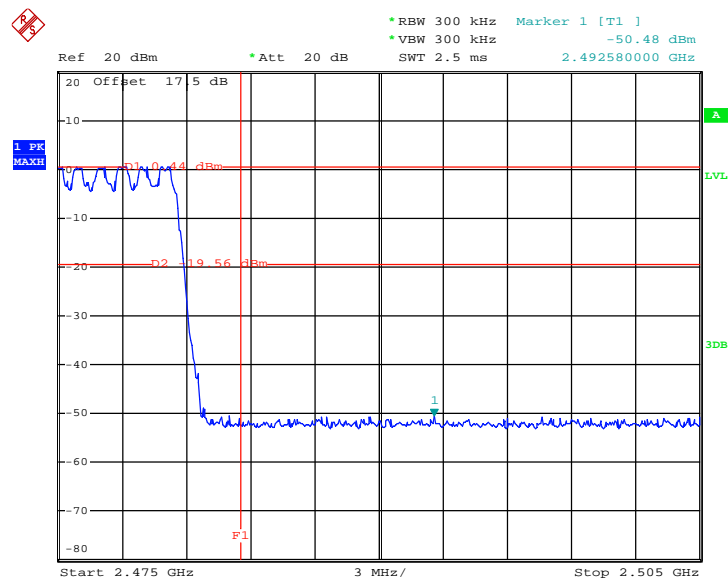**Hopping Mode High Band Edge Plot on Channel 78**


Date: 21.MAY.2013 11:01:43

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW = 300KHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.7.4 Test Setup

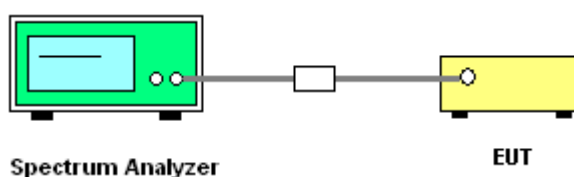

### 3.7.5 Test Results


Test Mode :	1Mbps	Temperature :	24~26℃
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Fly Chen

#### Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

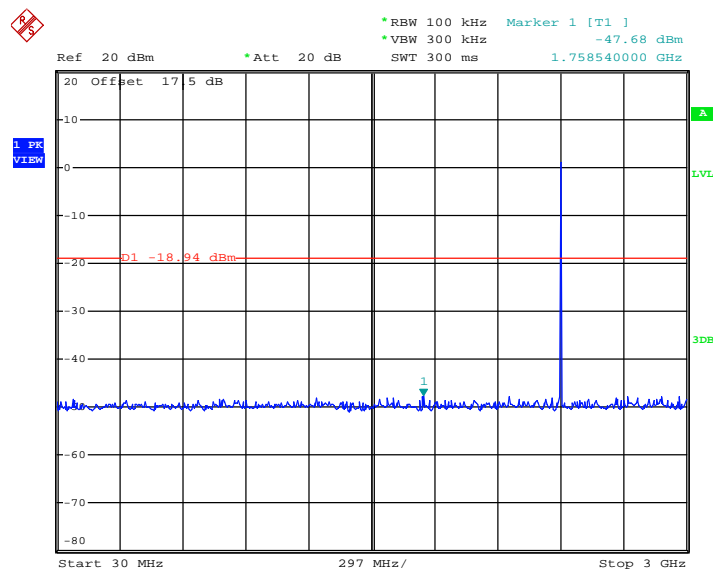


Date: 21.MAY.2013 11:41:18

#### Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz

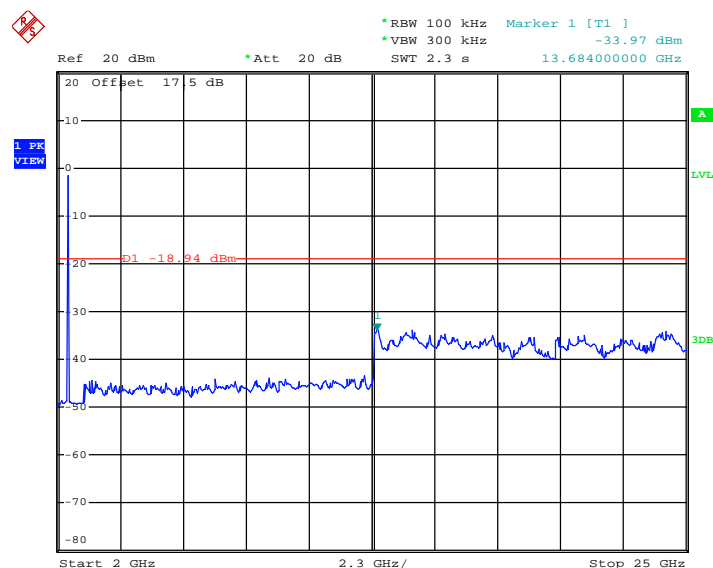


Date: 21.MAY.2013 11:42:23

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	50~53%
		<b>Test Engineer :</b>	Fly Chen

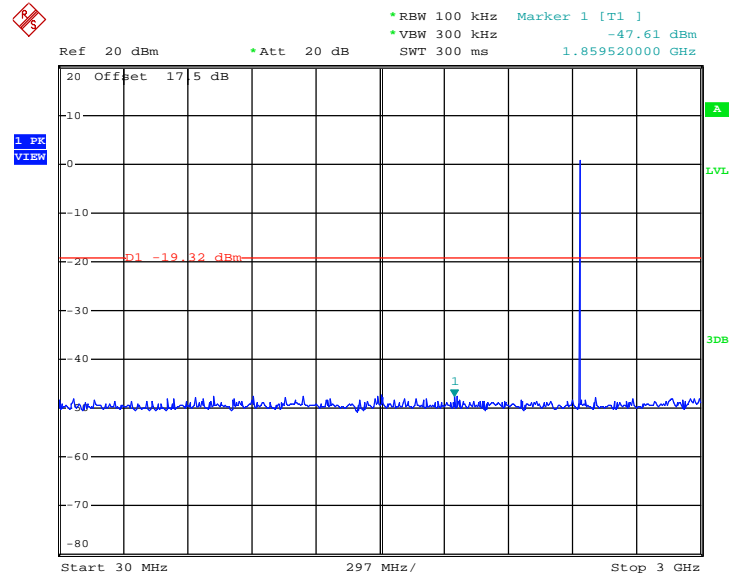**Conducted Spurious Emission Plot between 30MHz ~ 3 GHz**


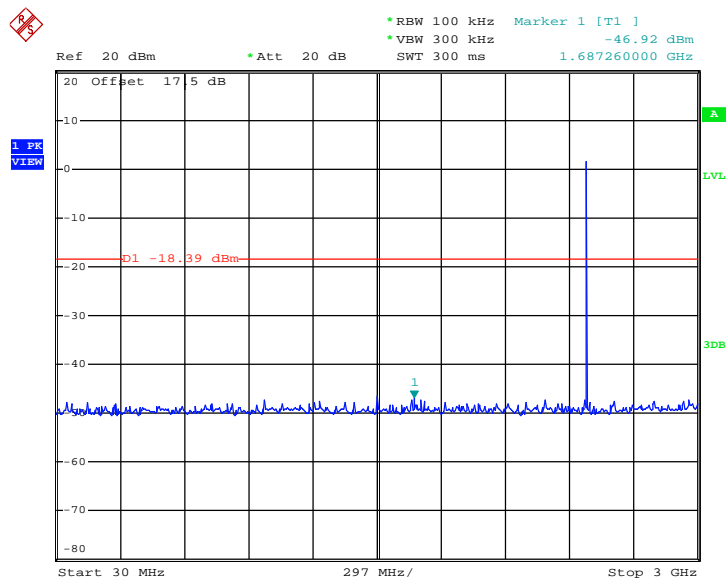
Date: 21.MAY.2013 11:43:38

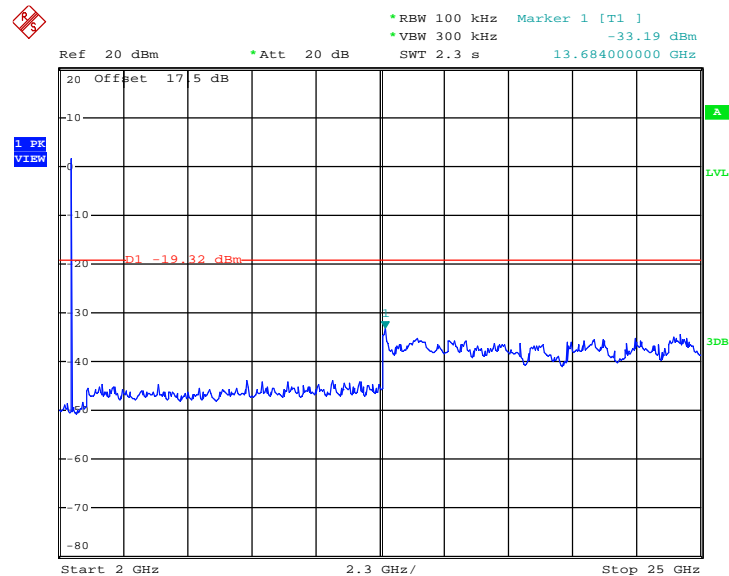**Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz**


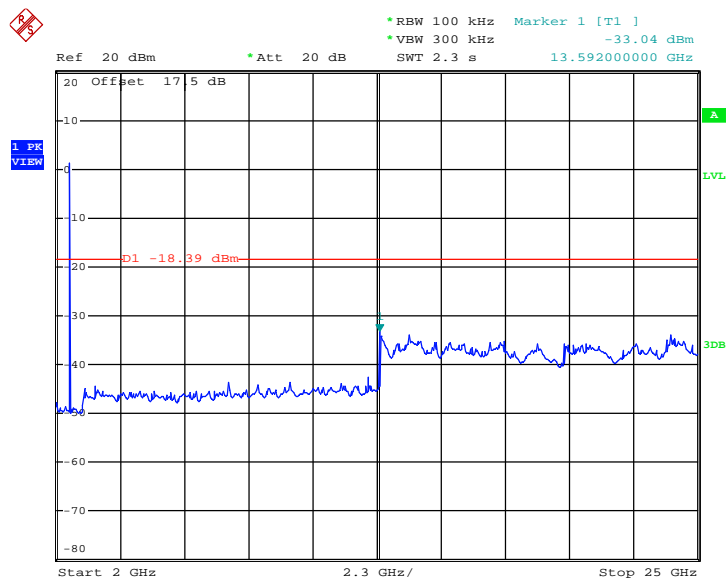
Date: 21.MAY.2013 11:44:06



<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	50~53%
		<b>Test Engineer :</b>	Fly Chen

**Conducted Spurious Emission Plot between 30MHz ~ 3 GHz**


Date: 21.MAY.2013 11:45:27

**Conducted Spurious Emission Plot between 2 GHz ~ 25 GHz**


Date: 21.MAY.2013 17:51:25

### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

See list of measuring instruments of this test report.


### 3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines and the guidelines in ANSI C63.10-2009.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Level = Peak Level +  $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.82dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ .

### 3.8.4 Test Setup


For radiated emissions below 30MHz

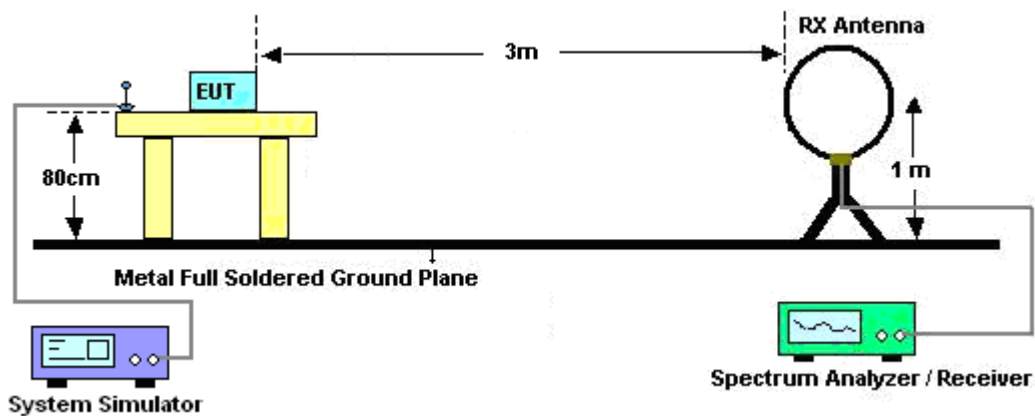

For radiated emissions from 30MHz to 1GHz

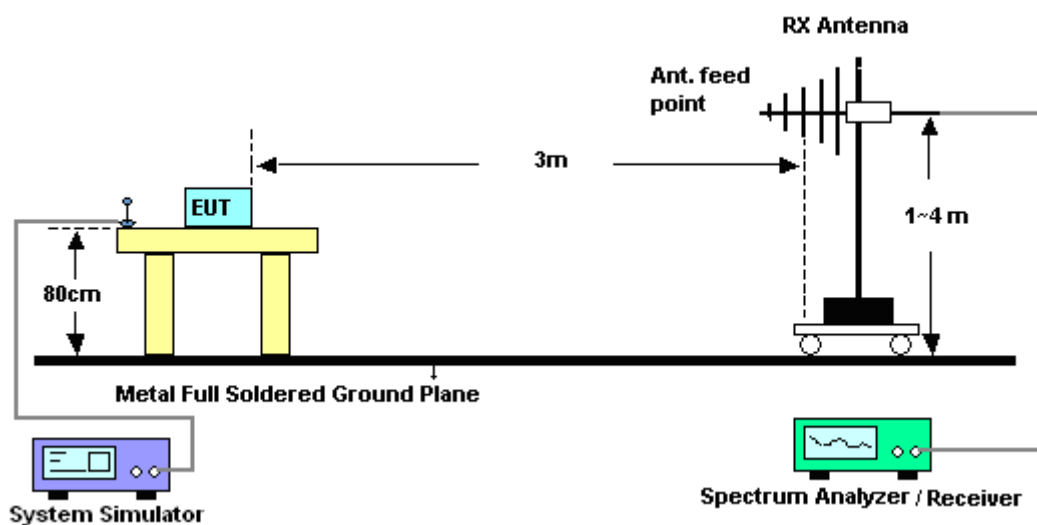

For radiated emissions above 1GHz

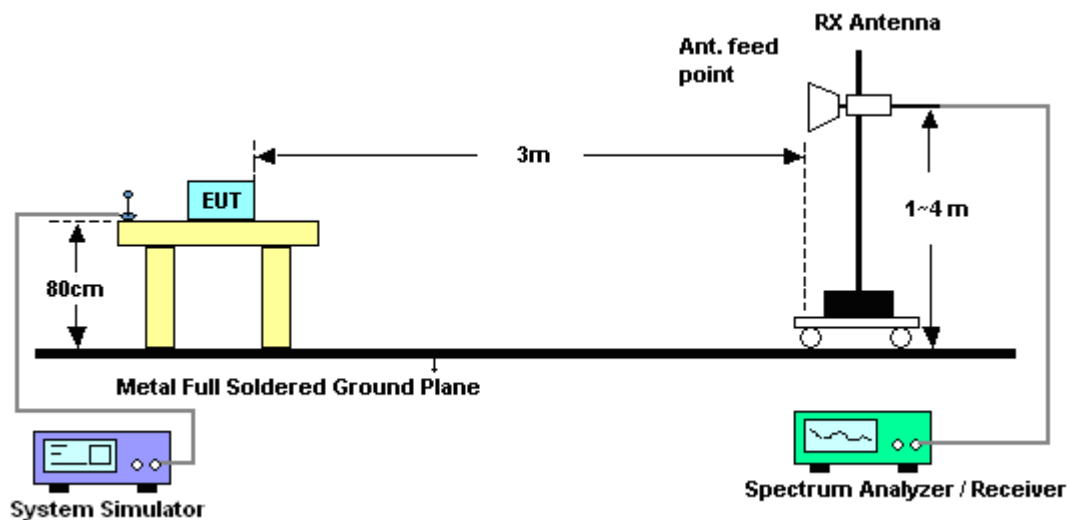


### 3.8.5 Test Results of Radiated Spurious Emission (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


### 3.8.6 Duty cycle correction factor for average measurement

#### DH5 on time (One Pulse) Plot on Channel 39

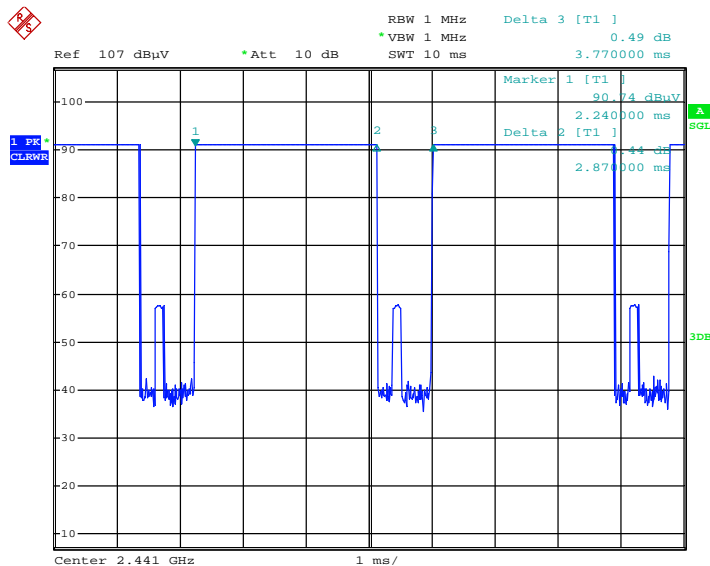

Date: 27.MAY.2013 22:07:14

#### DH5 on time/100ms (Count Pulses) Plot on Channel 39

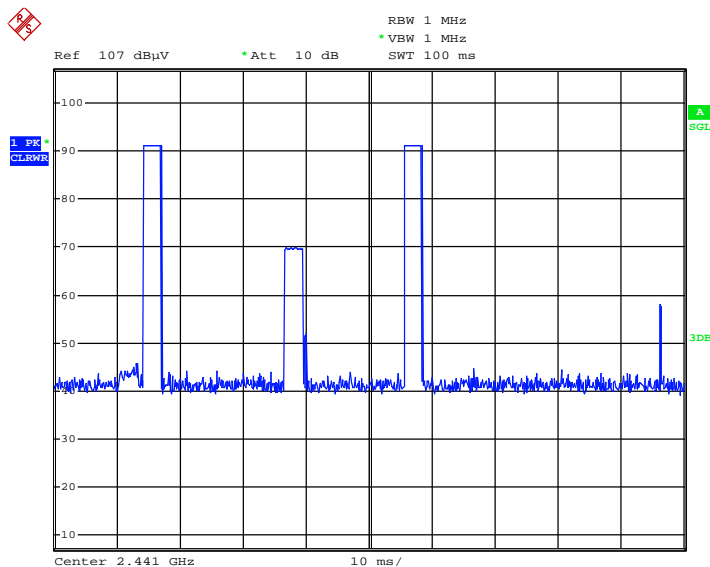

Date: 27.MAY.2013 22:07:54

#### Note:

1. Duty cycle = on time/100 milliseconds =  $2 * 2.87 / 100 = 5.74 \%$
2. Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.82 \text{ dB}$
3. DH5 has the highest duty cycle and is reported.

**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.87 \text{ ms} \times 20 \text{ channels} = 57.4 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.87 \text{ ms} \times 2 = 5.74 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.74 \text{ ms}/100\text{ms}) = -24.82 \text{ dB}$$

### 3.8.7 Test Result of Radiated Band Edges

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	43~44%
		<b>Test Engineer :</b>	Stone Hao

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2380.56	50.02	-23.98	74	45.8	32.83	2.9	31.51	110	311	Peak
2380.56	25.20	-28.80	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2366.97	49.59	-24.41	74	45.39	32.81	2.9	31.51	103	48	Peak
2366.97	24.77	-29.23	54	-	-	-	-	-	-	Average

**Note:** The average levels were calculated from the peak level corrected with duty cycle correction factor (24.82dB) derived from  $20\log(\text{dwell time}/100\text{ms})$ .

For example: Average level = 50.02dBuV/m – 24.82 (dB) = 25.20dBuV/m.

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	43~44%
		<b>Test Engineer :</b>	Stone Hao

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	57.84	-16.16	74	53.38	33.01	2.96	31.51	106	311	Peak
2483.5	33.02	-20.98	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	50.22	-23.78	74	45.76	33.01	2.96	31.51	103	254	Peak
2483.5	25.40	-28.60	54	-	-	-	-	-	-	Average



### 3.8.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

**Note:** Below 1GHz for radiated emission measurement, pre-scanned all test modes and only choose the worst case mode was recorded in the report.

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Hao	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2402 MHz is fundamental signal which can be ignored. 2. 2399MHz and 7206MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. For example, 194.31dBuV/m - 20dB = 74.31dBuV/m. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2399	56.68	-17.63	74.31	52.42	32.86	2.91	31.51	110	311	Peak
2402	94.31	-	-	90.05	32.86	2.91	31.51	110	311	Peak
2402	69.49	-	-	-	-	-	-	110	311	Average
4804	49.84	-24.16	74	41.99	35.17	4.22	31.54	200	0	Peak
7206	52.92	-21.39	74.31	42.39	36.16	5.33	30.96	100	0	Peak

**Note:** Other harmonics are lower than background noise.

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Hao	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2402 MHz is fundamental signal which can be ignored. 2. 2399MHz and 7206MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2399	50.88	-16.95	67.83	46.62	32.86	2.91	31.51	102	47	Peak
2402	87.83	-	-	83.57	32.86	2.91	31.51	102	47	Peak
2402	63.01	-	-	-	-	-	-	100	214	Average
4804	49.94	-24.06	74	42.09	35.17	4.22	31.54	100	0	Peak
7206	50.82	-17.01	67.83	40.29	36.16	5.33	30.96	100	0	Peak

**Note:** Other harmonics are lower than background noise.

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Hao	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2441 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2441	95.62	-	-	91.24	32.95	2.94	31.51	108	313	Peak
2441	70.8	-	-	-	-	-	-	100	0	Average
4882	49.64	-24.36	74	41.72	35.18	4.26	31.52	200	106	Peak
7324	52.1	-21.9	74	41.37	36.21	5.46	30.94	100	0	Peak

**Note:** Other harmonics are lower than background noise.

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Hao	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2441 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2441	87.98	-	-	83.6	32.95	2.94	31.51	103	265	Peak
2441	63.16	-	-	-	-	-	-	100	0	Average
4882	50.14	-23.86	74	42.22	35.18	4.26	31.52	100	0	Peak
7324	51.89	-22.11	74	41.16	36.21	5.46	30.94	100	0	Peak

**Note:** Other harmonics are lower than background noise.

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Hao	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	19.5	-20.5	40	34.73	18	0.34	33.57	-	-	Peak
138.64	18.82	-24.68	43.5	40.74	10.97	0.7	33.59	-	-	Peak
176.47	19.31	-24.19	43.5	43.39	8.71	0.78	33.57	-	-	Peak
191.99	18.06	-25.44	43.5	42.22	8.59	0.81	33.56	-	-	Peak
903	28.84	-17.16	46	39.04	20.46	1.77	32.43	100	0	Peak
941.8	28.11	-17.89	46	38.1	20.7	1.75	32.44	-	-	Peak
2480	96.92	-	-	92.46	33.01	2.96	31.51	107	311	Peak
2480	72.1	-	-	-	-	-	-	100	353	Average
4960	50.22	-23.78	74	42.24	35.2	4.29	31.51	100	0	Peak
7440	52.82	-21.18	74	41.9	36.27	5.57	30.92	200	0	Peak

**Note:** Other harmonics are lower than background noise.

<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Hao	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
36.79	24.21	-15.79	40	43.26	14.19	0.38	33.62	120	0	Peak
112.45	19.08	-24.42	43.5	40.28	11.8	0.61	33.61	-	-	Peak
139.61	20.09	-23.41	43.5	42.07	10.9	0.71	33.59	-	-	Peak
168.71	17.12	-26.38	43.5	40.69	9.24	0.76	33.57	-	-	Peak
542.16	19.99	-26.01	46	33.34	18.35	1.33	33.03	-	-	Peak
960.23	23.14	-30.86	54	33.02	20.79	1.77	32.44	-	-	Peak
2480	88.27	-	-	83.81	33.01	2.96	31.51	102	256	Peak
2480	63.45	-	-	-	-	-	-	102	256	Average
4960	50.84	-23.16	74	42.86	35.2	4.29	31.51	100	0	Peak
7440	53.56	-20.44	74	42.64	36.27	5.57	30.92	200	0	Peak

**Note:** Other harmonics are lower than background noise.

### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.9.3 Test Procedures

1. The test follows the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.9.4 Test Setup

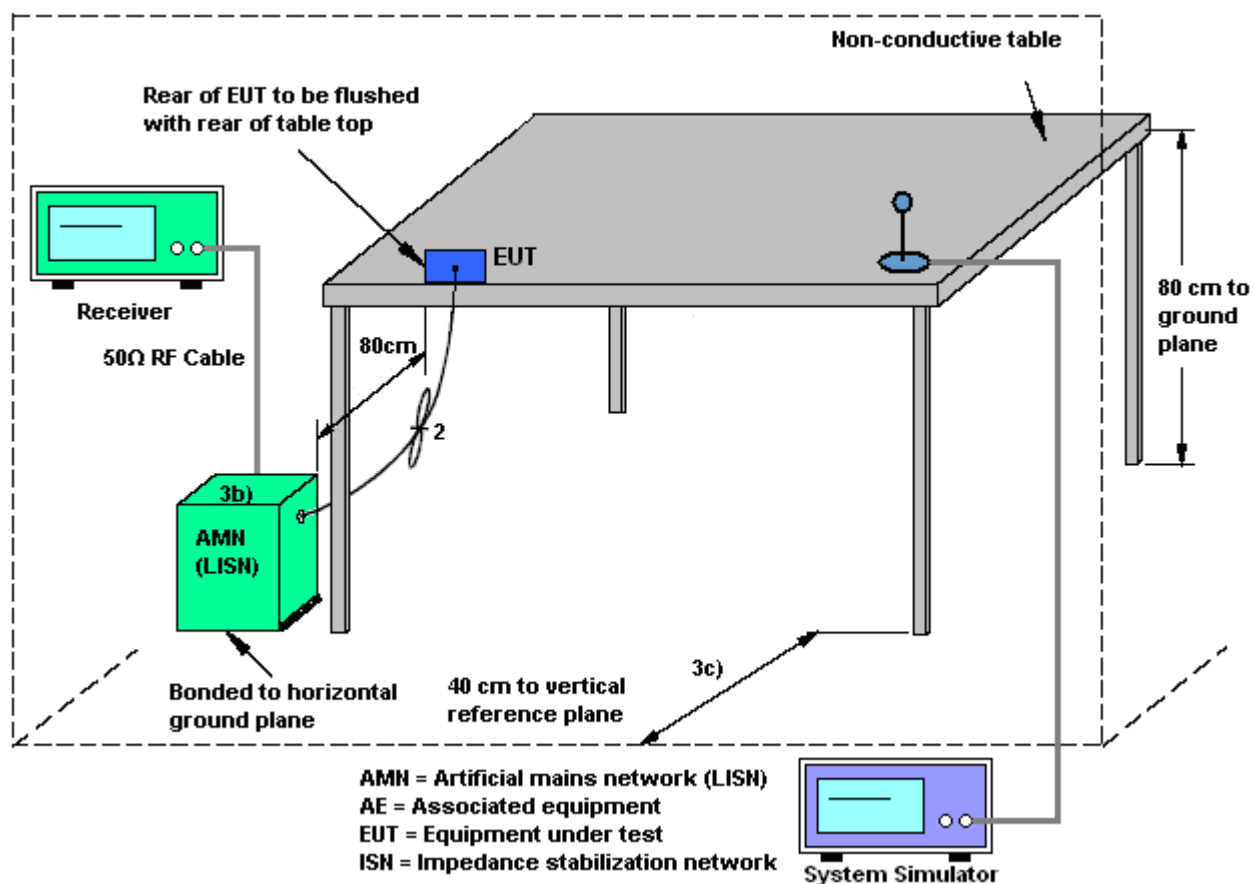



### 3.9.5 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	19~20℃
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + USB Cable (Charging from Adapter)		

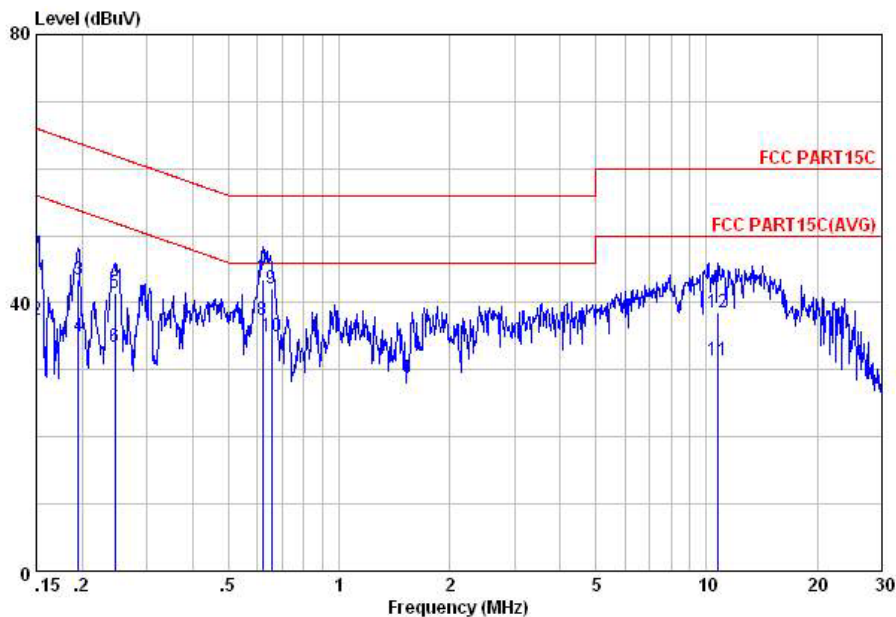

Site : C001-KS  
Condition: FCC PART15C LISN-L20130306 LINE  
Project : (FR) 351601  
mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	45.35	-20.65	66.00	33.20	1.95	10.20	QP
2	0.15	37.35	-18.65	56.00	25.20	1.95	10.20	Average
3	0.20	43.37	-20.43	63.80	32.10	1.05	10.22	QP
4	0.20	34.97	-18.83	53.80	23.70	1.05	10.22	Average
5	0.25	41.52	-20.39	61.91	30.40	0.89	10.23	QP
6	0.25	33.32	-18.59	51.91	22.20	0.89	10.23	Average
7	0.62	43.56	-12.44	56.00	33.10	0.20	10.26	QP
8	0.62	37.46	-8.54	46.00	27.00	0.20	10.26	Average
9	0.65	42.07	-13.93	56.00	31.60	0.20	10.27	QP
10	0.65	35.07	-10.93	46.00	24.60	0.20	10.27	Average
11	10.73	31.46	-18.54	50.00	20.90	0.20	10.36	Average
12	10.73	38.56	-21.44	60.00	28.00	0.20	10.36	QP

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	19~20°C
<b>Test Engineer :</b>	Tom Wang	<b>Relative Humidity :</b>	39~40%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b>	GSM850 Idle + Bluetooth Link + USB Cable (Charging from Adapter)		

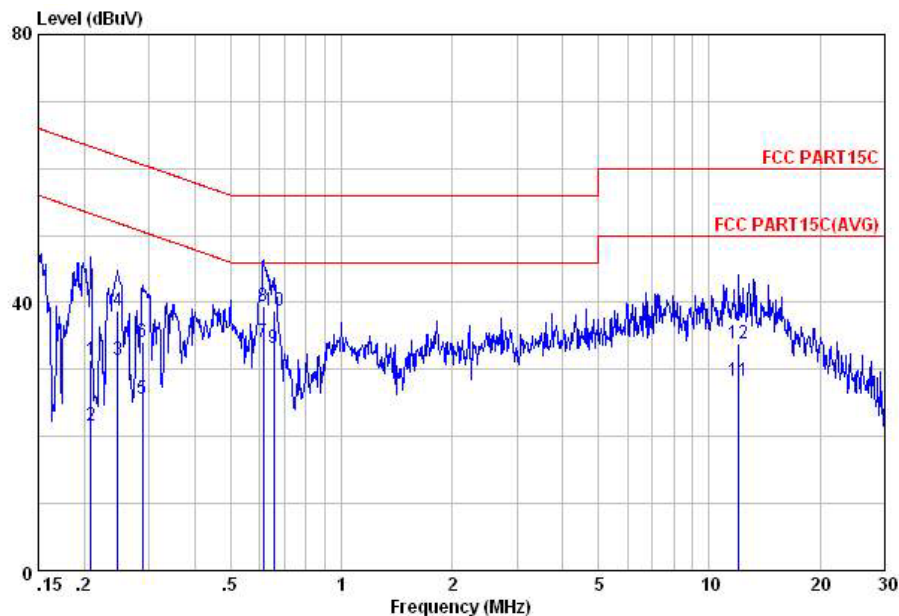

Site : C001-KS  
 Condition: FCC PART15C LISN-N20130306 NEUTRAL  
 Project : (FR) 351601  
 mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.21	31.40	-31.87	63.27	20.20	0.98	10.22	QP
2	0.21	21.70	-31.57	53.27	10.50	0.98	10.22	Average
3	0.25	31.43	-20.43	51.86	20.30	0.90	10.23	Average
4	0.25	38.83	-23.03	61.86	27.70	0.90	10.23	QP
5	0.29	25.62	-24.97	50.59	14.60	0.78	10.24	Average
6	0.29	34.12	-26.47	60.59	23.10	0.78	10.24	QP
7	0.61	34.20	-11.80	46.00	23.71	0.23	10.26	Average
8	0.61	39.40	-16.60	56.00	28.91	0.23	10.26	QP
9	0.65	33.18	-12.82	46.00	22.69	0.22	10.27	Average
10	0.65	38.88	-17.12	56.00	28.39	0.22	10.27	QP
11	12.06	28.21	-21.79	50.00	17.61	0.24	10.36	Average
12	12.06	33.81	-26.19	60.00	23.21	0.24	10.36	QP

## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Connected Construction**

Non-standard connector used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Jun. 01, 2012	May 20, 2013~ May 21, 2013	May 31, 2013	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	N/A	Mar. 28, 2013	May 20, 2013~ May 21, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	N/A	Mar. 28, 2013	May 20, 2013~ May 21, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 08, 2012	May 27, 2013	Nov. 07, 2013	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	100400	9kHz~30GHz	Jun. 01, 2012	May 27, 2013	May 31, 2013	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 07, 2012	May 27, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
HFH2-Z2 Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 22, 2012	May 27, 2013	Oct. 21, 2013	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	1908/7/13	00075957	1GHz~18GHz	Dec. 07, 2012	May 27, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	N/A	May 27, 2013	N/A	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	N/A	May 27, 2013	N/A	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz	Jun. 01, 2012	May 27, 2013	May 31, 2013	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 29, 2012	May 27, 2013	Dec. 28, 2013	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2012	May 27, 2013	Nov. 06, 2013	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	9170249	15GHz~40GHz	Nov. 23, 2012	May 27, 2013	Nov. 22, 2013	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 01, 2012	May 28, 2013	May 31, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 29, 2012	May 28, 2013	Dec. 28, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 29, 2012	May 28, 2013	Dec. 28, 2013	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 15, 2012	May 28, 2013	Nov. 14, 2013	Conduction (CO01-KS)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	2.26
--	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	2.54
--	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	4.72
--	------



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP351601 as below.