



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A03073106
Report No.:FCCA03073106
Page:1 of 18
Date:Sep. 22, 2003

Product Name: Wireless Presentation Remote
Model No.: K33062
Applicant: Kensington Technology Group
(A Division of Acco Brands, Inc.)
2000 Alameda De Las Pulgas, Second Floor, San Mateo,
CA 94403, U.S.A.
Date of Receipt: Jul. 31, 2003
Finished date of Test: Aug. 20, 2003
Applicable Standards: 47 CFR Part 15, Subpart C, Class B
ANSI C63.4:1992

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Checked By :

Sunyou Chen
(Sunyou Chen)

Date:

9/22/2003

Approved By :

Johnson Ho
(Johnson Ho, Director)

Date:

9/22/2003



Table of Contents

1.	DOCUMENT POLICY AND TEST STATEMENT	3
1.1	DOCUMENT POLICY	3
1.2	TEST STATEMENT	3
2.	DESCRIPTION OF EUT AND TEST MODE	4
2.1	GENERAL DESCRIPTION OF EUT	4
2.2	DESCRIPTION OF EUT INTERNAL DEVICE	4
2.3	DESCRIPTION OF TEST MODE	4
2.4	DESCRIPTION OF SUPPORT UNIT	5
3.	DESCRIPTION OF APPLIED STANDARDS	5
4.	CONDUCTED EMISSION TEST	6
4.1	CONDUCTED EMISSION LIMIT	6
4.2	TEST EQUIPMENT	6
4.3	TEST SETUP	7
4.4	TEST PROCEDURE	7
4.5	EUT OPERATING CONDITION	7
4.6	TEST RESULT	8
5.	RADIATED EMISSION TEST	9
5.1	RADIATED EMISSION LIMIT	9
5.2	TEST EQUIPMENT	10
5.3	TEST SET-UP	11
5.4	TEST PROCEDURE	12
5.5	EUT OPERATING CONDITION	12
5.6	RADIATED EMISSION TEST RESULT	13
6.	PHOTOS OF TESTING	16
7.	TERMS OF ABRIVATION	18

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	<h1>TEST REPORT</h1>	Reference No.:A03073106 Report No.:FCCA03073106 Page:3 of 18 Date:Sep. 22, 2003
--	----------------------	--

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- The report must not be used by the applicant to claim that the product is endorsed by NVLAP, TÜV, NEMKO and SRT.
- The NVLAP logo applies only to the applicable standards specified in this report.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- AC power source, 120 Vac/60 Hz, was used during the test.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	<h1>TEST REPORT</h1>	Reference No.:A03073106 Report No.:FCCA03073106 Page:4 of 18 Date:Sep. 22, 2003
--	----------------------	--

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Presentation Remote
MODEL NO.	K33062
POWER SUPPLY	DC 3V
CABLE	N/A
FREQUENCY	903.8MHz~904.8MHz
CARRIER FREQUENCY	904.3MHz
NUMBER OF CHANNEL	1
CHANNEL SPACING	180KHz
RATED RF OUTPUT POWER	0dBm
I.F. & L.O.	I.F.: 10.7MHz, L.O.: 915MHz
MODULATION TYPE	ASK
BIT RATE OF TRANSMISSION	5K
ANTENNA TYPE	Dipole Antenna

NOTE:

For more detailed information, please refer to the EUT's specification or user's manual provided by manufacturer.

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID/DOC	REMARK
N/A				

2.3 DESCRIPTION OF TEST MODE

N/A (It is only applicable to more than one test mode.)

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	<h1>TEST REPORT</h1>	Reference No.:A03073106 Report No.:FCCA03073106 Page:5 of 18 Date:Sep. 22, 2003
--	----------------------	--

2.4 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.4:1992 and CISRP22:1997. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID/DOC	CABLE
1	NOTEBOOK	DELL	PP01L	DOC/3892E610	1.5m unshielded power cord
2	PRINTER	EPSON	STYLUS C20SX	DOC/3902E004	1.5m unshielded power cord 1.2m shielded data cable
3	MONITOR	SAMSUNG	PG17IS	DOC/3882A925	1.5m unshielded power cord 1.2m shielded data cable
4	MODEM	ACEEX	DM-1414	DOC	1.5m unshielded DC power cable 1.2m shielded data cable

NOTE : For the actual test configuration, please refer to the photos of testing.

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of wireless product and to be connected with a PC system for normal use. According to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C
 ANSI C63.4:1992

All tests have been performed and recorded as per the above standards.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	<h1>TEST REPORT</h1>	Reference No.:A03073106 Report No.:FCCA03073106 Page:6 of 18 Date:Sep. 22, 2003
--	----------------------	--

4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION LIMIT

FREQUENCY (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2 TEST EQUIPMENT


The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 2750 MHz	ROHDE & SCHWARZ	ESCS30/ 830245/012	AUG. 2004 ETC
LISN (for EUT)	50 μ H, 50 ohm	SOLAR ELECTRONICS	8012-50-R-24-BNC / 924839	JUN. 2004 ETC
LISN (for Peripheral)	50 μ H, 50 ohm	SOLAR ELECTRONICS	9252-50-R-24-BNC / 951318	JUN. 2004 ETC
50 ohm TERMINATOR	50 ohm	HP	11593A/ 2	MAY 2004 ETC
COAXIAL CABLE	3m	SUNCITY	J400/ 3M	JUL. 2004 SRT
ISOLATION TRANSFORMER	N/A	APC	AFC-11015/ F102040016	N/A
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 771	N/A
GROUND PLANE	2.3M (H) x 2.4M (W)	SRT	N/A	APR. 2004 SRT
GROUND PLANE	2.4M (H) x 2.4M (W)	SRT	N/A	APR. 2004 SRT

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



4.3 TEST SETUP

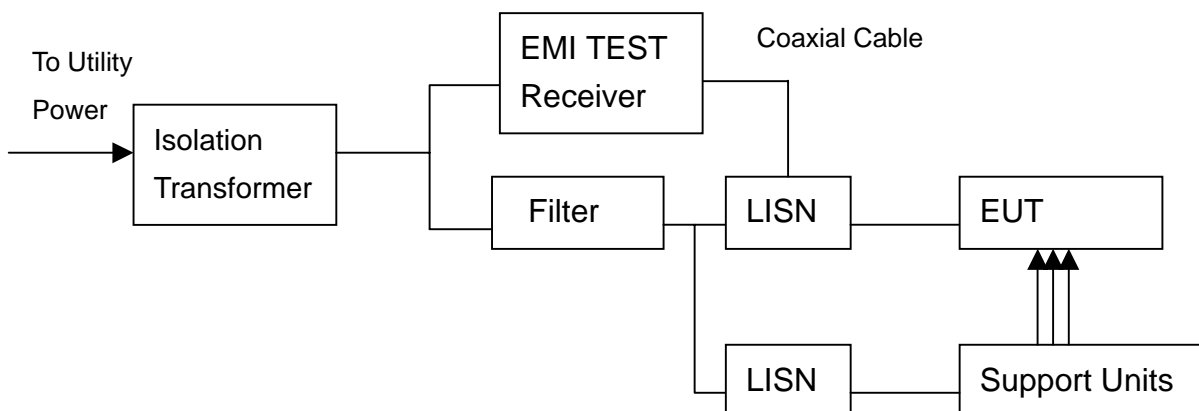

NOTE:

1. The EUT was put on a wooden table with 0.8m height above ground plane, and 0.4m away from reference ground plane (> 2mx2m).
2. For the actual test configuration, please refer to the photos of testing.
3. The serial no. of the LISN connected to EUT is 951318.
4. The serial no. of the LISN connected to support units is 924839.

4.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:1992 and CISRP22:1997. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50 μ H as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency. First, Find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

4.5 EUT OPERATING CONDITION

1. Under Windows XP run "EMI TEST" program.
2. PC sent "H" pattern or accessed the following peripherals directly or via EUT:
 - Color Monitor
 - RS232
 - Keyboard
 - Mouse
 - Printer
 - FDD
 - HDD
3. Under Windows XP run PowerPoint.



TEST REPORT

4.6 TEST RESULT

Temperature:	26°C	Humidity:	57 %RH
Ferquency Range:	0.15 – 30 MHz	Tested Mode:	N/A
Receiver Detector:	Q.P. and AV.	Tested By:	Yujeng Wu
		Tested Date:	Aug. 14, 2003

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.224	0.20	43.3	35.9	43.5	36.1	62.6	52.6	-19.1	-16.5
0.345	0.20	38.1	31.9	38.3	32.1	59.1	49.1	-20.8	-17.0
0.681	0.20	26.0	16.9	26.2	17.1	56.0	46.0	-29.8	-28.9
1.709	0.20	28.9	24.8	29.1	25.0	56.0	46.0	-26.9	-21.0
4.443	0.31	26.8	13.4	27.1	13.7	56.0	46.0	-28.9	-32.3
24.002	0.68	31.5	25.7	32.2	26.4	60.0	50.0	-27.8	-23.6

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.224	0.20	38.0	31.7	38.2	31.9	62.6	52.6	-24.4	-20.7
0.345	0.20	37.5	32.6	37.7	32.8	59.1	49.1	-21.4	-16.3
3.189	0.21	20.7	12.1	20.9	12.3	56.0	46.0	-35.1	-33.7
4.443	0.31	26.1	11.3	26.4	11.6	56.0	46.0	-29.6	-34.4
13.548	0.47	28.6	22.9	29.1	23.4	60.0	50.0	-30.9	-26.6
24.002	0.68	30.9	25.2	31.6	25.9	60.0	50.0	-28.4	-24.1

NOTE :

1. Measurement uncertainty is +/-2dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



5. RADIATED EMISSION TEST

5.1 RADIATED EMISSION LIMIT

FCC Part 15, Subpart B Section 15.209.

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH ($\mu\text{V/m}$)
0.009 - 0.490	300	2400/F(kHz)
0.490-1.705	300	24000/F(kHz)
1.705-30.0	30	30
30 - 88	3	100
88 - 216	3	150
216 - 960	3	200
ABOVE 960	3	500

NOTE :

1. In the emission tables above, the tighter limit applies at the band edges.
2. Distance refers to the distance between measuring instrument, antenna, and the closest point of any part of the device or system.

FCC Part 15, Subpart A Section 15.31(f)(2) Extrapolation factor of 40 dB/decade for measurement distances different than specified in with limits for frequencies below 30 MHz.

FCC Part15, Subpart C Section 15.209 limit of radiated emission for frequency below1000MHz. The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB $\mu\text{V/m}$)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
Above 960	3	54.0

NOTE :

1. In the emission tables above , the tighter limit applies at the band edges.
2. Distance refers to the distance between measuring instrument, antenna, and the closest point of any part of the device or system.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	<h1>TEST REPORT</h1>	Reference No.:A03073106 Report No.:FCCA03073106 Page:10 of 18 Date:Sep. 22, 2003
--	----------------------	---

5.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test:


EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	20 MHz TO 1 GHz	ROHDE & SCHWARZ	ESVS30/ 841977/003	SEP. 2003 R&S
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/ 9701-1124	APR. 2004 SRT
SPECTRUM ANALYZER	9 KHz TO 26.5 GHz	HP	8593E/ 3710A03220	MAY 2004 ETC
PRE-AMPLIFIER	1 GHz TO 26.5 GHz	HP	8449B/ 3008A01019	DEC. 2003 ETC
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	APR. 2004 SRT
COAXIAL CABLE	25M	SUNCITY	J400/ 25M	AUG. 2004 SRT
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 869	N/A
FREQUENCY CONVERTER	N/A	APC	AFC-2KBB/ F100030031	APR. 2004 SRT
LOOP ANTENNA	9 kHz TO 30 MHz	SCHWARZ	FHF2-Z2/ 1162 1/2	AUG. 2004 R&S
ANECHOIC CHAMBER	733	SRT	A03/ SRT003	DEC. 2003 SRT

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.



5.3 TEST SET-UP

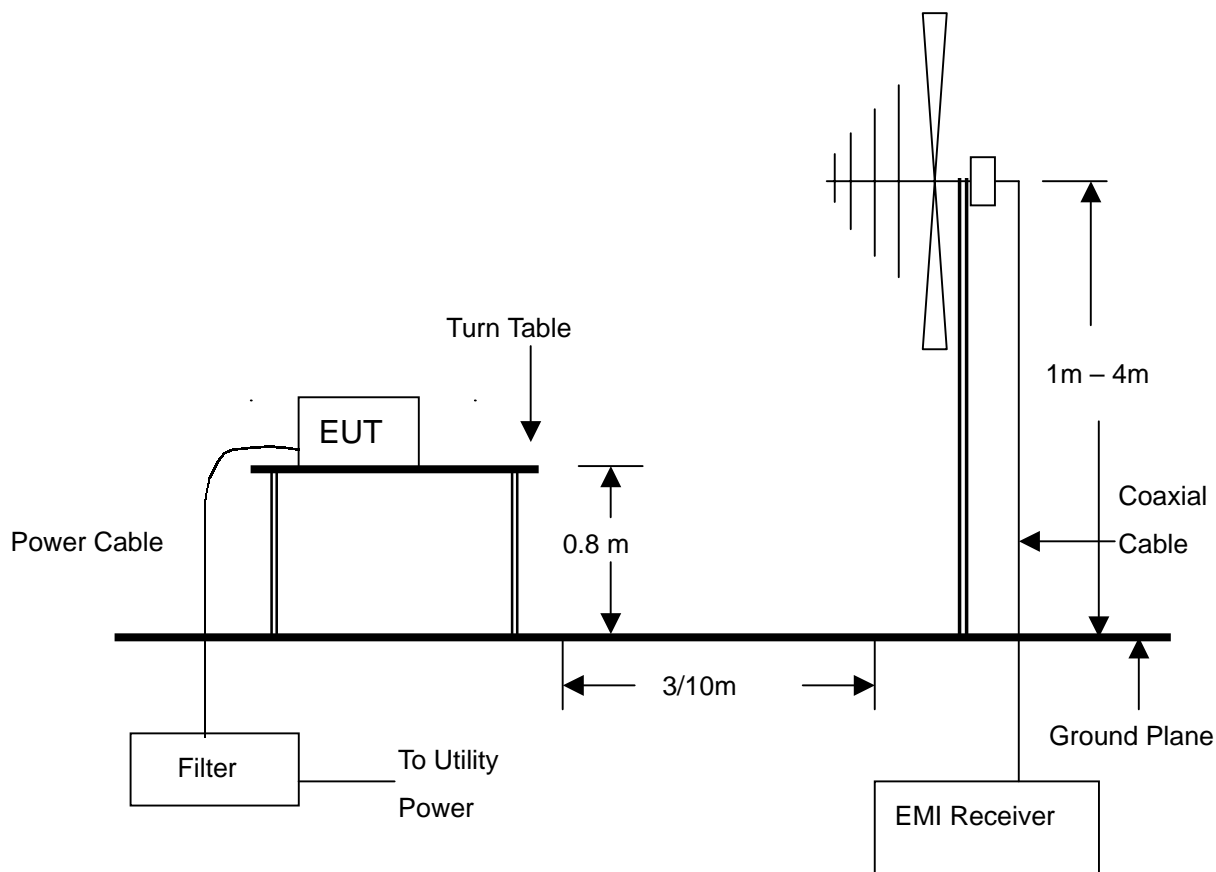

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



5.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:1992 and CISPR 22:1997. The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency. First, Find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

5.5 EUT OPERATING CONDITION

Same as section 4.5 of this report.

**Spectrum Research
& Testing Lab., Inc.**No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.**TEST REPORT**Reference No.:A03073106
Report No.:FCCA03073106
Page:13 of 18
Date:Sep. 22, 2003**5.6 RADIATED EMISSION TEST RESULT**

Temperature:	28°C	Humidity:	56 %RH
Ferquency Range:	30 - 1000 MHz	Measured Distance:	3m
Receiver Detector:	Q.P.	Tested Mode:	TX (Fundamental Frequency)
Tested By:	Yujeng Wu		
Tested Date:	Aug. 18, 2003		

Frequency (MHz)	Antenna Polarization	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
904.3(F)	H	3.05	23.64	61.8	88.5	N/A	-5.5
904.3(F)	V	3.05	23.64	59.9	86.6	N/A	-7.4

NOTE :

1. Measurement uncertainty is less than +/- 4dB
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.
5. (F) : Fundamental frequency of transmitter.

**Spectrum Research
& Testing Lab., Inc.**No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.**TEST REPORT**Reference No.:A03073106
Report No.:FCCA03073106
Page:14 of 18
Date:Sep. 22, 2003

Temperature:	28°C	Humidity:	56 %RH
Frequency Range:	1 - 10 GHz	Measured Distance:	3m
Receiver Detector:	PK. or AV.	Tested Mode:	TX (Harmonic Frequency)
Tested By:	Yujeng Wu		
Tested Date:	Aug. 18, 2003		

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)		Emission Level (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
1808.6000	-33.05	26.81	50.3	40.8	44.1	34.6	74.0	54.0	-29.9	-19.4	317.1	2.56
2712.9000	-32.09	29.39	44.4	*	41.7	*	74.0	54.0	-32.3	*	293.9	1.40
3617.2000	-30.88	32.45	47.2	*	48.8	*	74.0	54.0	-25.2	*	61.6	1.71

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)		Emission Level (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
1808.60	-33.05	26.47	51.9	44.1	45.3	37.5	74.0	54.0	-28.7	-16.5	220.5	1.34
2712.90	-32.09	29.39	42.8	*	40.1	*	74.0	54.0	-33.9	*	124.5	1.1
3617.20	-30.88	32.45	46.1	*	47.7	*	74.0	54.0	-26.3	*	229	1.37

NOTE :

1. Measurement uncertainty is 4dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit

**Spectrum Research
& Testing Lab., Inc.**No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.**TEST REPORT**Reference No.:A03073106
Report No.:FCCA03073106
Page:15 of 18
Date:Sep. 22, 2003

Temperature:	28°C	Humidity:	56 %RH
Frequency Range:	30 – 1000 MHz	Measured Distance:	3m
Receiver Detector:	Q.P.	Tested Mode:	RX
Tested By:	Yujeng Wu	Tested Date:	Aug. 18, 2003

Antenna Polarization:Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
131.1000	1.37	8.22	18.9	28.5	43.5	-15.0	203.7	1.20
176.2400	1.60	9.72	19.7	31.0	43.5	-12.5	21.4	1.07
233.8000	1.90	11.95	18.1	31.9	46.0	-14.1	169.7	1.59
398.7100	2.64	16.27	16.4	35.3	46.0	-10.7	124.3	1.21
451.7480	2.57	17.08	13.2	32.8	46.0	-13.2	119.4	1.04
669.2500	2.53	21.13	16.1	39.8	46.0	-6.2	8.0	2.19

Antenna Polarization:Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
117.1000	1.32	8.36	12.1	21.8	43.5	-21.7	140.2	1.29
136.0400	1.39	8.32	17.3	27.0	43.5	-16.5	153.2	1.37
234.7000	1.91	12.00	18.5	32.4	46.0	-13.6	170.6	1.05
332.7000	2.22	15.06	16.8	34.1	46.0	-11.9	145.6	1.20
451.7490	2.57	17.08	17.8	37.4	46.0	-8.6	12.7	1.67
669.8100	2.53	21.13	15.4	39.1	46.0	-6.9	11.0	1.68

NOTE :

1. Measurement uncertainty is 4dB.
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A03073106
Report No.:FCCA03073106
Page:16 of 18
Date:Sep. 22, 2003

6. PHOTOS OF TESTING

- Conducted test





TEST REPORT

- Radiated test



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A03073106
Report No.:FCCA03073106
Page:18 of 18
Date:Sep. 22, 2003

7. TERMS OF ABRIVATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction