



# FCC TEST REPORT

**REPORT NO.:** RF950327A05A

**MODEL NO.:** 33373

**RECEIVED:** Mar. 27, 2006

**TESTED:** Mar. 31 ~ Apr. 4, 2006

**ISSUED:** Apr. 11, 2006

**APPLICANT:** ACCO Brands, Inc.

**ADDRESS:** 333 Twin Dolphin Drive, 6th Floor, Redwood Shores, CA, 94065, USA

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

This test report consists of 30 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



## Table of Contents

|       |  |    |
|-------|--|----|
| 1.    | CERTIFICATION .....                                      | 4  |
| 2.    | SUMMARY OF TEST RESULTS .....                            | 5  |
| 2.1   | MEASUREMENT UNCERTAINTY .....                            | 5  |
| 3.    | GENERAL INFORMATION.....                                 | 6  |
| 3.1   | GENERAL DESCRIPTION OF EUT .....                         | 6  |
| 3.2   | DESCRIPTION OF TEST MODES .....                          | 7  |
| 3.2.1 | CONFIGURATION OF SYSTEM UNDER TEST .....                 | 7  |
| 3.2.2 | TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL: ..... | 8  |
| 3.3   | GENERAL DESCRIPTION OF APPLIED STANDARDS .....           | 9  |
| 3.4   | DESCRIPTION OF SUPPORT UNITS .....                       | 9  |
| 4.    | TEST TYPES AND RESULTS.....                              | 10 |
| 4.1   | CONDUCTED EMISSION MEASUREMENT .....                     | 10 |
| 4.2   | RADIATED EMISSION Measurement .....                      | 10 |
| 4.2.1 | LIMITS OF RADIATED EMISSION MEASUREMENT .....            | 10 |
| 4.2.2 | TEST INSTRUMENTS .....                                   | 11 |
| 4.2.3 | TEST PROCEDURES .....                                    | 12 |
| 4.2.4 | DEVIATION FROM TEST STANDARD .....                       | 12 |
| 4.2.5 | TEST SETUP .....   | 13 |
| 4.2.6 | EUT OPERATING CONDITIONS .....                           | 13 |
| 4.2.7 | TEST RESULTS .....                                       | 14 |
| 4.3   | 6dB BANDWIDTH MEASUREMENT .....                          | 16 |
| 4.3.1 | LIMITS OF 6dB BANDWIDTH MEASUREMENT .....                | 16 |
| 4.3.2 | TEST INSTRUMENTS .....                                   | 16 |
| 4.3.3 | TEST PROCEDURE .....                                     | 16 |
| 4.3.4 | DEVIATION FROM TEST STANDARD .....                       | 16 |
| 4.3.5 | TEST SETUP .....   | 16 |
| 4.3.6 | EUT OPERATING CONDITIONS .....                           | 16 |
| 4.3.7 | TEST RESULTS .....                                       | 17 |
| 4.4   | MAXIMUM PEAK OUTPUT POWER .....                          | 18 |
| 4.4.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....    | 18 |
| 4.4.2 | INSTRUMENTS .....  | 18 |
| 4.4.3 | TEST PROCEDURES .....                                    | 18 |
| 4.4.4 | DEVIATION FROM TEST STANDARD .....                       | 18 |
| 4.4.5 | TEST SETUP .....   | 19 |
| 4.4.6 | EUT OPERATING CONDITIONS .....                           | 19 |
| 4.4.7 | TEST RESULTS .....                                       | 19 |
| 4.5   | POWER SPECTRAL DENSITY MEASUREMENT .....                 | 20 |
| 4.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....       | 20 |
| 4.5.2 | TEST INSTRUMENTS .....                                   | 20 |
| 4.5.3 | TEST PROCEDURE .....                                     | 20 |
| 4.5.4 | DEVIATION FROM TEST STANDARD .....                       | 20 |
| 4.5.5 | TEST SETUP .....   | 20 |
| 4.5.6 | EUT OPERATING CONDITION .....                            | 20 |



|       |   |     |
|-------|---|-----|
| 4.5.7 | TEST RESULTS .....                            | 21  |
| 4.6   | BAND EDGES MEASUREMENT .....                  | 22  |
| 4.6.1 | LIMITS OF BAND EDGES MEASUREMENT .....        | 22  |
| 4.6.2 | TEST INSTRUMENTS .....                        | 22  |
| 4.6.3 | TEST PROCEDURE .....                          | 22  |
| 4.6.4 | DEVIATION FROM TEST STANDARD .....            | 22  |
| 4.6.5 | EUT OPERATING CONDITION .....                 | 22  |
| 4.6.6 | TEST RESULTS .....                            | 23  |
| 4.7   | ANTENNA REQUIREMENT .....                     | 27  |
| 4.7.1 | STANDARD APPLICABLE .....                     | 27  |
| 4.7.2 | ANTENNA CONNECTED CONSTRUCTION .....          | 27  |
| 5.    | PHOTOGRAPHS OF THE TEST CONFIGURATION.....    | 28  |
| 6.    | INFORMATION ON THE TESTING LABORATORIES ..... | 29  |
|       | APPENDIX-A .....                              | A-1 |



# 1. CERTIFICATION

**PRODUCT:** Wireless Presenter  
**BRAND NAME:** Kensington  
**MODEL NO.:** 33373  
**APPLICANT:** ACCO Brands, Inc.  
**TESTED:** Mar. 31 ~ Apr. 4, 2006  
**TEST SAMPLE:** ENGINEERING SAMPLE  
**STANDARDS:** FCC Part 15, Subpart C (Section 15.247),  
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** : Annie Chang , **DATE:** Apr. 11, 2006  
( Annie Chang )

**TECHNICAL ACCEPTANCE** : Ken Liu , **DATE:** Apr. 11, 2006  
Responsible for RF ( Ken Liu )

**APPROVED BY** : Gary Chang , **DATE:** Apr. 11, 2006  
( Gary Chang / Supervisor )

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| <b>APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)</b> |  |               |   |
|--|--|---------------|---|
| <b>Standard Section</b>  | <b>Test Type and Limit</b>   | <b>Result</b> | <b>Remark</b>   |
| 15.207   | AC Power Conducted Emission  | N/A           | The EUT power from AAA battery x2   |
| 15.247(a)(2)   | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System<br>Limit: min. 500kHz   | PASS          | Meet the requirement of limit.  |
| 15.247(b)  | Maximum Peak Output Power<br>Limit: max. 30dBm   | PASS          | Meet the requirement of limit.  |
| 15.247(d)  | Radiated Emissions<br>Limit: Table 15.209  | PASS          | Meet the requirement of limit.<br>Minimum passing margin is -1.95dB at 4814.00MHz |
| 15.247(e)  | Power Spectral Density<br>Limit: max. 8dBm   | PASS          | Meet the requirement of limit.  |
| 15.247(d)  | Band Edge Measurement<br>Limit: 20dB less than the peak value of fundamental frequency | PASS          | Meet the requirement of limit.  |

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| <b>Measurement</b> | <b>Frequency</b> | <b>Uncertainty</b> |
|--------------------|------------------|--------------------|
| Radiated emissions | 30MHz ~ 200MHz   | 3.59 dB            |
|                    | 200MHz ~1000MHz  | 3.61 dB            |
|                    | 1GHz ~ 18GHz     | 2.26 dB            |
|                    | 18GHz ~ 40GHz    | 1.94 dB            |

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                              |   |
|------------------------------|---|
| <b>EUT</b>                   | Wireless Presenter                                    |
| <b>MODEL NO.</b>             | 33373   |
| <b>FCC ID</b>                | GV333373  |
| <b>POWER SUPPLY</b>          | 3Vdc from AAA batteries                               |
| <b>MODULATION TECHNOLOGY</b> | DSSS  |
| <b>MODULATION TYPE</b>       | GFSK  |
| <b>OUTPUT POWER</b>          | 1.089mW   |
| <b>FREQUENCY RANGE</b>       | 2407MHz   |
| <b>NUMBER OF CHANNEL</b>     | 1   |
| <b>ANTENNA TYPE</b>          | 1/2 wave-length monopole patch antenna with 2dBi gain |
| <b>DATA CABLE</b>            | N/A   |
| <b>I/O PORTS</b>             | N/A   |
| <b>ASSOCIATED DEVICES</b>    | N/A   |

**NOTE:**


1. The EUT is a Wireless Presenter, which included transmitter part (Wireless Presenter) and Receiver (USB Type).
2. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

One channel is provided to this EUT.

| Channel | Freq. (MHz) |
|---------|-------------|
| 1       | 2407        |

#### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

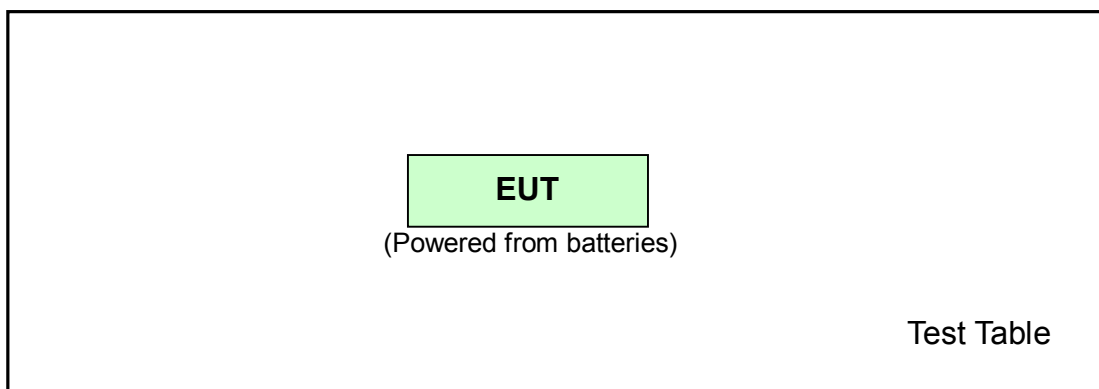

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

| EUT configure mode | Applicable to |       |       |      | Description |
|--------------------|---------------|-------|-------|------|-------------|
|                    | PLC           | RE<1G | RE≥1G | APCM |             |
| -                  | Note          | √     | √     | √    | NA          |

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz  
 RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement  
 Note: No need to concern of Conducted Emission due to the EUT is powered by battery.

#### **Radiated Emission Test (Below 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, antenna ports and X, Y, Z Axis (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| Available Channel | Tested Channel | Modulation Type | Axis |
|-------------------|----------------|-----------------|------|
| 1                 | 1              | GFSK            | X    |

#### **Radiated Emission Test (Above 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, antenna ports and X, Y, Z Axis (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| Available Channel | Tested Channel | Modulation Type | Axis |
|-------------------|----------------|-----------------|------|
| 1                 | 1              | GFSK            | X    |

#### **Bandedge Measurement:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| Available Channel | Tested Channel | Modulation Type |
|-------------------|----------------|-----------------|
| 1                 | 1              | GFSK            |

#### **Antenna Port Conducted Measurement:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| Available Channel | Tested Channel | Modulation Type |
|-------------------|----------------|-----------------|
| 1                 | 1              | GFSK            |





### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247)**

**ANSI C63.4-2003**

All test items have been performed and recorded as per the above standards.

### **3.4 DESCRIPTION OF SUPPORT UNITS**

N/A

## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

N/A

### 4.2 RADIATED EMISSION MEASUREMENT

#### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| Frequencies (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009-0.490       | 2400/F(kHz)                       | 300                           |
| 0.490-1.705       | 24000/F(kHz)                      | 30                            |
| 1.705-30.0        | 30                                | 30                            |
| 30-88             | 100                               | 3                             |
| 88-216            | 150                               | 3                             |
| 216-960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## 4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER           | MODEL NO.                | SERIAL NO.               | CALIBRATED UNTIL |
|--------------------------------------|--------------------------|--------------------------|------------------|
| Test Receiver<br>ROHDE & SCHWARZ     | ESMI                     | 839013/007<br>839379/002 | Jan. 24, 2007    |
| Spectrum Analyzer<br>ROHDE & SCHWARZ | FSEK30                   | 100049                   | Aug. 14, 2006    |
| BILOG Antenna<br>SCHWARZBECK         | VULB9163                 | 121                      | Jun. 01, 2006    |
| HORN Antenna<br>SCHWARZBECK          | BBHA 9120 D              | 9120D-407                | Jan. 22, 2007    |
| HORN Antenna<br>SCHWARZBECK          | BBHA 9170                | BBHA9170242              | Jan. 19, 2007    |
| Preamplifier<br>Agilent              | 8449B                    | 3008A01911               | Sep. 22, 2006    |
| RF signal cable<br>HUBER+SUHNNER     | SUCOFLEX 104             | 218188/218189            | Dec. 13, 2006    |
| RF signal cable<br>Worken            | 8D-FB                    | Cable-HYCH5-02           | Apr. 21, 2006    |
| Software<br>ADT.                     | ADT_Radiated_<br>V7.6.01 | NA                       | NA               |
| Antenna Tower<br>EMCO                | 2070/2080                | 512.835.4684             | NA               |
| Antenna Tower Controller<br>EMCO     | 2090                     | NA                       | NA               |
| Turn Table<br>EMCO                   | 2087-2.03                | NA                       | NA               |
| Turn Table Controller<br>EMCO        | 2090                     | NA                       | NA               |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 4.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The IC Site Registration No. is IC4924-4.

### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

## 4.2.5 TEST SETUP

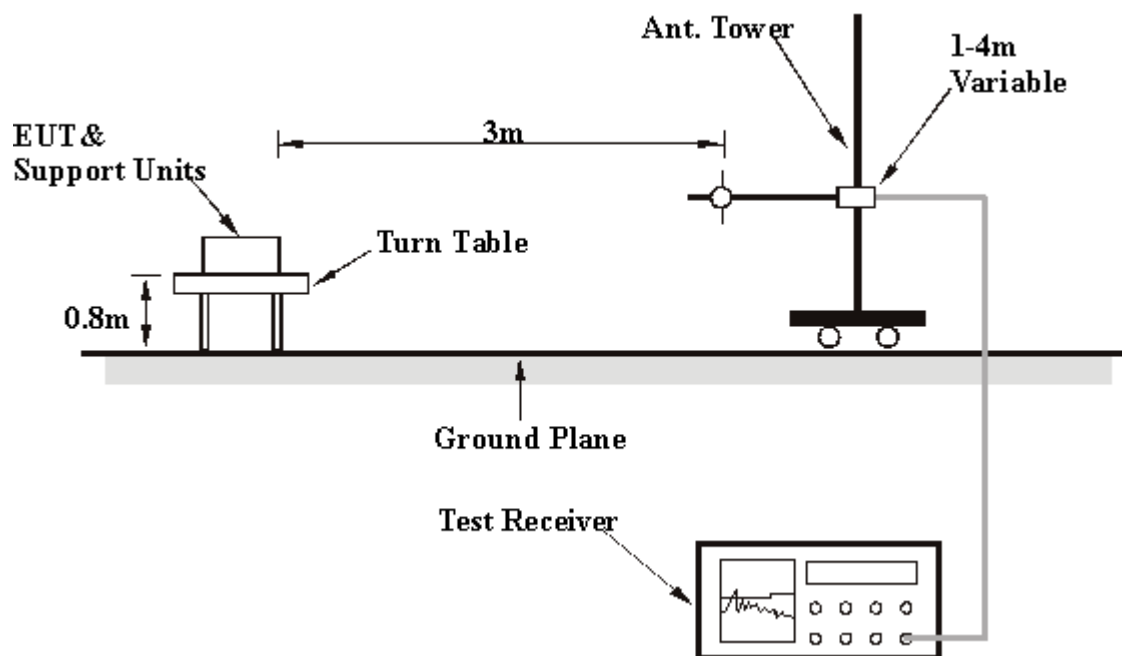

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 4.2.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.

## 4.2.7 TEST RESULTS

### RADIATED WORST CASE DATA: BELOW 1GHz

|                                 |                             |                          |               |
|---------------------------------|-----------------------------|--------------------------|---------------|
| <b>MODULATION TYPE</b>          | GFSK                        | <b>CHANNEL</b>           | 1             |
| <b>INPUT POWER</b>              | 3Vdc                        | <b>FREQUENCY RANGE</b>   | Below 1000MHz |
| <b>ENVIRONMENTAL CONDITIONS</b> | 22deg. C, 70%RH,<br>1001hPa | <b>DETECTOR FUNCTION</b> | Quasi-Peak    |
| <b>TESTED BY</b>                | Jamison Chan                |                          |               |

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 749.96      | 24.83 QP                | 46.00          | -21.17      | 1.00 H             | 118                  | 1.54             | 23.29                    |
| 2   | 795.22      | 25.25 QP                | 46.00          | -20.75      | 2.00 H             | 268                  | 2.05             | 23.19                    |
| 3   | 841.57      | 26.91 QP                | 46.00          | -19.09      | 2.00 H             | 340                  | 2.50             | 24.41                    |
| 4   | 874.98      | 27.12 QP                | 46.00          | -18.88      | 3.00 H             | 202                  | 2.48             | 24.64                    |
| 5   | 926.71      | 27.70 QP                | 46.00          | -18.30      | 3.00 H             | 70                   | 2.56             | 25.14                    |
| 6   | 959.04      | 27.62 QP                | 46.00          | -18.38      | 1.25 H             | 250                  | 2.23             | 25.39                    |

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 716.54      | 23.48 QP                | 46.00          | -22.52      | 1.75 V             | 46                   | 1.43             | 22.05                    |
| 2   | 748.88      | 25.09 QP                | 46.00          | -20.91      | 2.00 V             | 184                  | 1.84             | 23.25                    |
| 3   | 784.44      | 25.79 QP                | 46.00          | -20.21      | 1.25 V             | 154                  | 2.57             | 23.22                    |
| 4   | 848.03      | 26.10 QP                | 46.00          | -19.90      | 1.75 V             | 196                  | 1.51             | 24.60                    |
| 5   | 881.44      | 26.85 QP                | 46.00          | -19.15      | 3.00 V             | 184                  | 2.22             | 24.64                    |
| 6   | 942.88      | 27.77 QP                | 46.00          | -18.23      | 1.50 V             | 52                   | 2.32             | 25.45                    |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  - 3The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



### RADIATED WORST CASE DATA: ABOVE 1GHZ

|                                 |                             |                          |                          |
|---------------------------------|-----------------------------|--------------------------|--------------------------|
| <b>MODULATION TYPE</b>          | GFSK                        | <b>CHANNEL</b>           | 1                        |
| <b>INPUT POWER</b>              | 3Vdc                        | <b>FREQUENCY RANGE</b>   | 1 ~ 25GHz                |
| <b>ENVIRONMENTAL CONDITIONS</b> | 22deg. C, 70%RH,<br>1005hPa | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>TESTED BY</b>                | Jamison Chan                |                          |                          |

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No.      | Freq. (MHz)    | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB)  | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----------|----------------|-------------------------|----------------|--------------|--------------------|----------------------|------------------|--------------------------|
| 1        | 2390.00        | 55.62 PK                | 74.00          | -18.38       | 1.34 H             | 280                  | 24.11            | 31.51                    |
| 1        | 2390.00        | 44.26 AV                | 54.00          | -9.74        | 1.34 H             | 280                  | 12.75            | 31.51                    |
| 2        | *2407.00       | 98.32 PK                |                |              | 1.34 H             | 280                  | 66.76            | 31.56                    |
| 2        | *2407.00       | 96.94 AV                |                |              | 1.34 H             | 280                  | 65.38            | 31.56                    |
| 3        | 2483.50        | 54.81 PK                | 74.00          | -19.19       | 1.34 H             | 280                  | 23.00            | 31.81                    |
| 3        | 2483.50        | 44.79 AV                | 54.00          | -9.21        | 1.34 H             | 280                  | 12.98            | 31.81                    |
| 4        | 4814.00        | 54.71 PK                | 74.00          | -19.29       | 1.00 H             | 222                  | 17.78            | 36.92                    |
| <b>4</b> | <b>4814.00</b> | <b>52.05 AV</b>         | <b>54.00</b>   | <b>-1.95</b> | <b>1.00 H</b>      | <b>222</b>           | <b>15.12</b>     | <b>36.92</b>             |
| 5        | 7221.00        | 52.66 PK                | 74.00          | -21.34       | 1.53 H             | 30                   | 9.68             | 42.99                    |
| 5        | 7221.00        | 45.28 AV                | 54.00          | -8.72        | 1.53 H             | 30                   | 2.30             | 42.99                    |

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 2390.00     | 53.69 PK                | 74.00          | -20.31      | 1.34 V             | 280                  | 22.18            | 31.51                    |
| 1   | 2390.00     | 43.75 AV                | 54.00          | -10.25      | 1.34 V             | 280                  | 12.24            | 31.51                    |
| 2   | *2407.00    | 92.08 PK                |                |             | 1.34 V             | 280                  | 60.52            | 31.56                    |
| 2   | *2407.00    | 90.27 AV                |                |             | 1.34 V             | 280                  | 58.71            | 31.56                    |
| 3   | 2483.50     | 54.85 PK                | 74.00          | -19.15      | 1.34 V             | 280                  | 23.04            | 31.81                    |
| 3   | 2483.50     | 44.24 AV                | 54.00          | -9.76       | 1.34 V             | 280                  | 12.43            | 31.81                    |
| 4   | 4814.00     | 54.62 PK                | 74.00          | -19.38      | 1.10 V             | 339                  | 17.69            | 36.92                    |
| 4   | 4814.00     | 51.98 AV                | 54.00          | -2.02       | 1.10 V             | 339                  | 15.05            | 36.92                    |
| 5   | 7221.00     | 52.47 PK                | 74.00          | -21.53      | 1.48 V             | 200                  | 9.49             | 42.99                    |
| 5   | 7221.00     | 45.34 AV                | 54.00          | -8.66       | 1.48 V             | 200                  | 2.36             | 42.99                    |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency

## 4.3 6dB BANDWIDTH MEASUREMENT

### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

### 4.3.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSP 40    | 100036     | Mar. 16. 2007    |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.3.5 TEST SETUP

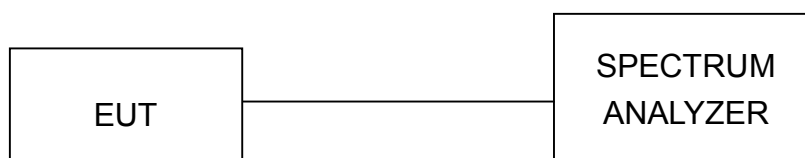

### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




### 4.3.7 TEST RESULTS

|                        |              |                                 |                          |
|------------------------|--------------|---------------------------------|--------------------------|
| <b>MODULATION TYPE</b> | GFSK         | <b>CHANNEL</b>                  | 1                        |
| <b>INPUT POWER</b>     | 3Vdc         | <b>ENVIRONMENTAL CONDITIONS</b> | 20deg. C, 70%RH, 1001hPa |
| <b>TESTED BY</b>       | Jamison Chan |                                 |                          |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS/FAIL |
|---------|-------------------------|---------------------|---------------------|-----------|
| 1       | 2407                    | 0.588               | 0.5                 | PASS      |

#### CH 1

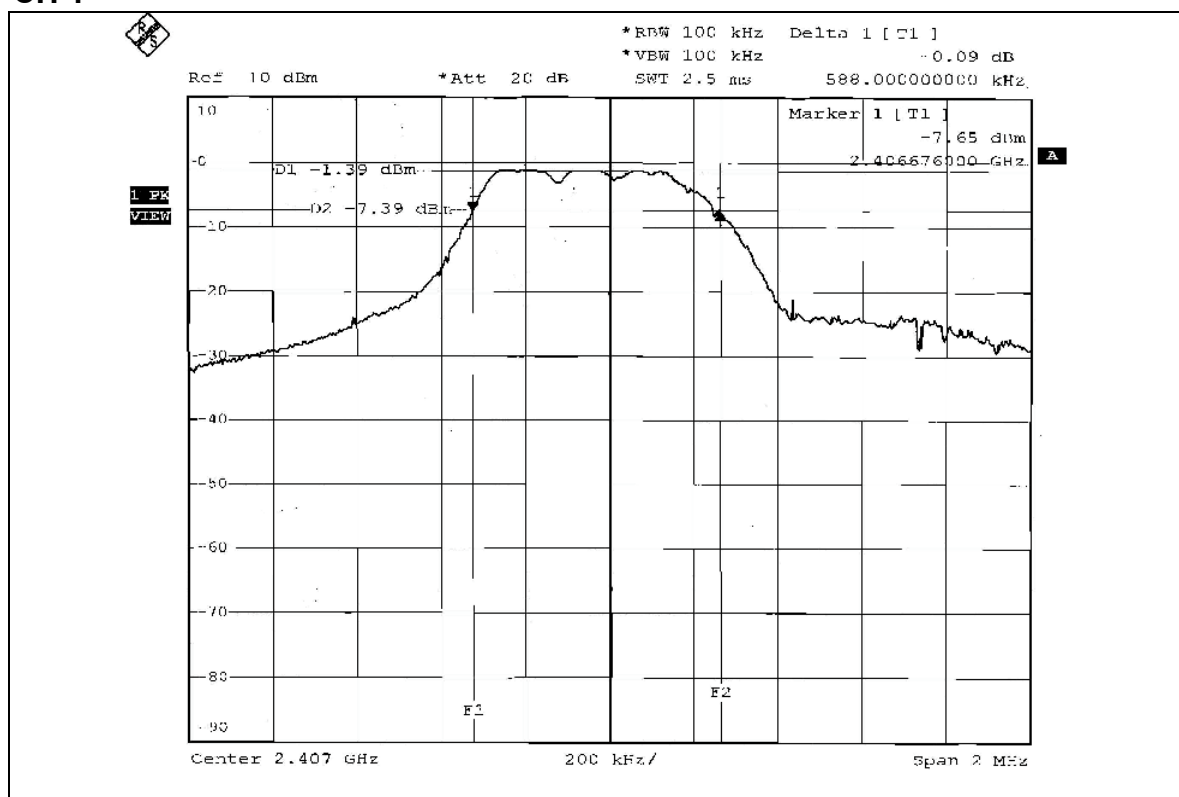



## 4.4 MAXIMUM PEAK OUTPUT POWER

### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

### 4.4.2 INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSP 40    | 100036     | Mar. 16. 2007    |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.4.3 TEST PROCEDURES


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1 MHz RBW and 1 MHz VBW, the peak value was measured and recorded.
4. Repeat above procedures until all frequencies measured were complete.

Note: The spectrum plots are attached on following pages.

### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP

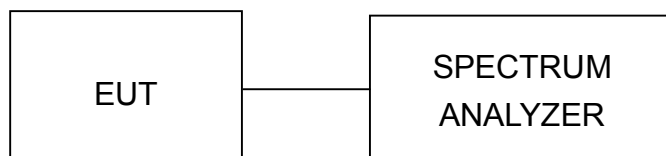

#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

#### 4.4.7 TEST RESULTS

|                        |              |                                 |                          |
|------------------------|--------------|---------------------------------|--------------------------|
| <b>MODULATION TYPE</b> | GFSK         | <b>CHANNEL</b>                  | 1                        |
| <b>INPUT POWER</b>     | 3Vdc         | <b>ENVIRONMENTAL CONDITIONS</b> | 20deg. C, 70%RH, 1001hPa |
| <b>TESTED BY</b>       | Jamison Chan |                                 |                          |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER OUTPUT (mW) | PEAK POWER LIMIT (dBm) | PASS/FAIL |
|---------|-------------------------|-------------------------|------------------------|------------------------|-----------|
| 1       | 2407                    | 0.37                    | 1.089                  | 30                     | PASS      |

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSP 40    | 100036     | Mar. 16. 2007    |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz.


The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.5.5 TEST SETUP



### 4.5.6 EUT OPERATING CONDITION


Same as Item 4.3.6

## 4.5.7 TEST RESULTS

|                        |              |                                 |                          |
|------------------------|--------------|---------------------------------|--------------------------|
| <b>MODULATION TYPE</b> | GFSK         | <b>CHANNEL</b>                  | 1                        |
| <b>INPUT POWER</b>     | 3Vdc         | <b>ENVIRONMENTAL CONDITIONS</b> | 20deg. C, 70%RH, 1001hPa |
| <b>TESTED BY</b>       | Jamison Chan |                                 |                          |

| CHANNEL | CHANNEL FREQUENCY (MHz) | RF POWER LEVEL IN 3kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS/FAIL |
|---------|-------------------------|---------------------------------|---------------------|-----------|
| 1       | 2407                    | -7.99                           | 8                   | PASS      |

### CH 1

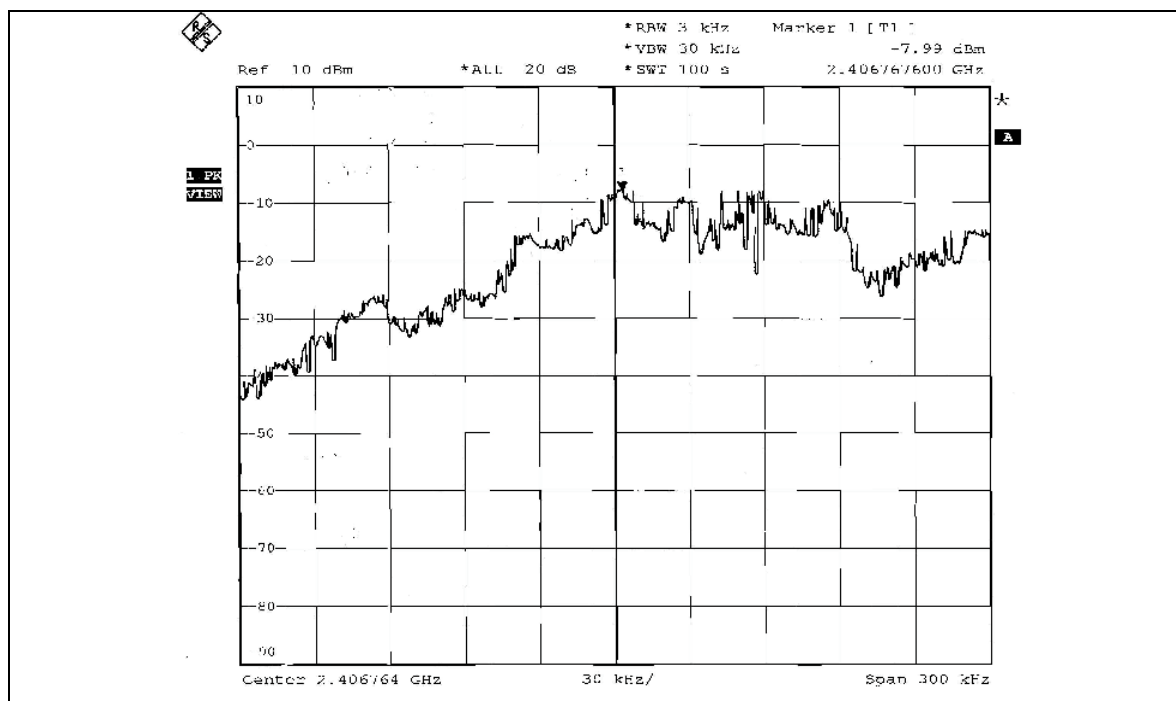

## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSP 40    | 100036     | Mar. 16. 2007    |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 100 kHz suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz) are attached on the following pages.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

## 4.6.6 TEST RESULTS

The spectrum plots are attached on the following 2 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

### Note 1:



The band edge emission plot on page 24 shows 28.96dBc between carrier maximum power and local maximum emission in restrict band (2.3250GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.32dBuV/m (Peak), so the maximum field strength in restrict band is  $98.32 - 28.96 = 69.36$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of on page 24 shows 68.60dBc between carrier maximum power and local maximum emission in restrict band (2.3248GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 96.94dBuV/m (Average), so the maximum field strength in restrict band is  $96.94 - 68.60 = 28.34$ BuV/m which is under 54dBuV/m limit.



### Note 2:



The band edge emission plot on page 25 shows 55.97dBc between carrier maximum power and local maximum emission in restrict band (2.4905GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.32dBuV/m (Peak), so the maximum field strength in restrict band is  $98.32 - 55.97 = 42.35$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of on page 26 shows 70.98dBc between carrier maximum power and local maximum emission in restrict band (2.4859GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 96.94dBuV/m (Average), so the maximum field strength in restrict band is  $96.94 - 70.98 = 25.96$ BuV/m which is under 54dBuV/m limit.

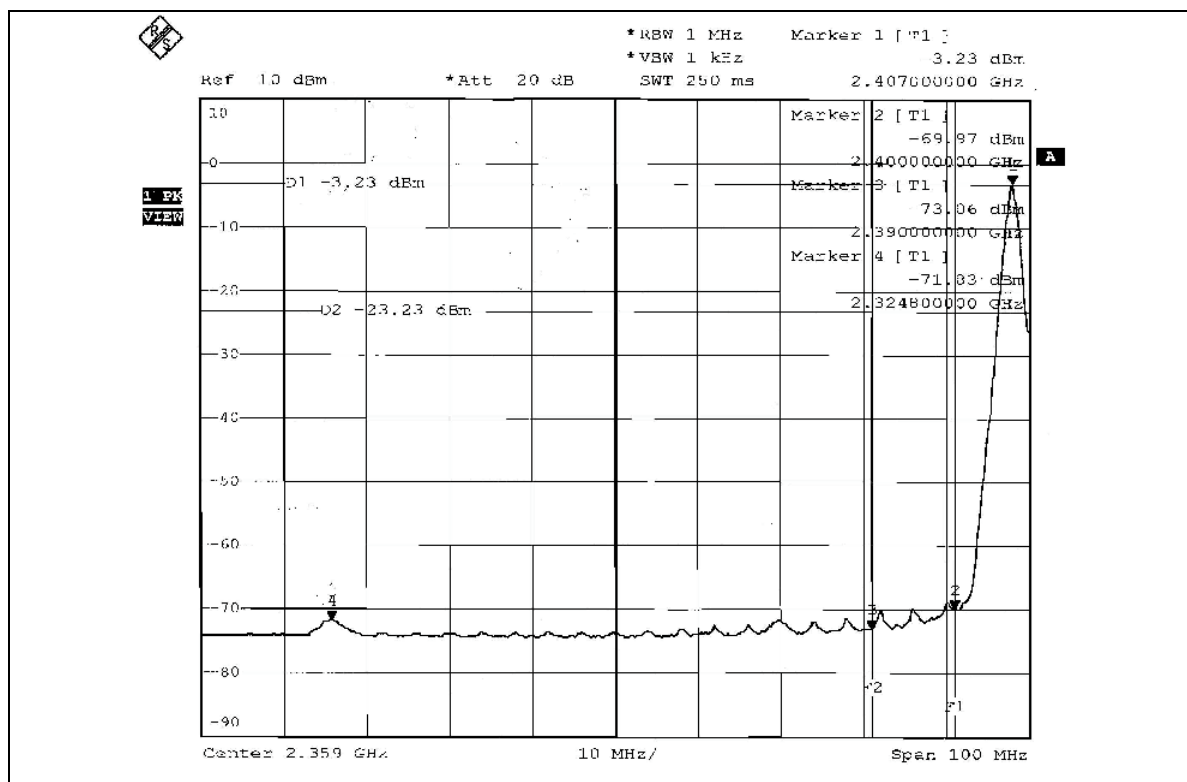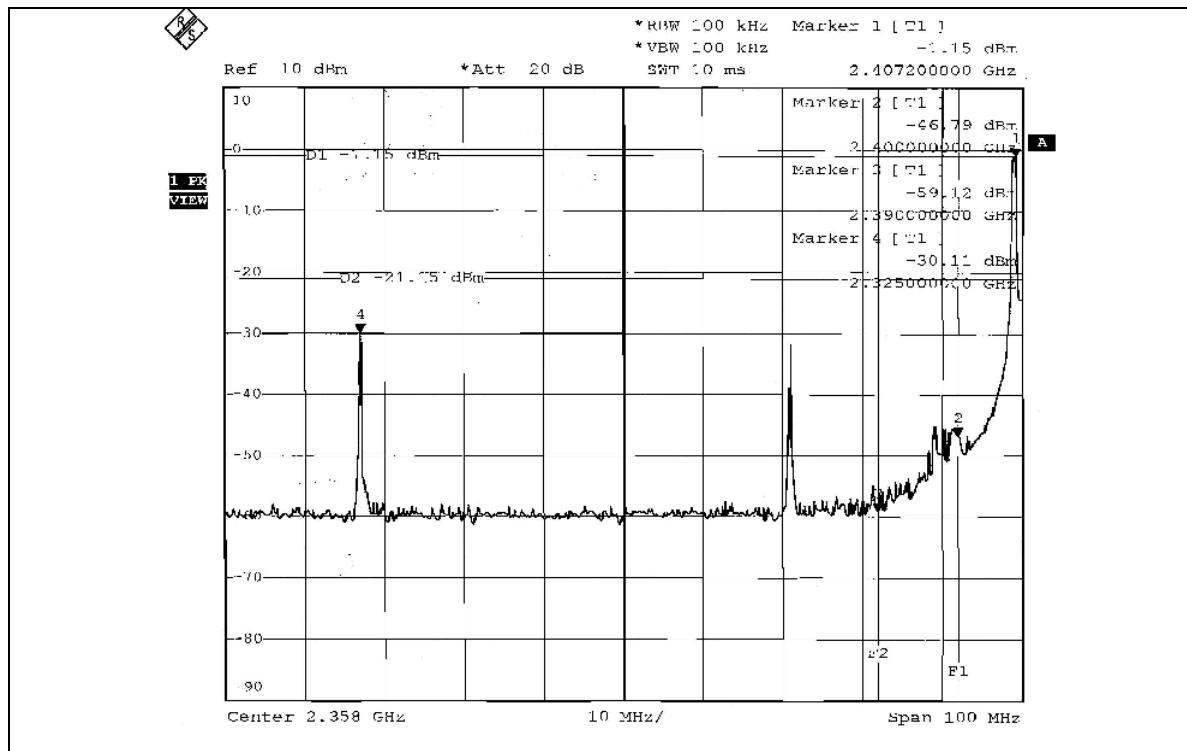



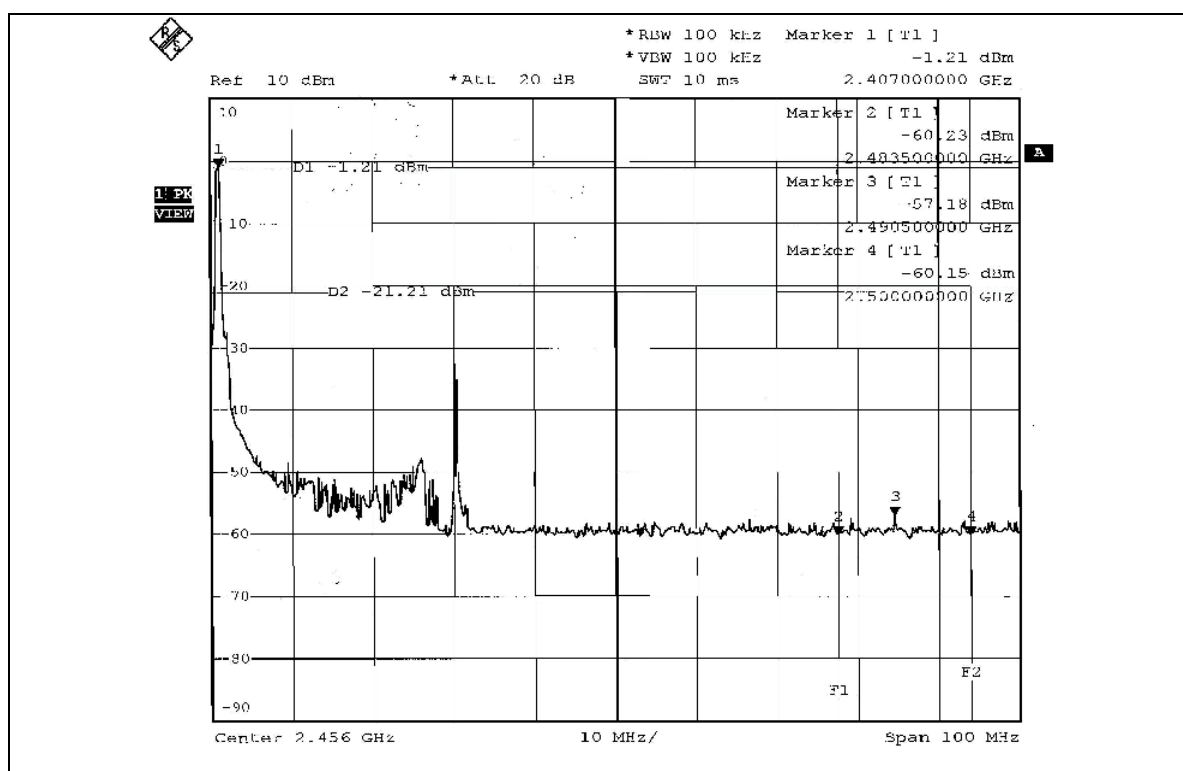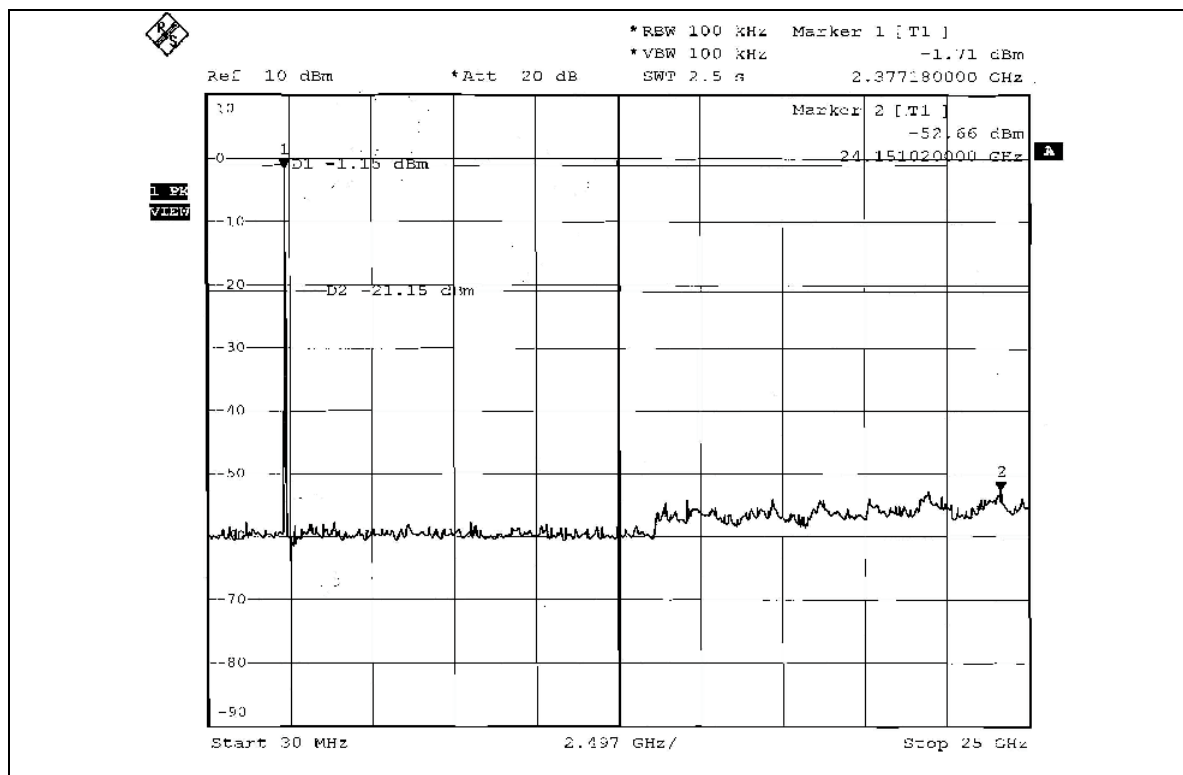

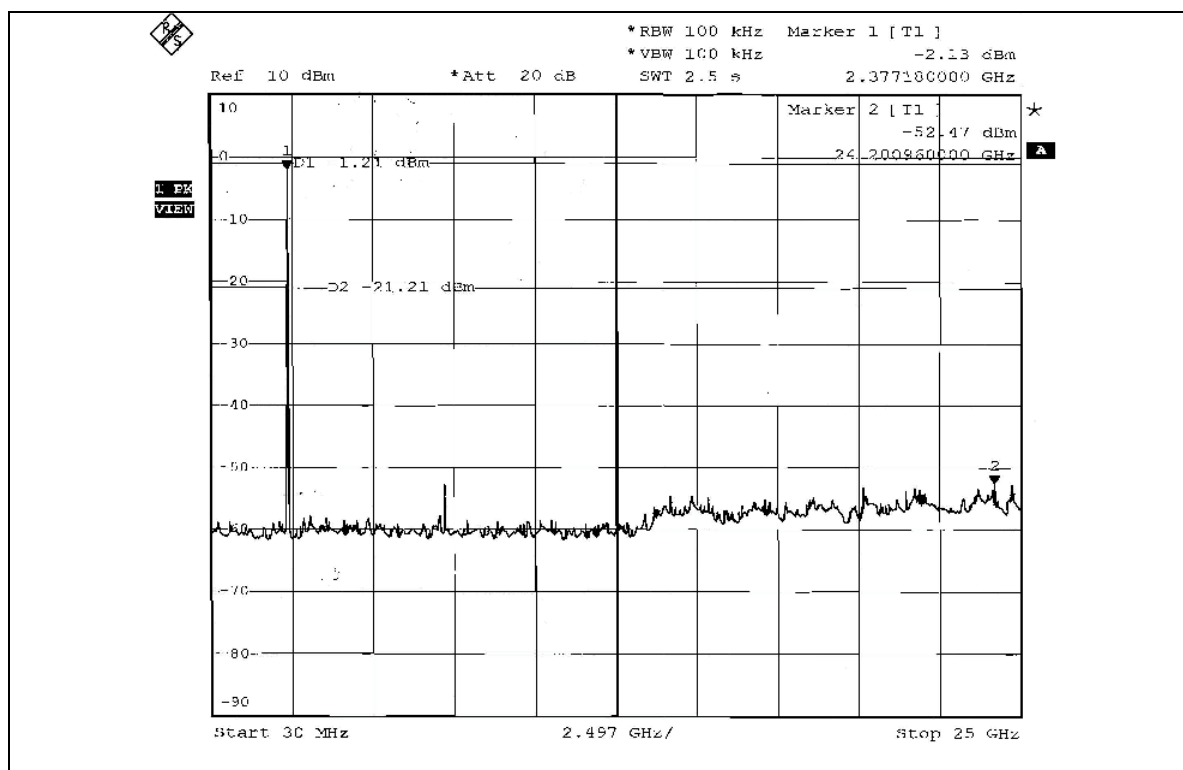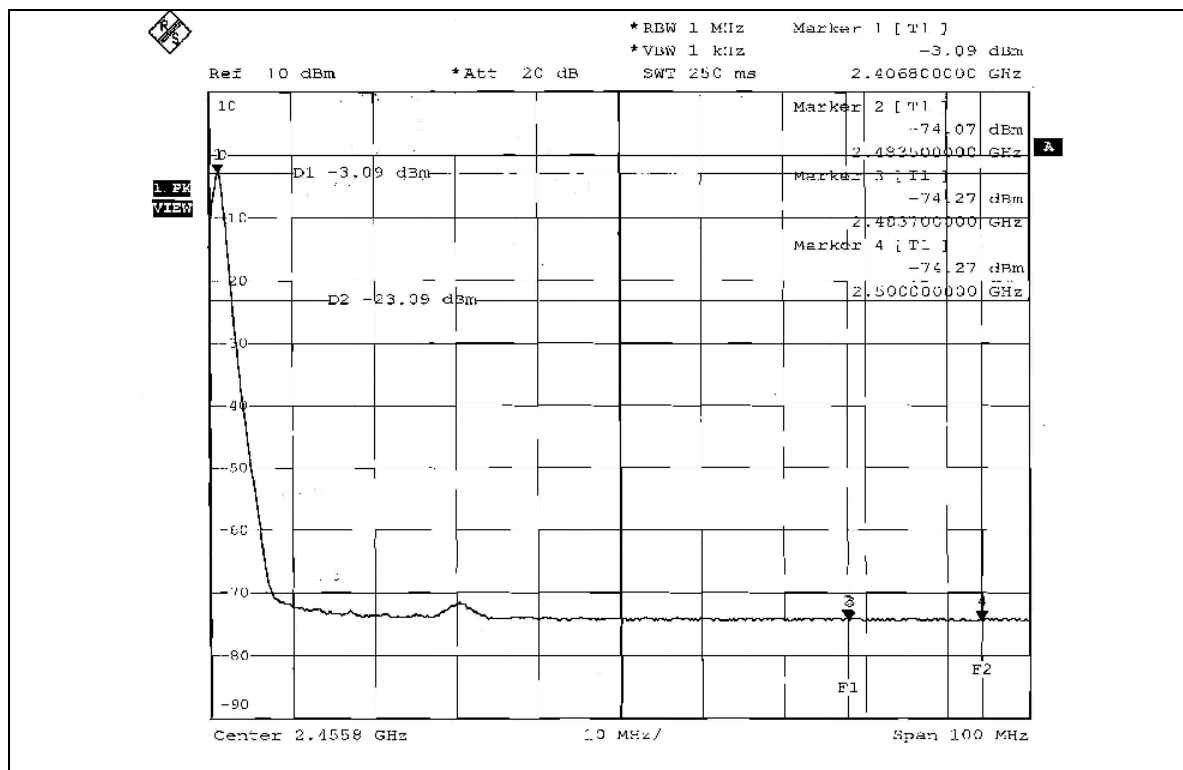

## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is 1/2 wave-length monopole patch antenna without connector. The maximum Gain of the antenna is 2dBi.

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

### RADIATED EMISSION TEST





## 6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

|                    |                       |
|--------------------|-----------------------|
| <b>USA</b>         | FCC, UL, A2LA         |
| <b>Germany</b>     | TUV Rheinland         |
| <b>Japan</b>       | VCCI                  |
| <b>Norway</b>      | NEMKO                 |
| <b>Canada</b>      | INDUSTRY CANADA , CSA |
| <b>R.O.C.</b>      | CNLA, BSMI, DGT       |
| <b>Netherlands</b> | Telefication          |
| <b>Singapore</b>   | PSB , GOST-ASIA(MOU)  |
| <b>Russia</b>      | CERTIS(MOU)           |

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**  
Tel: 886-2-26052180  
Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**  
Tel: 886-3-5935343  
Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**  
Tel: 886-3-3183232  
Fax: 886-3-3185050

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also

## **APPENDIX-A**

### **MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.