



FCC TEST REPORT

REPORT NO.: RF930428A05

MODEL NO.: 72225

RECEIVED: April 28, 2004

TESTED: May 20 ~ June 9, 2004

APPLICANT: ACCO Brands, Inc.

ADDRESS: 2855 Campus Drive San Mateo, CA 94403
United States

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 58 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



TABLE OF CONTENTS

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	8
4	TEST PROCEDURES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT.....	9
4.2	number of hopping frequency used.....	9
4.2.1	LIMIT OF HOPPING FREQUENCY USED	9
4.2.2	TEST INSTRUMENTS	9
4.2.3	TEST PROCEDURES	10
4.2.4	DEVIATION FROM TEST STANDARD	10
4.2.5	TEST SETUP	11
4.2.6	TEST RESULTS	11
4.3	DWELL TIME ON EACH CHANNEL.....	14
4.3.1	LIMIT OF DWELL TIME USED	14
4.3.2	TEST INSTRUMENTS	14
4.3.3	TEST PROCEDURES	15
4.3.4	DEVIATION FROM TEST STANDARD	15
4.3.5	TEST SETUP	15
4.3.6	TEST RESULTS	16
4.4	CHANNEL BANDWIDTH.....	23
4.4.1	LIMITS OF CHANNEL BANDWIDTH.....	23
4.4.2	TEST INSTRUMENTS	23
4.4.3	TEST PROCEDURE	24
4.4.4	DEVIATION FROM TEST STANDARD	24
4.4.5	TEST SETUP	24
4.4.6	EUT OPERATING CONDITION	24
4.4.7	TEST RESULTS	25
4.5	HOPPING CHANNEL SEPARATION	29
4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION.....	29
4.5.2	TEST INSTRUMENTS	29



4.5.3 TEST PROCEDURES30

4.5.4 DEVIATION FROM TEST STANDARD30

4.5.5 TEST SETUP30

4.5.6 TEST RESULTS31

4.6 MAXIMUM PEAK OUTPUT POWER –using POWER METTER.....35

4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT35

4.6.2 INSTRUMENTS.....35

4.6.3 TEST PROCEDURES36

4.6.4 DEVIATION FROM TEST STANDARD36

4.6.5 TEST SETUP37

4.6.6 EUT OPERATING CONDITION37

4.6.7 TEST RESULTS38

4.7 RADIATED EMISSION MEASUREMENT42

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT42

4.7.2 TEST INSTRUMENTS43

4.7.3 TEST PROCEDURES44

4.7.4 DEVIATION FROM TEST STANDARD44

4.7.5 TEST SETUP45

4.7.6 TEST RESULTS46

4.8 BAND EDGES MEASUREMENT50

4.8.1 LIMITS OF BAND EDGES MEASUREMENT50

4.8.2 TEST INSTRUMENTS50

4.8.3 TEST PROCEDURE50

4.8.4 DEVIATION FROM TEST STANDARD50

4.8.5 EUT OPERATING CONDITION51

4.8.6 TEST RESULTS51

4.9 ANTENNA REQUIREMENT56

4.9.1 STANDARD APPLICABLE56

4.9.2 ANTENNA CONNECTED CONSTRUCTION56

5 PHOTOGRAPHS OF THE TEST CONFIGURATION57

6 INFORMATION ON THE TESTING LABORATORIES.....58



1 CERTIFICATION

PRODUCT : PilotMouse Bluetooth
BRAND NAME : Kensington®
MODEL NO. : 72225
APPLICANT : ACCO Brands, Inc.
TESTED: May 20 ~ June 9, 2004
TEST ITEM : ENGINEERING SAMPLE
STANDARDS : FCC 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY: Annie Chang , **DATE:** June 16, 2004
(Annie Chang)

APPROVED BY: Mike Su. , **DATE:** June 16, 2004
(Mike Su, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission Limit: 48dBuV	NA	DC power not applicable
15.247(a)(1)(i)-(ii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit
15.247(a)(1)(ii)	Dwell Time on Each Channel Spec. : Max. 0.4 second within 31.2 second	PASS	Meet the requirement of limit
15.247(a)(1)(i)-(ii)	Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, whichever is greater.	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System Spec.: Max. 1 MHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Spec.: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -5.00 dB at 4804.00MHz
15.247(c)	Band Edge Measurement	PASS	Meet the requirement of limit

Note: The information of measurement uncertainty is available upon the customer's request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	PilotMouse Bluetooth
MODEL NO.	72225
POWER SUPPLY	3Vdc from battery
MODULATION TYPE	FHSS (GFSK)
FREQUENCY RANGE	2402MHz ~ 2480MHz
NUMBER OF CHANNEL	79
OUTPUT POWER	3.46dBm
ANTENNA TYPE	Micro String Antenna
ANTENNA GAIN	1dBi
DATA CABLE	N/A
I/O PORTS	N/A
ASSOCIATED DEVICES	N/A

NOTE:

1. The EUT is the PilotMouse Bluetooth, which is designed to work with any bluetooth enable PCs or bluetooth adapters.
2. For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Seventy-nine channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel 0, 39 and 78 are chosen for testing to fulfill the requirement of frequency spectrum usage in each country.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a PilotMouse Bluetooth. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2001

All test items have been performed and recorded as per the above standards.




3.4 DESCRIPTION OF SUPPORT UNITS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-0791UH-12800-123-5423	FCC DoC Approved
2	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

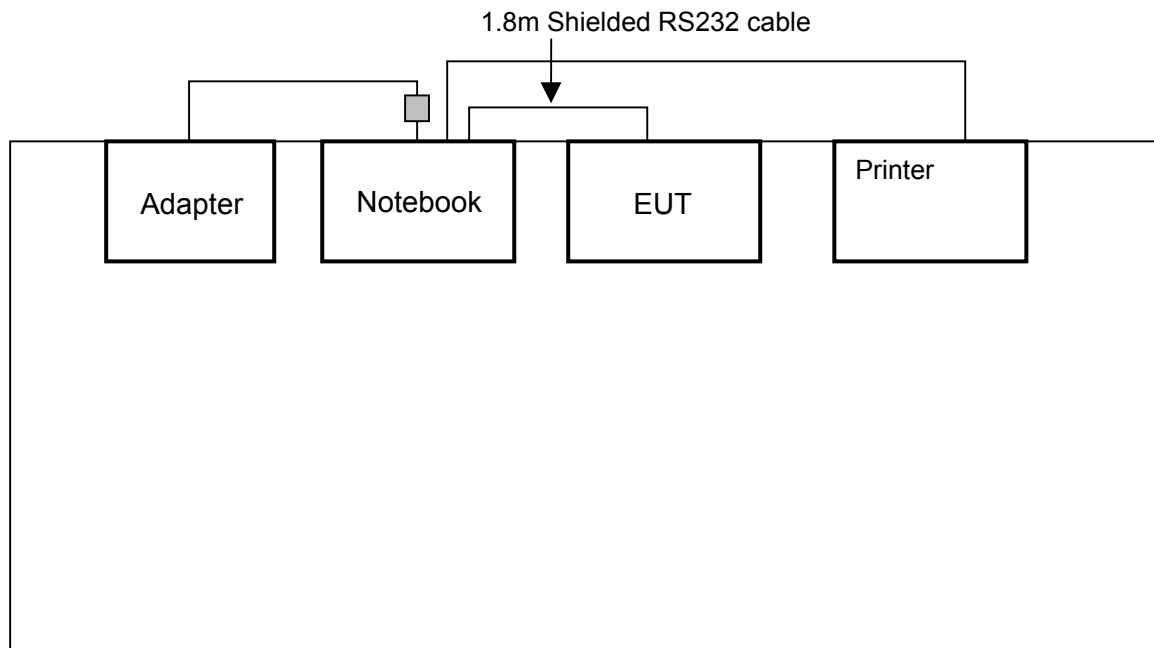

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT NA

4.2 NUMBER OF HOPPING FREQUENCY USED

4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 hopping frequencies, and should be equally spaced.

4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SIGNAL GENERATOR / Agilent	E8257C	MY43320668	Dec. 31, 2004

NOTE:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.




4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation


4.2.5 TEST SETUP

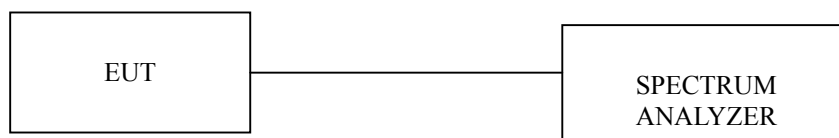

4.2.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

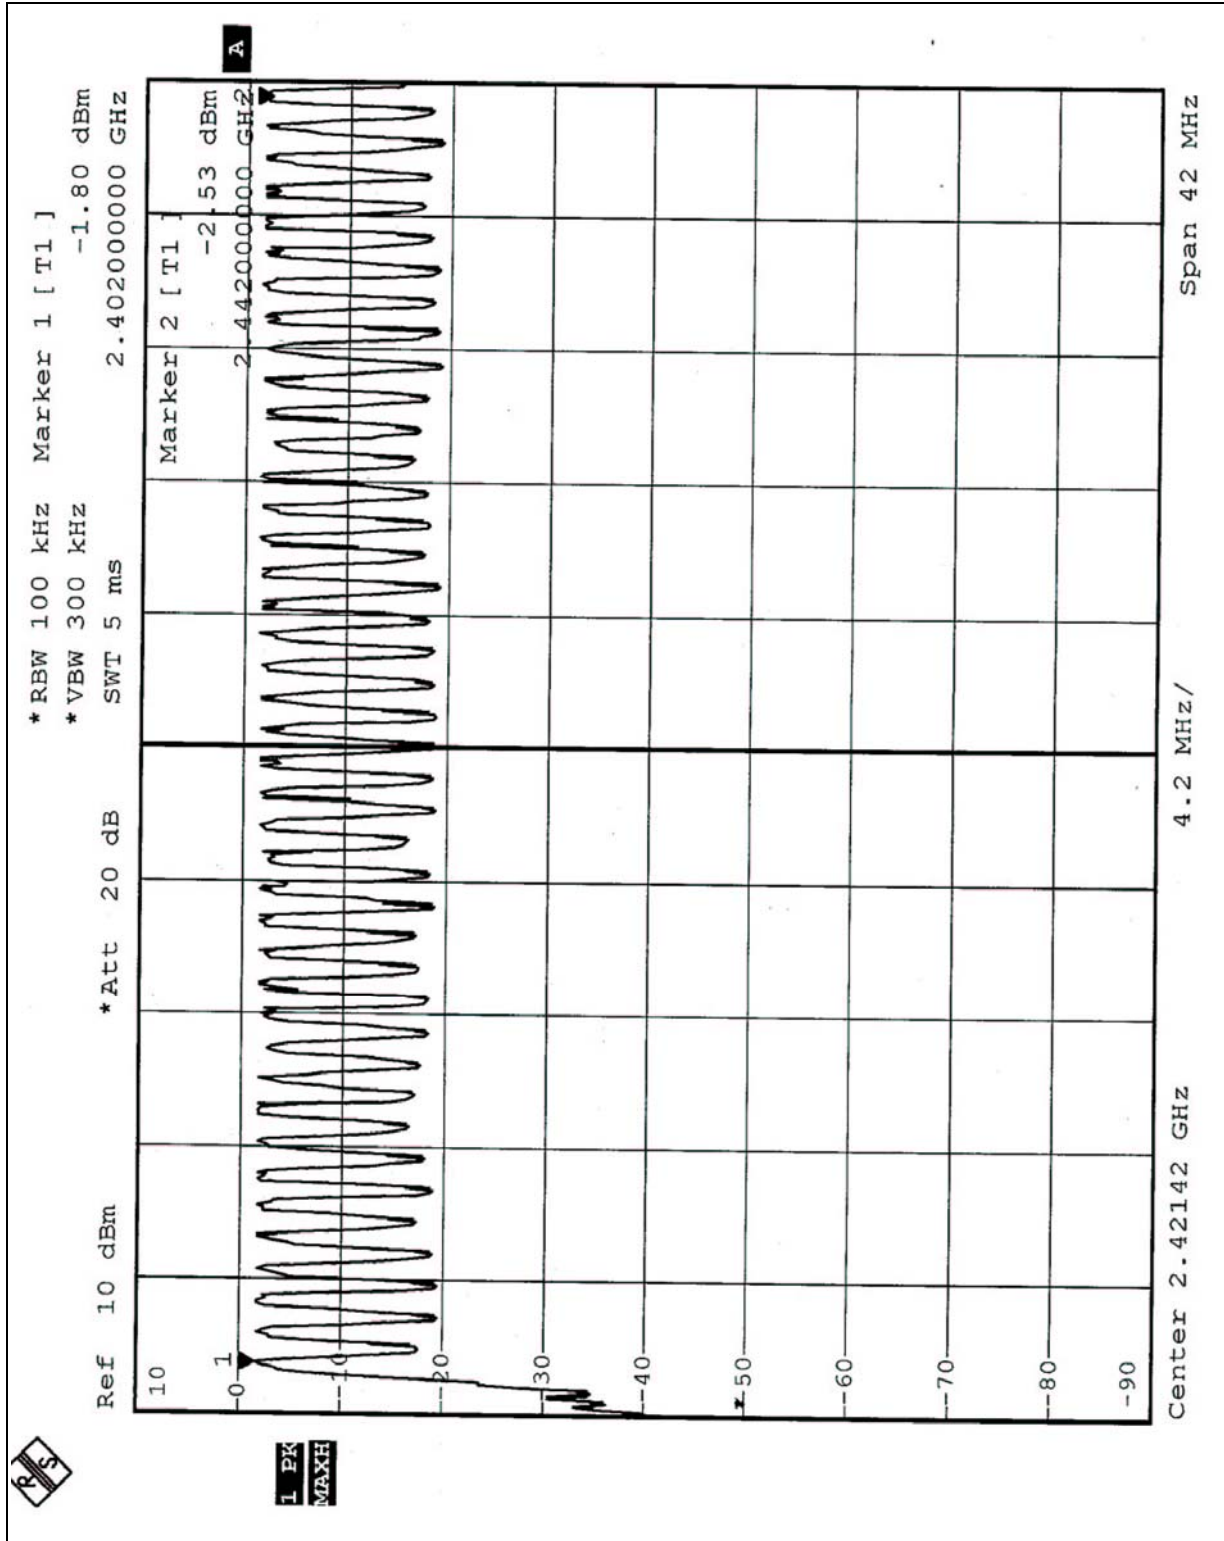

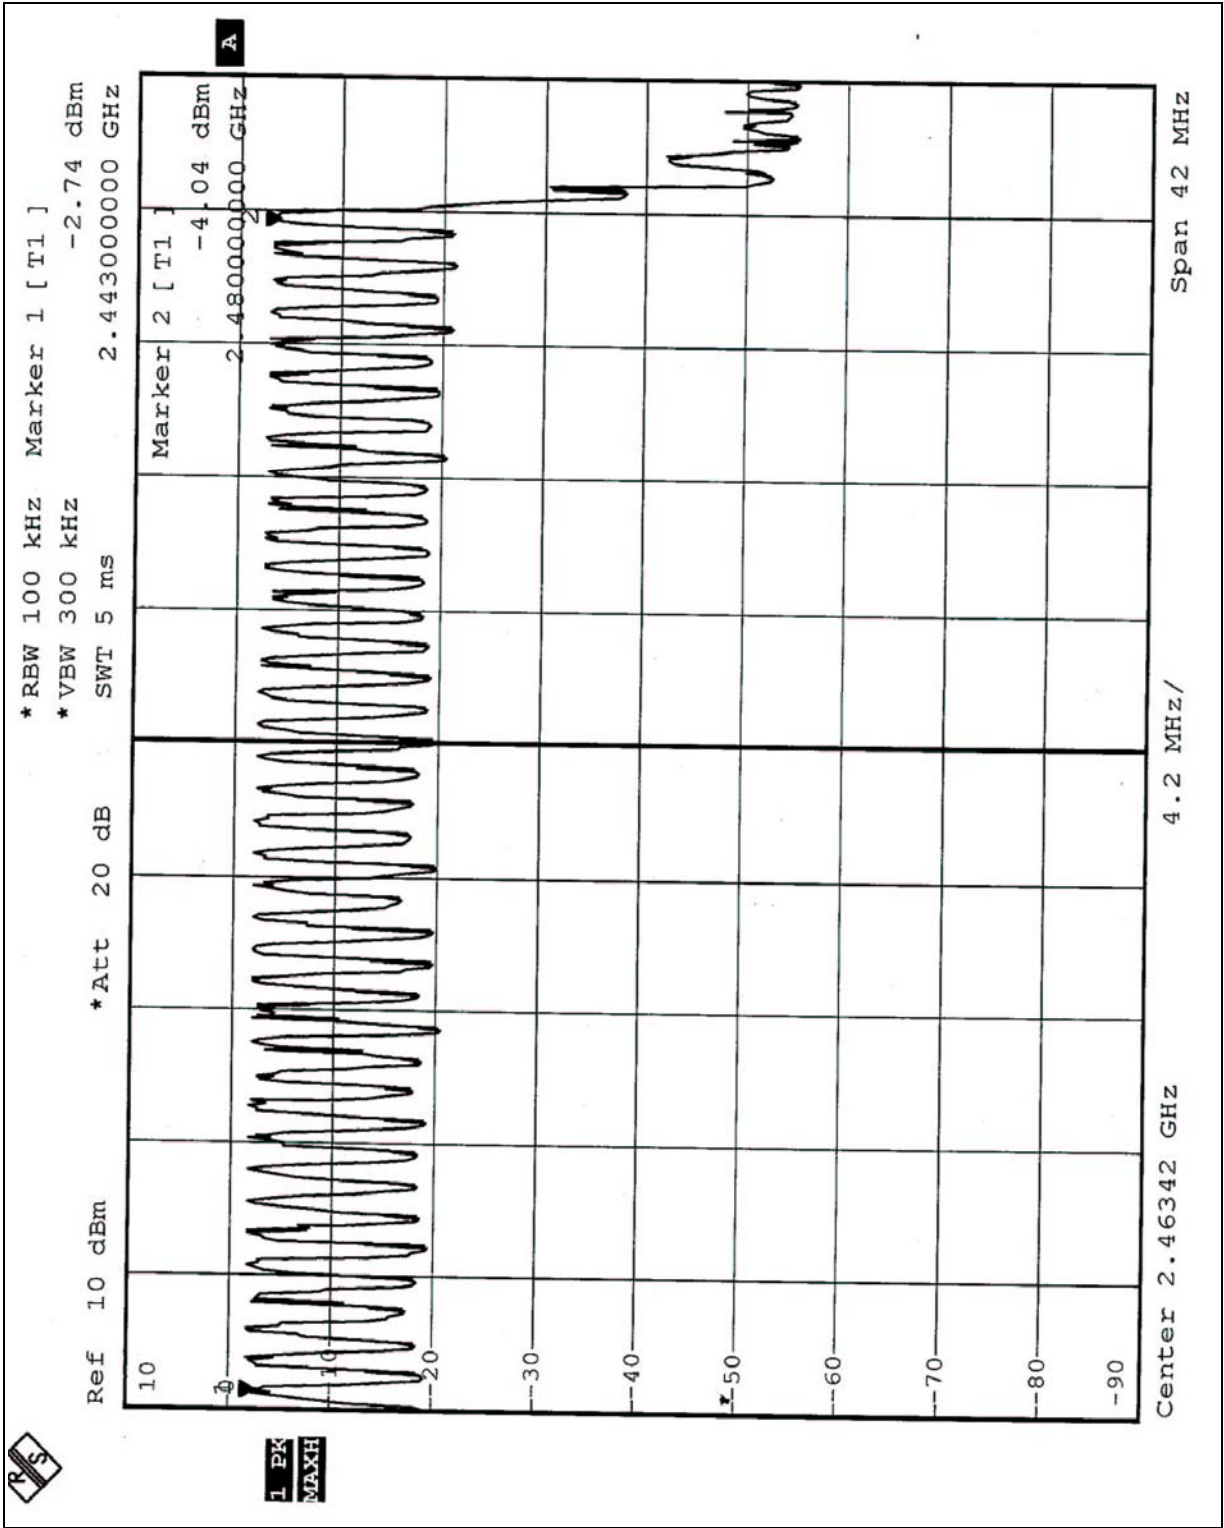

4.3 DWELL TIME ON EACH CHANNEL

4.3.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 31.6 second period. For hybrid systems, the average time of occupancy on any frequency should not exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SIGNAL GENERATOR / Agilent	E8257C	MY43320668	Dec 31, 2004

NOTES:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

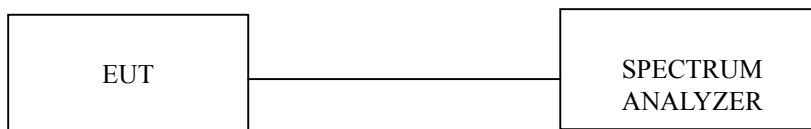


4.3.6 TEST RESULTS


Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316 times	0.60	189.60	400
DH3	26 (times / 5 sec) *6.32=164 times	1.87	306.68	400
DH5	17 (times / 5 sec) *6.32=107.44 times	3.16	339.51	400

Test plots of the transmitting time slot are shown on next six pages.





DH1

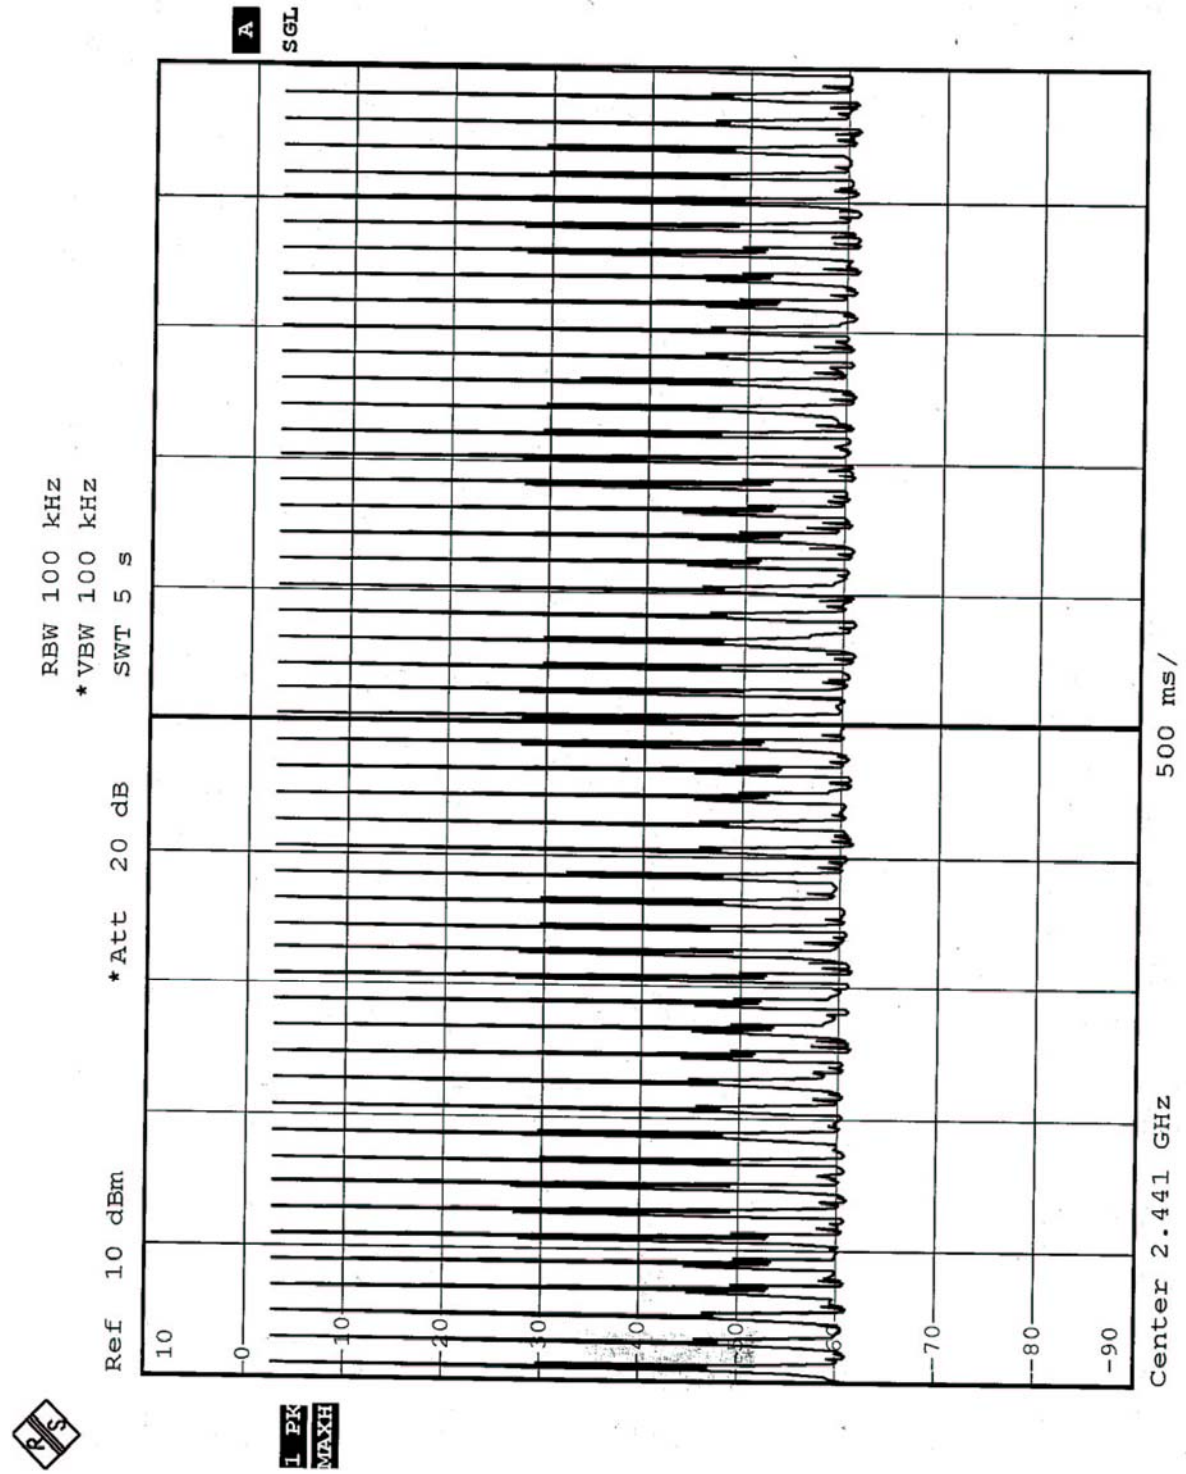

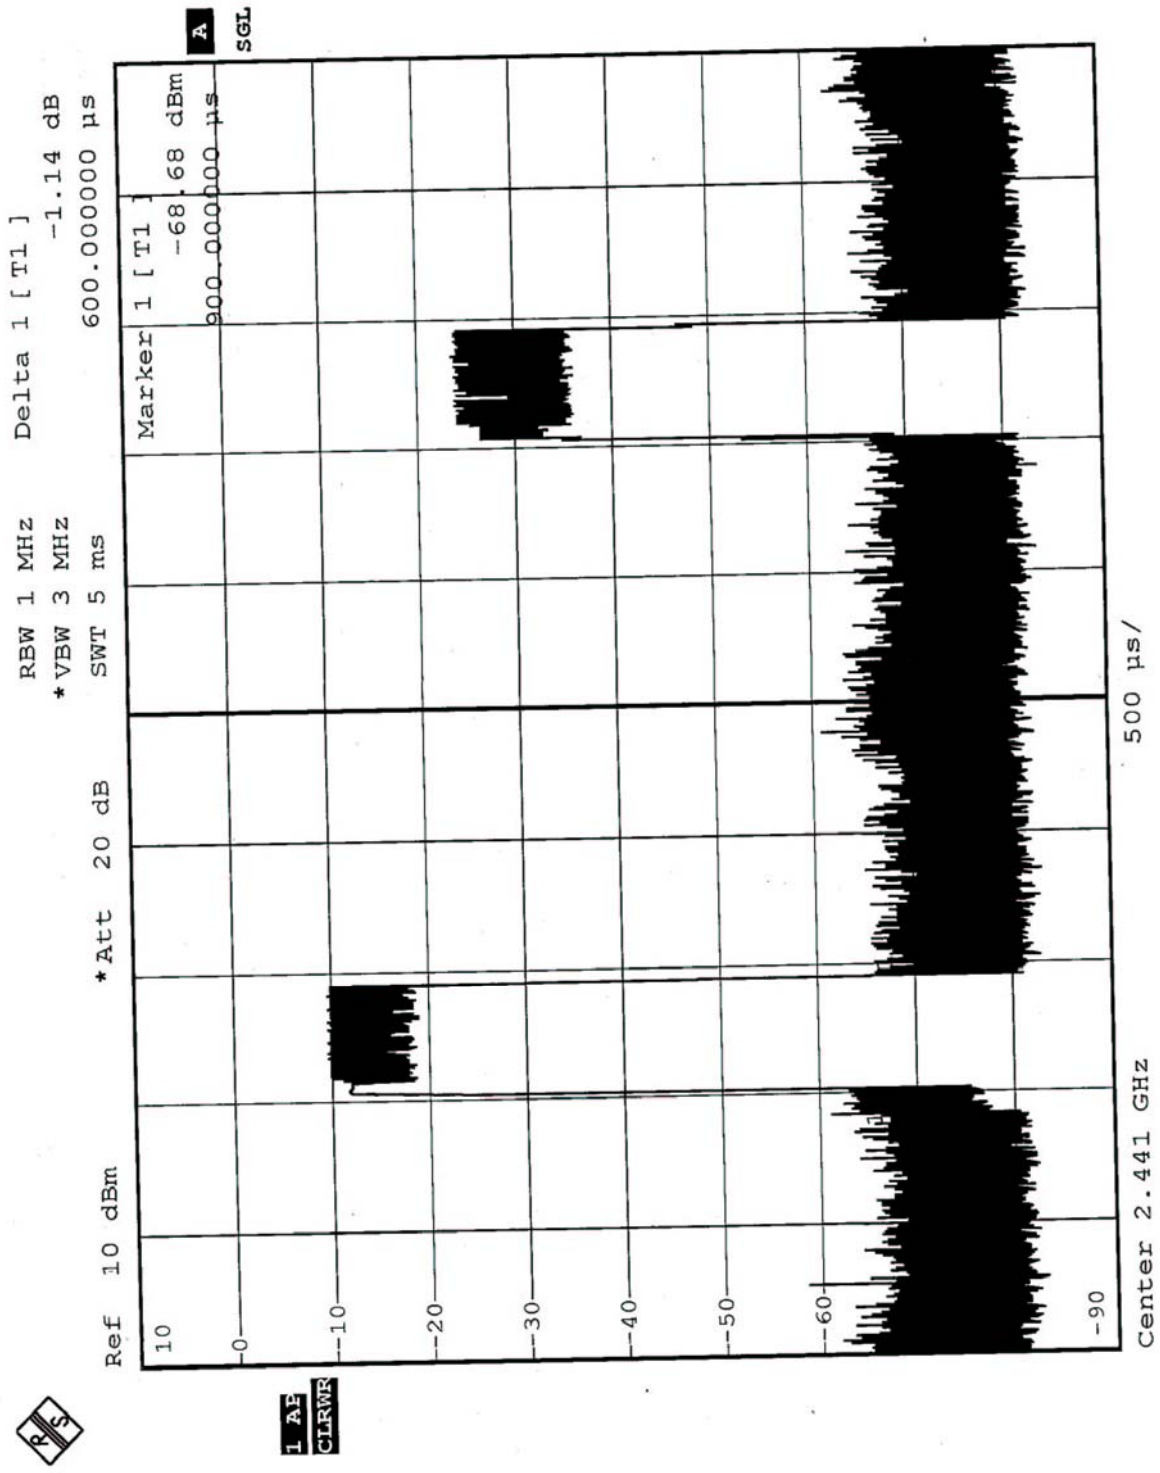



DH3

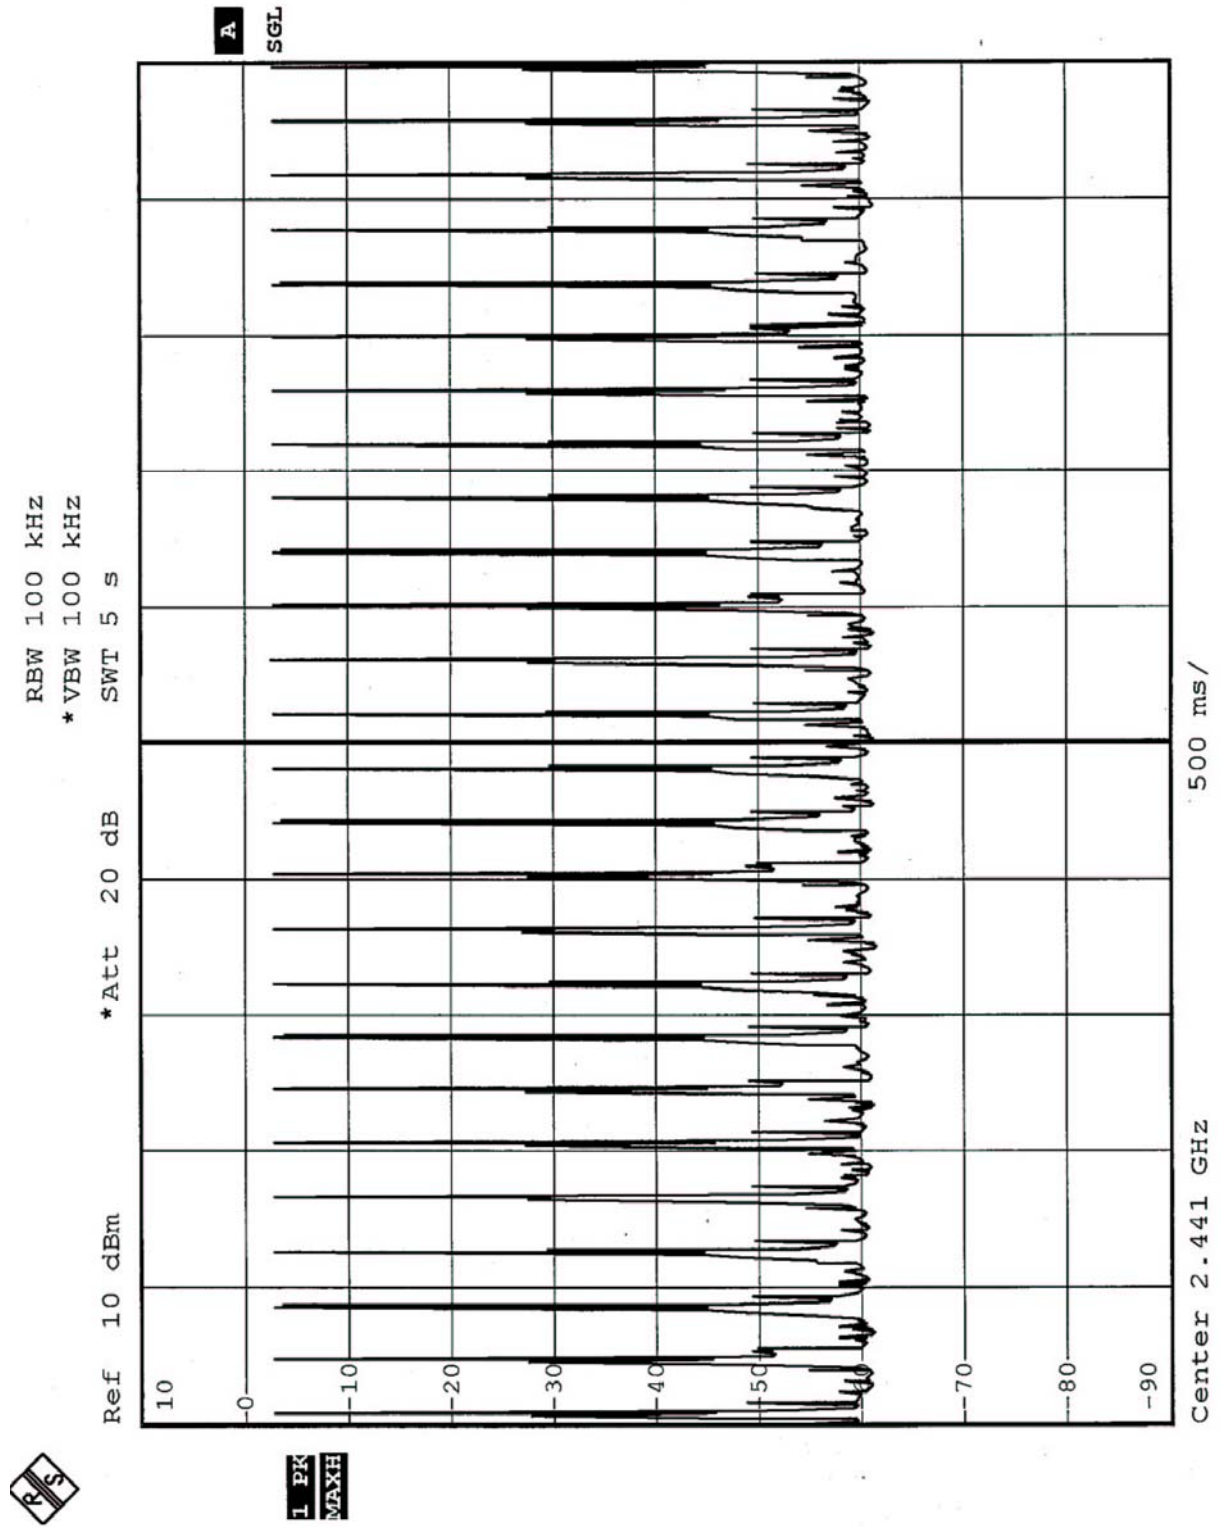

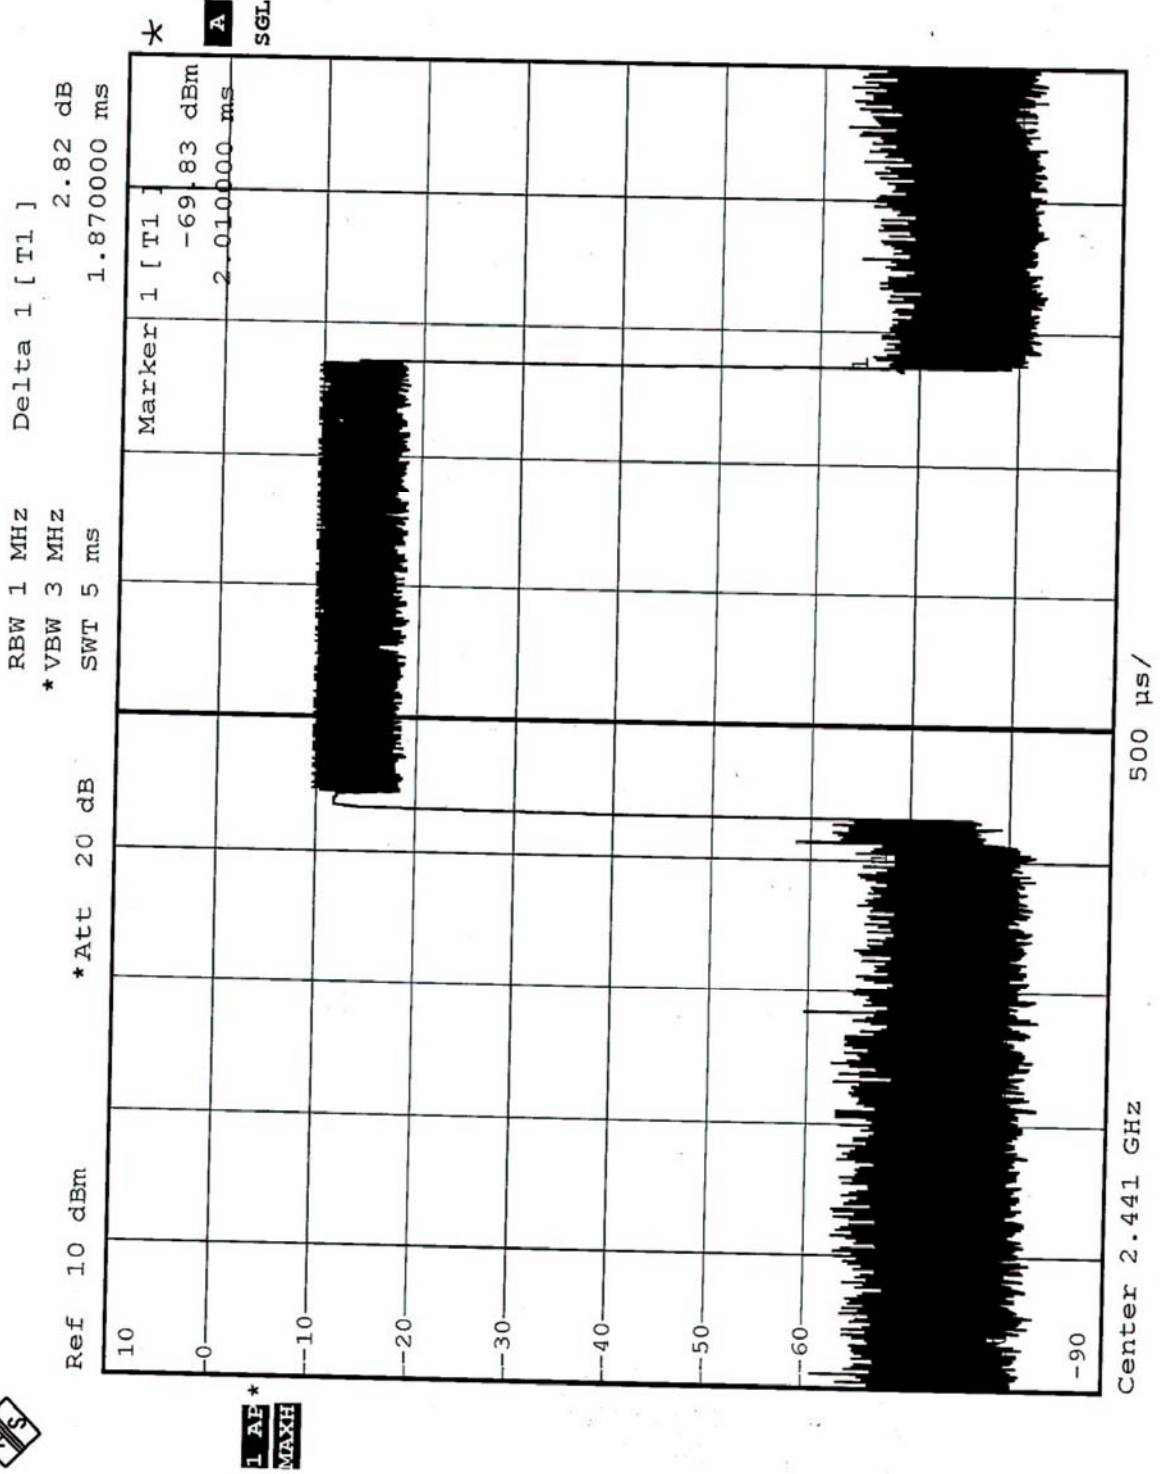

DH5

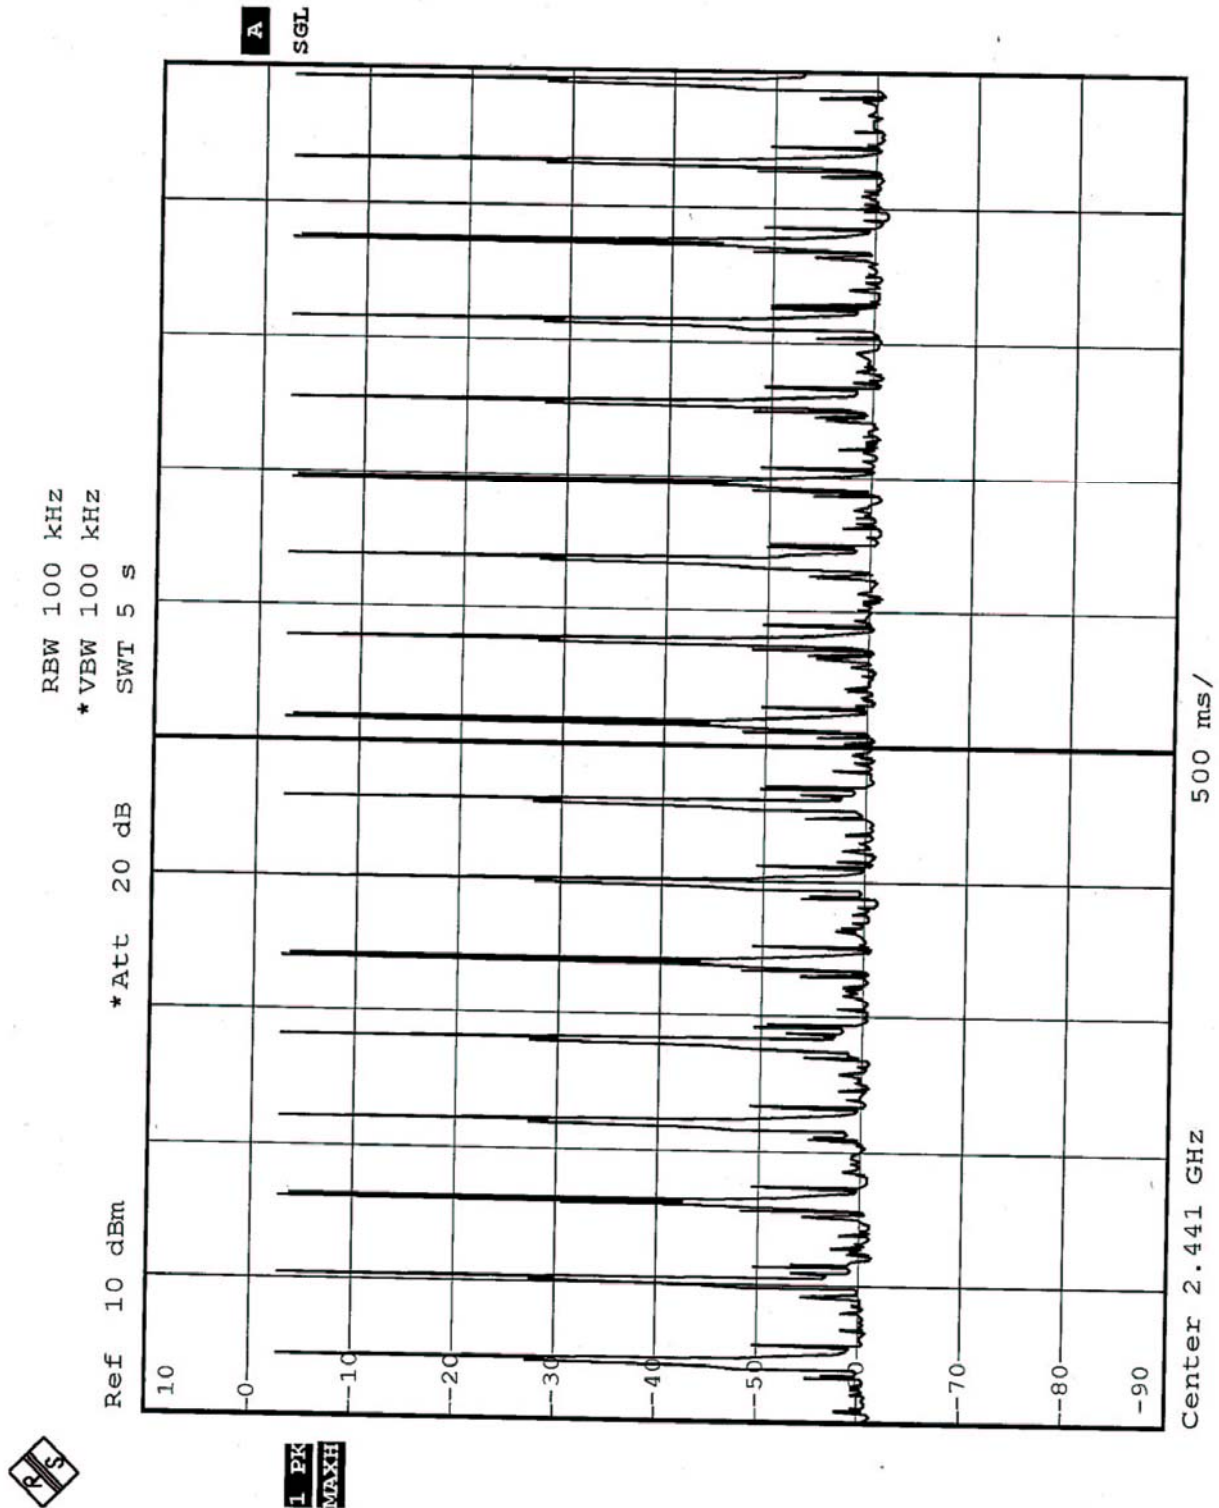

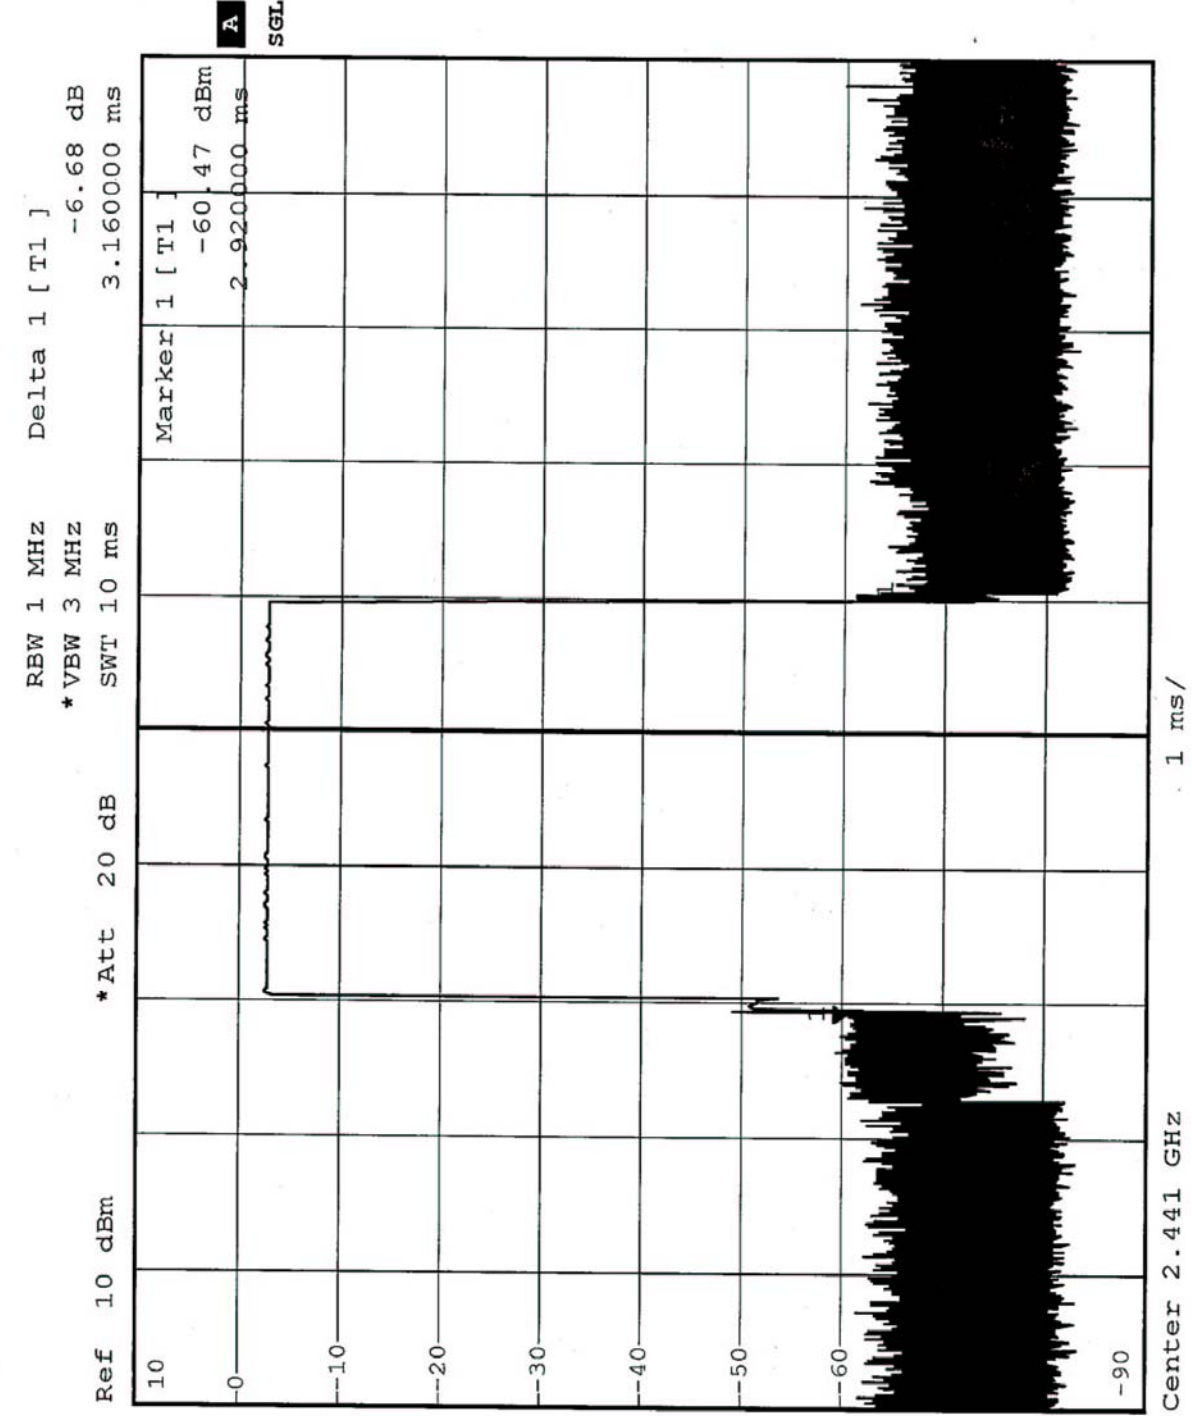

4.4 CHANNEL BANDWIDTH

4.4.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5 MHz and 5725-5850 MHz bands, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SIGNAL GENERATOR / Agilent	E8257C	MY43320668	Dec 31, 2004

NOTES:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP




4.4.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


4.4.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (kHz)	MAXIMUM LIMIT (MHz)	PASS/FAIL
0	2402	780	1	PASS
39	2441	822	1	PASS
78	2480	840	1	PASS

Channel 0

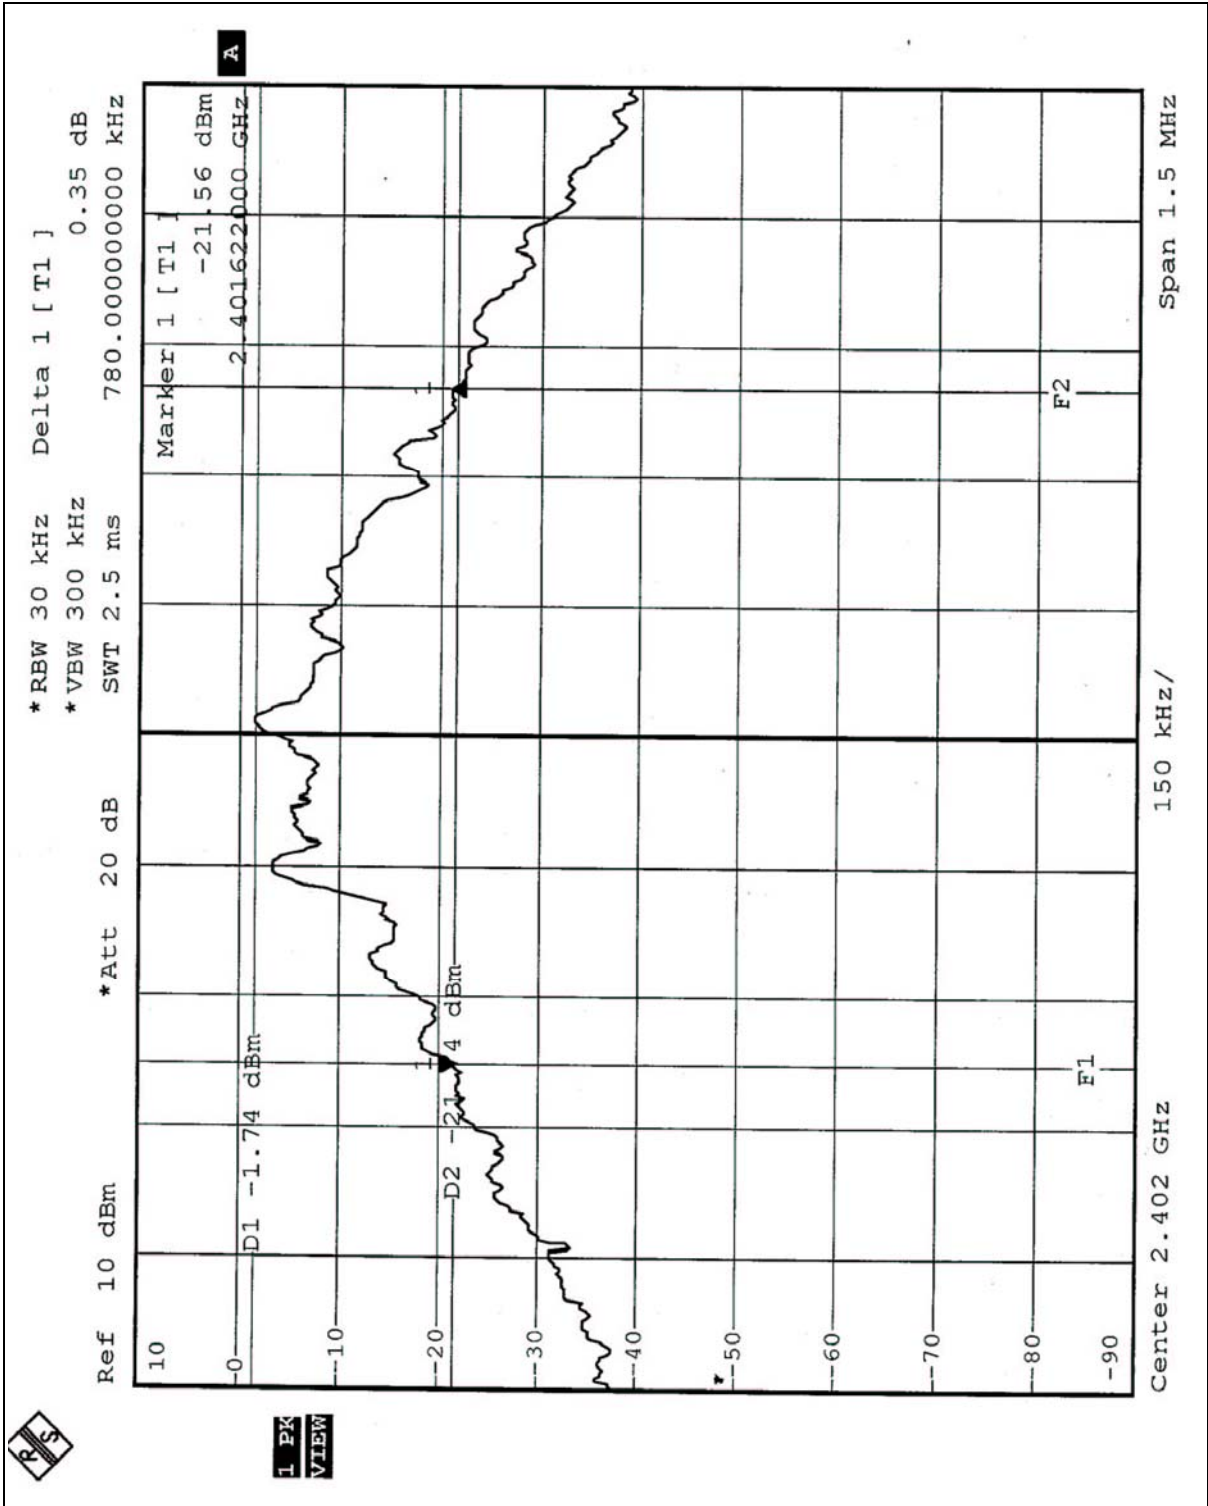


Channel 39

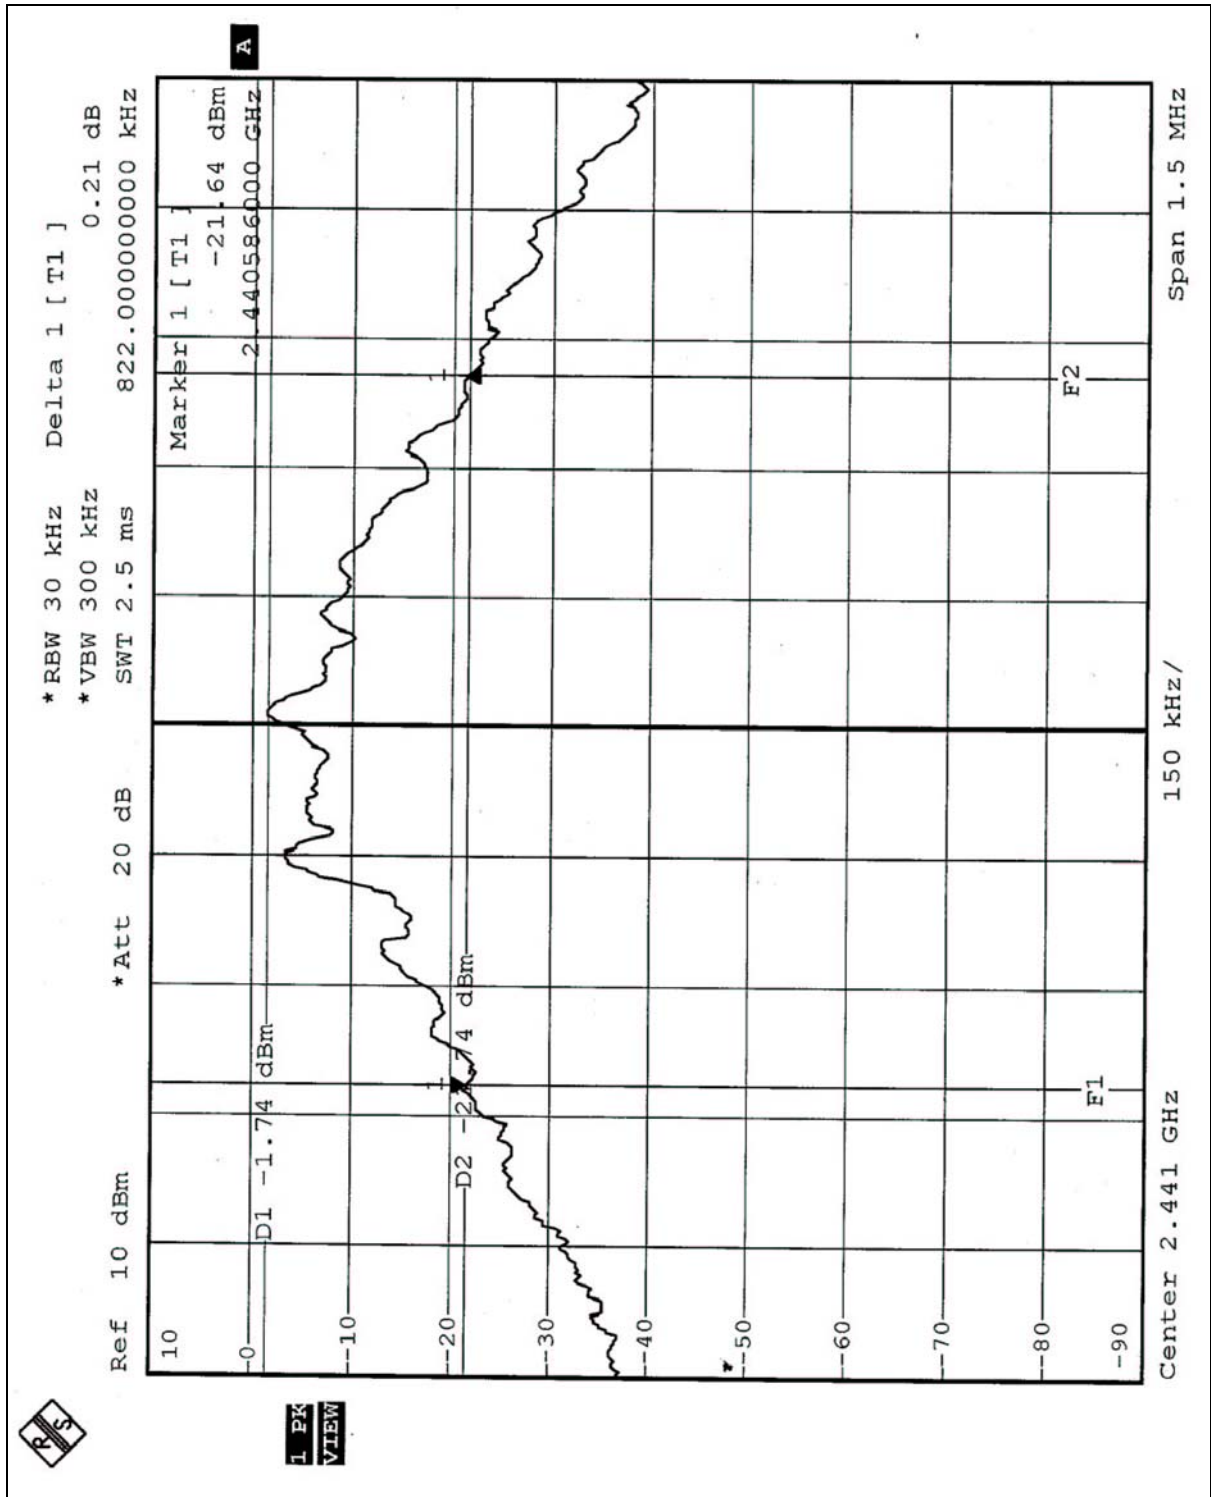



Channel 78

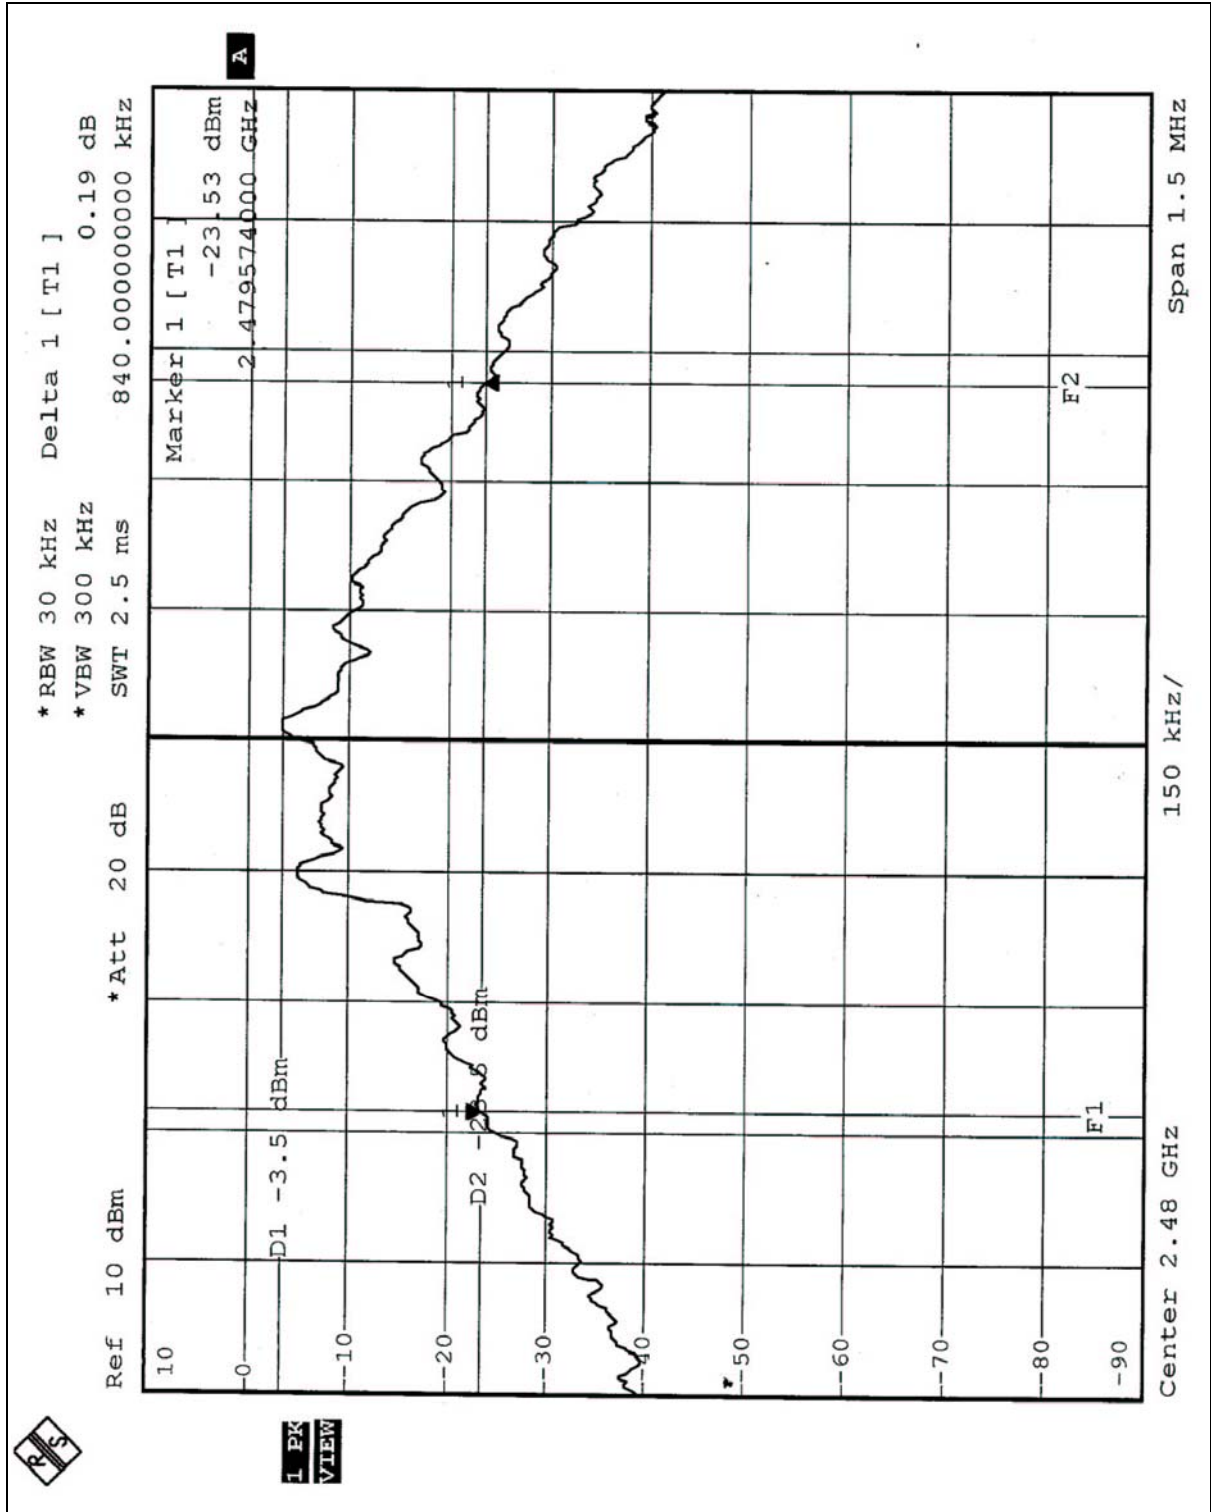

4.5 HOPPING CHANNEL SEPARATION

4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25KHz or 20dB bandwidth (whichever is greater).

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SIGNAL GENERATOR / Agilent	E8257C	MY43320668	Dec 31, 2004

NOTES:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

