


REV.	DESCRIPTION	ENG.	APPROVAL
2	變更內容	Sarah.Lee 2011/05/24	Ruby.Ai 2011/05/24



NOTE:

1. 印刷顏色為黑底銀字,具體請參考承認樣品
2. 此圖面實際尺寸,請拿樣品與 Bottom Cover現合ok後,才可量產
3. "\*"為重點尺寸.
4. 公差:-0.5/0mm
5. 普通壓克力膠,T=0.03mm,粘著力:3.0kg/cm<sup>2</sup>
6. S/N編法: A YY WW A XXXXXX 由生管/採購提供

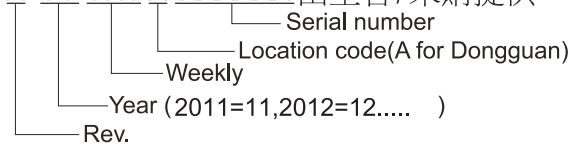


7. Requirement of Primax Green Part:

1. Comply with Primax QW-5Q002 "Green Product Chemical Substances Specification
  2. Follow customer's specification as required
  3. Follow Halogen- Free requirement : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm if required.
- Label30400780400X/30400102359X周別需對應,由採購提供

DO NOT SCALE DRAWING		PRIMAX 致伸資訊電子有限公司 PRIMAX ELECTRONICS LTD.											
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PRIMAX ELECTRONICS LTD AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF PRIMAX ELECTRONICS LTD.		USED Kensington	APPD. Ruby.Ai										
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE ±1.0°		FINISH	CHKD. Ruby.Ai										
<table border="1"> <thead> <tr> <th>DIMENSIONS</th> <th>TOLERANCE</th> </tr> </thead> <tbody> <tr> <td>0.00 TO 30.00mm</td> <td>±0.10mm</td> </tr> <tr> <td>30.01 TO 80.00mm</td> <td>±0.13mm</td> </tr> <tr> <td>80.01 TO 150.00mm</td> <td>±0.15mm</td> </tr> <tr> <td>150.01 ↑</td> <td>±0.20mm</td> </tr> </tbody> </table>		DIMENSIONS	TOLERANCE	0.00 TO 30.00mm	±0.10mm	30.01 TO 80.00mm	±0.13mm	80.01 TO 150.00mm	±0.15mm	150.01 ↑	±0.20mm	SCALE	UNIT mm
DIMENSIONS	TOLERANCE												
0.00 TO 30.00mm	±0.10mm												
30.01 TO 80.00mm	±0.13mm												
80.01 TO 150.00mm	±0.15mm												
150.01 ↑	±0.20mm												
MATERIAL		DR. Sarah.Lee 2011/04/19											
75#反銀龍+亮OPP		TITLE Product Label											
		DWG NO. 304007804000											
		SIZE A4											
		FILE NAME 304007804000	SHEET 1/1										
		REV. 2											

# Bottom of EUT

Model:M01380-M  
Frequency:2408~2474MHz  
FCC ID:GV3M01380-M  
IC:6128A-M01380M

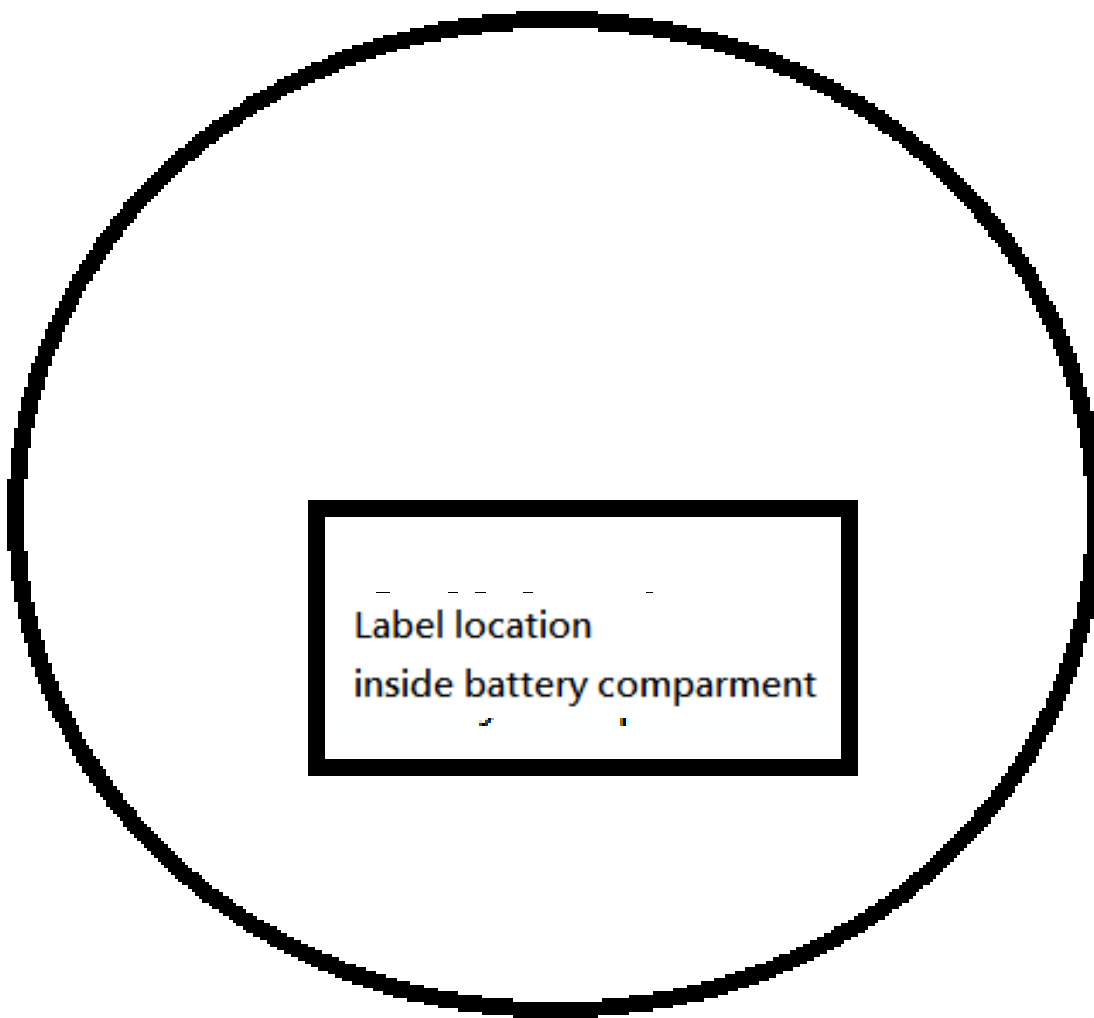

Label location  
inside battery compartment