

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : Wireless 54Mbps Access Point

Model No. : CW2201, CW2200

FCC ID : GX5-CW2200

Filing Type : Certification

Applicant : **Broadxent Pte Ltd**
31 International Business Park, Creative Resource,
Singapore 609921

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

History of this test report	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer	2
1.3. Basic Description of Equipment under Test	2
1.4. Feature of Equipment under Test	3
2. Test Configuration of Equipment under Test.....	4
2.1. Test Manner	4
2.2. Description of Test System	4
2.3. Connection Diagram of Test System	6
3. Test Software	7
4. General Information of Test.....	8
4.1. Test Voltage	8
4.2. Standard for Methods of Measurement.....	8
4.3. Test in Compliance with	8
4.4. Frequency Range Investigated	8
4.5. Test Distance	8
5. Report of Measurements and Examinations	9
5.1. List of Measurements and Examinations	9
5.2. 6dB Bandwidth	10
5.3. Peak Output Power	13
5.4. Power Spectral Density	14
5.5. Test of Conducted Emission	17
5.6. Test of Radiated Emission	21
5.7. Band Edges Measurement.....	38
5.8. Antenna Requirements	40
5.9. RF Exposure	41
6. EMI Suppression Component List.....	43
7. Antenna Factor & Cable Loss	44
8. List of Measuring Equipments Used	45
9. Uncertainty of Test Site	46

History of this test report

Original Report Issue Date: Aug. 26, 2003

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : Wireless 54Mbps Access Point
Model No. : CW2201, CW2200
FCC ID : GX5-CW2200
Filing Type : Certification
Applicant : **Broadxent Pte Ltd**
31 International Business Park, Creative Resource,
Singapore 609921

HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 2001** and the equipment under test was **passed** all test items required in FCC Part 15 subpart C, relative to the equipment under test. Testing was carried out on Aug. 22, 2003 at **SPORTON International Inc.** LAB.



Alex Chen
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : GX5-CW2200

Page No. : 1 of 46

Issued Date : Aug. 26, 2003

1. General Description of Equipment under Test

1.1. Applicant

Broadxent Pte Ltd
31 International Business Park, Creative Resource, Singapore 609921

1.2. Manufacturer

Same 1.1

1.3. Basic Description of Equipment under Test

Equipment : Wireless 54Mbps Access Point
Model No. : CW2201, CW2200
FCC ID. : GX5-CW2200
Trade Name : Broadxent
TP Cable : Non-Shielded, 3m
TP Cable : Non-Shielded, 1m
Power Supply Type : Switching
AC Power Input : Wall-Mount, 2pin
DC Power Cable : Non-Shielded, 1.8m

1.4. Feature of Equipment under Test

One 10/100 Base-TX RJ-45 auto sensing and crossover Ethernet WAN port for Broadband connection
(Cable/DSL or direct Ethernet)

Four RJ-45 LAN ports for 10/100Base-TX auto sensing & crossover Ethernet Switch LAN connection
802.11g Wireless LAN

One external and one built-in antennas for wireless technology

PPPoE (PPP over Ethernet) Client with Keep Alive/Connect On Demand Support

PAP and CHAP Authentication

DHCP Client

MAC Address Cloning

DHCP Server

NAT

Firewall Support

Bridge Mode Support

802.1D Spanning Tree Bridging

IP Filtering, IP Forwarding

DMZ Hosting

ASCII/HEX Format 64/128 Bit WEP Key for Wireless LAN

Allow/Deny List for Wireless LAN

VPN Support (IPSec Passthrough, and PPTP Passthrough)

Configurable through Web Browser via WAN/LAN

Software Upgrade

NTP/Manual System Clock

Configuration Saving/Retrieving

Event Log

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with notebook and peripherals pursuant to ANSI C63.4-2001 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The complete test system included remote Load, COMPAQ Notebook, SAMSUNG Monitor, COMPAQ PS/2 Keyboard, LOGITECH USB Mouse, HP Printer and EUT for EMI test.
- c. The following test modes were performed for EMI test:
 - Mode 1: CH01 (2412MHz)
 - Mode 2: CH06 (2437MHz)
 - Mode 3: CH11 (2462MHz)
- d. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 25000MHz.

2.2. Description of Test System

Support Unit 1. – Notebook (COMPAQ) – for local workstation

FCC ID	: N/A
Model No.	: PRESARIO 1500
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0090
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (SAMSUNG) – for local workstation

FCC ID	: N/A
Model No.	: 550S
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0013
Data Cable	: Shielded, 360 degree via metal backshells, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. – PS/2 Keyboard (COMPAQ) – for local workstation

FCC ID : N/A
Model No. : 6511-VA
Serial No. : SP0054
Data Cable : Shielded, 360 degree via metal backshells, 1.5m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.


Support Unit 4. – USB Mouse (LOGITECH) – for local workstation

FCC ID : N/A
Model No. : M-BE58
Serial No. : SP0108
Data Cable : Shielded, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 5. -- Printer (HP) – for local workstation

FCC ID : B94C2642X
Model No. : DJ400
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0048
Data Cable : Shielded, 360 degree via metal backshells, 1.35m

2.3. Connection Diagram of Test System

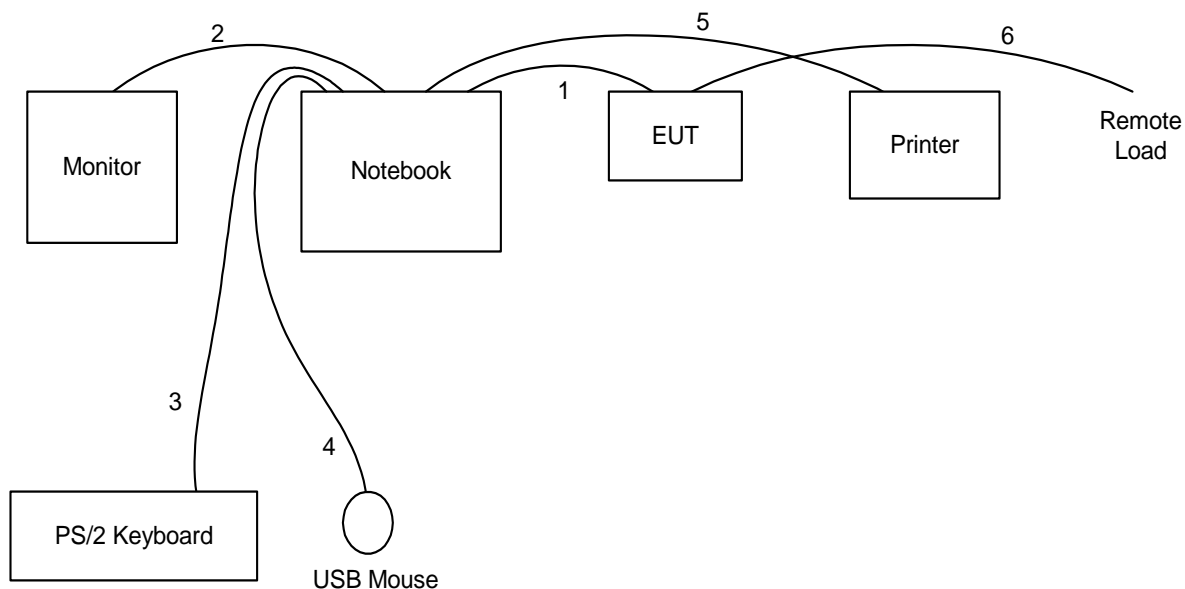

1. The TP cable is connected from Notebook to the EUT.
2. The I/O cable is connected from Notebook to the support unit 2.
3. The I/O cable is connected from Notebook to the support unit 3.
4. The I/O cable is connected from Notebook to the support unit 4.
5. The I/O cable is connected from Notebook to the support unit 5.
6. The TP cable is connected from EUT to the remote load.

3. Test Software

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating " H" pattern was used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the hard disk drive and runs it.
- c. The PC sends " H" messages to the monitor, and the monitor displays " H" patterns on the screen.
- d. The PC sends " H" messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- f. Repeat the steps from c to e.

At the same time, "MFGTEST" was executed to keep transmitting signals at fixed frequency.

4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : CO01-HY, 03CH03-HY

4.1. Test Voltage

110V/60Hz

4.2. Standard for Methods of Measurement

ANSI C63.4-2001 for conducted power line test and radiated emission test,
FCC 97-114 for test of 6dB Bandwidth
FCC 97-114 for test of Maximum Peak Output Power
FCC 97-114 for test of 100kHz Bandwidth of Frequency Band Edges
FCC 97-114 for test of Power Spectral Density

4.3. Test in Compliance with

FCC Part 15, Subpart C, 15.247

4.4. Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation: from 30 MHz to 25000MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Report of Measurements and Examinations

5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.207	Conducted Emission	Pass
<u>15.247(a)(2)</u>	6dB Bandwidth	Pass
<u>15.247(b)</u>	Maximum Peak Output Power	Pass
15.209	Radiated Emission	Pass
<u>15.247(c)</u>	100kHz Bandwidth of Frequency Band Edges	Pass
<u>15.247(d)</u>	Power Spectral Density	Pass
<u>15.203</u>	Antenna Requirement	Pass
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	Pass

5.2. 6dB Bandwidth


5.2.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.2.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

5.2.3. Test Setup Layout :




5.2.4. Test Result : The spectrum analyzer plots are attached as below

- Temperature: 27 °C
- Relative Humidity: 62%


Channel	Frequency (MHz)	6dB Emission bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
01	2412	10.04	0.5	1
06	2437	10.04	0.5	2
11	2462	10.00	0.5	3

Plot1(Channel 01) :

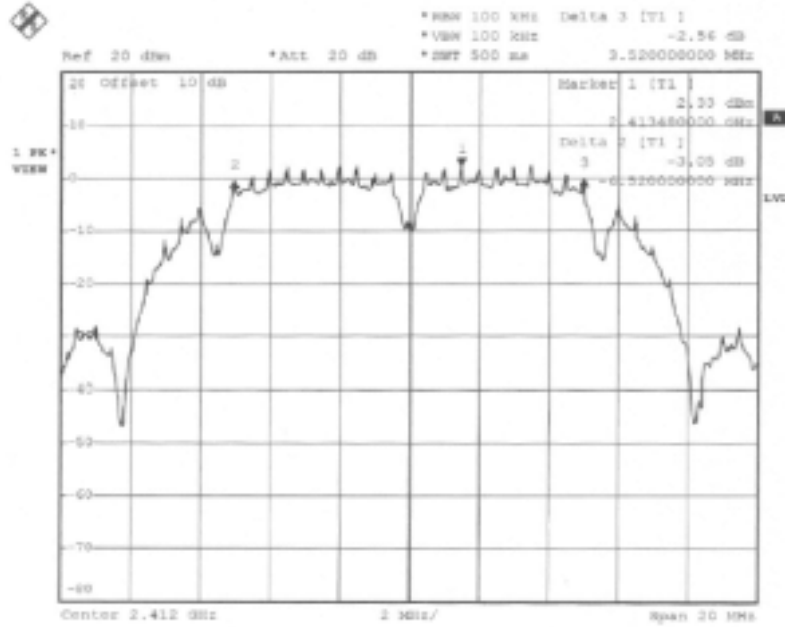


Date: 20.AUG.2003 17:30:56

Plot2(Channel 06) :

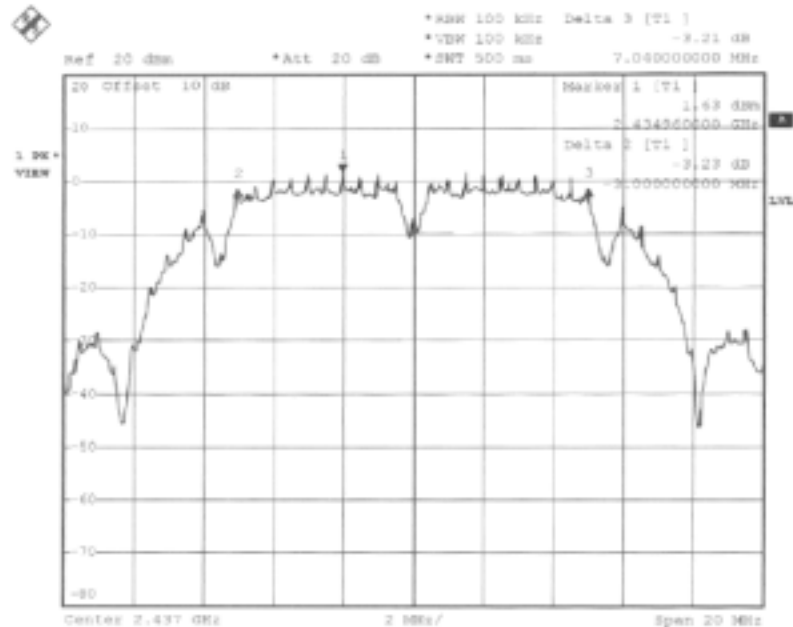

Date: 20.AUG.2003 17:43:28

Plot3(Channel 11) :

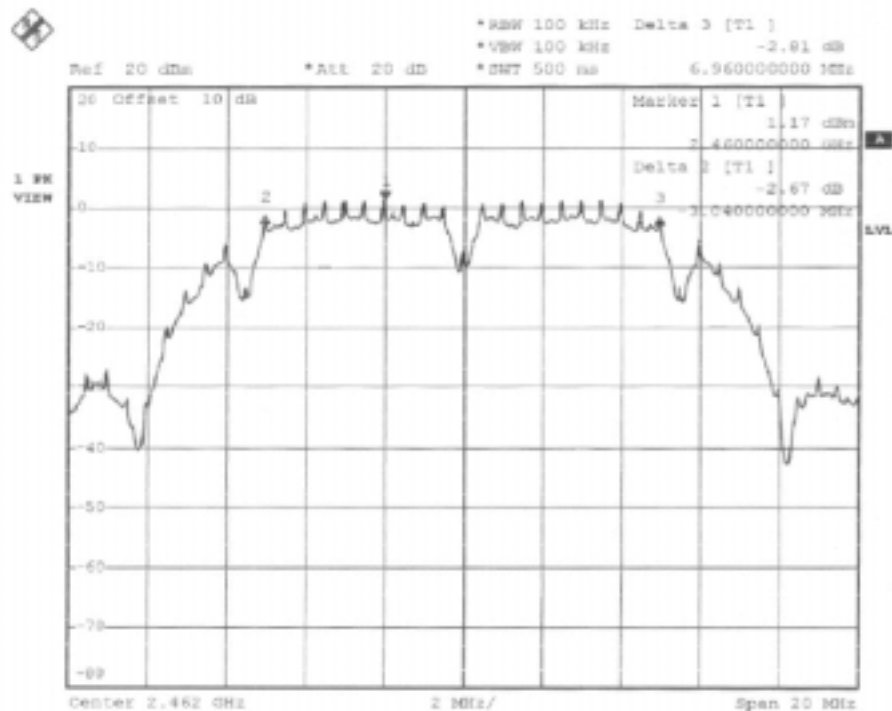

Comments : 6dB Emission bandwidth>500kHz

5.3. Peak Output Power


5.3.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.3.2. Test Procedure :

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

5.3.3. Test Setup Layout :



5.3.4. Test Result : See spectrum analyzer plots below

- Temperature: 27°C
- Relative Humidity: 62 %
- Antenna Gain: 3 dBi

Channel	Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (mW)	Limits (Watt/dBm)
01	2412	12.52	17.86487575	1W/30 dBm
06	2437	11.55	14.28893959	1W/30 dBm
11	2462	11.24	13.30454418	1W/30 dBm

- Comments : Maximum Peak Output Power < 30dBm (1Watt)

5.4. Power Spectral Density


5.4.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.4.2. Test Procedure :

1. The transmitter output was connected to spectrum analyzer through an attenuator.
2. The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
3. The power spectral density was measured and recorded.
4. The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

5.4.3. Test Setup Layout :




5.4.4. Test Result : See spectrum analyzer plots below

- Temperature: 27°C
- Relative Humidity: 62 %


Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)	Plot Ref. No.
01	2412	-9.35	8	1
06	2437	-11.15	8	2
11	2462	-11.77	8	3

Plot1(Channel 01):

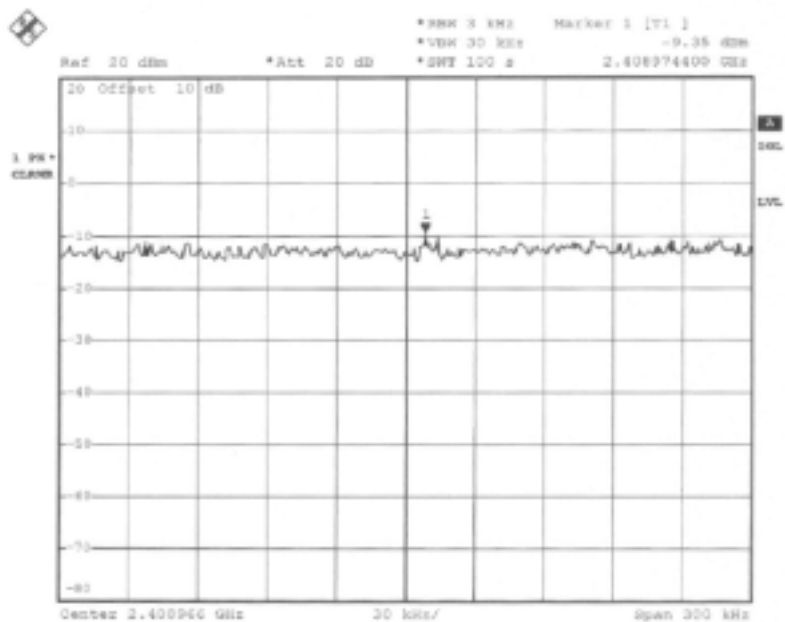


Date: 20.AUG.2003 17:36:16

Plot2(Channel 06):

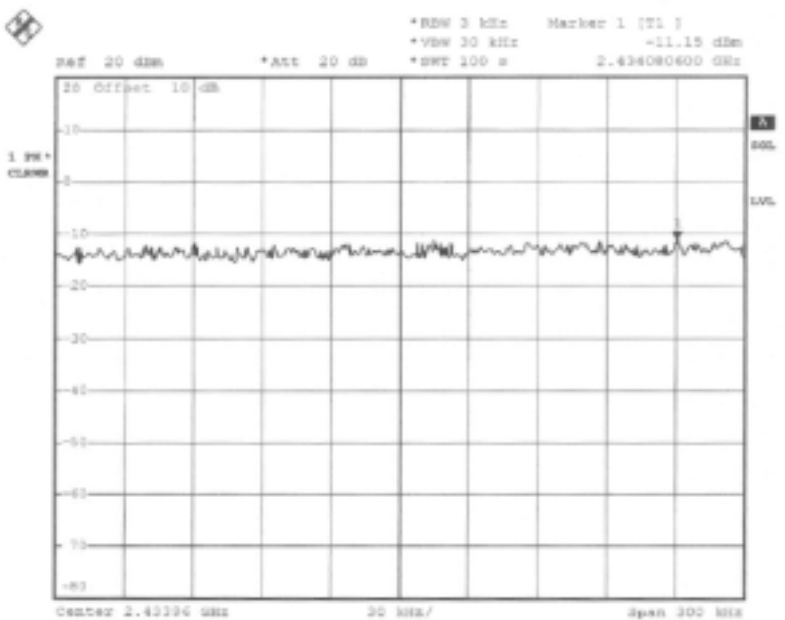

Date: 20.AUG.2003 17:46:09

Plot3(Channel 11):

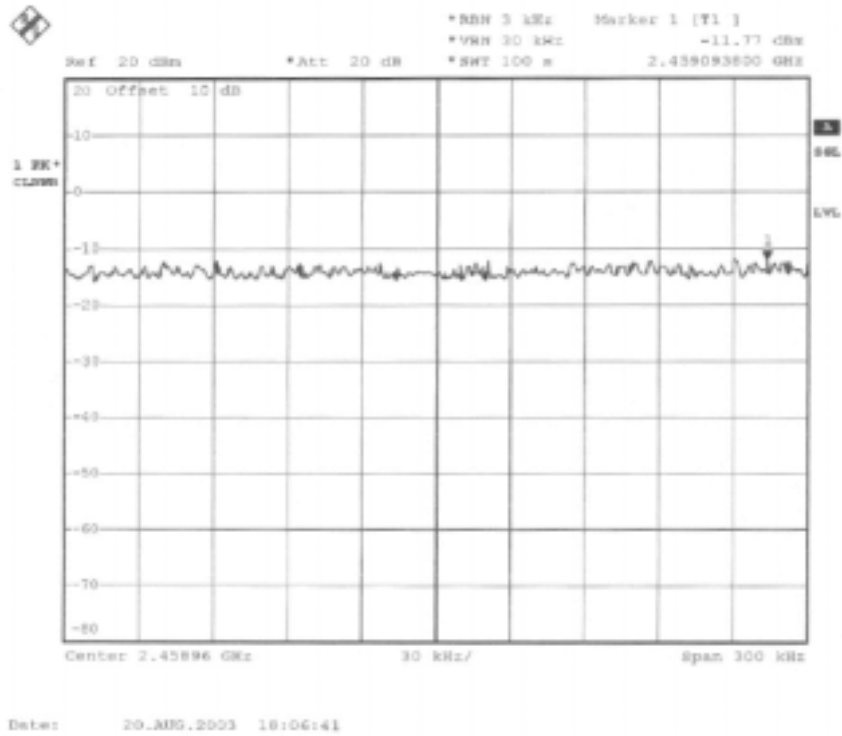

5.5. Test of Conducted Emission

Conducted Emissions were measured from 150 KHz to 30 MHz with a bandwidth of 9 KHz and return leads of the EUT according to the methods defined in ANSI C63.4-2001 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

5.5.1. Major Measuring Instruments :

● Test Receiver	(R&S ESCS 30)
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

5.5.2. Test Procedures :

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.5.3. Test Result of Conducted Emission :

- Test Mode: Mode 1
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 26°C
- Relative Humidity: 30 %


The test was passed at the minimum margin that marked by the frame in the following table

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 Model : CW2201 CU2200
 Memo : TX CH01

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.163	46.35	-18.94	65.29	46.21	0.10	0.04	QP
2	0.163	38.86	-16.43	55.29	38.72	0.10	0.04	Average
3	0.372	38.50	-9.97	48.47	38.29	0.10	0.11	Average
4	0.372	39.36	-19.11	58.47	39.15	0.10	0.11	QP
5	1.030	35.60	-20.40	56.00	35.44	0.10	0.06	QP
6	1.030	34.06	-11.94	46.00	33.90	0.10	0.06	Average
7	2.842	32.99	-13.01	46.00	32.76	0.10	0.13	Average
8	2.842	36.32	-19.68	56.00	36.09	0.10	0.13	QP
9	3.256	34.66	-11.34	46.00	34.42	0.10	0.14	Average
10	3.256	36.13	-19.87	56.00	35.89	0.10	0.14	QP
11	4.985	35.08	-20.92	56.00	34.77	0.12	0.19	QP
12	4.985	31.73	-14.27	46.00	31.42	0.12	0.19	Average

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 Model : CW2201 CU2200
 Memo : TX CH01

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.164	46.09	-19.17	65.26	45.95	0.10	0.04	QP
2	0.164	36.68	-18.58	55.26	36.54	0.10	0.04	Average
3	1.980	32.82	-13.18	46.00	32.61	0.10	0.11	Average
4	1.980	34.46	-21.54	56.00	34.25	0.10	0.11	QP
5	2.555	32.95	-13.05	46.00	32.69	0.14	0.12	Average
6	2.555	35.40	-20.60	56.00	35.14	0.14	0.12	QP
7	3.587	35.11	-20.89	56.00	34.79	0.18	0.14	QP
8	3.587	31.63	-14.37	46.00	31.31	0.18	0.14	Average
9	4.779	33.41	-12.59	46.00	33.03	0.20	0.18	Average
10	4.779	36.76	-19.24	56.00	36.38	0.20	0.18	QP
11	14.154	38.81	-21.19	60.00	38.15	0.29	0.37	QP
12	14.154	33.94	-16.06	50.00	33.28	0.29	0.37	Average

Test Engineer : 
 John Huang

- Test Mode: Mode 2
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 26°C
- Relative Humidity: 30 %


The test was passed at the minimum margin that marked by the frame in the following table

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 Model : CW2201 CU2200
 Memo : TX CH06

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.164	45.72	-19.54	65.26	45.58	0.10	0.04	QP
2	0.164	37.26	-18.00	55.26	37.12	0.10	0.04	Average
3	0.413	38.99	-8.60	47.59	38.77	0.10	0.12	Average
4	0.413	40.99	-16.60	57.59	40.77	0.10	0.12	QP
5	0.578	30.11	-25.89	56.00	29.91	0.10	0.10	QP
6	0.578	26.30	-19.70	46.00	26.10	0.10	0.10	Average
7	1.153	31.39	-14.61	46.00	31.22	0.10	0.07	Average
8	1.153	35.09	-20.91	56.00	34.92	0.10	0.07	QP
9	3.090	32.63	-23.37	56.00	32.39	0.10	0.14	QP
10	3.090	24.94	-21.06	46.00	24.70	0.10	0.14	Average
11	3.630	33.23	-12.77	46.00	32.99	0.10	0.14	Average
12	3.630	36.81	-19.19	56.00	36.57	0.10	0.14	QP

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 Model : CW2201 CU2200
 Memo : TX CH06

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	1.980	33.17	-12.83	46.00	32.96	0.10	0.11	Average
2	1.980	34.69	-21.31	56.00	34.48	0.10	0.11	QP
3	2.270	35.00	-21.00	56.00	34.76	0.12	0.12	QP
4	2.270	33.59	-12.41	46.00	33.35	0.12	0.12	Average
5	2.555	33.00	-13.00	46.00	32.74	0.14	0.12	Average
6	2.555	35.48	-20.52	56.00	35.22	0.14	0.12	QP
7	3.010	34.65	-21.35	56.00	34.36	0.16	0.13	QP
8	3.010	31.52	-14.48	46.00	31.23	0.16	0.13	Average
9	3.586	32.00	-14.00	46.00	31.68	0.18	0.14	Average
10	3.586	35.31	-20.69	56.00	34.99	0.18	0.14	QP
11	4.742	32.33	-13.67	46.00	31.95	0.20	0.18	Average
12	4.742	36.03	-19.97	56.00	35.65	0.20	0.18	QP

Test Engineer : 
 John Huang

- Test Mode: Mode 3
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 26°C
- Relative Humidity: 30 %


The test was passed at the minimum margin that marked by the frame in the following table

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 Model : CW2201 CU2200
 Memo : TX CH11

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.164	45.50	-19.76	65.26	45.36	0.10	0.04	QP
2	0.164	37.07	-18.19	55.26	36.93	0.10	0.04	Average
3	0.413	39.91	-17.68	57.59	39.69	0.10	0.12	QP
4	0.413	36.13	-11.46	47.59	35.91	0.10	0.12	Average
5	0.576	30.01	-25.99	56.00	29.01	0.10	0.10	QP
6	0.576	26.35	-19.65	46.00	26.15	0.10	0.10	Average
7	1.363	35.20	-20.80	56.00	35.02	0.10	0.08	QP
8	1.363	32.58	-13.42	46.00	32.40	0.10	0.08	Average
9	3.099	28.67	-17.33	46.00	28.43	0.10	0.14	Average
10	3.099	34.18	-21.82	56.00	33.94	0.10	0.14	QP
11	3.591	33.62	-12.38	46.00	33.38	0.10	0.14	Average
12	3.591	36.52	-19.48	56.00	36.28	0.10	0.14	QP

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 Model : CW2201 CU2200
 Memo : TX CH11

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.413	37.59	-10.00	47.59	37.37	0.10	0.12	Average
2	0.413	38.52	-19.07	57.59	38.30	0.10	0.12	QP
3	1.777	34.98	-21.02	56.00	34.78	0.10	0.10	QP
4	1.777	33.83	-12.17	46.00	33.63	0.10	0.10	Average
5	2.150	34.26	-11.74	46.00	34.04	0.11	0.11	Average
6	2.150	35.43	-20.57	56.00	35.21	0.11	0.11	QP
7	2.399	35.25	-20.75	56.00	35.00	0.13	0.12	QP
8	2.399	33.97	-12.03	46.00	33.72	0.13	0.12	Average
9	4.835	35.02	-10.98	46.00	34.64	0.20	0.18	Average
10	4.835	38.50	-17.50	56.00	38.12	0.20	0.18	QP
11	19.710	39.62	-20.38	60.00	38.88	0.30	0.44	QP
12	19.710	35.57	-14.43	50.00	34.83	0.30	0.44	Average

Test Engineer : 
 John Huang

5.6. Test of Radiated Emission

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2001. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

5.6.1. Major Measuring Instruments

- Amplifier (HP 8447D)
 - RF Gain 30 dB
 - Signal Input 100 KHz to 1.3 GHz

- Amplifier (MITEQ AFS44)
 - RF Gain 40 dB
 - Signal Input 100 MHz to 26.5 GHz


- Spectrum analyzer (R&S FSEK30)
 - Attenuation 10 dB
 - Start Frequency 30 MHz
 - Stop Frequency 25 GHz
 - Resolution Bandwidth 120 KHz for below 1GHz
1 MHz for above 1GHz
 - Video Bandwidth 1 MHz
 - Signal Input 20 Hz to 40 GHz

- Test Receiver (SCHAFFNER SCR3501)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 9 K – 1 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

5.6.2. Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.6.3. Typical Test Setup Layout of Radiated Emission

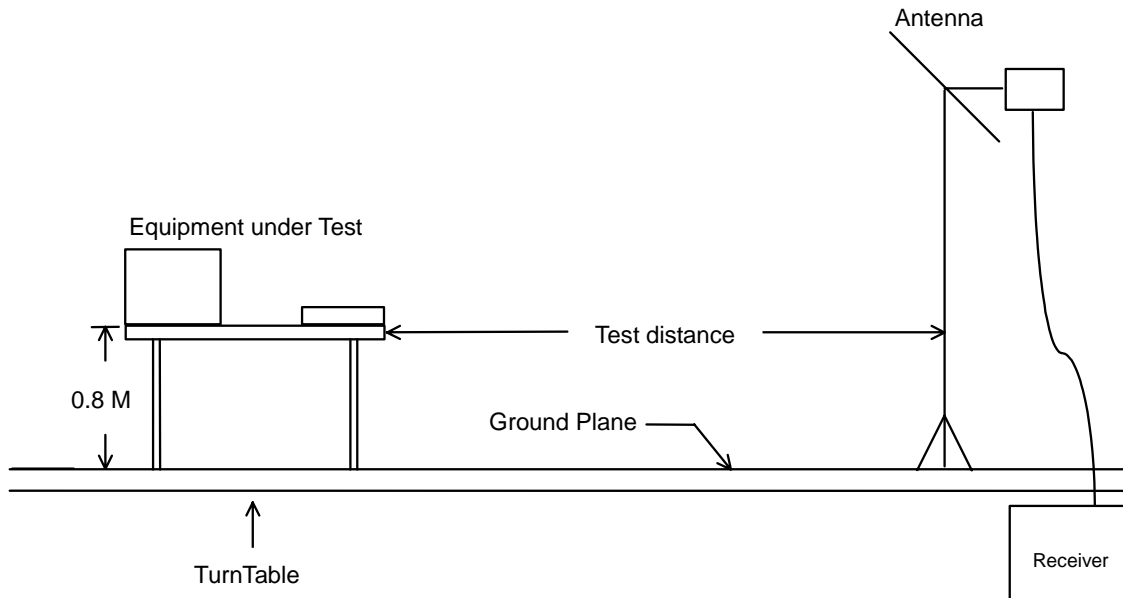

5.6.4. Test Result of Radiated Emission

- Test Mode: Mode 1
- Test Distance: 3 M
- Temperature: 27 °C
- Relative Humidity: 62 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following table

■ Spurious Emission

```

Site      : 03CH03-HY
Condition : 3m 03CH03-MAT HORIZONTAL
EUT       : Wireless 54Mbps Access Point
Power     : 110V/60Hz
MODEL     : CW2201 CW2200
MEMO     : TX CH01 2412MHz
    
```

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	145.020	37.17	-6.93	43.50	52.08	9.83	2.08	26.82	Peak	---	---
2	151.500	37.24	-6.26	43.50	52.71	9.22	2.10	26.79	Peak	---	---
3	155.820	36.71	-6.79	43.50	52.75	8.62	2.11	26.77	Peak	---	---

```

Site      : 03CH03-HY
Condition : 3m 03CH03-MAT HORIZONTAL
EUT       : Wireless 54Mbps Access Point
Power     : 110V/60Hz
MODEL     : CW2201 CW2200
MEMO     : TX CH01 2412MHz
    
```

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	374.200	37.19	-8.81	46.00	46.91	13.82	3.50	27.04	Peak	---	---
2	397.300	36.96	-9.04	46.00	46.09	14.54	3.51	27.18	Peak	---	---
3	500.200	34.42	-11.58	46.00	42.28	16.03	3.81	27.70	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CU2200
 MEMO : TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	143.130	39.04	-4.46	43.50	53.01	9.99	2.07	26.03	QP	---	---
2	145.020	39.19	-4.31	43.50	54.10	9.83	2.08	26.82	QP	---	---
3	148.260	38.96	-4.54	43.50	54.12	9.56	2.09	26.81	QP	---	---
4	151.500	38.72	-4.78	43.50	54.19	9.22	2.10	26.79	QP	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CU2200
 MEMO : TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	455.400	35.01	-10.99	46.00	43.51	15.40	3.58	27.48	Peak	---	---
2	500.200	37.71	-8.29	46.00	45.57	16.03	3.01	27.70	Peak	---	---
3	624.100	36.80	-9.20	46.00	42.92	17.46	4.42	28.00	Peak	---	---

FCC TEST REPORT

Report No. : F380603

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1054.000	42.54	-31.46	74.00	41.25	24.25	4.02	26.98	Peak	---	---
2	1054.000	35.51	-18.49	54.00	34.22	24.25	4.02	26.98	Average	---	---
3	1246.000	43.13	-30.87	74.00	41.10	24.72	4.31	27.00	Peak	---	---
4	1246.000	35.59	-18.41	54.00	33.56	24.72	4.31	27.00	Average	---	---
5	1372.000	45.13	-28.87	74.00	42.62	25.02	4.51	27.02	Peak	---	---
6	1372.000	37.19	-16.81	54.00	34.68	25.02	4.51	27.02	Average	---	---
7	1844.000	44.99	-29.01	74.00	39.91	26.78	5.38	27.08	Peak	---	---
8	1844.000	38.33	-15.67	54.00	33.25	26.78	5.38	27.08	Average	---	---
11	2478.000	49.09	-24.91	74.00	41.57	28.38	6.31	27.17	Peak	---	---
12	2478.000	46.31	-7.69	54.00	38.79	28.38	6.31	27.17	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4254.000	56.82	-17.18	74.00	42.75	32.49	9.09	27.51	Peak	---	---
2	4254.000	50.88	-3.12	54.00	36.81	32.49	9.09	27.51	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1372.000	45.90	-28.10	74.00	43.39	25.02	4.51	27.02	Peak	---	---
2	1372.000	36.59	-17.41	54.00	34.08	25.02	4.51	27.02	Average	---	---
3	1596.000	39.15	-14.85	54.00	35.56	25.75	4.89	27.05	Average	---	---
4	1596.000	46.07	-27.93	74.00	42.48	25.75	4.89	27.05	Peak	---	---
5	2318.000	54.57	-19.43	74.00	47.56	28.06	6.10	27.15	Peak	---	---
6	2318.000	53.61	-0.39	54.00	46.60	28.06	6.10	27.15	Average	100	105
9	2478.000	53.93	-20.07	74.00	46.41	28.38	6.31	27.17	Peak	---	---
10	2478.000	52.01	-1.99	54.00	44.49	28.38	6.31	27.17	Average	---	---
11	2558.000	50.84	-23.16	74.00	42.96	28.62	6.45	27.19	Peak	---	---
12	2558.000	47.08	-6.12	54.00	40.00	28.62	6.45	27.19	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH01 2412MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3214.000	55.18	-18.82	74.00	44.33	30.52	7.61	27.28	Peak	---	---
2	3214.000	50.41	-3.59	54.00	39.56	30.52	7.61	27.28	Average	---	---

- For 5GHz ~ 25GHz
 Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Detect (dB)	Mode
2414.000	H	28.25	6.23	63.51	-	-	97.99	79341.43		Peak
2414.000	H	28.25	6.23	59.34	-	-	93.82	49090.79		AV
2414.000	V	28.25	6.23	67.03	-	-	101.51	118987.13		AV
2414.000	V	28.25	6.23	71.14	-	-	105.62	190985.33		Peak
4824.000	V/H						-			AV/Peak
7236.000	V/H						-			AV/Peak
9648.000	V/H						-			AV/Peak
12060.000	V/H						-			AV/Peak
14472.000	V/H						-			AV/Peak
16884.000	V/H						-			AV/Peak
19296.000	V/H						-			AV/Peak
21708.000	V/H						-			AV/Peak
24120.000	V/H						-			AV/Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : Steve
Steve Chen

- Test Mode: Mode 2
- Test Distance: 3 M
- Temperature: 27 °C
- Relative Humidity: 62 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following table

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CU2200
 MEMO : TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	143.130	37.23	-6.27	43.50	52.00	9.99	2.07	26.03	Peak	---	---
2	148.260	37.11	-6.39	43.50	52.27	9.86	2.09	26.81	Peak	---	---
3	151.500	37.18	-6.32	43.50	52.65	9.22	2.10	26.79	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CU2200
 MEMO : TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	374.200	36.41	-9.59	46.00	46.13	13.82	3.50	27.04	Peak	---	---
2	397.300	37.76	-8.24	46.00	46.89	14.54	3.51	27.18	Peak	---	---
3	497.400	36.22	-9.78	46.00	44.12	15.99	3.80	27.69	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	140.970	38.91	-4.59	43.50	53.50	10.18	2.07	26.84	QP	---	---
2	145.020	39.20	-4.30	43.50	54.11	9.83	2.08	26.82	QP	---	---
3	148.260	39.02	-4.48	43.50	54.18	9.56	2.09	26.81	QP	---	---
4	151.500	38.59	-4.91	43.50	54.06	9.22	2.10	26.79	QP	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	455.400	36.78	-9.22	46.00	45.28	15.40	3.58	27.48	Peak	---	---
2	500.200	36.76	-9.24	46.00	44.62	16.03	3.81	27.70	Peak	---	---
3	624.100	36.16	-9.84	46.00	42.28	17.46	4.42	28.00	Peak	---	---

FCC TEST REPORT

Report No. : F380603

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1054.000	44.15	-29.85	74.00	42.86	24.25	4.02	26.98	Peak	---	---
2	1054.000	31.75	-22.25	54.00	30.46	24.25	4.02	26.98	Average	---	---
3	1372.000	44.85	-29.15	74.00	42.34	25.02	4.51	27.02	Peak	---	---
4	1372.000	33.79	-20.21	54.00	31.28	25.02	4.51	27.02	Average	---	---
5	1726.000	45.47	-28.53	74.00	41.10	26.29	5.15	27.07	Peak	---	---
6	1726.000	37.78	-16.22	54.00	33.41	26.29	5.15	27.07	Average	---	---
7	1836.000	45.09	-28.91	74.00	40.06	26.74	5.37	27.08	Peak	---	---
8	1836.000	37.68	-16.32	54.00	32.65	26.74	5.37	27.08	Average	---	---
11	2478.000	49.63	-24.37	74.00	42.11	28.38	6.31	27.17	Peak	---	---
12	2478.000	47.63	-6.37	54.00	40.11	28.38	6.31	27.17	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3892.000	56.91	-17.09	74.00	42.85	32.34	9.10	27.38	Peak	---	---
2	3892.000	50.85	-3.15	54.00	36.79	32.34	9.10	27.38	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CU2200
 MEMO : TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2238.000	48.10	-25.90	74.00	41.36	27.89	5.99	27.14	Peak	---	---
2	2238.000	38.04	-15.96	54.00	31.30	27.89	5.99	27.14	Average	---	---
3	2318.000	50.07	-3.13	54.00	43.06	28.06	6.10	27.15	Average	100	96
4	2318.000	55.51	-18.49	74.00	48.50	28.06	6.10	27.15	Peak	---	---
5	2398.000	57.21	-16.79	74.00	49.94	28.22	6.21	27.16	Peak	---	---
6	2398.000	51.65	-22.35	74.00	44.38	28.22	6.21	27.16	Peak	100	100
9	2478.000	49.66	-24.34	74.00	42.14	28.38	6.31	27.17	Peak	---	---
10	2478.000	55.53	-18.47	74.00	48.01	28.38	6.31	27.17	Peak	---	---
11	2558.000	42.93	-11.07	54.00	35.05	28.62	6.45	27.19	Average	---	---
12	2558.000	54.09	-19.91	74.00	46.21	28.62	6.45	27.19	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CU2200
 MEMO : TX CH06 2437MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4268.000	56.89	-17.11	74.00	42.83	32.49	9.08	27.51	Peak	---	---
2	4268.000	50.78	-3.22	54.00	36.72	32.49	9.08	27.51	Average	---	---

- For 5GHz ~ 25GHz
 Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor (dB/m)	Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	(uV/m)	Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
2436.000	H	28.29	6.26	61.09	-	-	95.64	60534.09		Peak
2436.000	H	28.29	6.26	57.41	-	-	91.96	39627.80		AV
2436.000	V	28.29	6.26	71.29	-	-	105.84	195884.47		Peak
2436.000	V	28.29	6.26	67.11	-	-	101.66	121059.81		AV
4874.000	V/H						-			AV/Peak
7311.000	V/H						-			AV/Peak
9748.000	V/H						-			AV/Peak
12185.000	V/H						-			AV/Peak
14622.000	V/H						-			AV/Peak
17059.000	V/H						-			AV/Peak
19496.000	V/H						-			AV/Peak
21933.000	V/H						-			AV/Peak
24370.000	V/H						-			AV/Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : Steve
Steve Chen

- Test Mode: Mode 3
- Test Distance: 3 M
- Temperature: 27 °C
- Relative Humidity: 62 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following table

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	143.130	36.97	-6.53	43.50	51.74	9.99	2.07	26.83	Peak	---	---
2	145.020	37.09	-6.41	43.50	52.00	9.83	2.08	26.82	Peak	---	---
3	151.500	37.04	-6.46	43.50	52.51	9.22	2.10	26.79	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	374.200	36.74	-9.26	46.00	46.46	13.82	3.50	27.04	Peak	---	---
2	396.600	37.71	-8.29	46.00	46.06	14.52	3.51	27.10	Peak	---	---
3	500.200	34.00	-12.00	46.00	41.86	16.03	3.81	27.70	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	143.130	39.12	-4.38	43.50	53.89	9.99	2.07	26.83	QP	---	---
2	145.020	39.11	-4.39	43.50	54.02	9.83	2.08	26.82	QP	---	---
3	148.260	39.00	-4.50	43.50	54.16	9.56	2.09	26.81	QP	---	---
4	151.500	38.85	-4.65	43.50	54.32	9.22	2.10	26.79	QP	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	455.400	36.37	-9.63	46.00	44.87	15.40	3.58	27.48	Peak	---	---
2	500.200	36.73	-9.27	46.00	44.59	16.03	3.81	27.70	Peak	---	---
3	624.100	35.37	-10.63	46.00	41.49	17.46	4.42	28.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1060.000	42.83	-31.17	74.00	41.51	24.27	4.03	26.98	Peak	---	---
2	1060.000	31.87	-22.13	54.00	30.55	24.27	4.03	26.98	Average	---	---
3	1180.000	43.70	-30.30	74.00	41.92	24.56	4.21	26.99	Peak	---	---
4	1180.000	32.24	-21.76	54.00	30.46	24.56	4.21	26.99	Average	---	---
5	1326.000	42.63	-31.37	74.00	40.29	24.91	4.44	27.01	Peak	---	---
6	1326.000	33.43	-20.57	54.00	31.09	24.91	4.44	27.01	Average	---	---
7	1372.000	44.59	-29.41	74.00	42.08	25.02	4.51	27.02	Peak	---	---
8	1372.000	35.76	-18.24	54.00	33.25	25.02	4.51	27.02	Average	---	---
9	2406.000	50.03	-23.97	74.00	42.74	28.23	6.22	27.16	Peak	---	---
10	2406.000	50.29	-3.71	54.00	43.00	28.23	6.22	27.16	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CW2200
 MEMO : TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4260.000	57.35	-16.65	74.00	43.28	32.49	9.09	27.51	Peak	---	---
2	4260.000	50.89	-3.11	54.00	36.82	32.49	9.09	27.51	Average	100	100

Site : 03CH03-HY
 Condition : 3a HORN-ANT-6741 VERTICAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CU2200
 MEMO : TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1454.000	45.26	-28.74	74.00	42.44	25.22	4.63	27.03	Peak	---	---
2	1454.000	30.78	-23.22	54.00	27.96	25.22	4.63	27.03	Average	---	---
3	1596.000	46.39	-27.61	74.00	42.80	25.75	4.89	27.05	Peak	---	---
4	1596.000	31.55	-22.45	54.00	27.96	25.75	4.89	27.05	Average	---	---
5	2318.000	53.57	-20.43	74.00	46.56	28.06	6.10	27.15	Peak	---	---
6	2318.000	49.16	-4.84	54.00	42.15	28.06	6.10	27.15	Average	---	---
7	2398.000	53.58	-20.42	74.00	46.31	28.22	6.21	27.16	Peak	---	---
8	2398.000	48.94	-5.06	54.00	41.67	28.22	6.21	27.16	Average	---	---
11	2558.000	50.60	-23.40	74.00	42.72	28.62	6.45	27.19	Peak	---	---
12	2558.000	39.95	-14.05	54.00	32.07	28.62	6.45	27.19	Average	---	---

Site : 03CH03-HY
 Condition : 3a HORN-ANT-6741 VERTICAL
 EUT : Wireless 54Mbps Access Point
 Power : 110V/60Hz
 MODEL : CW2201 CU2200
 MEMO : TX CH11 2462MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4308.000	56.83	-17.17	74.00	42.85	32.47	9.04	27.53	Peak	---	---
2	4308.000	50.76	-3.24	54.00	36.78	32.47	9.04	27.53	Average	---	---

- For 5GHz ~ 25GHz
 Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor (dB/m)	Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Detect (dB)	Mode
2462.000	H	28.35	6.29	60.38	-	-	95.02	56363.77		Peak
2462.000	H	28.35	6.29	56.51	-	-	91.15	36099.40		AV
2462.000	V	28.35	6.29	69.85	-	-	104.49	167687.23		Peak
2462.000	V	28.35	6.29	65.90	-	-	100.54	106414.30		AV
4924.000	V/H						-			AV/Peak
7386.000	V/H						-			AV/Peak
9848.000	V/H						-			AV/Peak
12310.000	V/H						-			AV/Peak
14772.000	V/H						-			AV/Peak
17234.000	V/H						-			AV/Peak
19696.000	V/H						-			AV/Peak
22158.000	V/H						-			AV/Peak
24620.000	V/H						-			AV/Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : Steve
Steve Chen

5.7. Band Edges Measurement

5.7.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.7.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.7.3. Test Result :

- Test Result in lower band (Channel 1) : PASS
- Test Result in higher band(Channel 11) : PASS

5.7.4. Note on Band edge Emission


The band edge emission plot on page 41. shows 50.16dB delta between carrier maximum power and local maximum emission in the restricted band (2.484GHz).

Polarity	The emission of carrier power strength (dB μ V/m)	The maximum field strength in restrict band (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
H	95.02	44.86	74.00	-29.14	Peak
H	91.15	40.99	54.00	-13.01	Average
V	104.49	54.33	74.00	-19.67	Peak
V	100.54	50.38	54.00	-3.62	Average


* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.

The spectrum analyzer plots are attached as below :

Plot1 (Channel 01) :

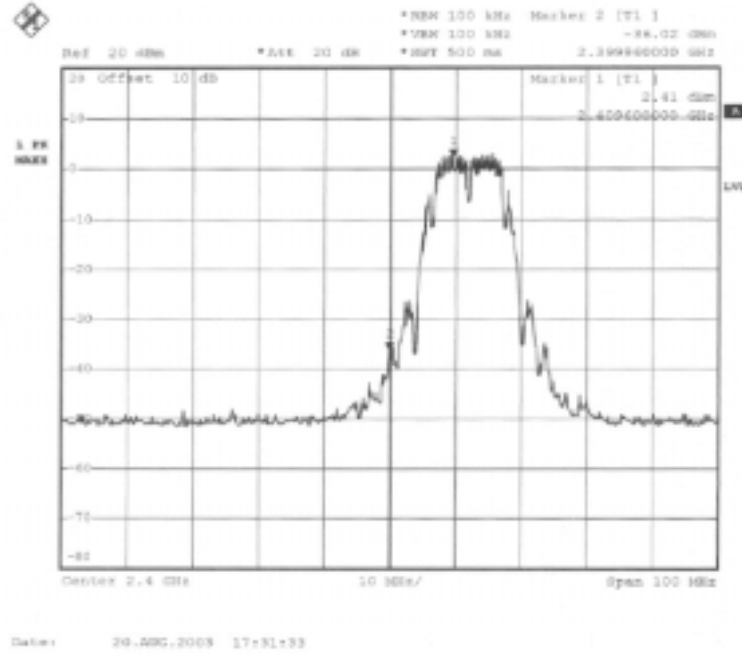

Plot2 (Channel 11) :

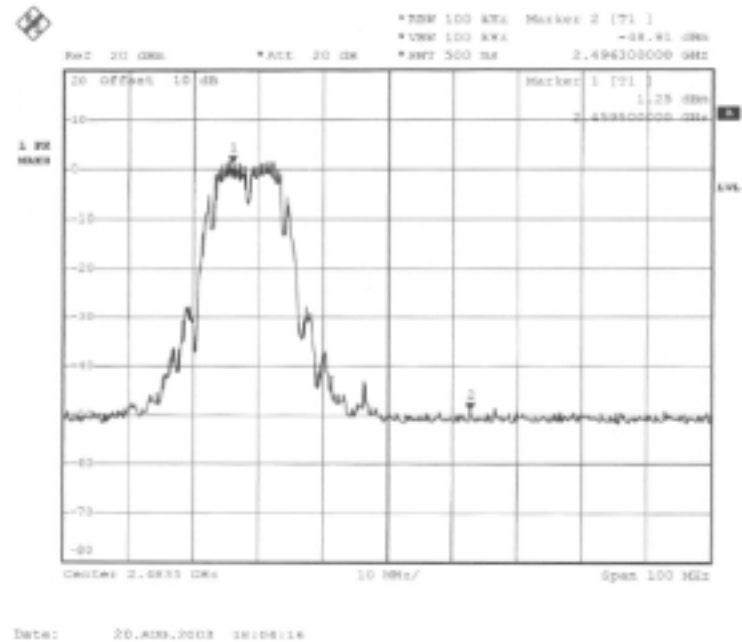

Comments : All emissions in any 100kHz bandwidth outside the band edge are attenuated more then 20dB from the carrier.

5.8. Antenna Requirements

The EUT use a undetachable antenna via SMA-reversed external connector. It is considered meet antenna requirement of FCC.

5.8.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.8.2. Antenna Connected Construction

The maximum Gain antenna used in this product is dipole antenna. The antenna connector type is SMA. The coaxial cable of the antenna is fixed to the antenna.

5.9. RF Exposure

FCC Rules and Regulations Part 1.1307,1.1310,2.1091,2.1093:

RF Exposure Compliance

5.9.1. Limit For Maximum Permissible Exposure (MPE)

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

F=frequency in MHz

*Plane-wave equivalent power density

5.9.2. MPE Calculations

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{3770}$$

- E = Electric field (V/m)
- P = Peak output power (mW)
- G = Antenna numeric gain (numeric)
- d = Separation distance (m)

Because the EUT is belong to General Population/ Uncontrolled Exposure. So the Limit of Power Density is 1.0 mW/cm². We can change the formula to:

$$d = \sqrt{\frac{30 \times P \times G}{3770}}$$

Channel NO.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (W)	Calculated RF Exposure Separation Distance (m)	Minimum RF Exposure Separation Distance (m)
Channel 1	3.00	2.00	12.52	0.0179	0.0168	0.20
Channel 6	3.00	2.00	11.55	0.0143	0.0151	0.20
Channel 11	3.00	2.00	11.24	0.0133	0.0145	0.20

5.9.3. FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 20cm (8 inches) during normal operation. Proposed RF exposure safety information to include in User's Manual.

6. EMI Suppression Component List

1. Add a core on power cable.
(As the External photo No. 3)
2. Add a geket on module board.
(As the Internal photo No. 2)

7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	1.01	1000	24.10	3.92
35	13.63	1.04	2000	27.40	5.66
40	11.11	1.09	3000	30.00	7.20
45	10.59	1.24	4000	32.60	9.36
50	6.47	1.43	5000	33.40	9.16
55	5.83	1.39	6000	34.20	10.70
60	5.18	1.59	7000	35.30	12.16
65	4.81	1.41	8000	36.90	13.12
70	4.43	1.43	9000	38.10	13.81
75	5.10	1.55	10000	39.00	14.83
80	5.91	1.56	11000	38.60	15.83
85	7.33	1.62	12000	39.50	17.11
90	8.74	1.41	13000	39.30	17.62
95	9.05	1.81	14000	41.60	18.37
100	9.36	1.68	15000	40.60	19.10
110	9.65	1.73	16000	37.20	19.72
120	9.97	1.79	17000	40.20	21.98
130	10.51	1.93	18000	48.90	21.22
140	10.32	2.06	19000	37.60	23.90
150	9.42	2.09	20000	37.30	24.07
160	8.09	2.12	21000	37.00	25.49
170	7.43	2.12	22000	38.00	24.92
180	7.60	2.12	23000	38.70	25.60
190	7.43	2.21	24000	38.60	25.70
200	7.26	2.29	25000	38.90	26.54
220	9.11	2.42			
240	10.88	2.54			
260	11.75	2.66			
280	11.55	2.76			
300	11.36	2.85			
320	12.03	3.10			
340	12.69	3.36			
360	13.33	3.49			
380	14.00	3.50			
400	14.63	3.51			
450	15.33	3.55			
500	16.03	3.81			
550	16.65	4.05			
600	17.29	4.23			
650	17.64	4.63			
700	18.00	4.74			
750	18.39	4.95			
800	18.79	5.06			
850	19.10	5.18			
900	19.42	5.40			
950	19.58	5.91			
1000	19.75	5.58			

8. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9 KHz – 2.75 GHz	Dec. 12, 2002	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001-008	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001-009	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Jan. 07, 2003	Conduction (CO01-HY)
50 ohm BNC type Terminal	NOBLE	50ohm	TM013	50 ohm	Apr. 24, 2003	Conduction (CO01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2003	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSEK30	100189	20Hz~40GHz	Aug. 04, 2003	Radiation (03CH03-HY)
Receiver	SCHAFFNER	SCR 3501	417	9 KHz – 1GHz	Feb. 20, 2003	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Oct. 21, 2002	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2687	30MHz – 2GHz	Dec. 21, 2002	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Jan. 02, 2003	Radiation (03CH03-HY)
Amplifier	MITEQ	NSP2650-NF	805858	100MHz~26.5GHz	Jul. 10, 2003	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	AH-118	10094	1GHz – 18GHz	Apr. 10, 2003	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Mar. 14, 2003	Radiation (03CH03-HY)
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted
Power sensor	R&S	NRV-Z55	100049	DC~40GHz	May 28, 2003	Conducted
Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	May 28, 2003	Conducted
AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	May 27, 2003	Conducted
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 02, 2002	Conducted

Calibration Interval of instruments listed above is one year.

9. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m
Antenna factor calibration	normal(k=2)	±1
cable loss calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
Antenna Directivity	rectangular	±3
Antenna Factor V.S. Height	rectangular	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25
site imperfection	rectangular	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	±0.54
combined standard uncertainty Ue(y)	normal	±2.7
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±5.4

$U = \{((1/2)^2+(0.3/2)^2+(2^2+0.5^2+2^2+0.25^2+2^2)/3+(0.54)^2/2)\} = 2.2$ for 10m test distance

$U = \{((1/2)^2+(0.3/2)^2+(2^2+3^2+2^2+0.25^2+2^2)/3+(0.54)^2/2)\} = 2.7$ for 3m test distance

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	0.2
combined standard uncertainty Ue(y)	normal	±1.66
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±3.32

$U = \{(0.3/2)^2 + (2^2+1.5^2+0.2^2)/3+(0.2)^2/2\} = 1.66$