



Radiated Emission Measurement

Operator: Kai

File :1

Data :#2


Date: 2024/5/16

Temperature: 23.6 °C

80.0 dBuV/m

Time: 下午 02:07:52

Humidity: 58.0 %

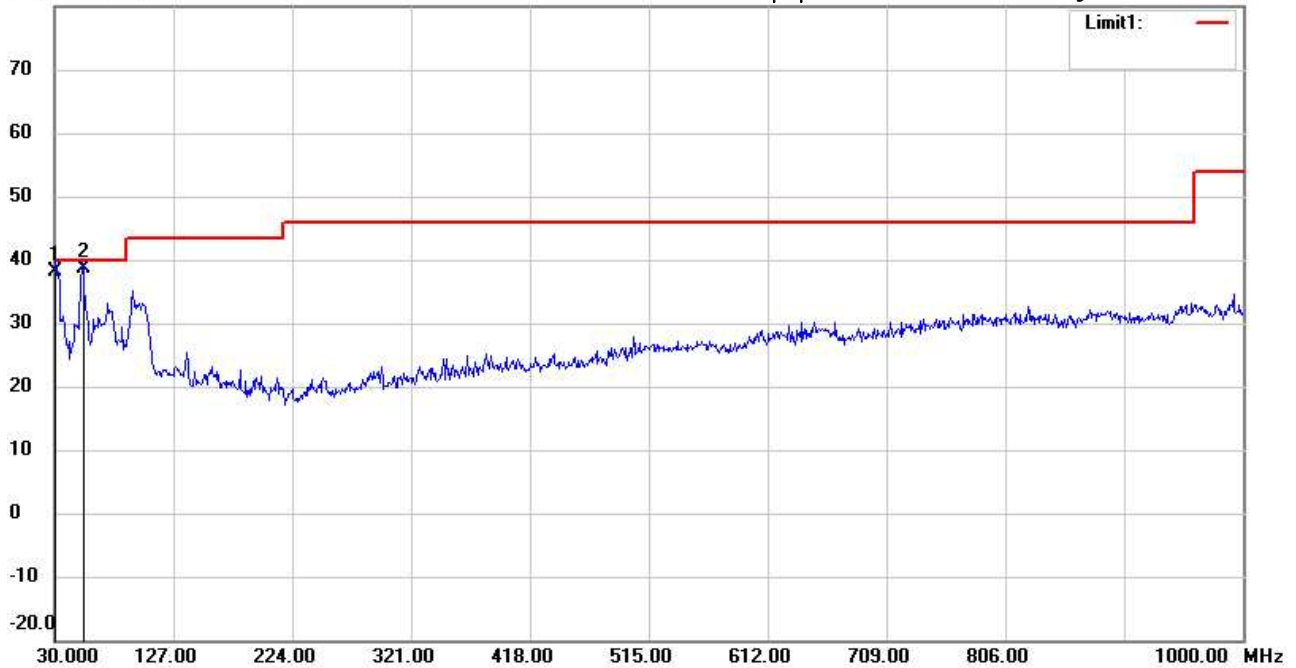

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Vertical*

EUT : W6M22405-23456

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 906.32MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	30.9700	52.85	QP	-14.75	38.10	40.00	100	112	-1.90	
*	52.7950	51.44	QP	-12.70	38.74	40.00	100	359	-1.26	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#1


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:32:00

Humidity: 58.0 %

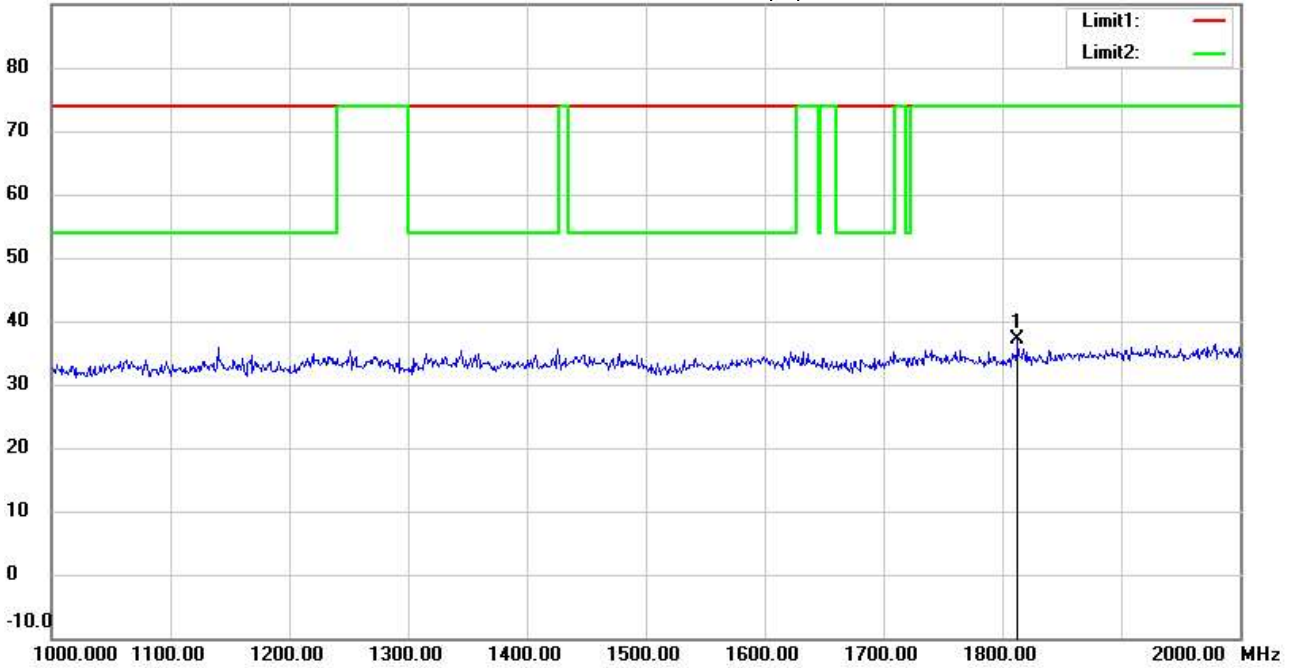

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22405-23456

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 906.32MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1813.000	44.78	peak	-7.64	37.14	74.00	150	21	-36.86	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#5


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:34:49

Humidity: 58.0 %

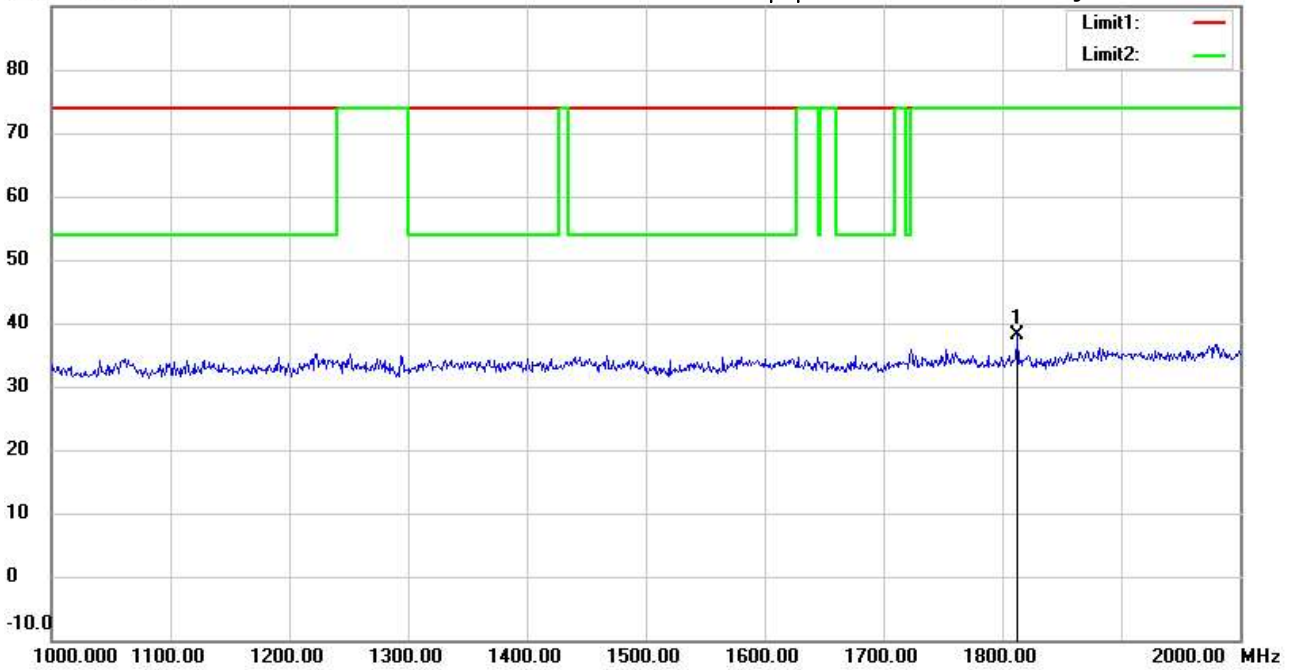

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M22405-23456

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 906.32MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1813.000	45.84	peak	-7.64	38.20	74.00	150	153	-35.80	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#2


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:32:41

Humidity: 58.0 %

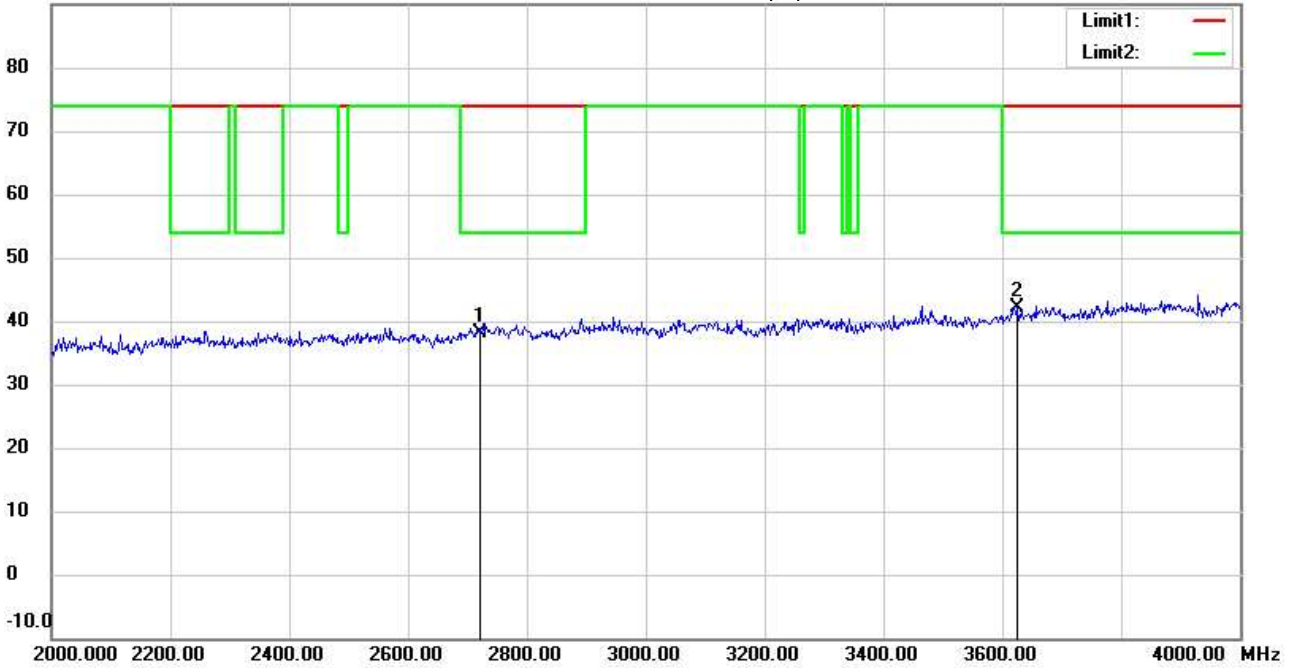

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22405-23456

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 906.32MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2718.960	41.95	peak	-3.79	38.16	74.00	150	112	-35.84	
*	3625.280	43.08	peak	-1.01	42.07	74.00	150	310	-31.93	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#6


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:35:31

Humidity: 58.0 %

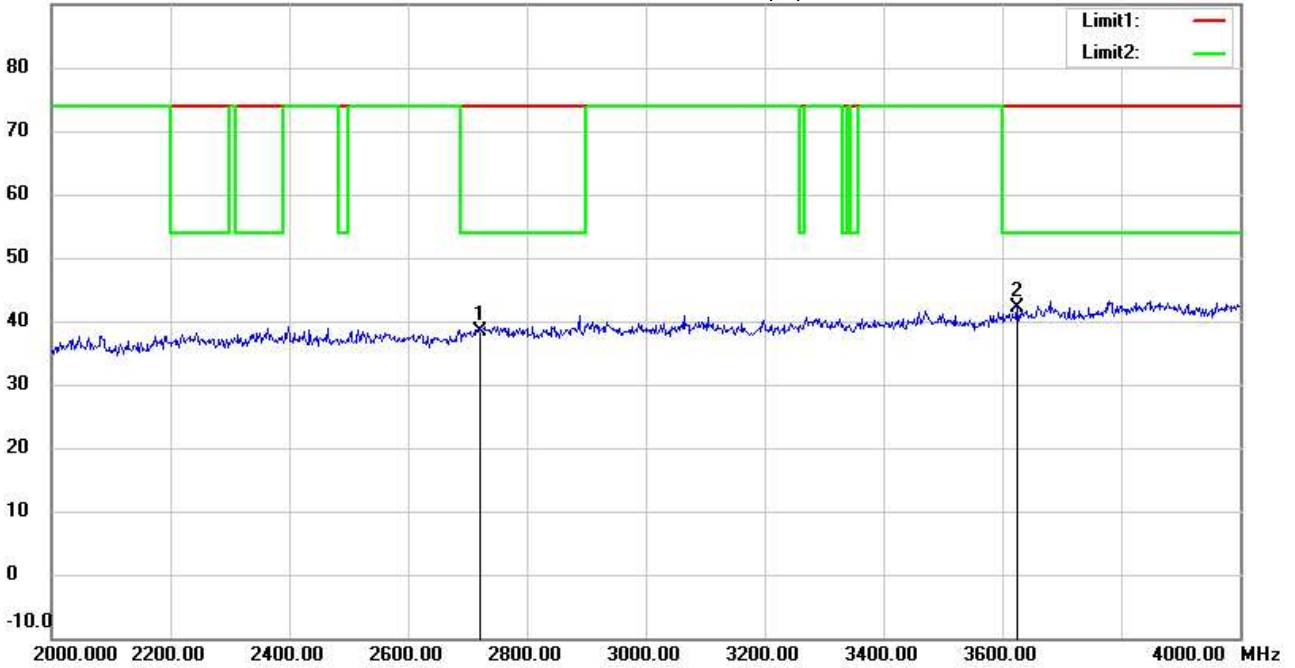

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M22405-23456

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 906.32MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2718.960	42.17	peak	-3.79	38.38	74.00	150	169	-35.62	
*	3625.280	43.18	peak	-1.01	42.17	74.00	150	94	-31.83	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#3


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:33:22

Humidity: 58.0 %

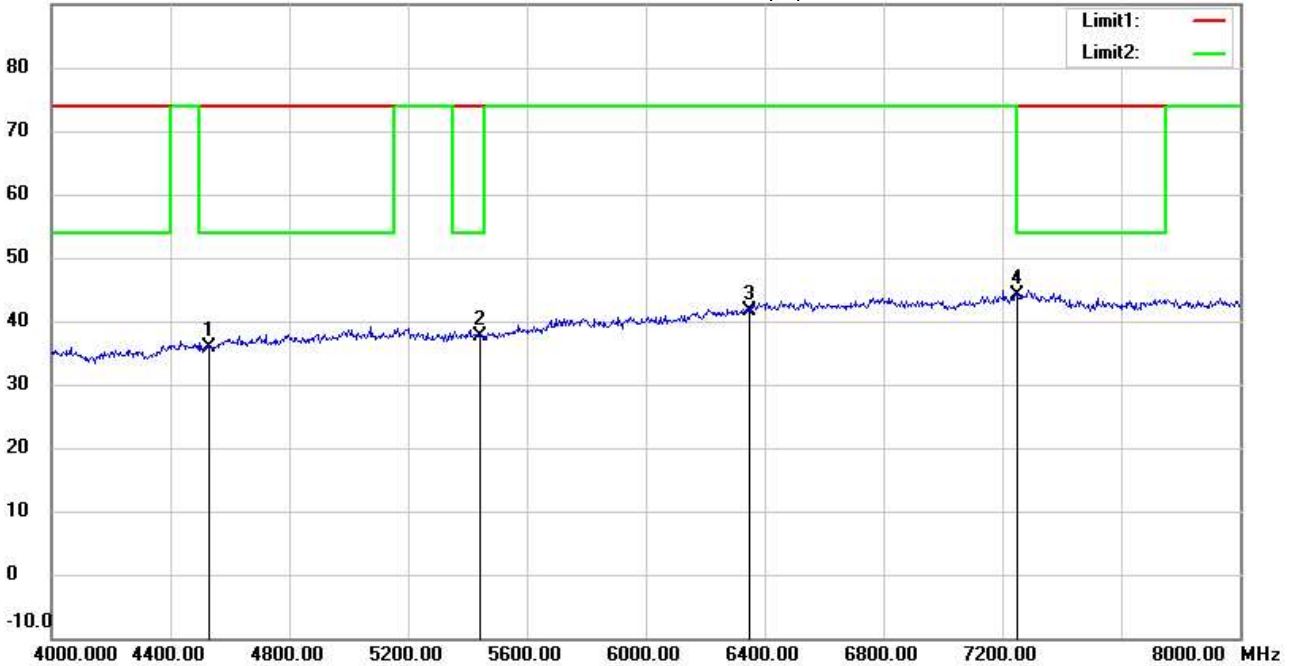

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22405-23456

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 906.32MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4531.600	33.13	peak	2.79	35.92	74.00	150	285	-38.08	
	5437.920	32.95	peak	4.64	37.59	74.00	150	166	-36.41	
	6344.240	33.01	peak	8.55	41.56	74.00	150	94	-32.44	
*	7250.560	34.21	peak	10.03	44.24	74.00	150	233	-29.76	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#7


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:36:14

Humidity: 58.0 %

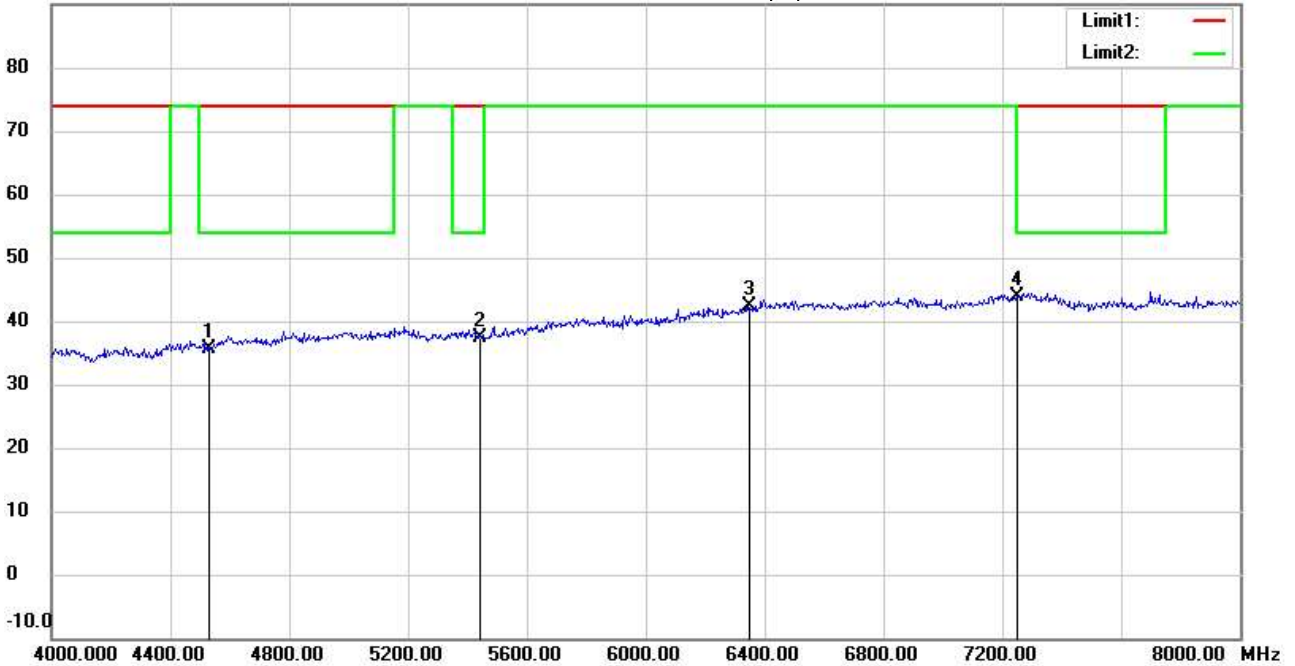

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22405-23456

M/N:

Test Mode : TX 906.32MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4531.600	32.82	peak	2.79	35.61	74.00	150	188	-38.39	
	5437.920	32.86	peak	4.64	37.50	74.00	150	47	-36.50	
	6344.240	33.89	peak	8.55	42.44	74.00	150	51	-31.56	
*	7250.560	33.91	peak	10.03	43.94	74.00	150	336	-30.06	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#4


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:34:04

Humidity: 58.0 %

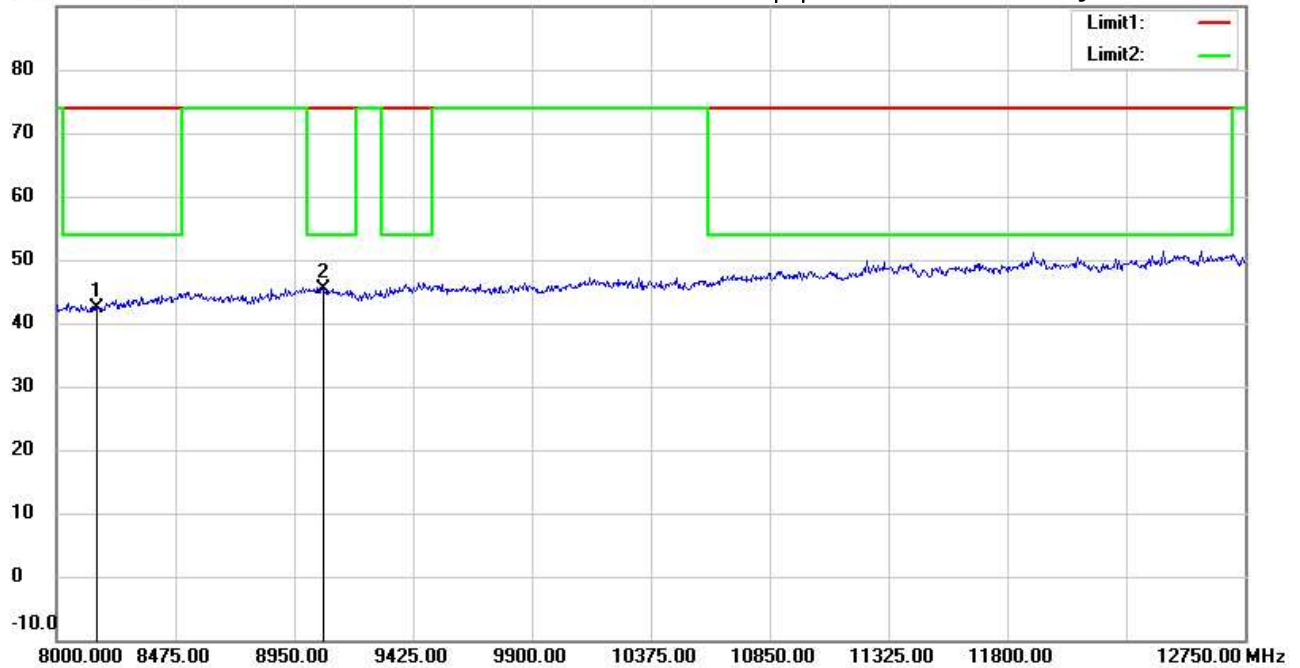

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22405-23456

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 906.32MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	8156.880	32.13	peak	10.20	42.33	74.00	150	359	-31.67	
*	9063.200	33.44	peak	11.87	45.31	74.00	150	60	-28.69	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#8


Date: 2024/5/16

Temperature:23.6 °C

90.0 dBuV/m

Time: 下午 02:36:55

Humidity:58.0 %

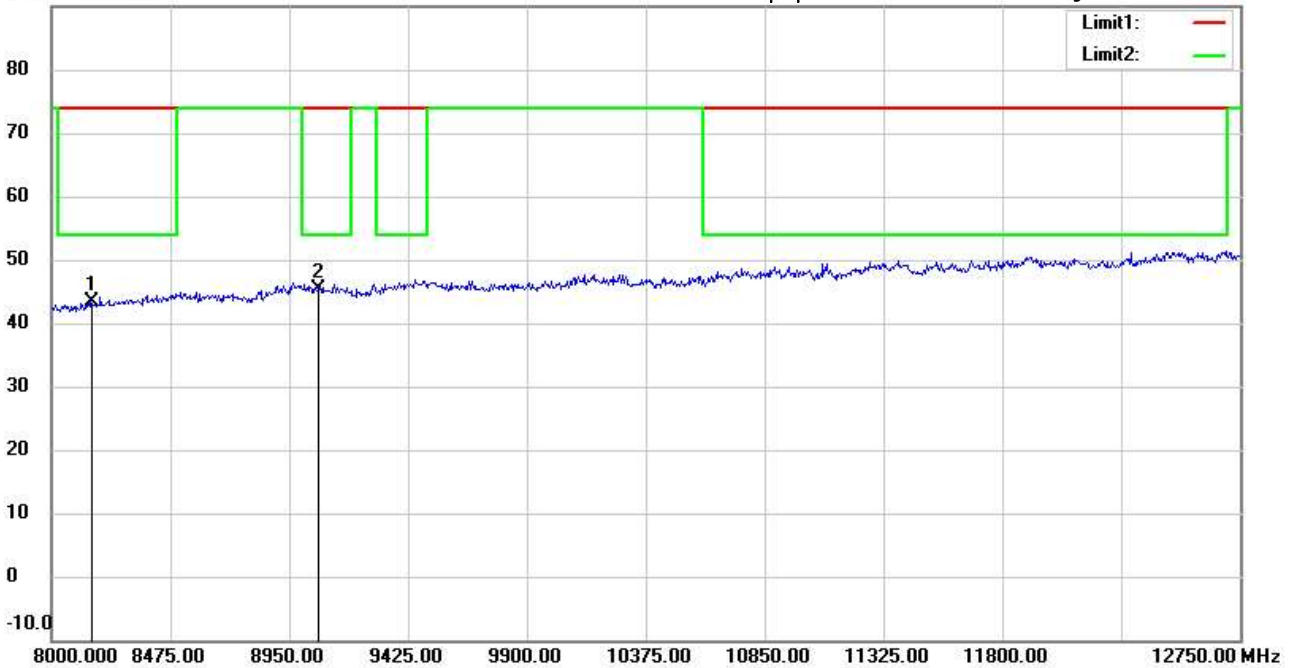

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M22405-23456

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 906.32MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	8156.880	33.13	peak	10.20	43.33	74.00	150	300	-30.67	
*	9063.200	33.55	peak	11.87	45.42	74.00	150	272	-28.58	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#1


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:55:09

Humidity: 58.0 %

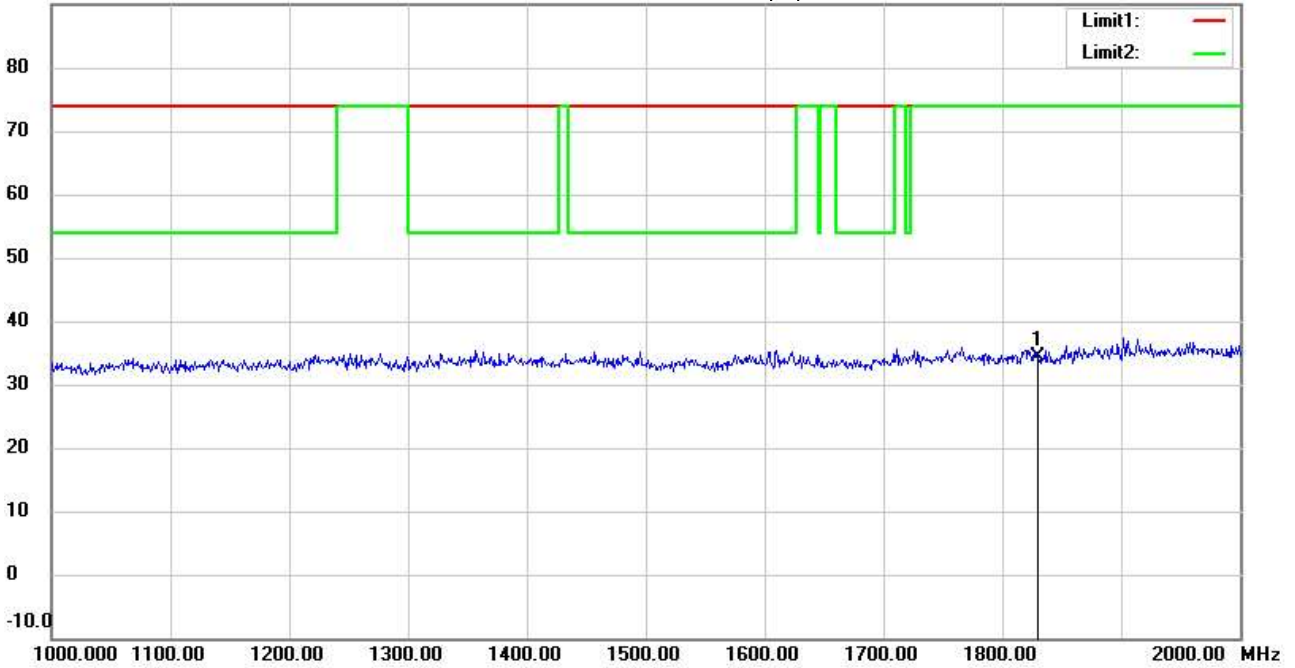

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22405-23456

M/N:

Test Mode : TX 914.84MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1829.680	41.82	peak	-7.53	34.29	74.00	150	158	-39.71	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#5


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:57:58

Humidity: 58.0 %

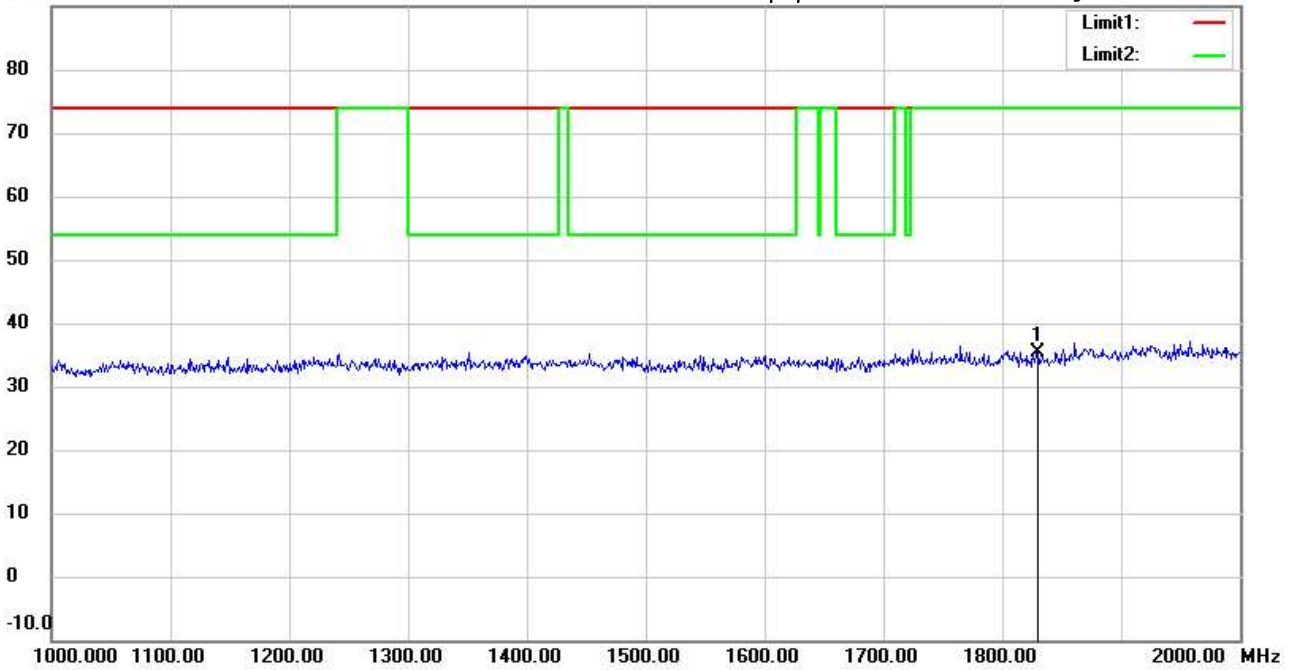

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M22405-23456

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 914.84MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1829.680	42.93	peak	-7.53	35.40	74.00	150	215	-38.60	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#2


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:55:49

Humidity: 58.0 %

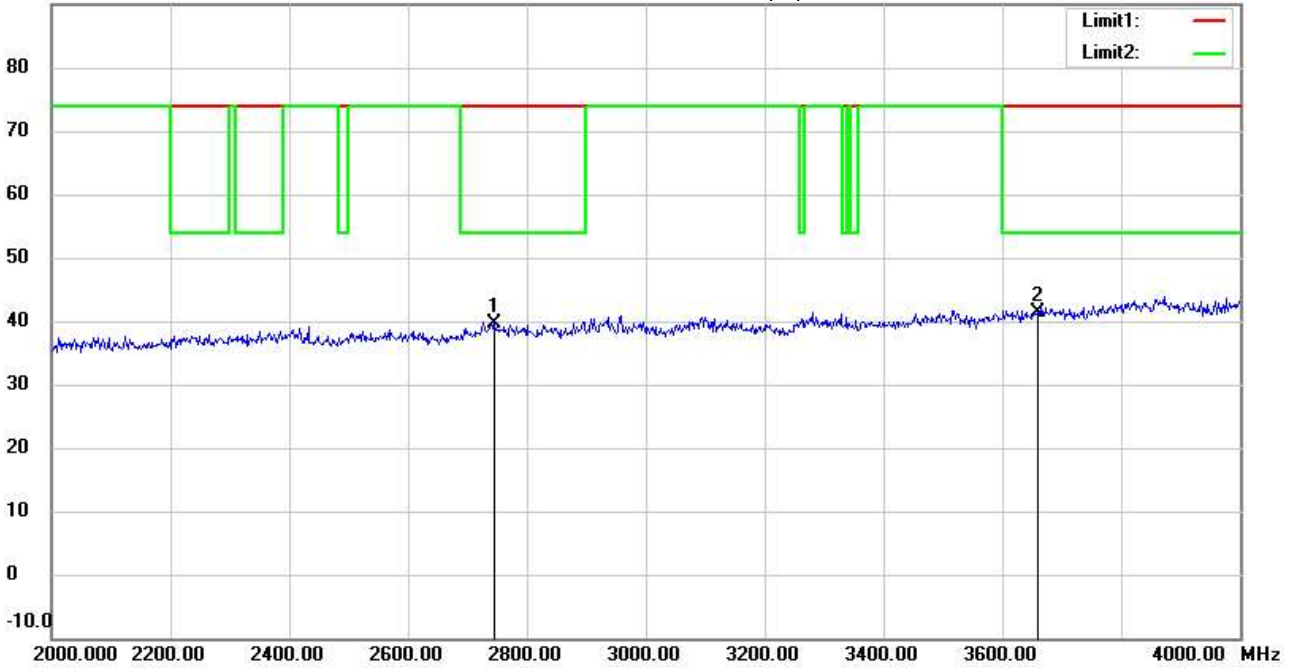

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22405-23456

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 914.84MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2744.520	43.37	peak	-3.68	39.69	74.00	150	289	-34.31	
*	3659.360	42.30	peak	-0.84	41.46	74.00	150	199	-32.54	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#6


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:58:40

Humidity: 58.0 %

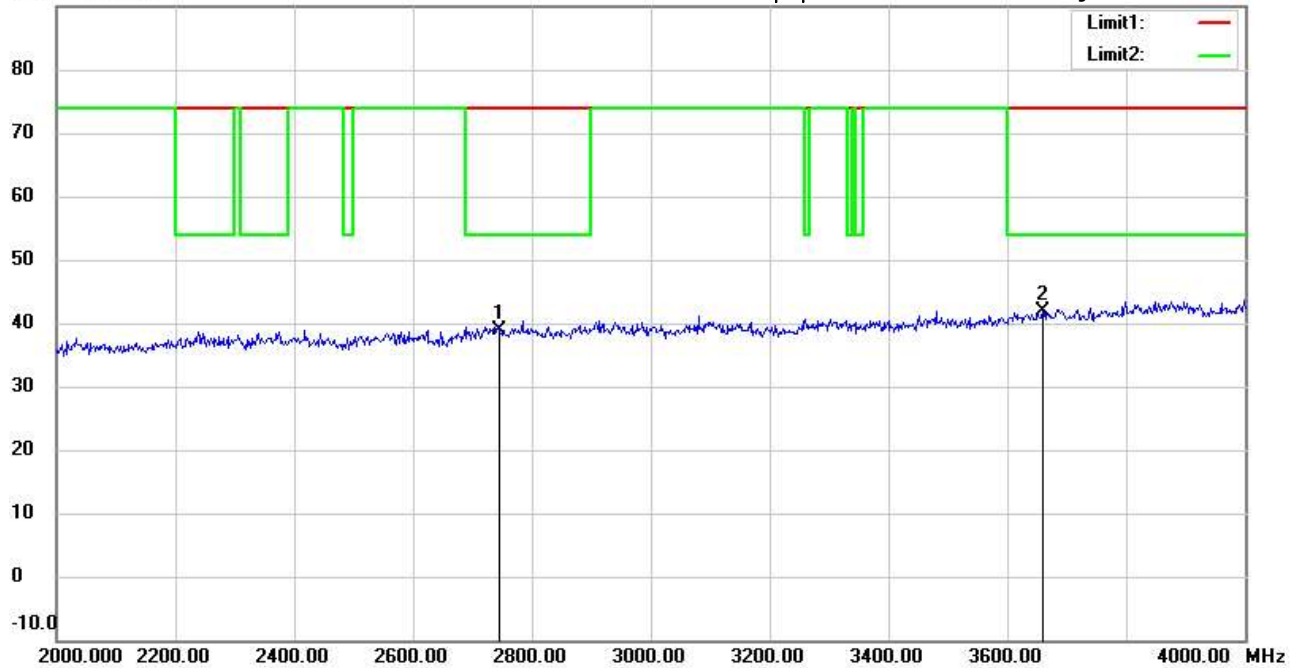

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M22405-23456

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 914.84MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2744.520	42.52	peak	-3.68	38.84	74.00	150	45	-35.16	
*	3659.360	42.74	peak	-0.84	41.90	74.00	150	12	-32.10	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#3


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:56:31

Humidity: 58.0 %

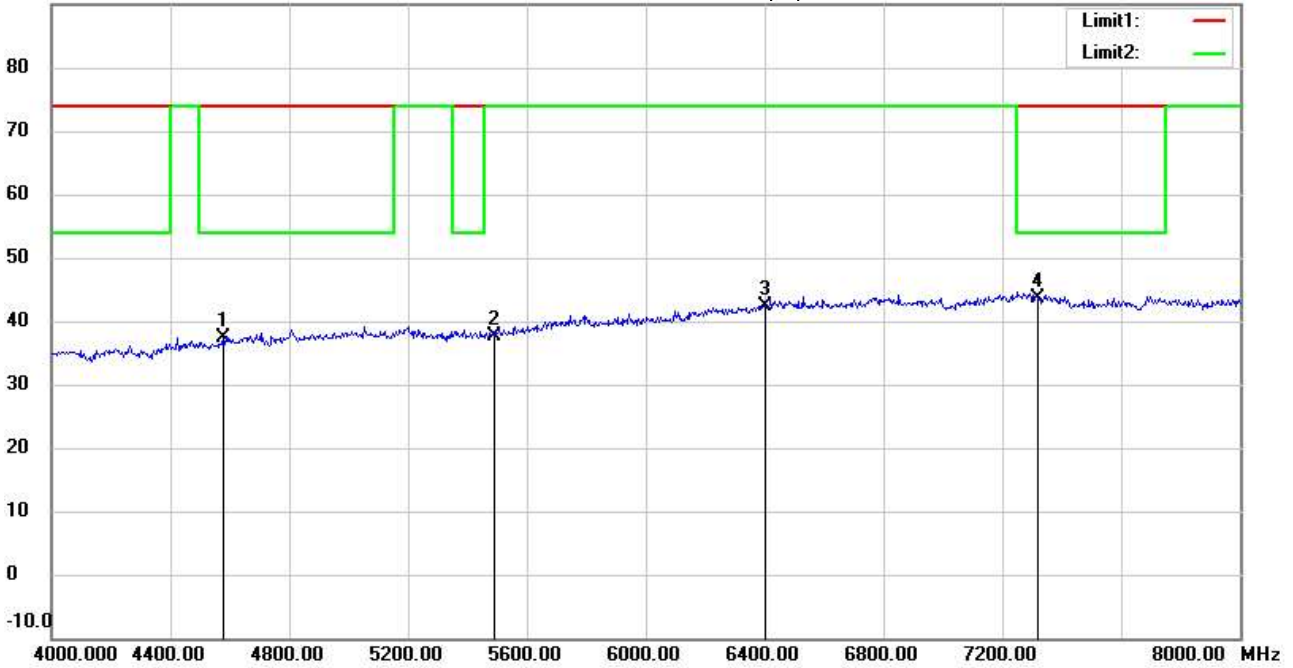

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22405-23456

M/N:

Test Mode : TX 914.84MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4574.200	34.32	peak	3.08	37.40	74.00	150	29	-36.60	
	5489.040	32.85	peak	4.89	37.74	74.00	150	185	-36.26	
	6403.880	33.16	peak	9.11	42.27	74.00	150	358	-31.73	
*	7318.720	33.54	peak	10.04	43.58	74.00	150	122	-30.42	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#7


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:59:22

Humidity: 58.0 %

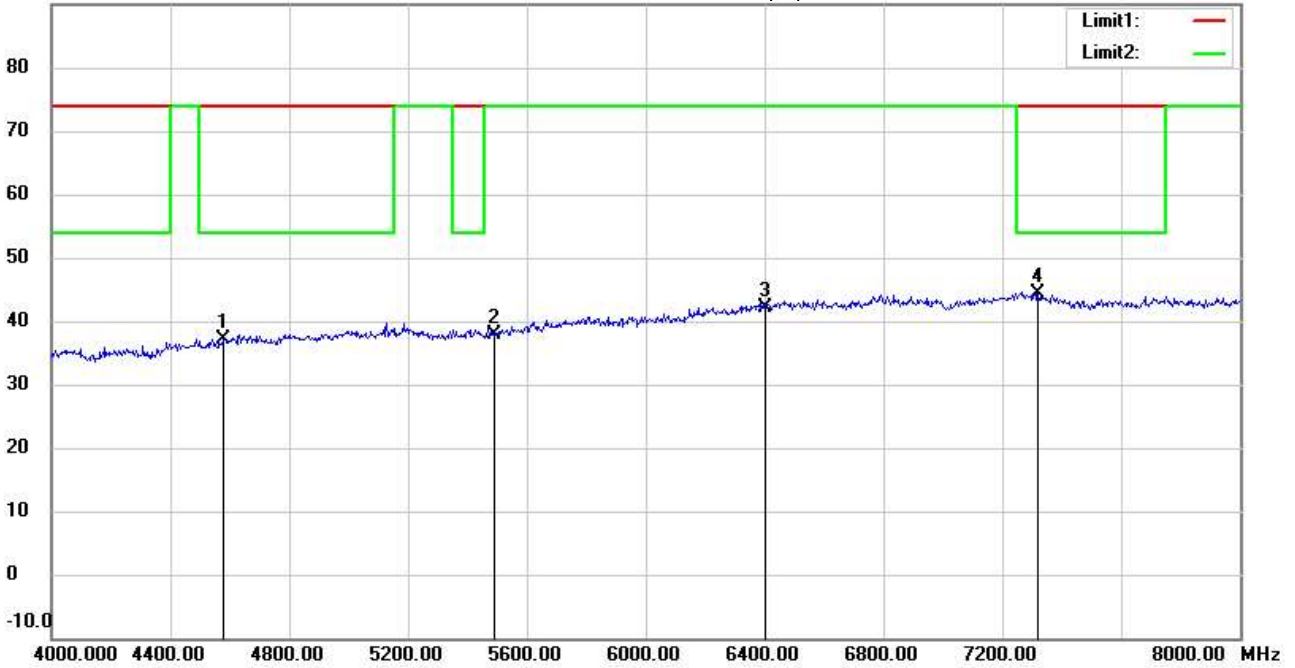

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22405-23456

M/N:

Test Mode : TX 914.84MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4574.200	34.03	peak	3.08	37.11	74.00	150	26	-36.89	
	5489.040	32.98	peak	4.89	37.87	74.00	150	157	-36.13	
	6403.880	33.09	peak	9.11	42.20	74.00	150	41	-31.80	
*	7318.720	34.33	peak	10.04	44.37	74.00	150	333	-29.63	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#4


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 02:57:13

Humidity: 58.0 %

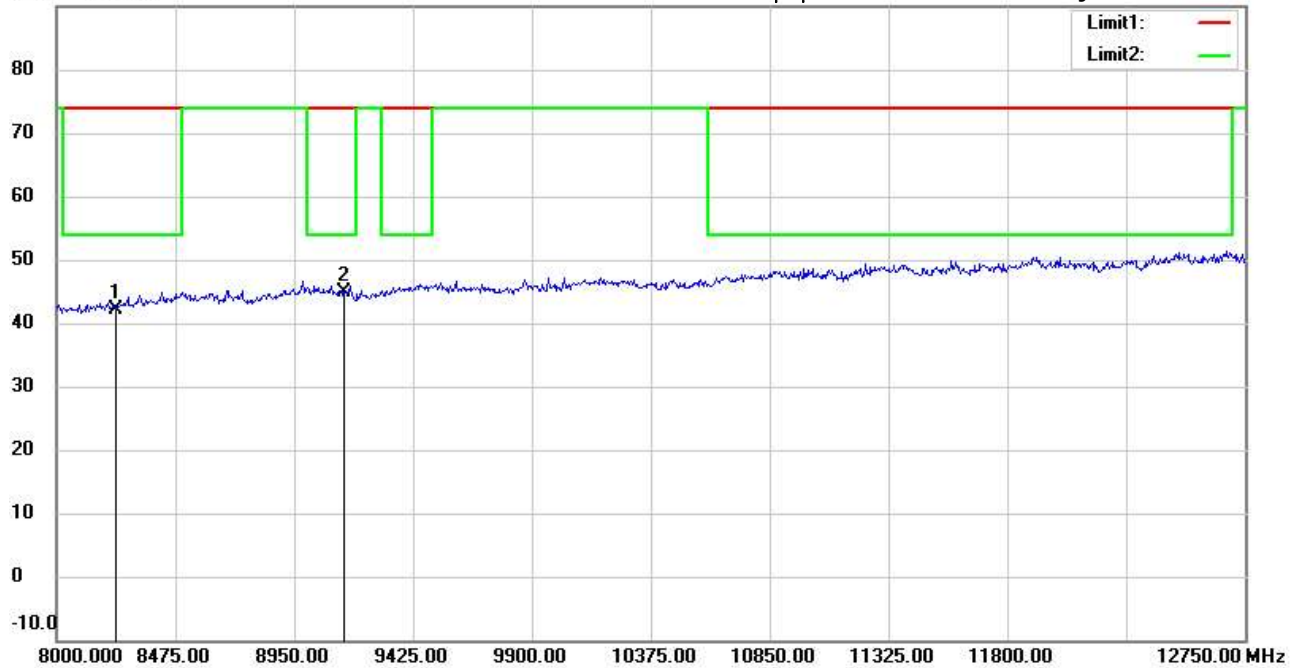

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22405-23456

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 914.84MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	8233.560	31.60	peak	10.53	42.13	74.00	150	5	-31.87	
*	9148.400	33.09	peak	11.86	44.95	74.00	150	97	-29.05	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#8


Date: 2024/5/16

Temperature: 23.6 °C

90.0 dBuV/m

Time: 下午 03:00:04

Humidity: 58.0 %

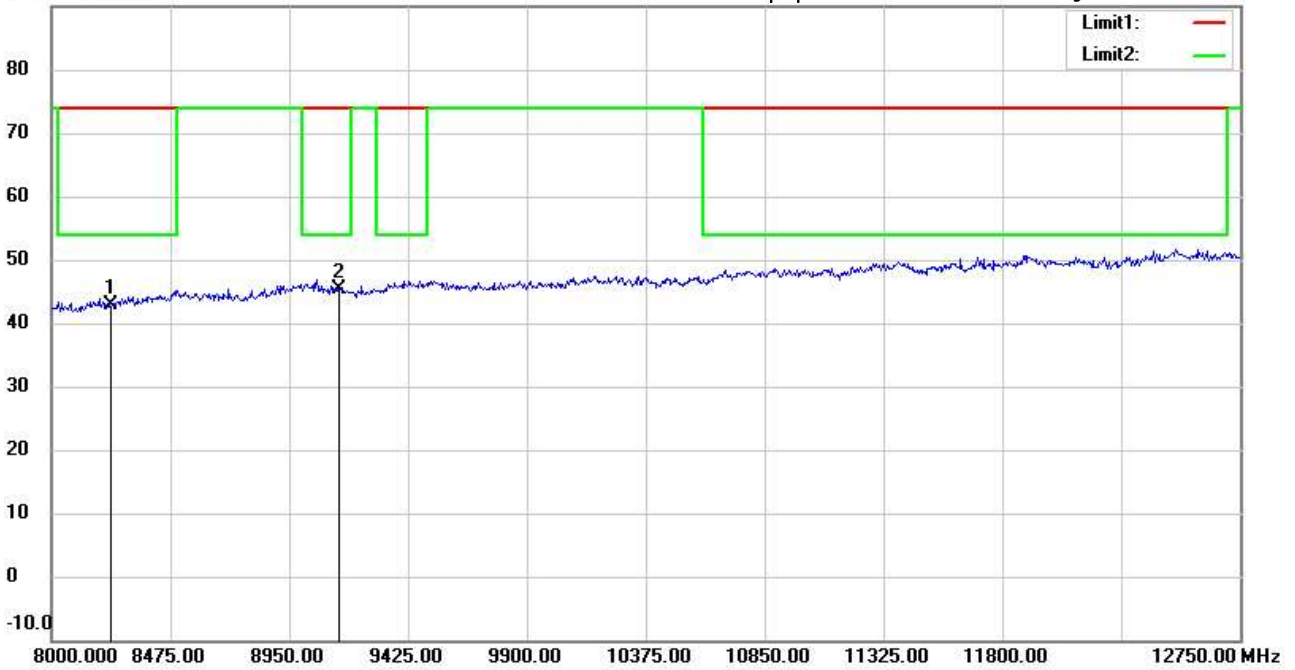

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M22405-23456

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 914.84MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	8233.560	32.34	peak	10.53	42.87	74.00	150	2	-31.13	
*	9148.400	33.42	peak	11.86	45.28	74.00	150	193	-28.72	