

47 CFR PART 15 SUBPART C TEST REPORT

for

Emergency Strobe Light

Model No.: ESLx-xxxxx-xxxxx Series

(x=0~9, A~Z or blank)

FCC ID: GX9ESL1

of

Applicant: **CLIMAX TECHNOLOGY CO., LTD.**

Address: No. 258, Sinhu 2nd Rd., Neihu District, Taipei City 114,
Taiwan (R.O.C.)

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1072, TW1140, TW1146, TW1477, TW0037

Industry Canada filed test laboratory Reg. No.: 20037, 31634



Report No.: W6M22406-23537-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



Registration number: W6M22406-23537-C-1
FCC ID: GX9ESL1

TABLE OF CONTENTS

1 GENERAL INFORMATION.....2

1.1 NOTES2

1.2 TESTING LABORATORY3

1.3 DETAILS OF APPROVAL HOLDER3

1.4 APPLICATION DETAILS.....3

1.5 GENERAL INFORMATION OF TEST ITEM4

1.6 TEST STANDARDS4

2 TECHNICAL TEST.....5

2.1 SUMMARY OF TEST RESULTS5

2.2 TEST ENVIRONMENT5

2.3 TEST EQUIPMENT LIST6

2.4 GENERAL TEST PROCEDURE.....7

3 TEST RESULTS (ENCLOSURE)9

3.1 PEAK OUTPUT POWER (TRANSMITTER)10

3.2 TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS13

3.3 SPURIOUS EMISSIONS (TX).....14

3.4 CARRIER FREQUENCY SEPARATION16

3.5 NUMBER OF HOPPING FREQUENCIES18


3.6 TIME OF OCCUPANCY (DWELL TIME).....20

3.7 20dB BANDWIDTH24

3.8 BAND-EDGE COMPLIANCE OF RF EMISSIONS27

3.9 RADIATED EMISSIONS FROM DIGITAL PART.....30

3.10 POWER LINE CONDUCTED EMISSION.....31



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22406-23537-C-1

FCC ID: GX9ESL1

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.
4. Antenna gain is provided by applicant and laboratory issue relevant data and results.

Tester:

June 28, 2024

Sora Kuo

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

June 28, 2024


Kevin Wang

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22406-23537-C-1

FCC ID: GX9ESL1

1.2 Testing laboratory

1.2.1 Location

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,
New Taipei City 207, Taiwan (R.O.C.)

Xizhi Lab

No. 99, Sec. 1, Balian Rd., Xizhi Dist.,
New Taipei City 221032, Taiwan (R.O.C.)

Worldwide Testing Services (Taiwan) Co., Ltd.
6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6606-8877

1.2.2 Details of accreditation status

Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1072, TW1140, TW1146, TW1477, TW0037

Industry Canada filed test laboratory Reg. No.: 20037, 31634

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :


Name: ./.
Accredited number: ./.
Street: ./.
Town: ./.
Country: ./.

1.3 Details of approval holder

Name: CLIMAX TECHNOLOGY CO., LTD.
Street: No. 258, Sinhu 2nd Rd., Neihu District,
Town: Taipei City 114,
Country: Taiwan (R.O.C.)

1.4 Application details

Date of receipt of test item: June 14, 2024
Date of test: from June 17, 2024 to June 26, 2024



Registration number: W6M22406-23537-C-1

FCC ID: GX9ESL1

1.5 General information of Test item

Type of test item: Emergency Strobe Light
 Model number: ESLx-xxxxx-xxxxx Series (x=0~9, A~Z or blank)
 Multi-listing model number: ./.
 Sample no.: #01

Technical data

Frequency band: 918.0375-924.48 MHz

Mode	Frequency	Power (dBm)
919MHz	918.0375 MHz	13.76
	921.98 MHz	13.74
	924.48 MHz	13.72

Power supply: Battery 3Vd.c.
 Operation modes: Duplex
 Modulation type: FSK
 Antenna type: PCB antenna
 Antenna gain: 0.4 dBi
 Host device: none
 Classification:

Fixed Device	<input checked="" type="checkbox"/>
Mobile Device (Human Body distance > 20cm)	<input type="checkbox"/>
Portable Device (Human Body distance < 20cm)	<input type="checkbox"/>
Modular Radio Device	<input type="checkbox"/>

Manufacturer: (if applicable)


Name: ./.
 Street: ./.
 Town: ./.
 Country: ./.

1.6 Test standards

47 CFR PART 15 SUBPART C § 15.247 (2023-10)

Special statement:

1. This test report is valid in connection to the model has been tested, any modification to the product which is different from the test model will avoid the certification of the test report.
2. This test report shall always be duplicated in full pages unless the written approval of the testing.
3. The x in model number is representing different case shape, case colors, led mask color, and control ID.
4. The model number of EUT is ESL-1. This model does not contain logo.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22406-23537-C-1

FCC ID: GX9ESL1


2.3 Test Equipment List

Max Output Power, 20dB Bandwidth, Band edge & Frequency Separation,
Number Of Hopping, Dwell Time

Code No.	Test equipment	Mode No.	Serial No.	Brand	Cal. Date	Next Cal. Date
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2024/2/16	2025/2/15
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2024/3/7	2025/3/6
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2024/2/16	2025/2/15
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2024/2/16	2025/2/15

Spurious Emission(966A)

Code No.	Test equipment	Mode No.	Serial No.	Brand	Cal. Date	Next Cal. Date
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2023/9/20	2024/9/19
ETSTW-RE 154	EMI Test Receiver	ESR3	102829	R&S	2024/2/16	2025/4/9
ETSTW-RE 160	Amplifier Module	CHC 3	None	WTS	2023/7/14	2024/7/13
ETSTW-RE 177	TRILOG Broadband Antenna	VULB 9168 &EMCI-N-6-06	01380&AT-06007	SCHWARZBECK &EMC	2024/3/4	2025/3/3
ETSTW-RE 178	Double Ridged Guide Horn Antenna	DRH18-E	210505A18ES	RFSPIN	2024/2/29	2025/2/28
ETSTW-Cable 077	SMA type cable (10m)	EMC104-SM-SM- 10000	230511	EMCI	2023/7/14	2024/7/13
ETSTW-Cable 084	SMA type cable (1m)	SF104-11SMA-1000	816477/4	HONOVA	2023/7/14	2024/7/13
ETSTW-Cable 089	SMA type cable (2m)	SF104-11SMA-2000	SN 811889/4	HUBER+SUHNER	2023/7/14	2024/7/13
WTSTW-SW 002	EMI TEST SOFTWARE	EZ_EMCI	None	Farad	Version ETS-03A1 Version EMCI-3A1+	



Registration number: W6M22406-23537-C-1

FCC ID: GX9ESL1

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22406-23537-C-1

FCC ID: GX9ESL1

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor = $20 \log (\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22406-23537-C-1

FCC ID: GX9ESL1

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Equivalent radiated Power	15.247(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Transmitter operating	15.247(d):15.209	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions conducted – Transmitter operating	15.247	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Carrier Frequency Separation	15.247(a) (1)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Number of Hopping Frequencies	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Time of Occupancy (Dwell Time)	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
20 dB Bandwidth	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band-edge Compliance of RF Emission	15.247(d)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission from Digital Part	15.109	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	15.207(a)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

The follows is intended to leave blank.



Registration number: W6M22406-23537-C-1
 FCC ID: GX9ESL1

3.1 Peak Output Power (transmitter)

FCC Rule: 15.247

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).


Test date: June 26, 2024

Temperature: 27.4 °C


Humidity: 53.6 %

Tester: Sora

Band	Channel	Power (dBm)	Limit (dBm)
919M	918.0375 MHz	13.76	30
	921.98 MHz	13.74	30
	924.48 MHz	13.72	30

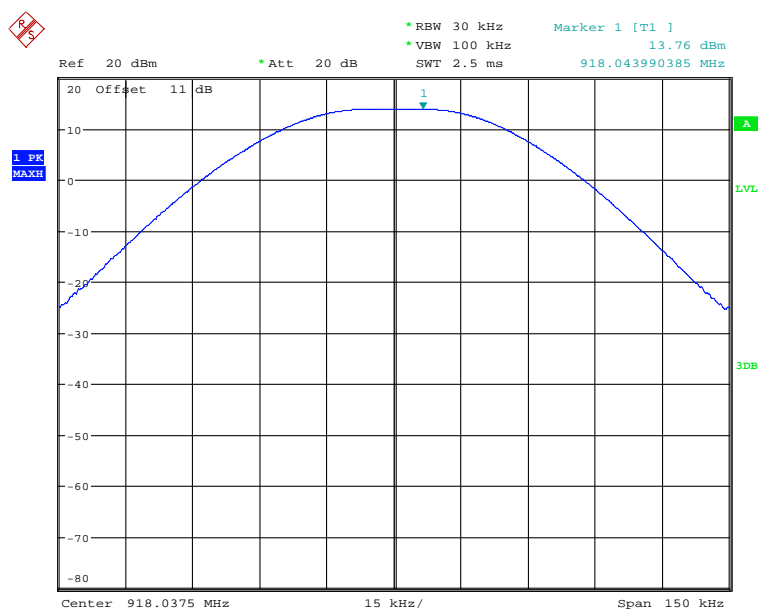


MAX OUTPUT POWER 918.0375MHz
 Date: 26.JUN.2024 13:25:45




Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22406-23537-C-1
FCC ID: GX9ESL1

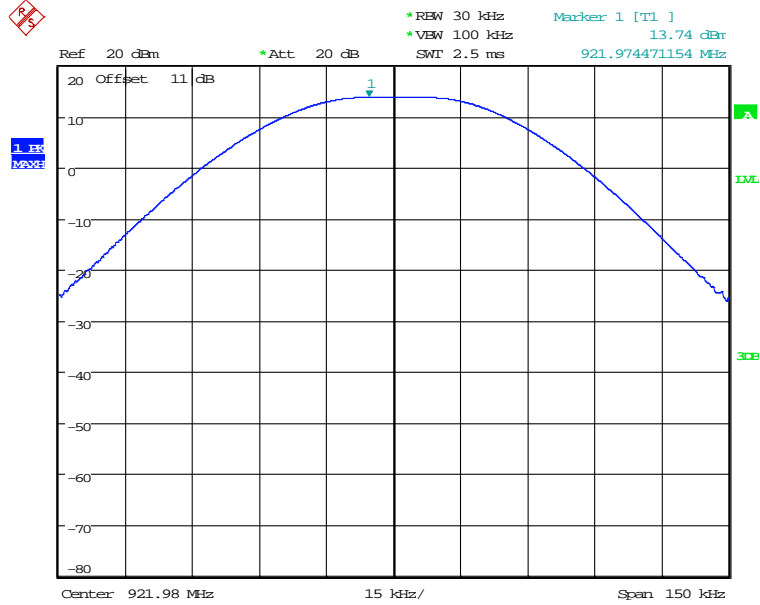

MAX OUTPUT POWER 921.98MHz
Date: 26.JUN.2024 13:29:26

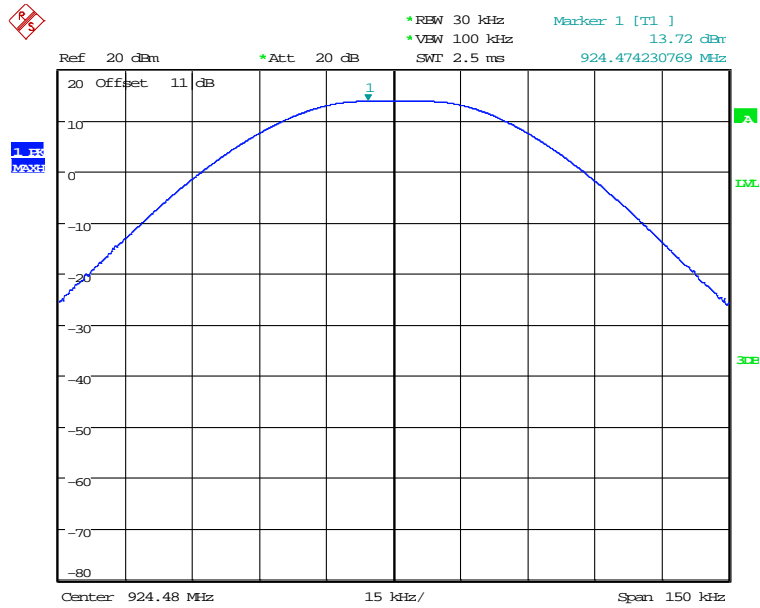

MAX OUTPUT POWER 924.48MHz
Date: 26.JUN.2024 13:31:50



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22406-23537-C-1

FCC ID: GX9ESL1

Limits:

Frequency (MHz)	Number of hopping channels			
	≥ 75	≥ 50	$49 \geq 25$	$74 \geq 15$
902-928	--	30 dBm	24 dBm	--
2400-2483.5 MHz	30 dBm	--	--	21 dBm
5725-5850 MHz	30 dBm	--	--	--

In case of employing transmitter antennas having antenna gain >dBi and using fixed poin-to point operation consider §15.247 (b)(4).



Registration number: W6M22406-23537-C-1
FCC ID: GX9ESL1

3.2 Transmitter Radiated Emissions in restricted Bands

FCC Rules: 15.247 (d), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26000 MHz.

For radiated emission tests, the analyzer setting was as followings:

RES BW VID BW

Frequency <1 GHz 100 kHz 100 kHz (Peak measurements)

Frequency >1 GHz 1 MHz 1 MHz (Peak measurements)

1 MHz 1 MHz (Average measurements)

Limits:

For frequencies below 1GHz :

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continues operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Average measurements).

Limit – duty cycle correction

No duty cycle correction was added to the reading.


54.0dB μ V/m

For frequencies above 1GHz (Peak measurements).

Limit + 20dB

54.0dB μ V/m + 20 dB= 74 dB μ V/m

Explanation: See attached diagrams in appendix.



Registration number: W6M22406-23537-C-1
 FCC ID: GX9ESL1

3.3 Spurious emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).
 In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance to point 2.3.

Calculation of test results:
 Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.
 In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Marker-Delta-Method" or the „Duty-Cycle Correction Factor“.


Summary table with radiated data of the test plots

ESLx-xxxxx-xxxxx Series

Model: (x=0~9, A~Z or blank) Date: --
 Mode: -- Temperature: -- °C Engineer: --
 Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit (dBuV/m) Peak Ave.		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22406-23537-C-1

FCC ID: GX9ESL1

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
 2. The formula of measured value as: Test Result = Reading + Correction Factor
 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
 4. All not in the table noted test results are more than 20 dB below the relevant limits.
 5. After evaluated, the test result in this report adopt the worst case to measure, please see attached diagrams in appendix.

All other not noted test plots do not contain significant test results in relation to the limits.

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.



Registration number: W6M22406-23537-C-1

FCC ID: GX9ESL1

3.4 Carrier Frequency Separation

Carrier Frequency Separation was measured with modulation (declared by manufacturer).


According to FCC rules part 15 subpart C §15.247 frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater.

Test date: June 26, 2024

Temperature: 27.4 °C

Humidity: 53.6 %

Tester: Sora

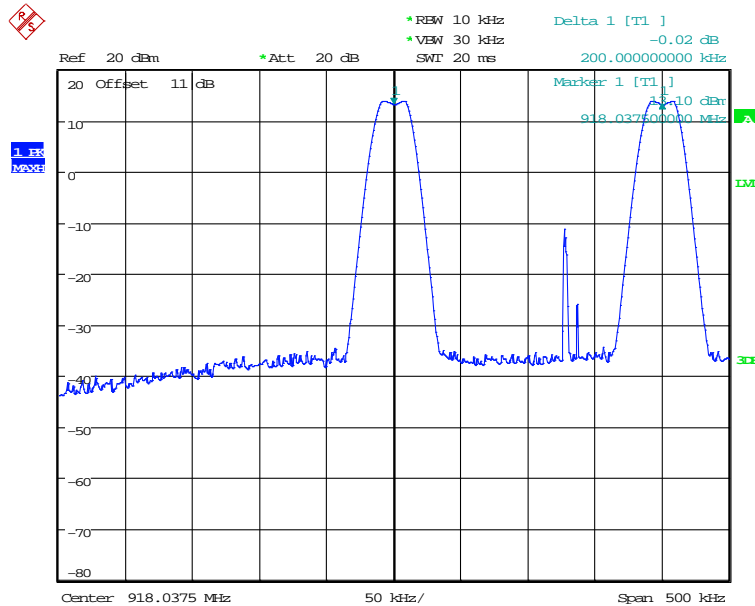


FREQUENCY SEPARATION 918.0375MHz

Date: 26.JUN.2024 14:43:41




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22406-23537-C-1
 FCC ID: GX9ESL1

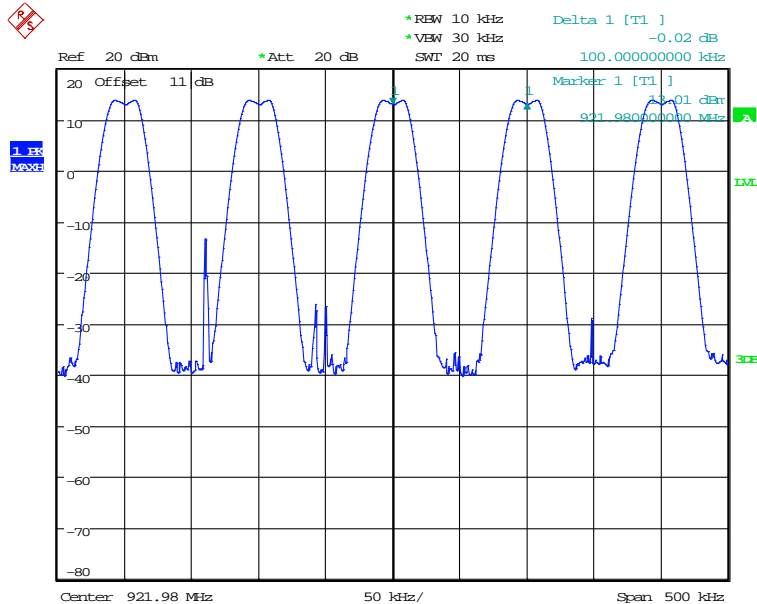


FREQUENCY SEPARATION 921.98MHz
 Date: 26.JUN.2024 14:44:47

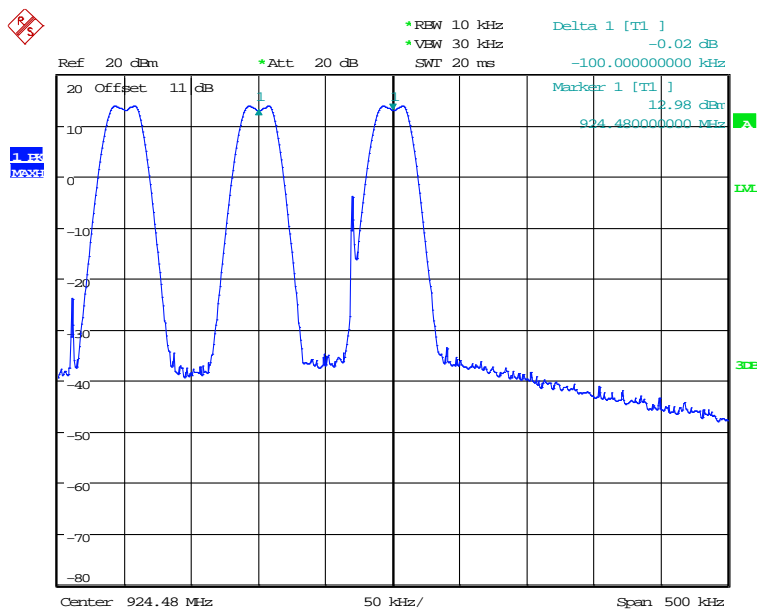

FREQUENCY SEPARATION 924.48MHz
 Date: 26.JUN.2024 14:49:30

Limits:

Frequency (MHz)	20 dB bandwidth < 25 kHz	20 dB bandwidth > 25 kHz
902-928	25 kHz	20 dB bandwidth
2400-2483.5 5725-5850.0	25 kHz	20 dB bandwidth




Registration number: W6M22406-23537-C-1
 FCC ID: GX9ESL1

3.5 Number of Hopping Frequencies

According to FCC rules part 15 subpart C §15.247 frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies. Frequency hopping systems in 5725-5850 MHz bands shall use least 75 hopping frequencies.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20dB bandwidth of the hopping channel 250 kHz or greater, the system shall use at least 25 hopping frequencies.


Test date: June 26, 2024
 Temperature: 27.4 °C
 Humidity: 53.6 %
 Tester: Sora

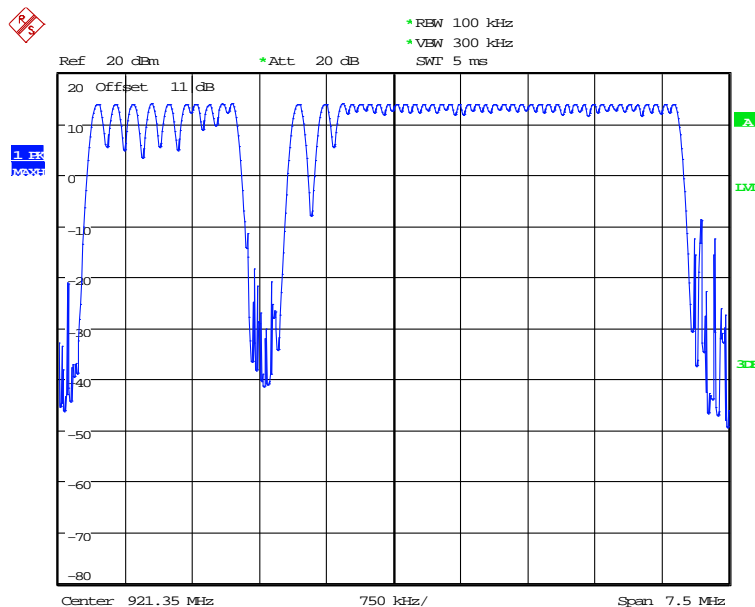

NUMBER OF HOPPING
 Date: 26.JUN.2024 14:53:55

Limits:

Frequency (MHz)	20dB Bandwidth	Number of Channels
902-928 MHz	Bandwidth < 250 kHz	≥ 50
	Bandwidth ≥ 250 kHz	≥ 25
2400-2483.5	not defined	15
5725-5850.0 MHz	1 MHz	75



Registration number: W6M22406-23537-C-1
FCC ID: GX9ESL1

3.5.1 Pseudorandom Frequency Hopping Sequence


The generation of the hopping sequence is determined by the Bluetooth core specification and complies with the FCC requirements.

3.5.2 Coordination of hopping sequences to other transmitters

According to the Bluetooth core specification such a coordination is not possible. During scatternet function only one of the two hopping sequences will be used at a definite moment.

3.5.3 System Receiver Hopping Capability

According to the Bluetooth core specification. The system receivers shift frequencies in synchronization with the transmitted signals.



Registration number: W6M22406-23537-C-1
FCC ID: GX9ESL1


3.6 Time of Occupancy (Dwell Time)

Frequency hopping systems operating in the 5725-5850 MHz band shall use an average time of occupancy on any frequency not greater than 0.4 seconds within a 30 second period.

In 2400-2483.5 MHz band the average time of occupancy on any channel shall not be greater than 0.4 seconds multiplied by the number of hopping channels employed.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

Test date: June 26, 2024
Temperature: 27.4 °C
Humidity: 53.6 %
Tester: Sora

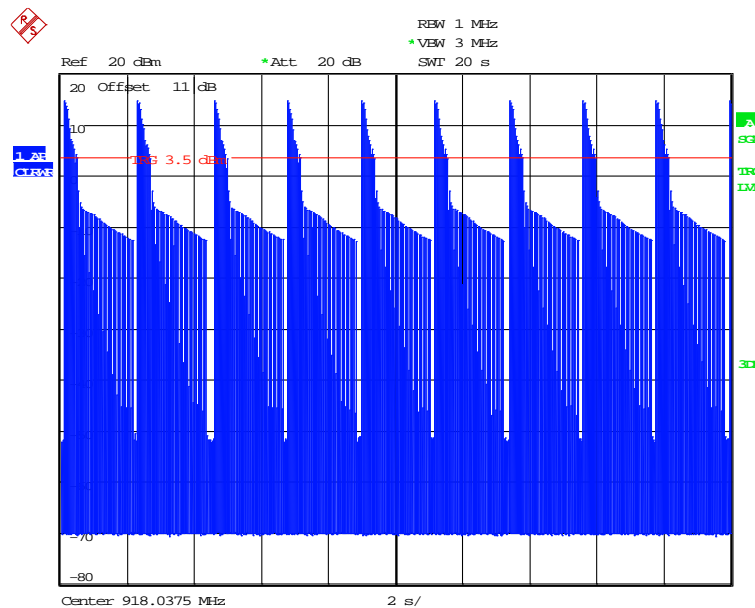


DWELL TIME 918.0375MHz
Date: 26.JUN.2024 15:16:25




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22406-23537-C-1
FCC ID: GX9ESL1

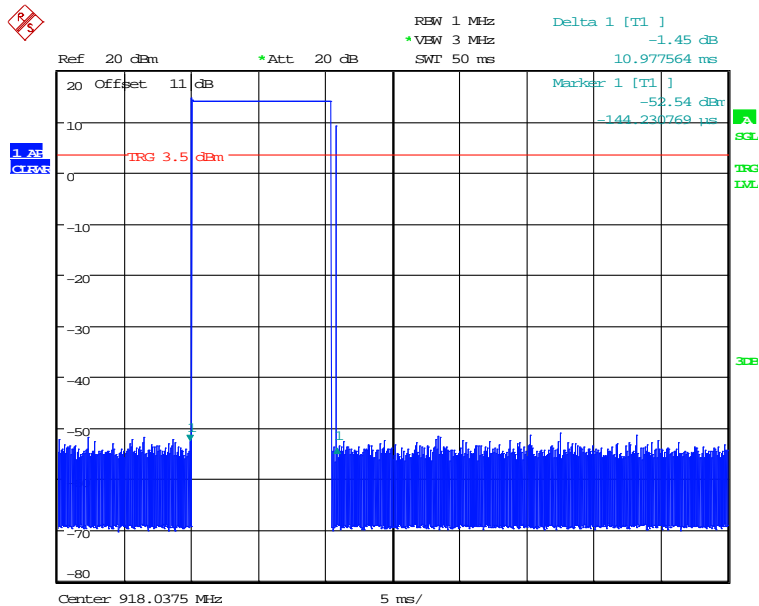


DWELL TIME 918.0375MHz (10.978ms * 9events = 98.802ms)
Date: 26.JUN.2024 15:12:55

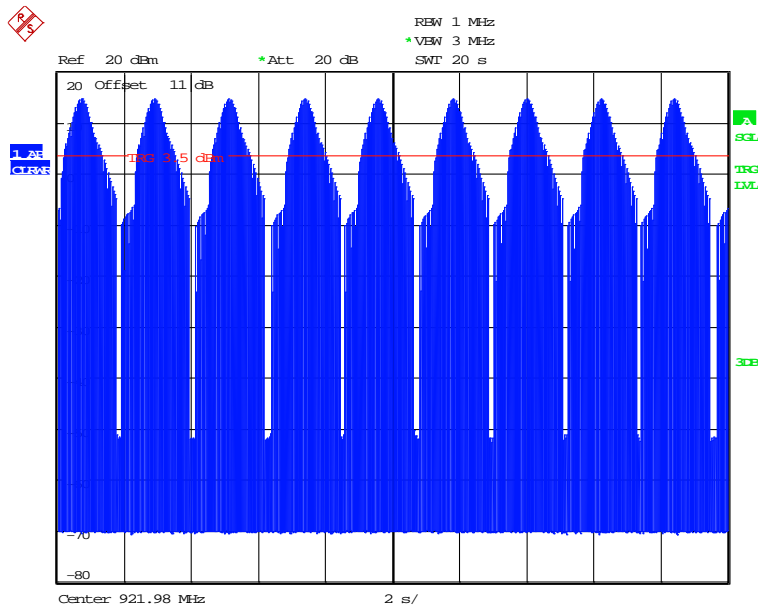

DWELL TIME 921.98MHz
Date: 26.JUN.2024 15:18:25




Registration number: W6M22406-23537-C-1
 FCC ID: GX9ESL1

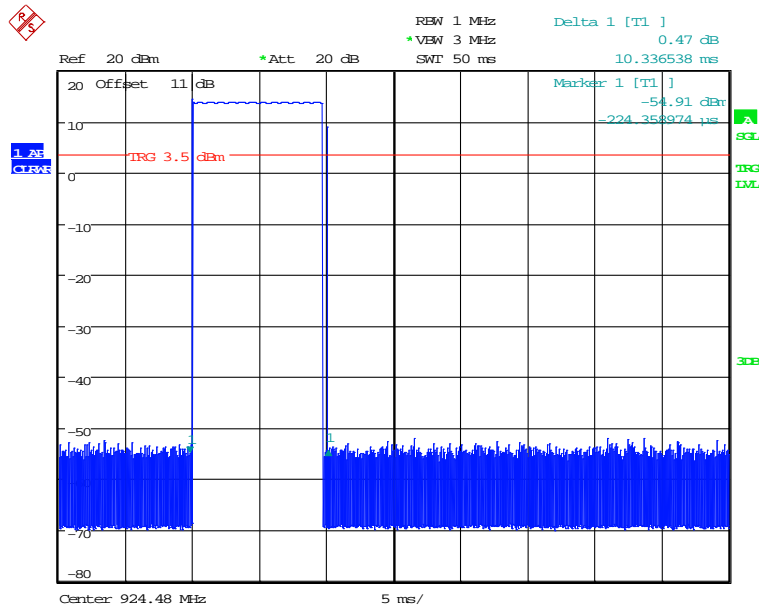

DWELL TIME 924.48MHz (10.337ms * 9events = 93.033ms)
 Date: 26.JUN.2024 15:14:52

Limits and measurement periods:

Frequency (MHz)	Number of channels	Measurement Period	Limit
902 – 928	≥50	20 s	0.4 s
	49 ≥ 25	10 s	0.4 s
2400 – 2483.5	≥ 15	0.4 s * number of used channels	0.4 s
5725- 5850	≥ 75	30 s	0.4s



Registration number: W6M22406-23537-C-1

FCC ID: GX9ESL1

3.7 20dB Bandwidth

Frequency hopping systems operating in the 5725-5850 MHz bands shall use a maximum 20dB bandwidth of 1 MHz.

The 20dB bandwidth is measured on the lowest, middle and highest hopping channel.


For frequency hopping systems operating in the 902-928 MHz band the maximum 20dB bandwidth of the hopping channel is 500 kHz.

Test date: June 26, 2024

Temperature: 27.4 °C

Humidity: 53.6 %

Tester: Sora

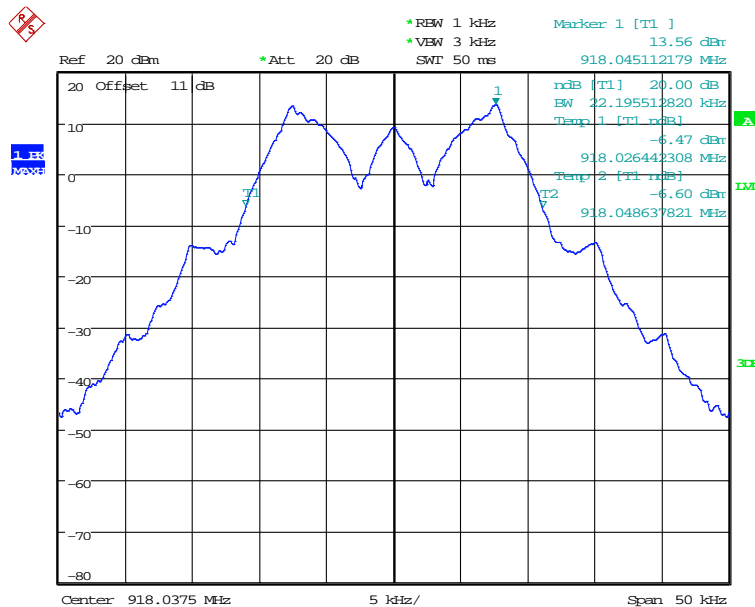


20DB BANDWIDTH 918.0375MHz
Date: 26.JUN.2024 13:26:34




Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22406-23537-C-1
 FCC ID: GX9ESL1

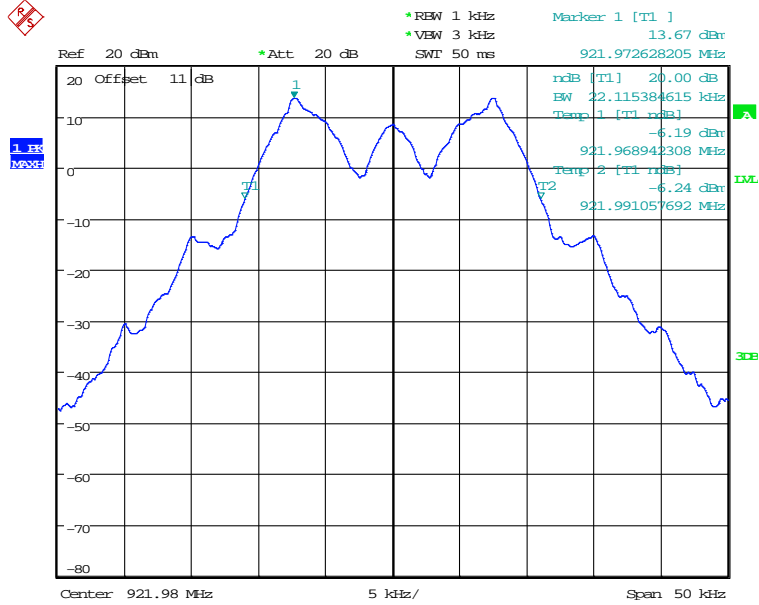

20DB BANDWIDTH 921.98MHz
 Date: 26.JUN.2024 13:30:17

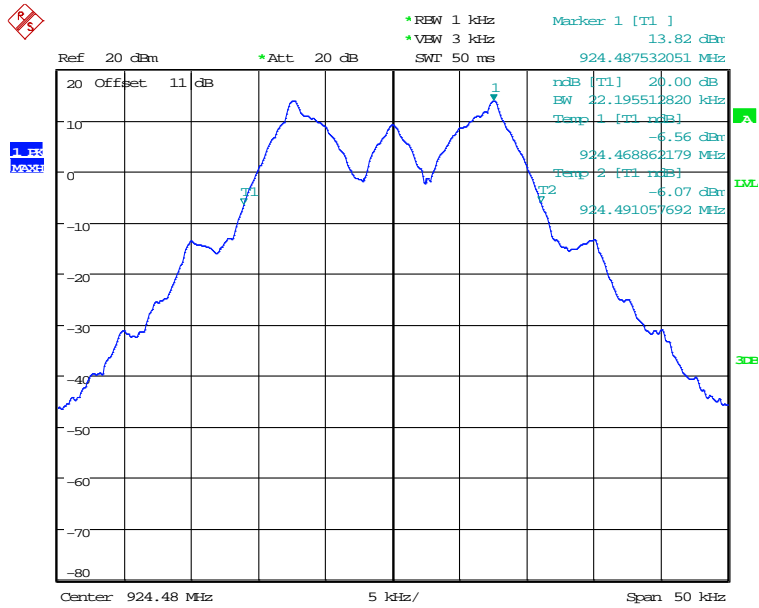

20DB BANDWIDTH 924.48MHz
 Date: 26.JUN.2024 13:31:08



Registration number: W6M22406-23537-C-1


FCC ID: GX9ESL1

Limits:

Frequency (MHz)	Limit
902-928	≤ 500 kHz
2400-2483.5	not defined
5725-5850	≤ 1 MHz

3.7.1 System Receiver Input Bandwidth

It is determined in the Bluetooth core specification. The value matches to the bandwidth of transmitter signal.



Registration number: W6M22406-23537-C-1

FCC ID: GX9ESL1

3.8 Band-edge Compliance of RF Emissions

According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.


In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

Test date: June 26, 2024


Temperature: 27.4 °C

Humidity: 53.6 %

Tester: Sora

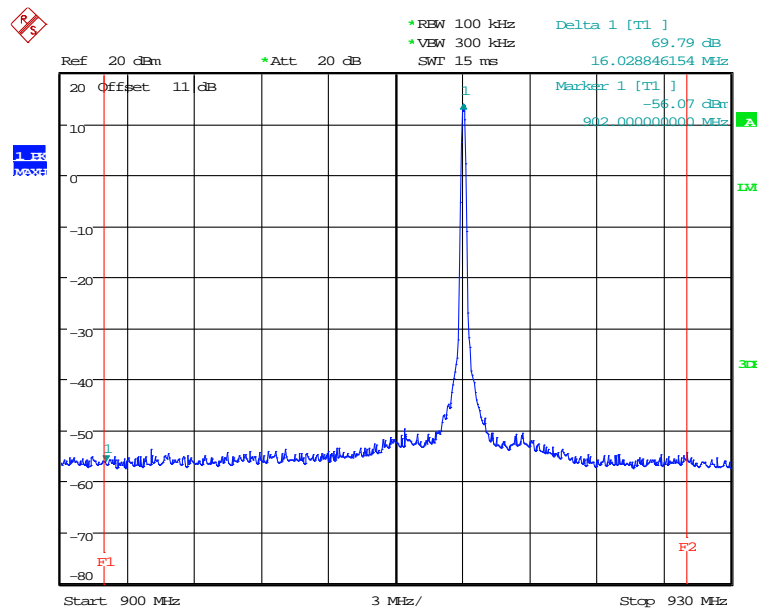


BANDEDGE 918.0375MHz
Date: 26.JUN.2024 13:27:45




Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22406-23537-C-1
FCC ID: GX9ESL1

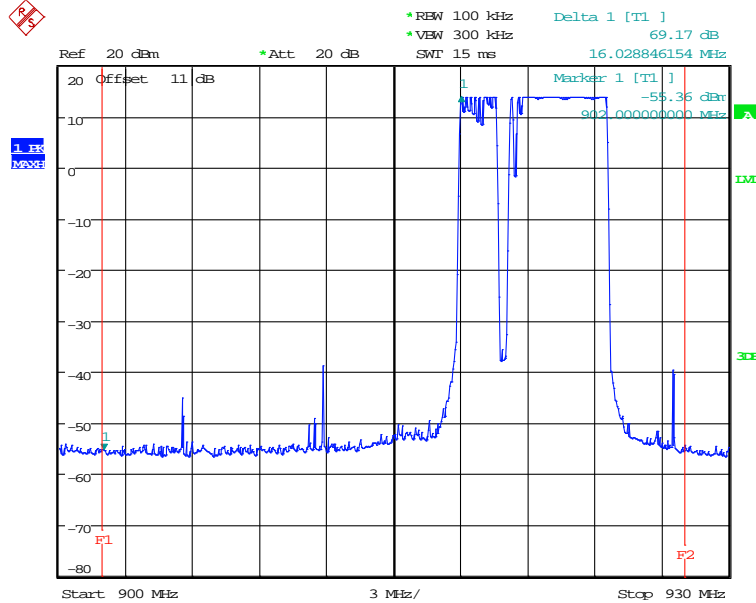

BANDEDGE 918.0375MHz HOPPING MODE
Date: 26.JUN.2024 13:38:18

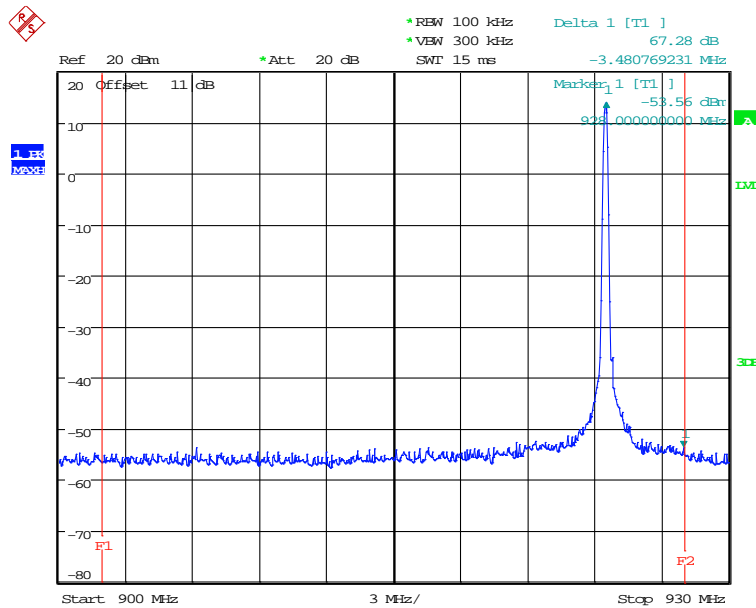


BANDEDGE 924.48MHz
Date: 26.JUN.2024 13:33:00



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22406-23537-C-1
 FCC ID: GX9ESL1

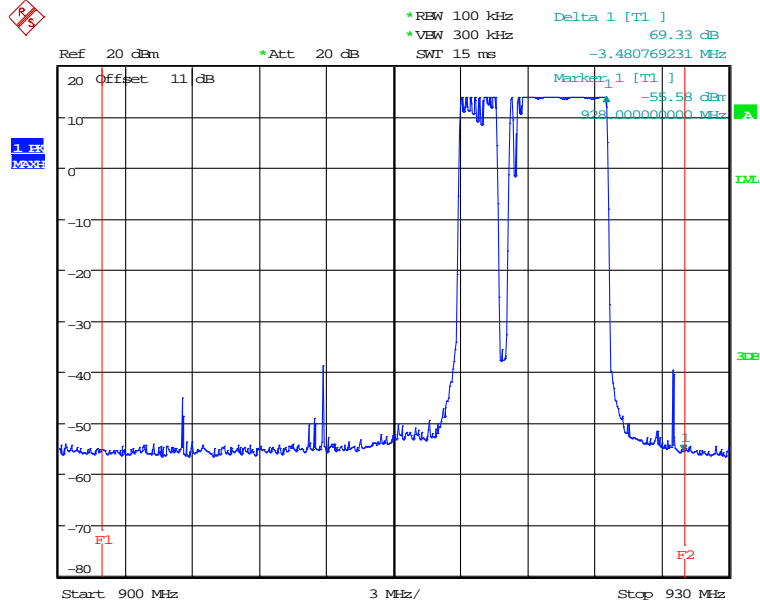

BANDEDGE 924.48MHz HOPPING MODE
 Date: 26.JUN.2024 13:37:42

Limits:

Frequency (MHz)	Limit
902 - 928	- 20 dB
2400 - 2483.5	
5725 - 5850	



Registration number: W6M22406-23537-C-1

FCC ID: GX9ESL1

3.9 Radiated Emissions from Digital Part


FCC Rule: 15.109

Summary table with radiated data of the test plots

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Explanation: The test results are listed in the separated test report no.: W6M22406-23537-P-15B.



Registration number: W6M22406-23537-C-1


FCC ID: GX9ESL1

3.10 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

- Note:**
- 1. The formula of measured value as: Test Result = Reading + Correction Factor**
 - 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss**
 - 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
 - 4. All not in the table noted test results are more than 20 dB below the relevant limits.**
 - 5. Up Line: QP Limit Line, Down Line: Ave Limit Line.**
 - 6. This test is not required because the EUT is powered by battery.**



Registration number: W6M22406-23537-C-1
FCC ID: GX9ESL1

Appendix

Measurement diagrams

Spurious Emissions radiated



Radiated Emission Measurement

Operator: Kai

File :1

Data :#1


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 11:45:12

Humidity: 45.8 %

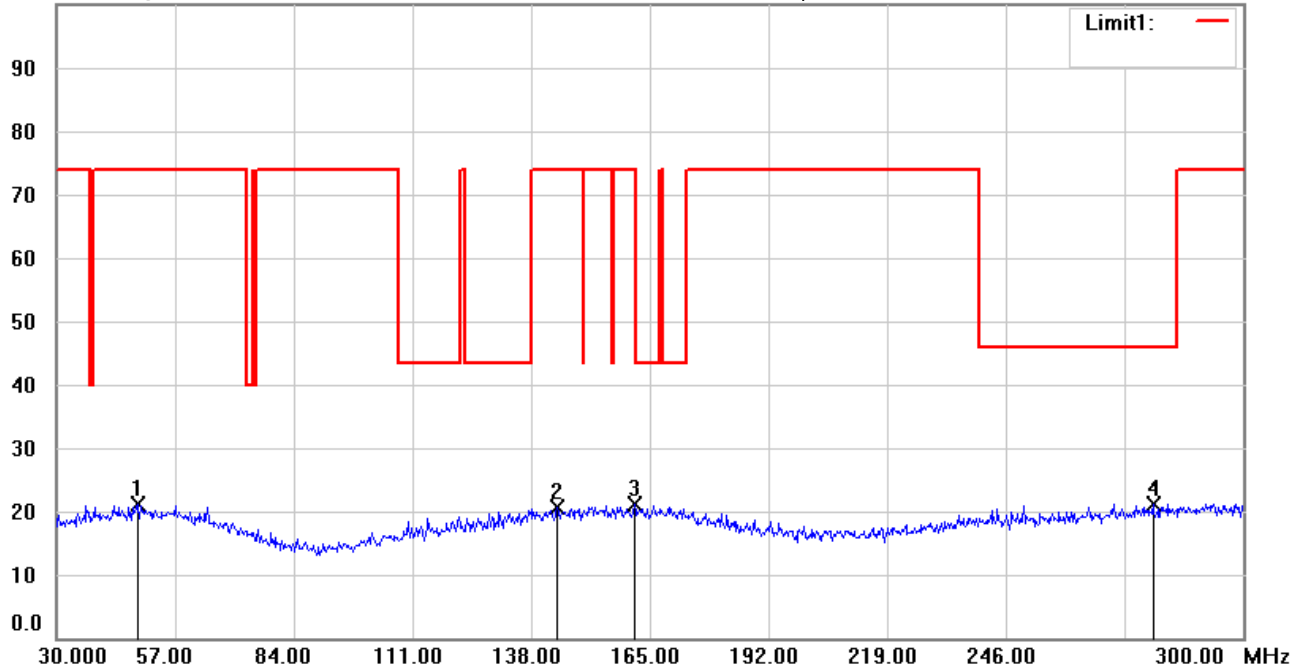

Site : 966A Chamber

Condition : FCC Restriction Band 30-300

Polarization: *Horizontal*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 918.0375MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	48.4950	33.72	peak	-12.70	21.02	74.00	100	152	-52.98	
	143.9400	33.16	peak	-12.56	20.60	74.00	100	66	-53.40	
	161.4900	33.34	peak	-12.27	21.07	74.00	100	198	-52.93	
*	279.4800	33.88	peak	-12.64	21.24	46.00	100	57	-24.76	



Radiated Emission Measurement

Operator: Kai

File :1

Data :#2


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 11:45:56

Humidity: 45.8 %

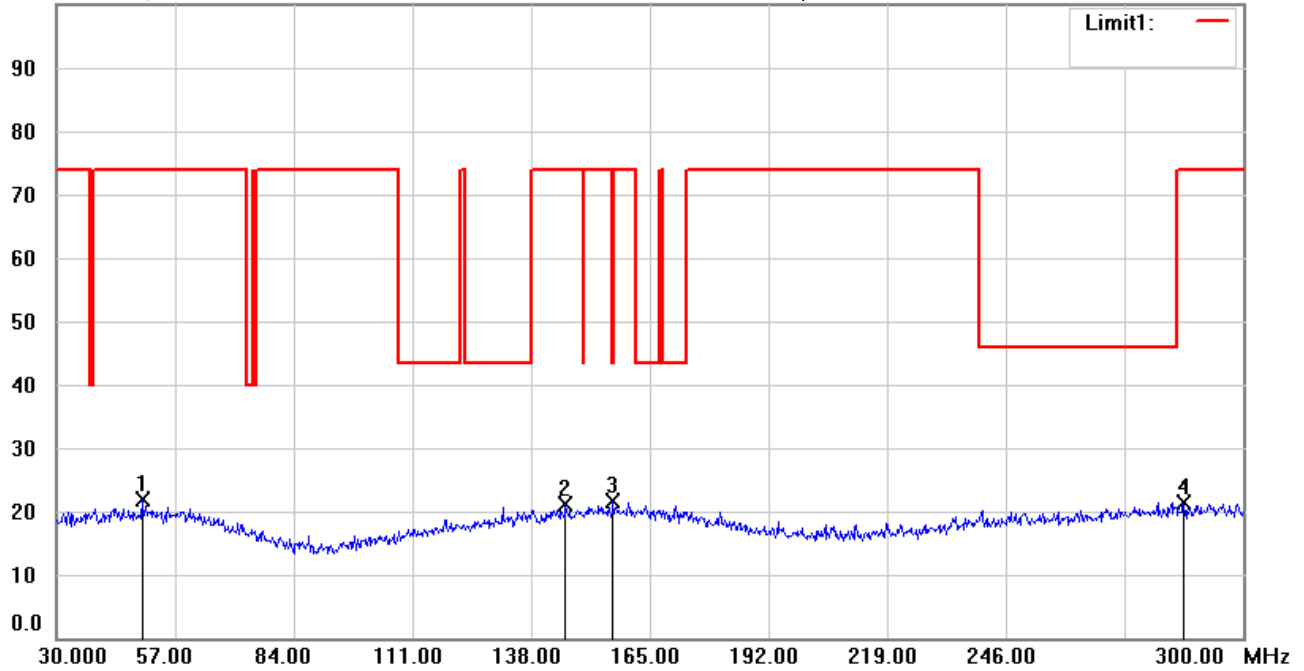

Site : 966A Chamber

Condition : FCC Restriction Band 30-300

Polarization: *Vertical*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 918.0375MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	49.4400	34.50	peak	-12.64	21.86	74.00	100	102	-52.14	
	145.8300	33.53	peak	-12.44	21.09	74.00	100	33	-52.91	
	156.6300	33.90	peak	-12.16	21.74	74.00	100	140	-52.26	
	286.3650	33.81	peak	-12.42	21.39	74.00	100	258	-52.61	



Radiated Emission Measurement

Operator: Kai

File :1

Data :#3


Date: 2024/6/20

Temperature:26.5 °C

100.0 dBuV/m

Time: 上午 11:46:40

Humidity:45.8 %

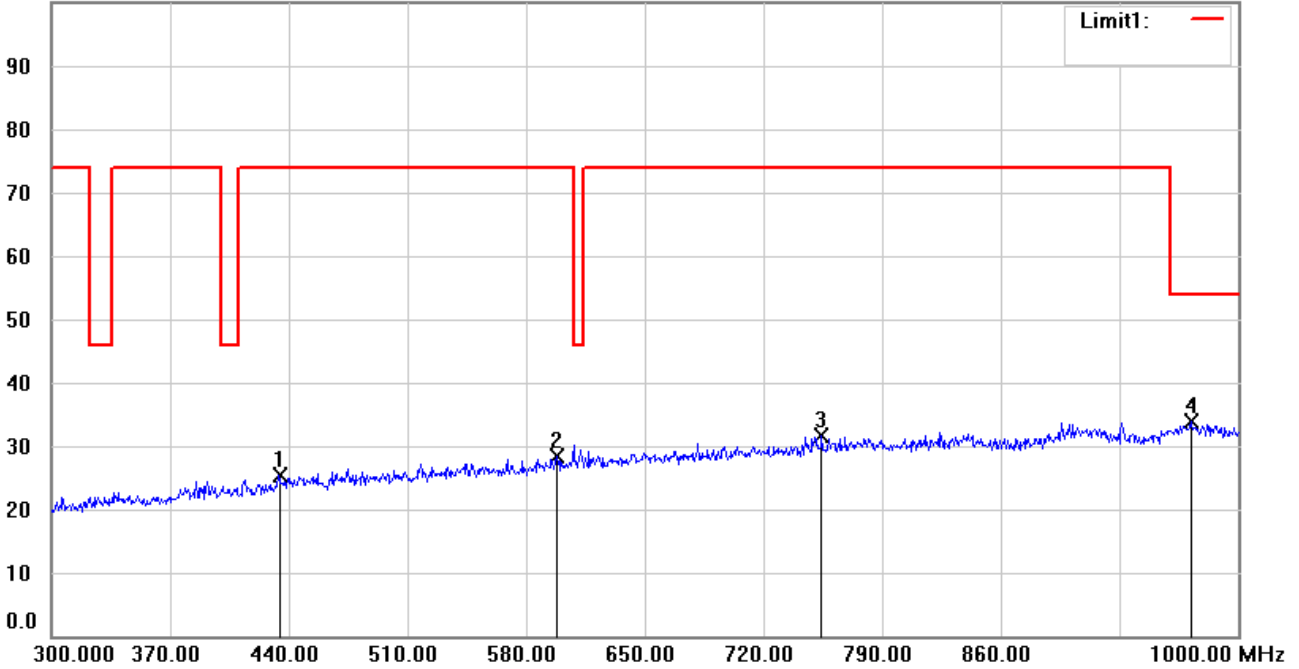

Site : 966A Chamber

Condition : FCC Restriction Band 300-1000

Polarization: *Horizontal*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 918.0375MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	434.0500	34.14	peak	-8.83	25.31	74.00	100	113	-48.69	
	598.2000	33.63	peak	-5.30	28.33	74.00	100	37	-45.67	
	754.3000	33.99	peak	-2.27	31.72	74.00	100	185	-42.28	
*	972.3500	34.40	peak	-0.54	33.86	54.00	100	90	-20.14	



Radiated Emission Measurement

Operator: Kai

File :1

Data :#4


Date: 2024/6/20

Temperature:26.5 °C

100.0 dBuV/m

Time: 上午 11:47:25

Humidity:45.8 %

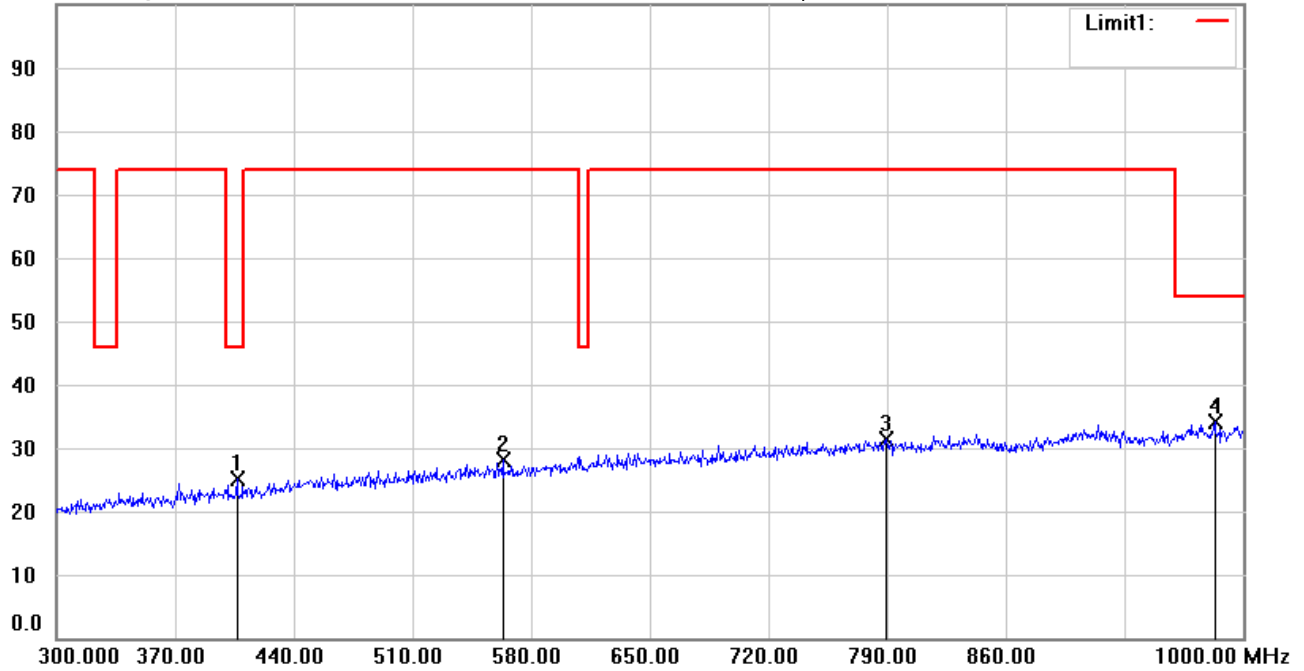

Site : 966A Chamber

Condition : FCC Restriction Band 300-1000

Polarization: **Vertical**

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 918.0375MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	406.7500	34.74	peak	-9.67	25.07	46.00	100	111	-20.93	
	563.2000	34.61	peak	-6.40	28.21	74.00	100	58	-45.79	
	789.3000	33.35	peak	-2.05	31.30	74.00	100	44	-42.70	
*	983.2000	34.66	peak	-0.51	34.15	54.00	100	166	-19.85	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#1


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:42:11

Humidity: 45.8 %

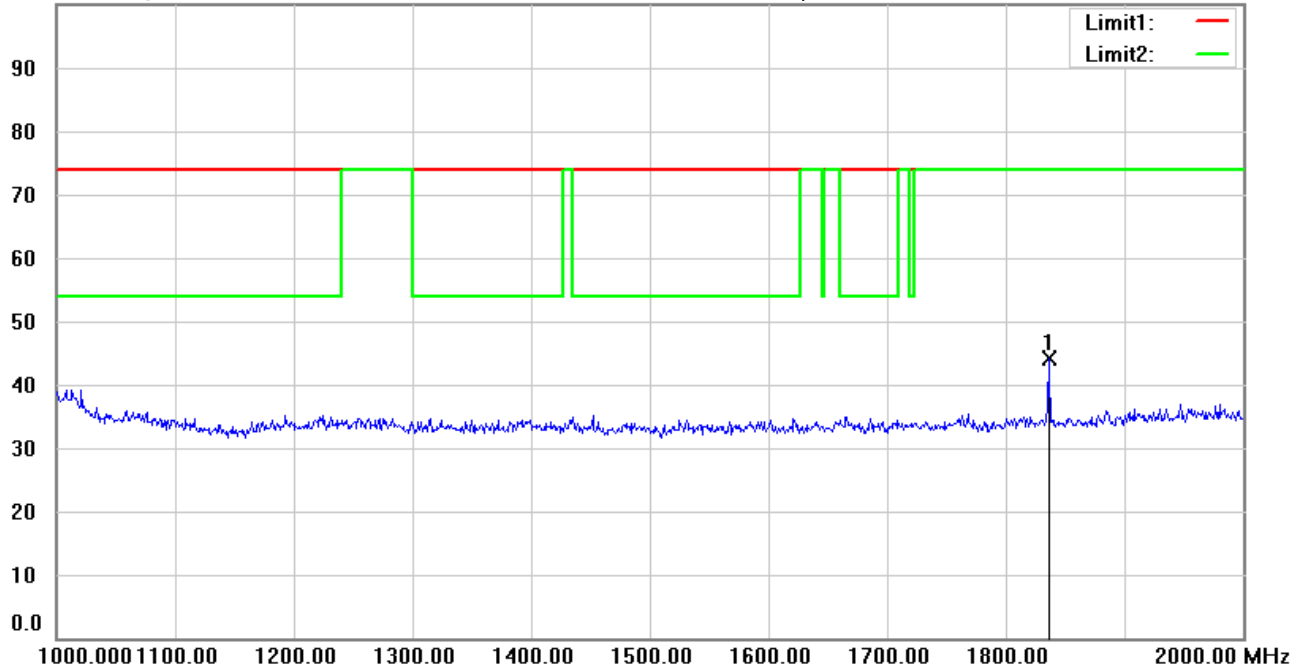

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 918.0375MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1836.500	51.58	peak	-7.49	44.09	74.00	150	244	-29.91	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#5


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:45:00

Humidity: 45.8 %

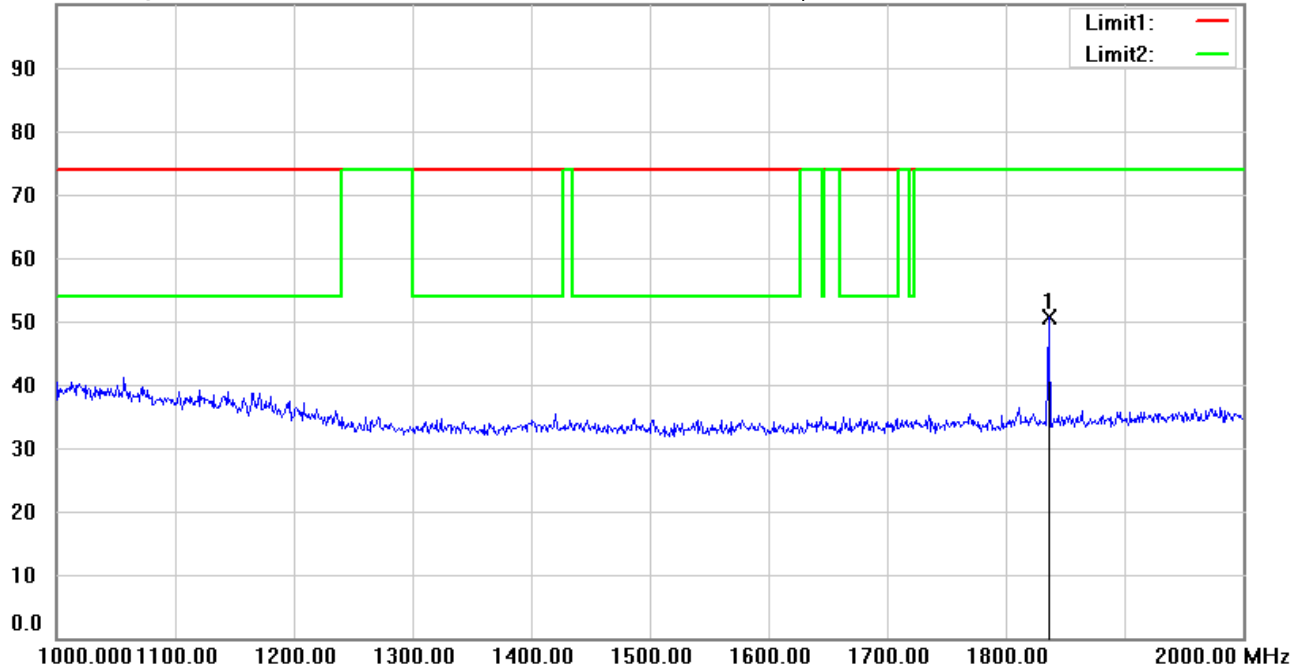

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 918.0375MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1836.500	58.12	peak	-7.49	50.63	74.00	150	14	-23.37	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#2


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:42:52

Humidity: 45.8 %

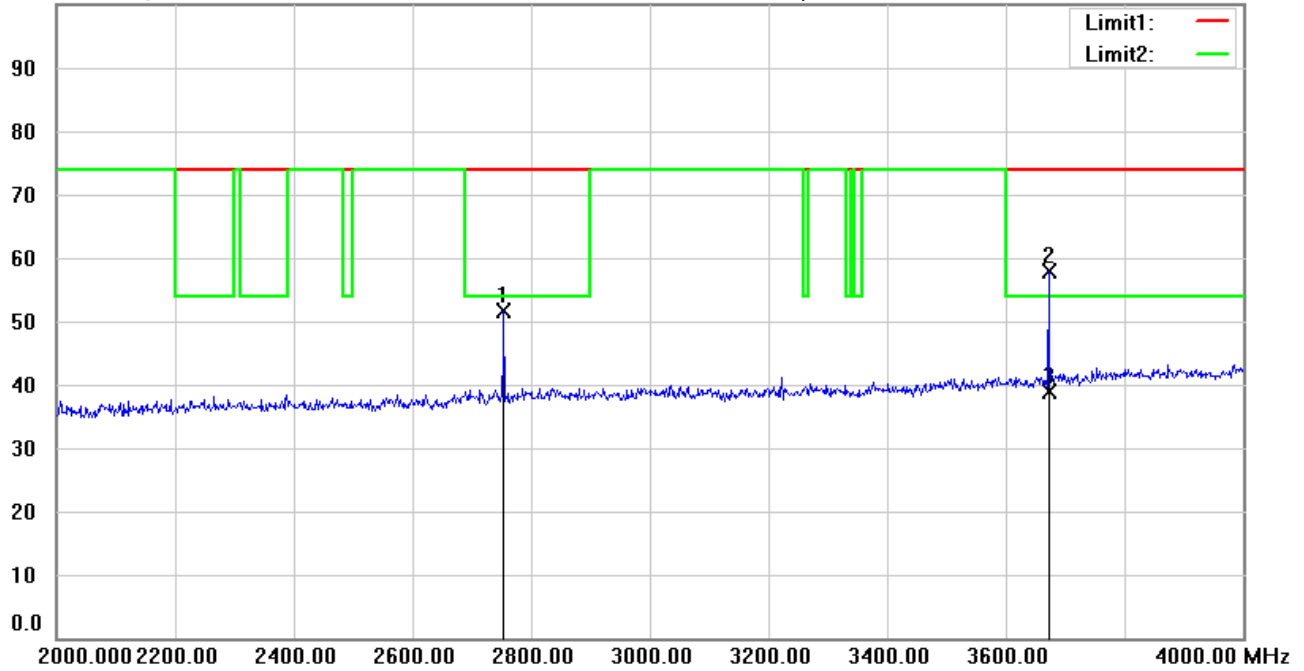

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 918.0375MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2754.000	55.31	peak	-3.64	51.67	74.00	150	211	-22.33	
	3673.000	58.77	peak	-0.77	58.00	74.00	150	23	-16.00	
*	3673.000	39.58	AVG	-0.77	38.81	54.00	150	23	-15.19	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#6


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:45:42

Humidity: 45.8 %

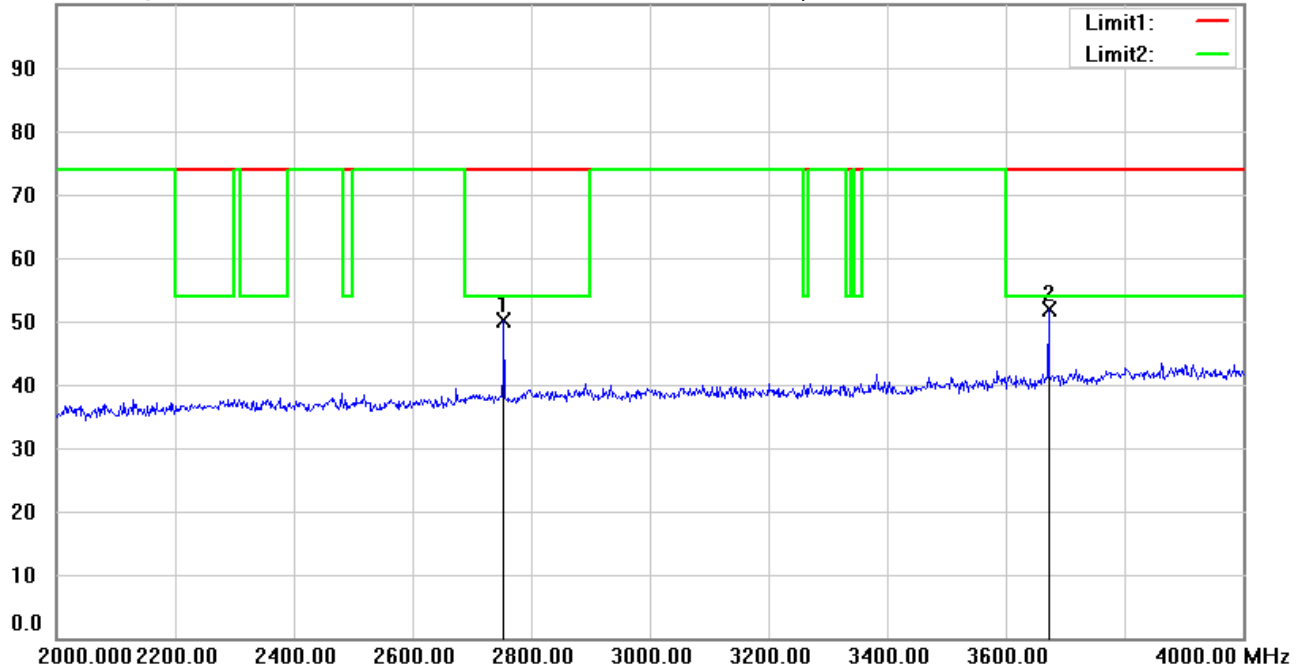

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 918.0375MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2754.000	53.73	peak	-3.64	50.09	74.00	150	177	-23.91	
*	3673.000	52.55	peak	-0.77	51.78	74.00	150	54	-22.22	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#3


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:43:34

Humidity: 45.8 %

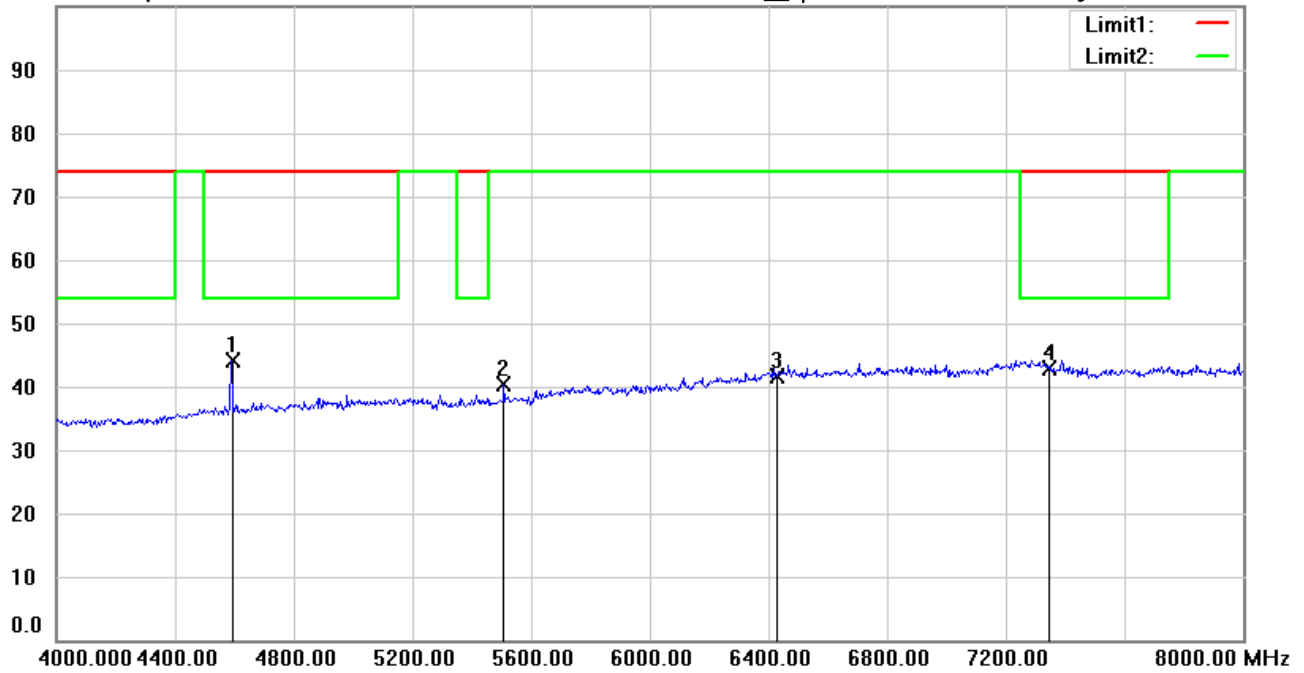

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 918.0375MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4590.000	40.90	peak	3.19	44.09	74.00	150	25	-29.91	
	5508.000	35.50	peak	4.96	40.46	74.00	150	289	-33.54	
	6426.262	32.62	peak	9.10	41.72	74.00	150	89	-32.28	
	7344.300	32.94	peak	10.05	42.99	74.00	150	49	-31.01	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#7


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:46:25

Humidity: 45.8 %

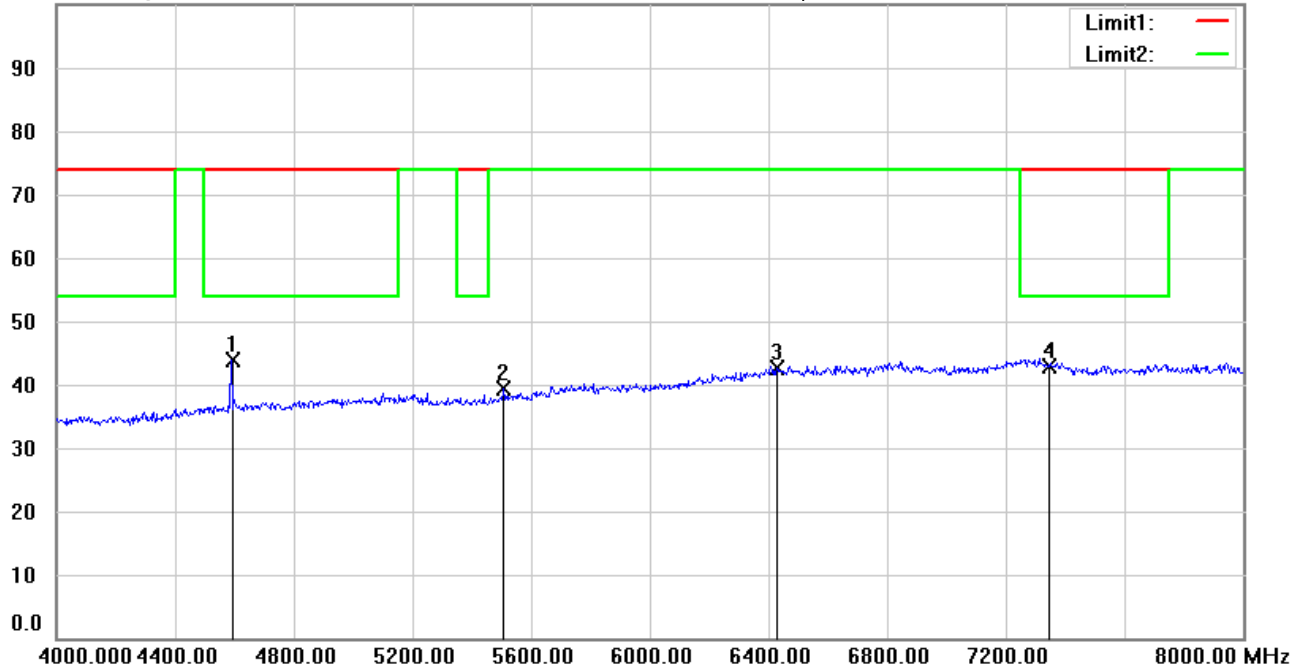

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22406-23537

M/N:

Test Mode : TX 918.0375MHz

Note :

Polarization: *Vertical*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4590.000	40.78	peak	3.19	43.97	74.00	150	152	-30.03	
	5508.000	34.47	peak	4.96	39.43	74.00	150	341	-34.57	
	6426.262	33.45	peak	9.10	42.55	74.00	150	177	-31.45	
	7344.300	32.94	peak	10.05	42.99	74.00	150	19	-31.01	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#4


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:44:15

Humidity: 45.8 %

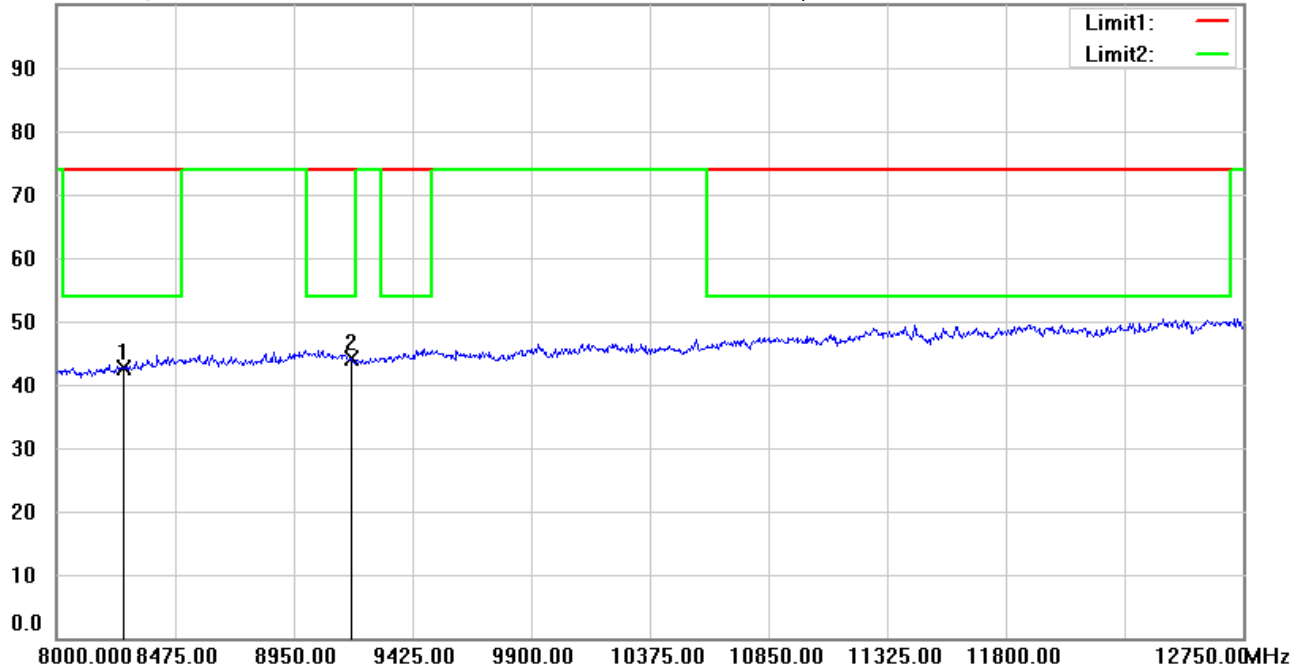

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 918.0375MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	8262.337	32.14	peak	10.54	42.68	74.00	150	280	-31.32	
*	9180.375	32.18	peak	11.88	44.06	74.00	150	177	-29.94	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#8


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:47:06

Humidity: 45.8 %

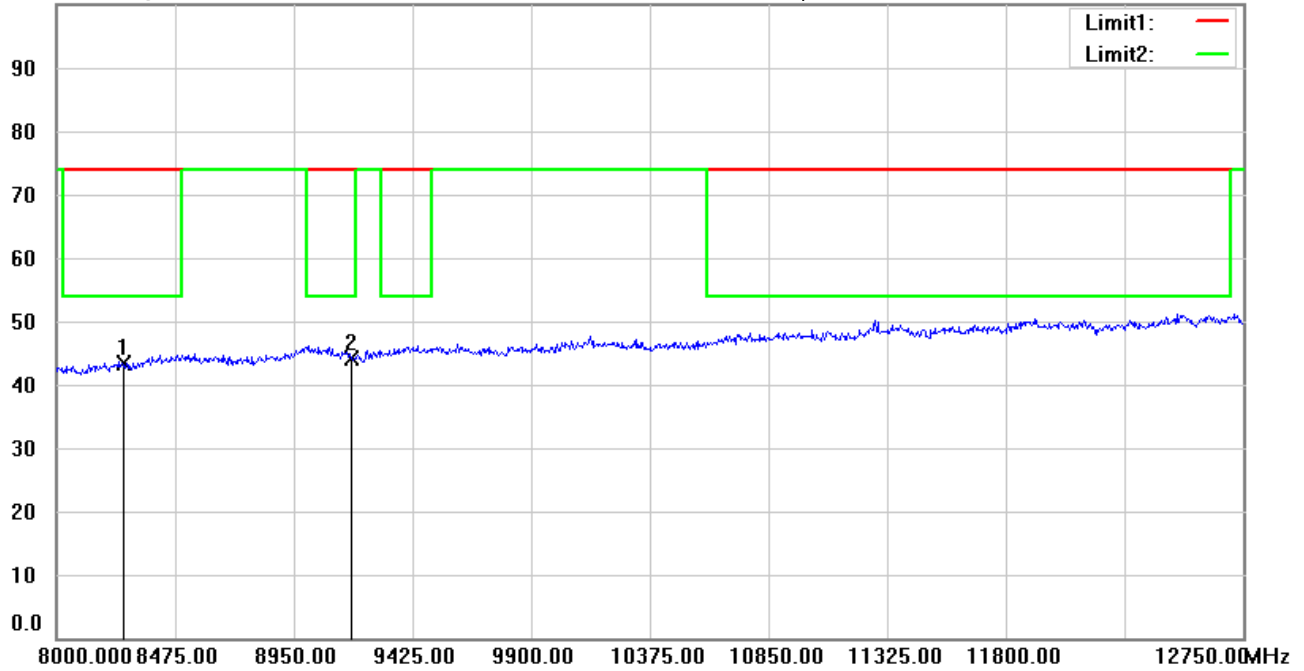

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 918.0375MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	8262.337	32.96	peak	10.54	43.50	74.00	150	303	-30.50	
*	9180.375	32.30	peak	11.88	44.18	74.00	150	330	-29.82	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#1


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:54:55

Humidity: 45.8 %

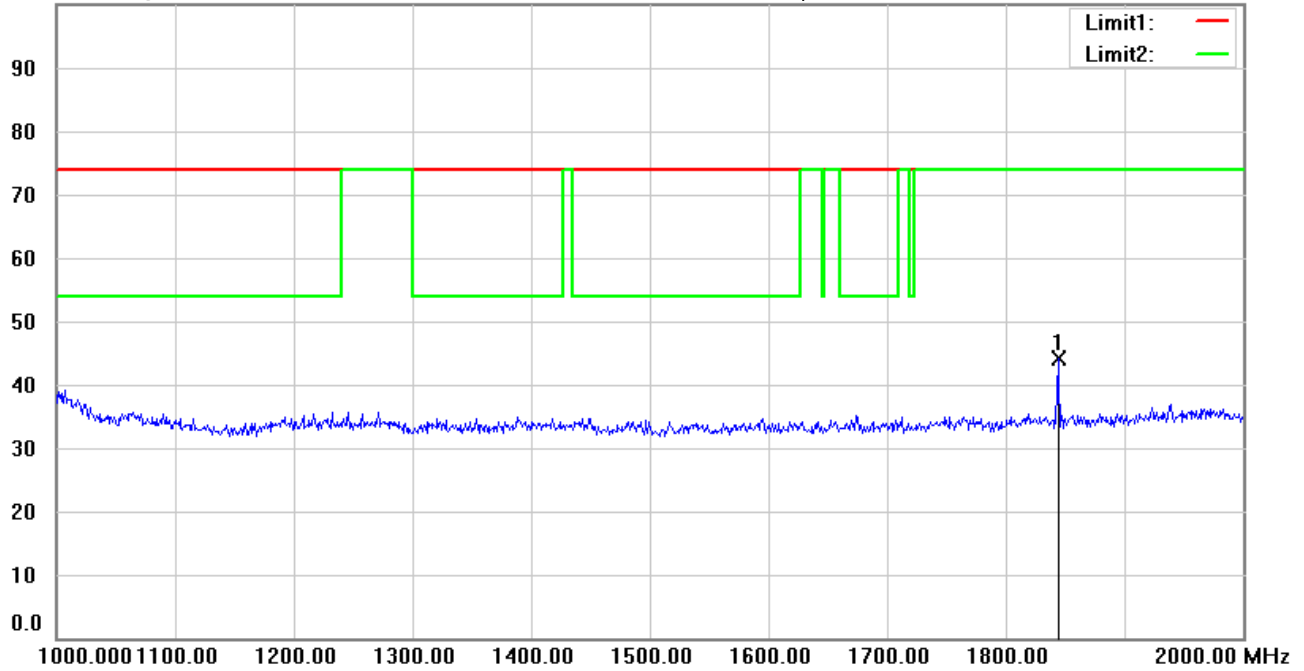

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 921.98MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1844.500	51.53	peak	-7.43	44.10	74.00	150	152	-29.90	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#5


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:57:45

Humidity: 45.8 %

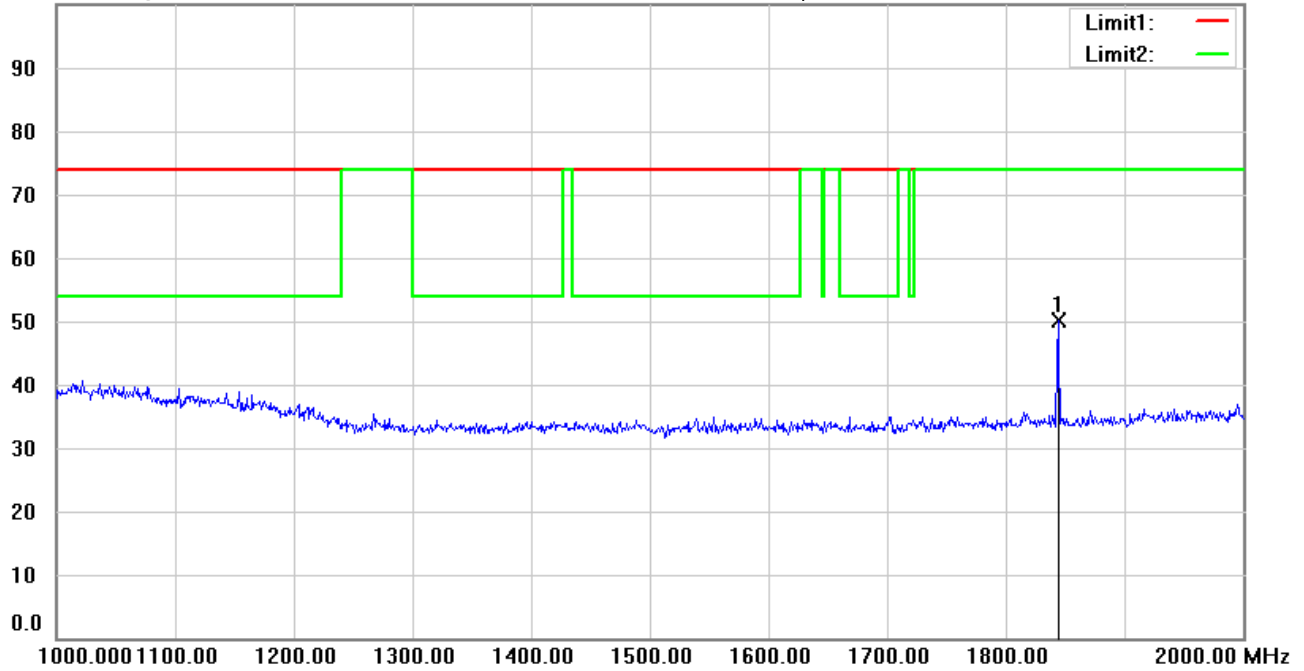

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 921.98MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1844.500	57.51	peak	-7.43	50.08	74.00	150	298	-23.92	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#2


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:55:36

Humidity: 45.8 %

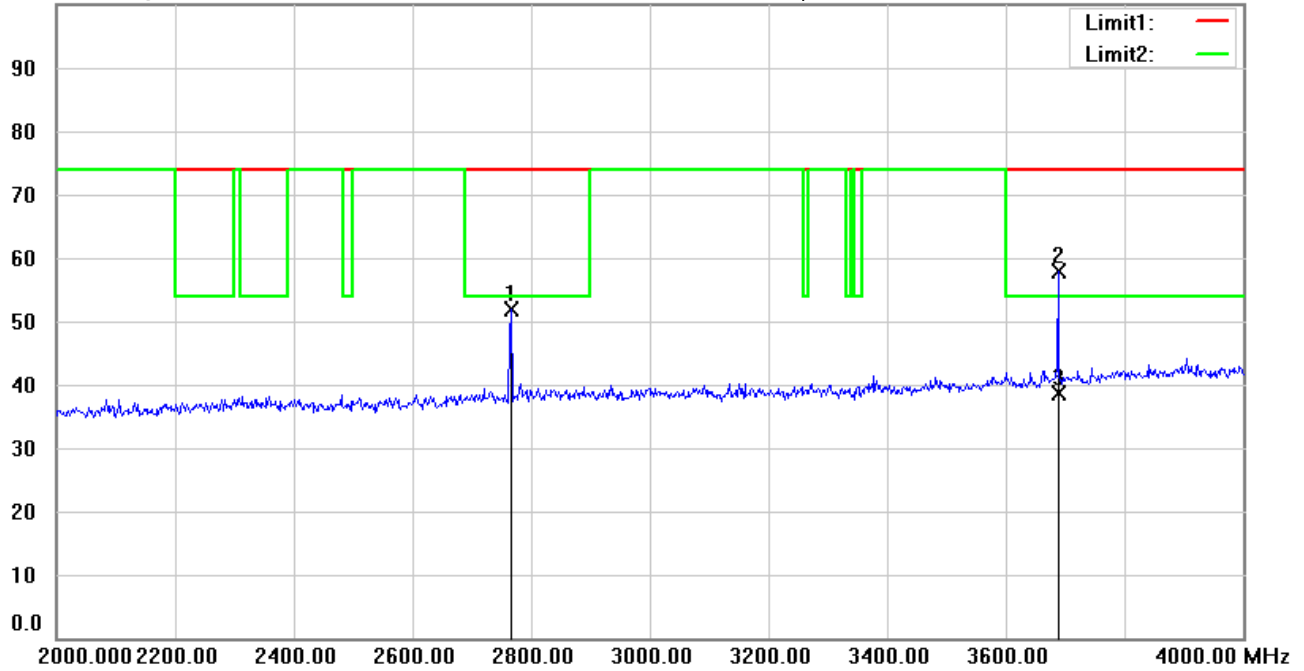

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 921.98MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2766.000	55.40	peak	-3.59	51.81	74.00	150	152	-22.19	
	3688.000	58.45	peak	-0.69	57.76	74.00	150	29	-16.24	
*	3688.000	39.26	AVG	-0.69	38.57	54.00	150	29	-15.43	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#6


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:58:26

Humidity: 45.8 %

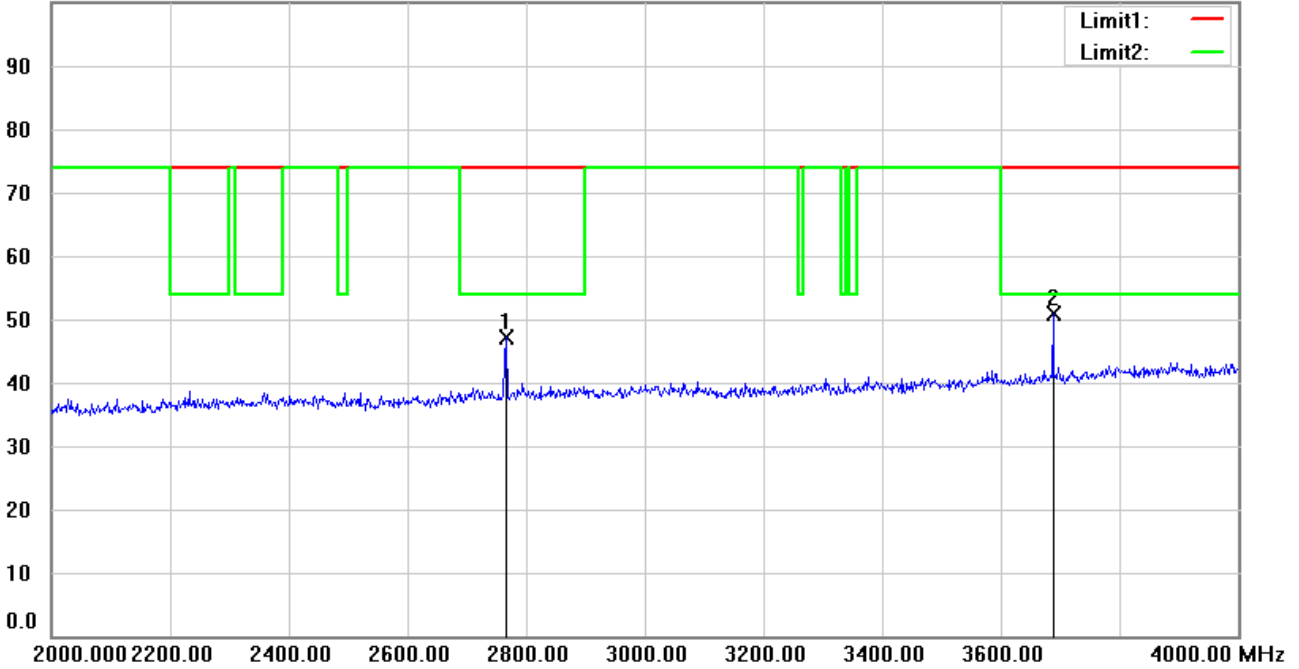

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 921.98MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2766.000	50.67	peak	-3.59	47.08	74.00	150	255	-26.92	
*	3688.000	51.59	peak	-0.69	50.90	74.00	150	185	-23.10	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#3


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:56:17

Humidity: 45.8 %

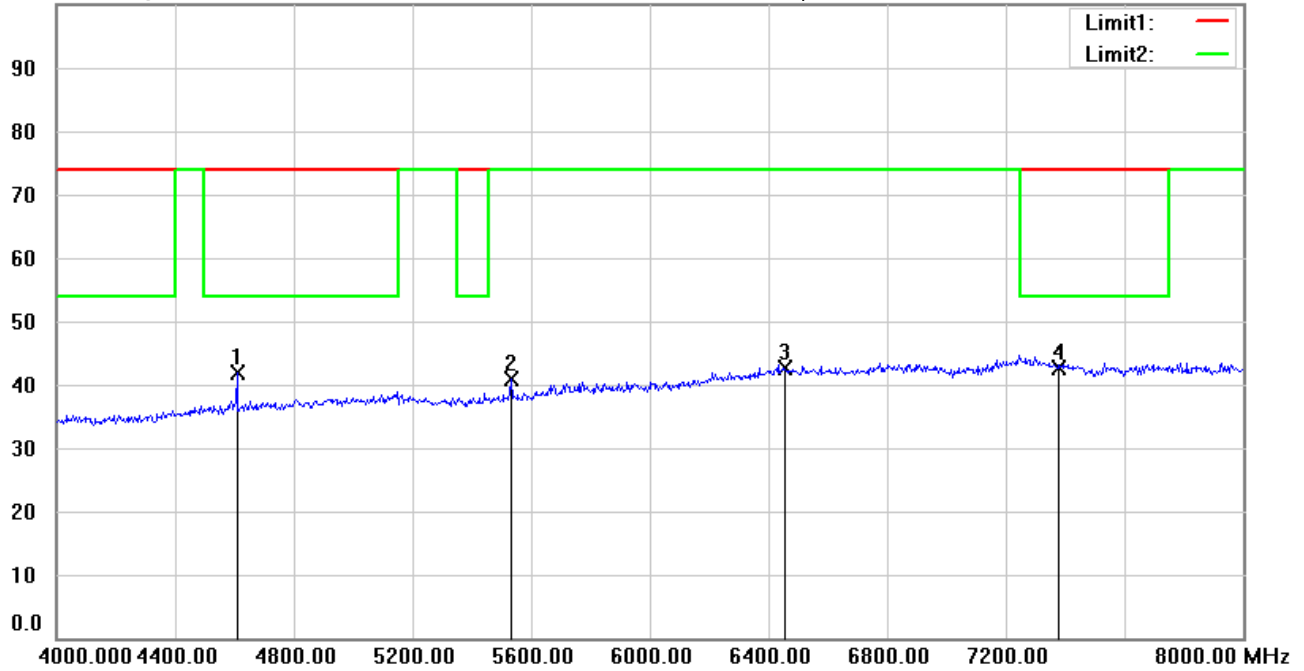

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22406-23537

M/N:

Test Mode : TX 921.98MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4610.000	38.71	peak	3.27	41.98	74.00	150	156	-32.02	
	5532.000	35.84	peak	5.02	40.86	74.00	150	188	-33.14	
*	6453.860	33.61	peak	9.09	42.70	74.00	150	277	-31.30	
	7375.840	32.53	peak	10.06	42.59	74.00	150	18	-31.41	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#7


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:59:09

Humidity: 45.8 %

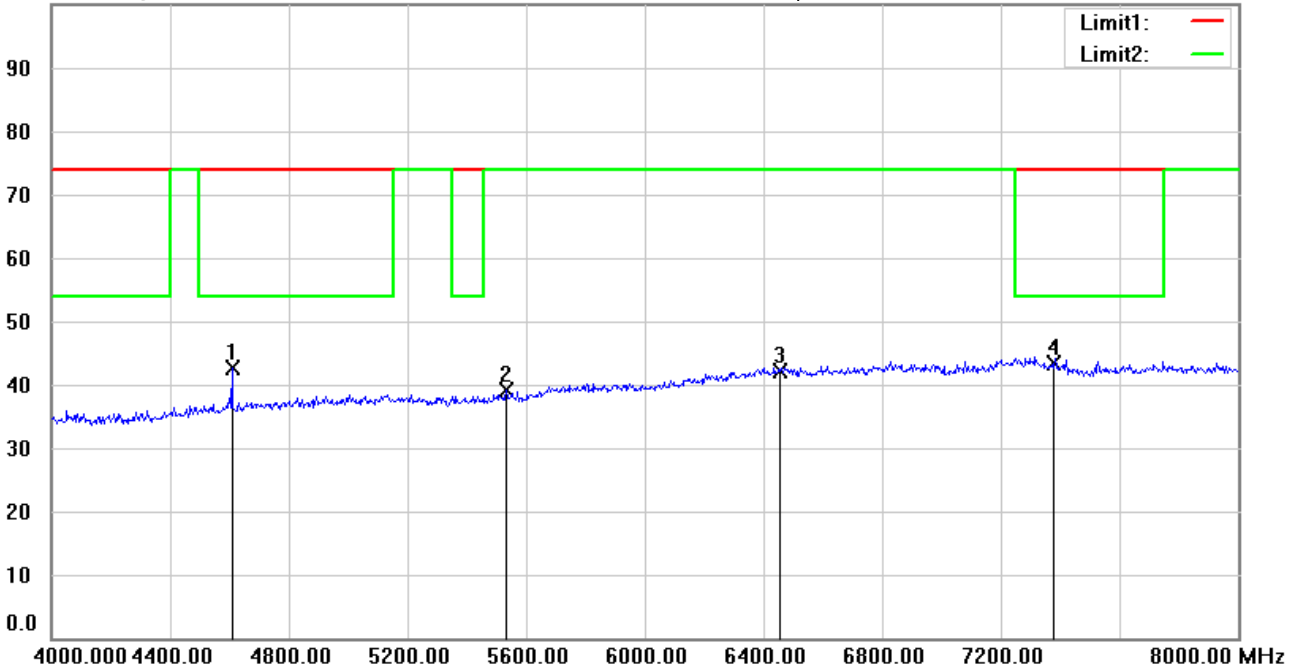

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 921.98MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4610.000	39.40	peak	3.27	42.67	74.00	150	210	-31.33	
	5531.880	34.09	peak	5.02	39.11	74.00	150	33	-34.89	
	6453.860	33.15	peak	9.09	42.24	74.00	150	269	-31.76	
*	7375.840	33.28	peak	10.06	43.34	74.00	150	94	-30.66	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#4


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:56:59

Humidity: 45.8 %

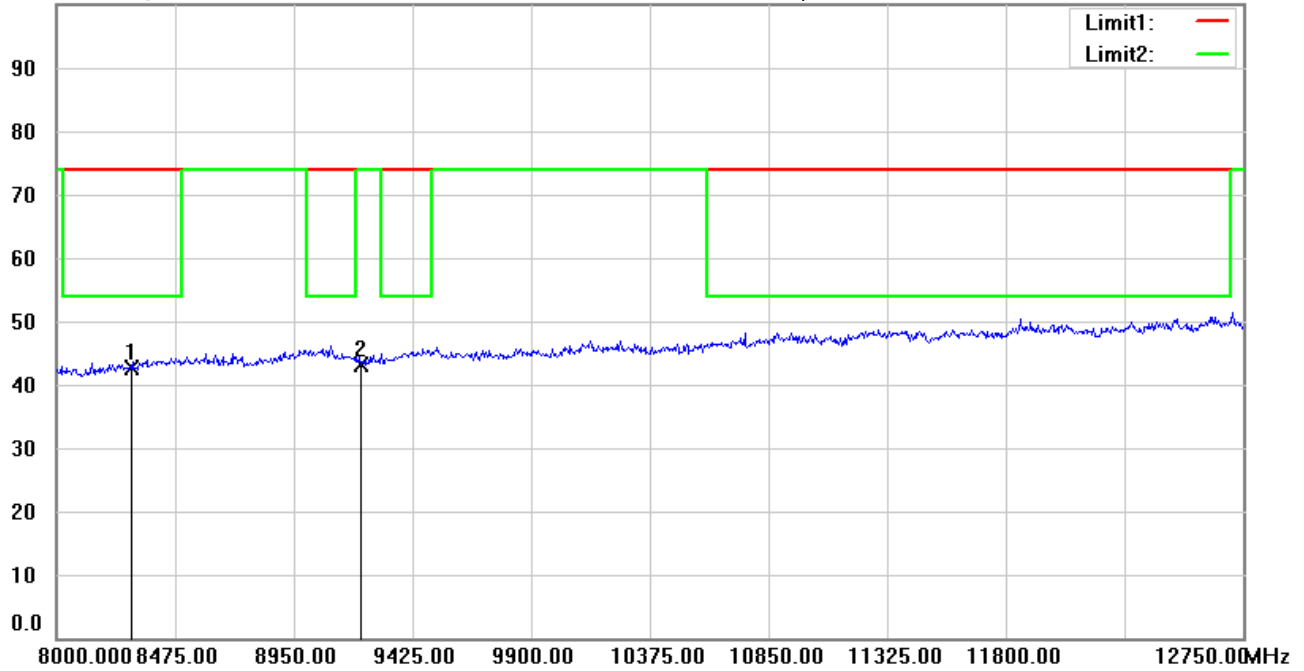

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 921.98MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	8297.820	32.00	peak	10.56	42.56	74.00	150	127	-31.44	
*	9219.800	31.38	peak	11.87	43.25	74.00	150	85	-30.75	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#8


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 10:59:50

Humidity: 45.8 %

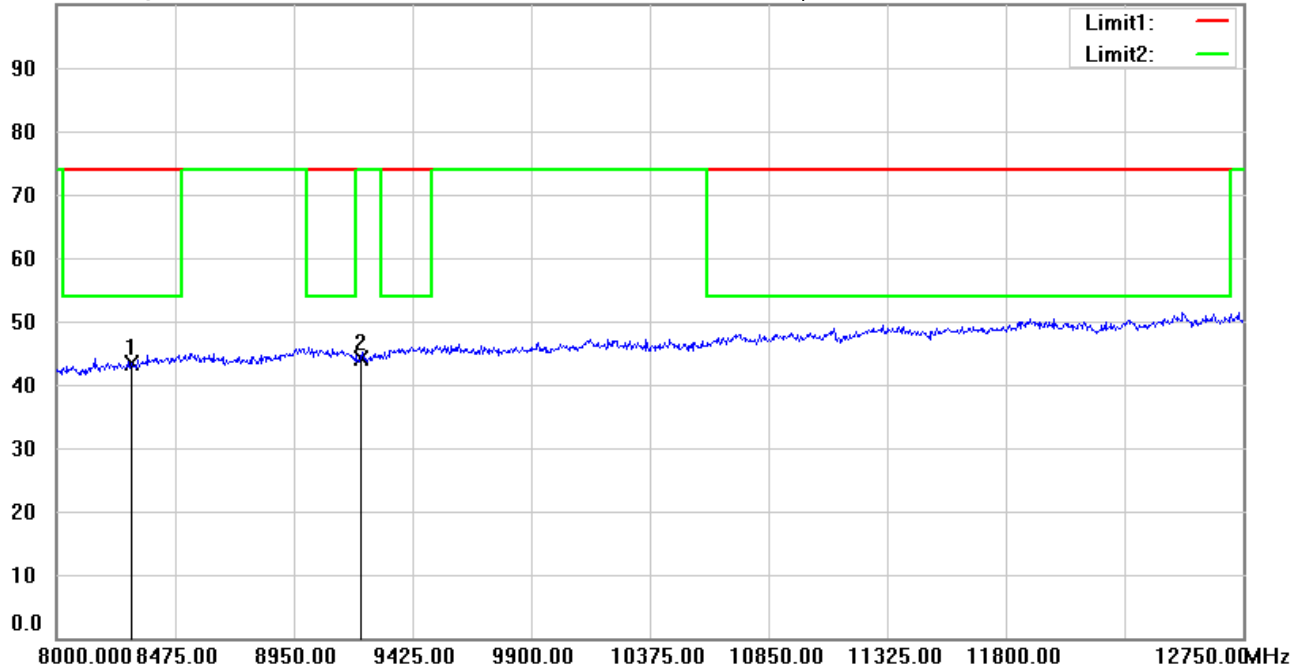

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 921.98MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	8297.820	32.90	peak	10.56	43.46	74.00	150	357	-30.54	
*	9219.800	32.25	peak	11.87	44.12	74.00	150	275	-29.88	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#1


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 11:06:40

Humidity: 45.8 %

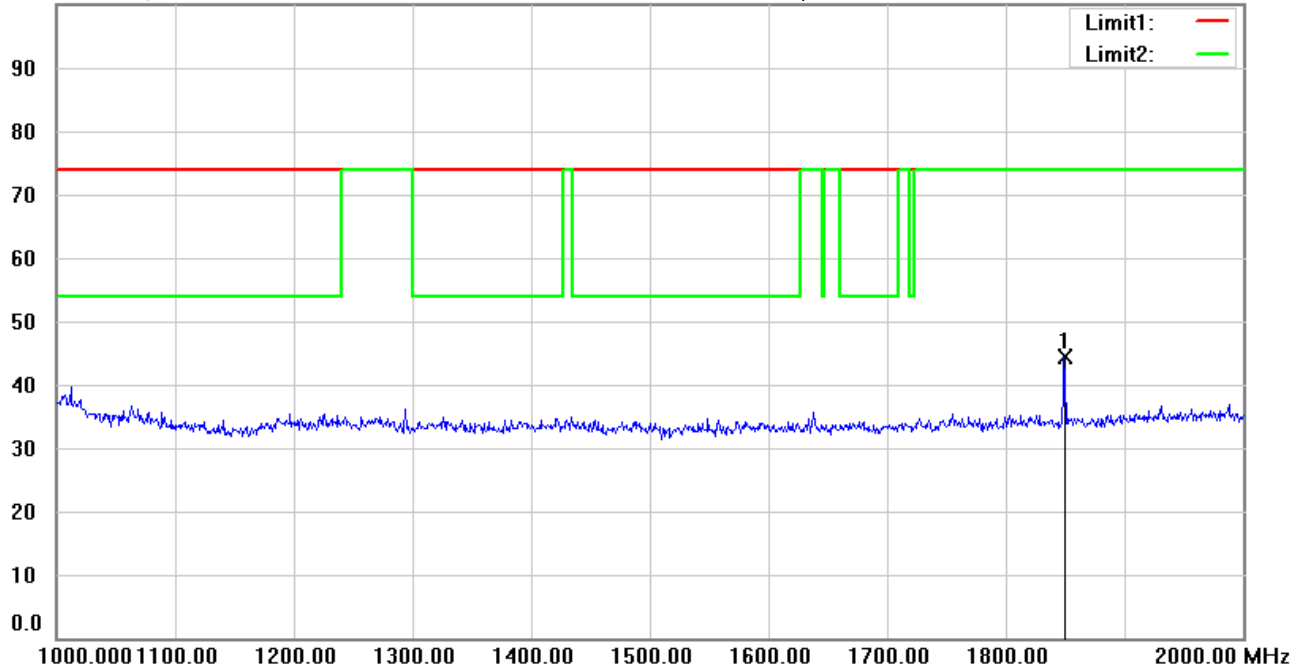

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 924.48MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1849.500	51.79	peak	-7.40	44.39	74.00	150	211	-29.61	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#5


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 11:09:31

Humidity: 45.8 %

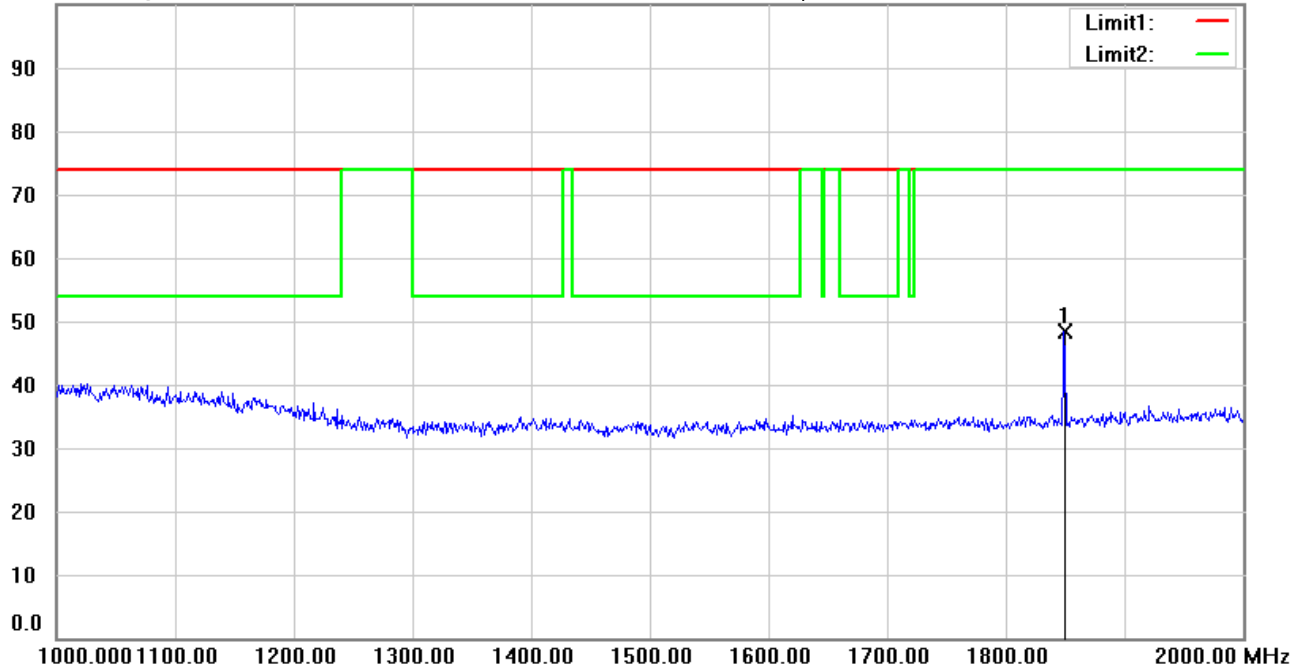

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 924.48MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1849.500	55.82	peak	-7.40	48.42	74.00	150	141	-25.58	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#2


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 11:07:22

Humidity: 45.8 %

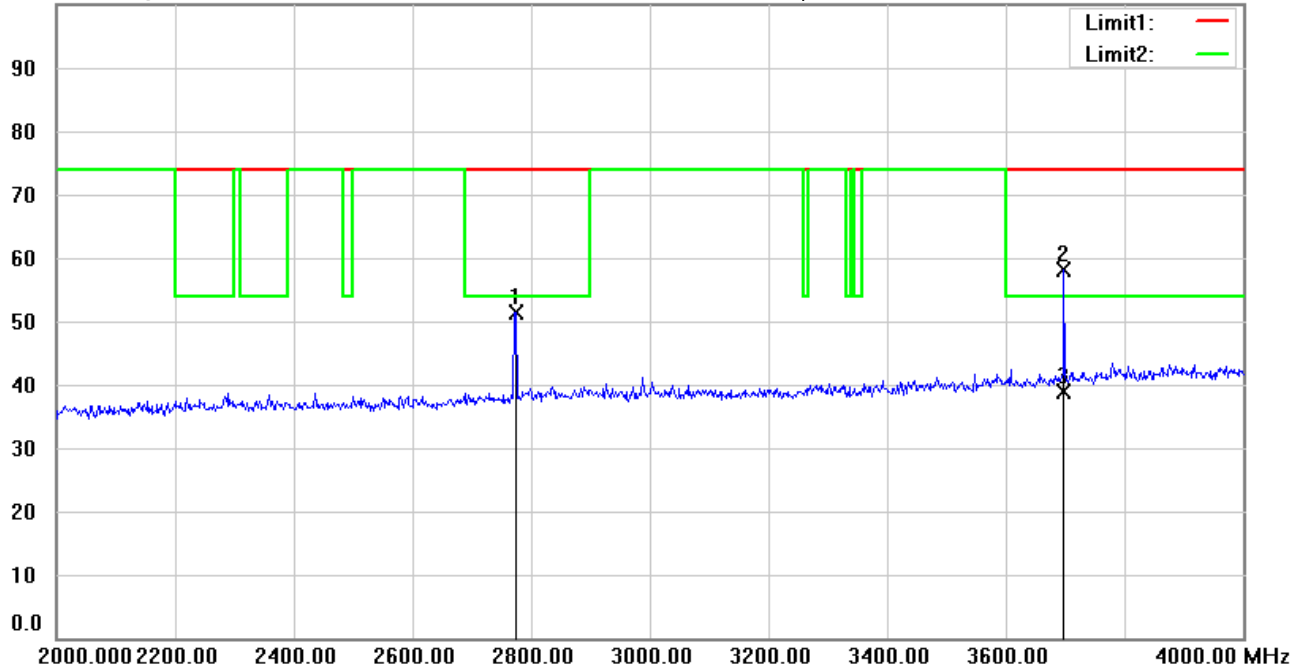

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 924.48MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2773.000	55.03	peak	-3.56	51.47	74.00	150	155	-22.53	
	3698.000	58.70	peak	-0.64	58.06	74.00	150	289	-15.94	
*	3698.000	39.51	AVG	-0.64	38.87	54.00	150	289	-15.13	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#6


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 11:10:13

Humidity: 45.8 %

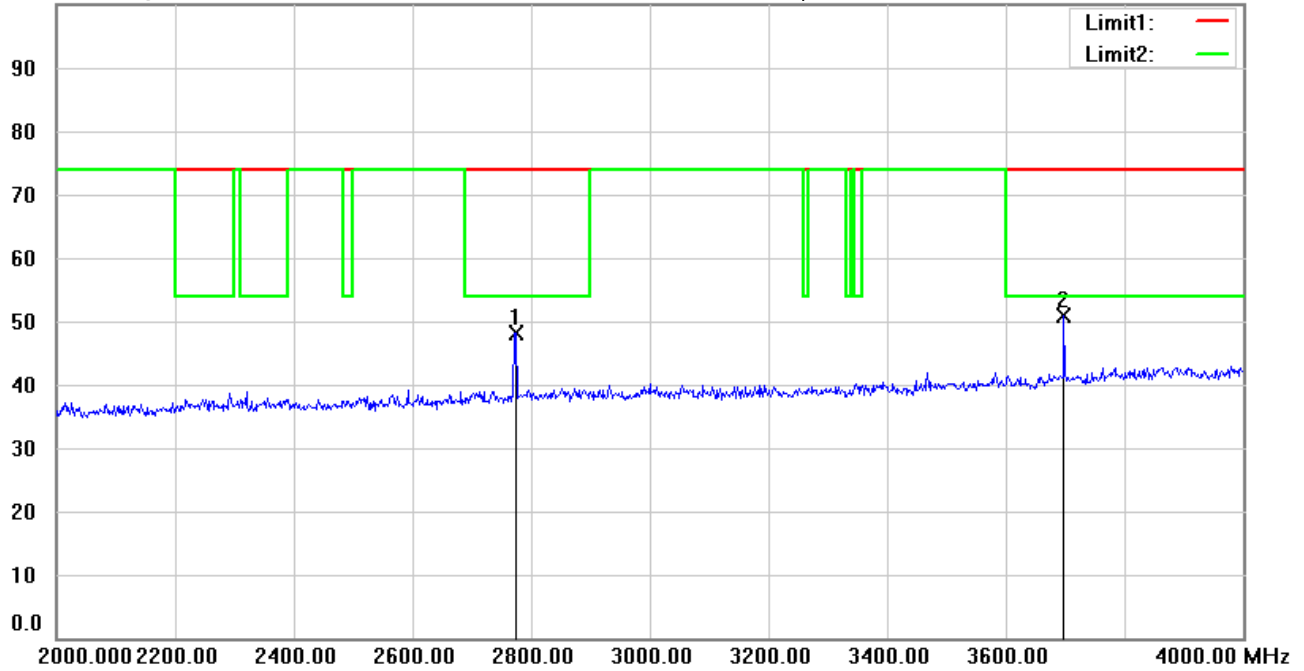

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 924.48MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2773.000	51.74	peak	-3.56	48.18	74.00	150	289	-25.82	
*	3698.000	51.64	peak	-0.64	51.00	74.00	150	144	-23.00	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#3


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 11:08:04

Humidity: 45.8 %

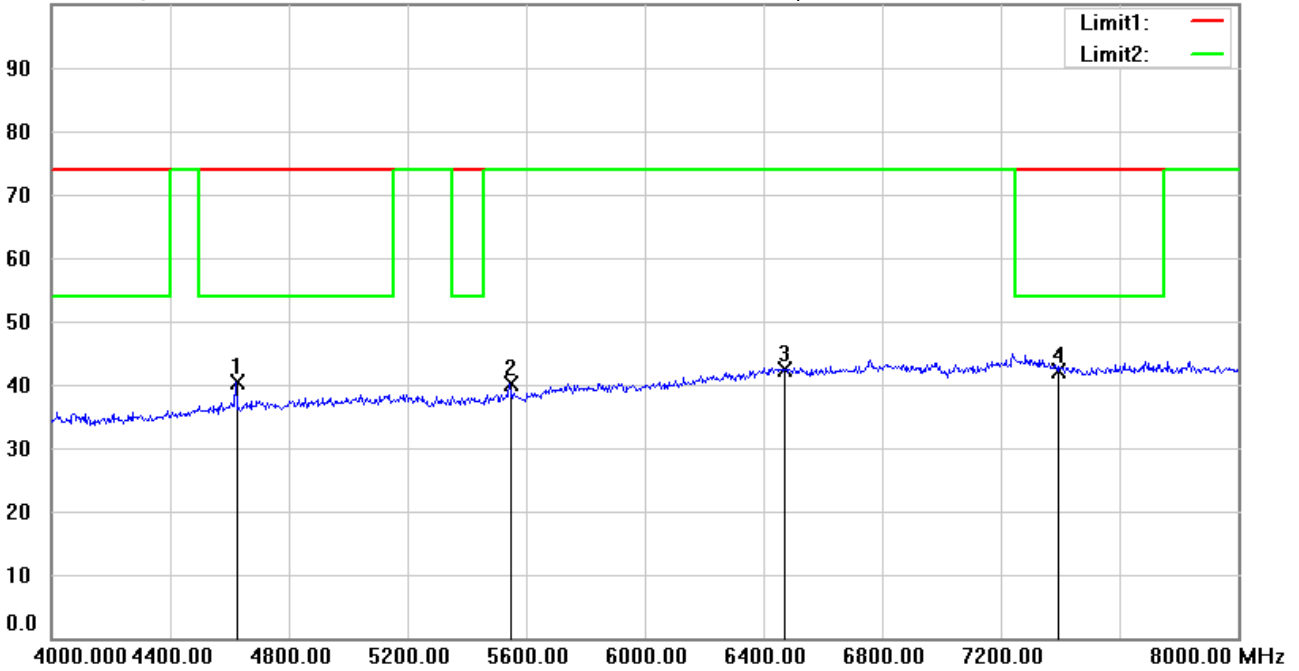

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 924.48MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4622.000	37.06	peak	3.29	40.35	74.00	150	23	-33.65	
	5546.000	34.97	peak	5.06	40.03	74.00	150	266	-33.97	
*	6471.360	33.30	peak	9.08	42.38	74.00	150	19	-31.62	
	7395.840	32.16	peak	10.07	42.23	74.00	150	57	-31.77	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#7


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 11:10:56

Humidity: 45.8 %

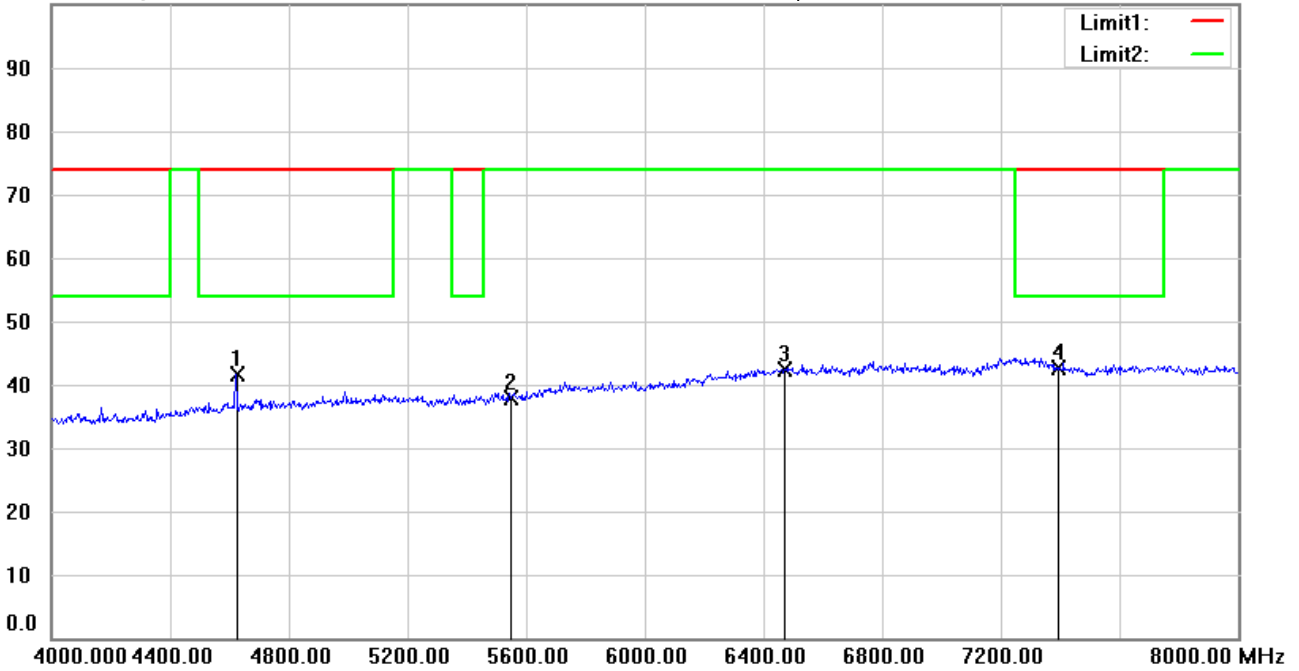

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22406-23537

M/N:

Test Mode : TX 924.48MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4622.000	38.37	peak	3.29	41.66	74.00	150	277	-32.34	
	5546.880	32.75	peak	5.06	37.81	74.00	150	195	-36.19	
	6471.360	33.34	peak	9.08	42.42	74.00	150	144	-31.58	
*	7395.840	32.57	peak	10.07	42.64	74.00	150	160	-31.36	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#4


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 11:08:46

Humidity: 45.8 %

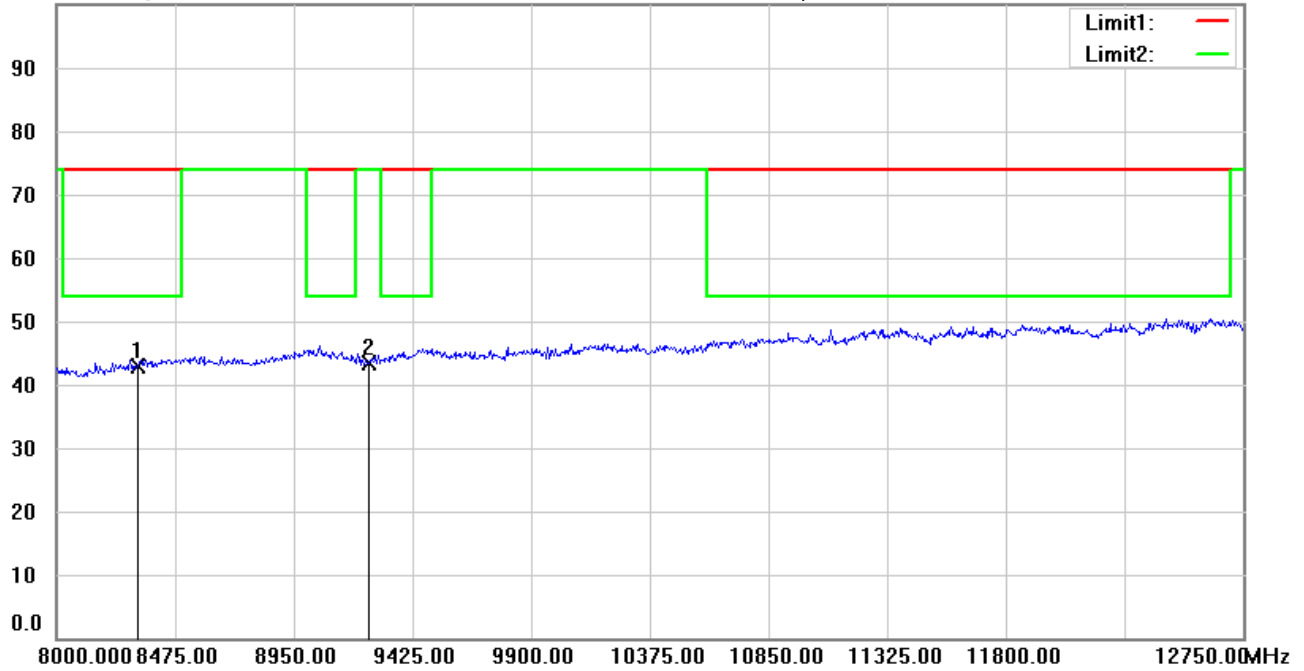

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 924.48MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	8320.320	32.29	peak	10.65	42.94	74.00	150	183	-31.06	
*	9244.800	31.54	peak	11.84	43.38	74.00	150	281	-30.62	



Radiated Emission Measurement

Operator: Kai

File :3

Data :#8


Date: 2024/6/20

Temperature: 26.5 °C

100.0 dBuV/m

Time: 上午 11:11:37

Humidity: 45.8 %

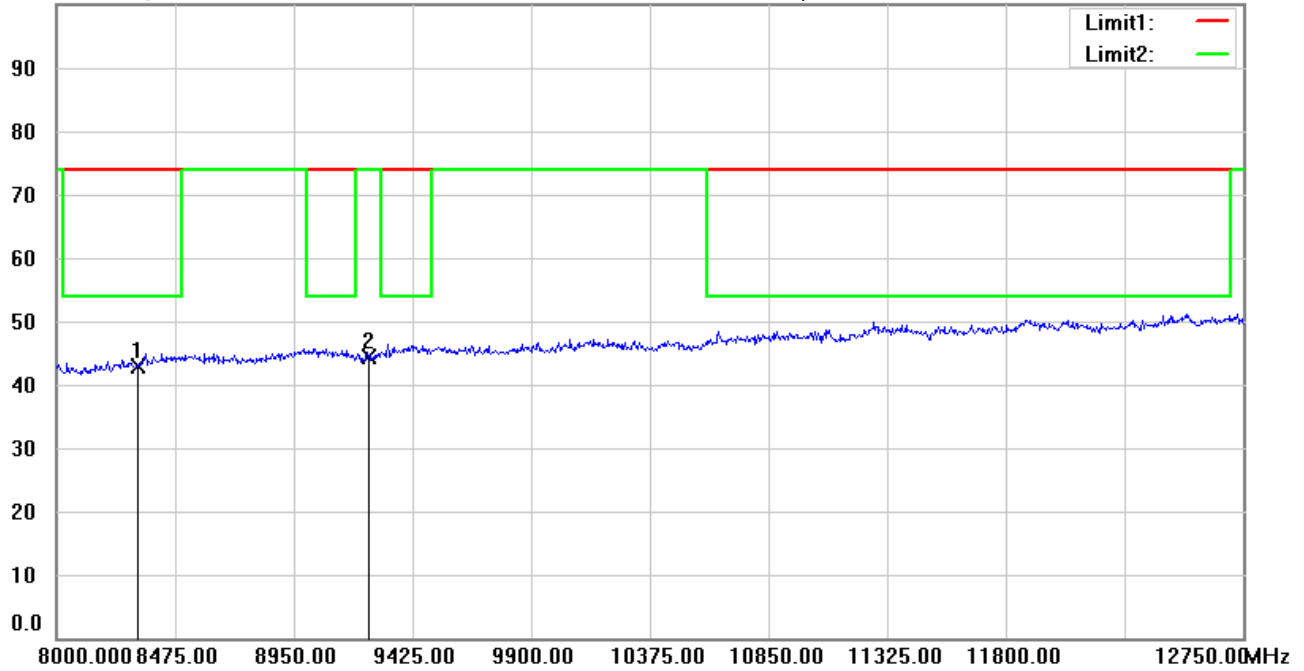

Site : 966A Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M22406-23537

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 924.48MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	8320.320	32.15	peak	10.65	42.80	74.00	150	357	-31.20	
*	9244.800	32.60	peak	11.84	44.44	74.00	150	29	-29.56	