



VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00			2016/04/25	First Release	Shawn


ARRIS

Made in China




**US:6EDDL01BNVG3XXX**  
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions :  
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.  
FCC ID : GZ5NVG3XXX





**LISTED I.T.E. E141744**

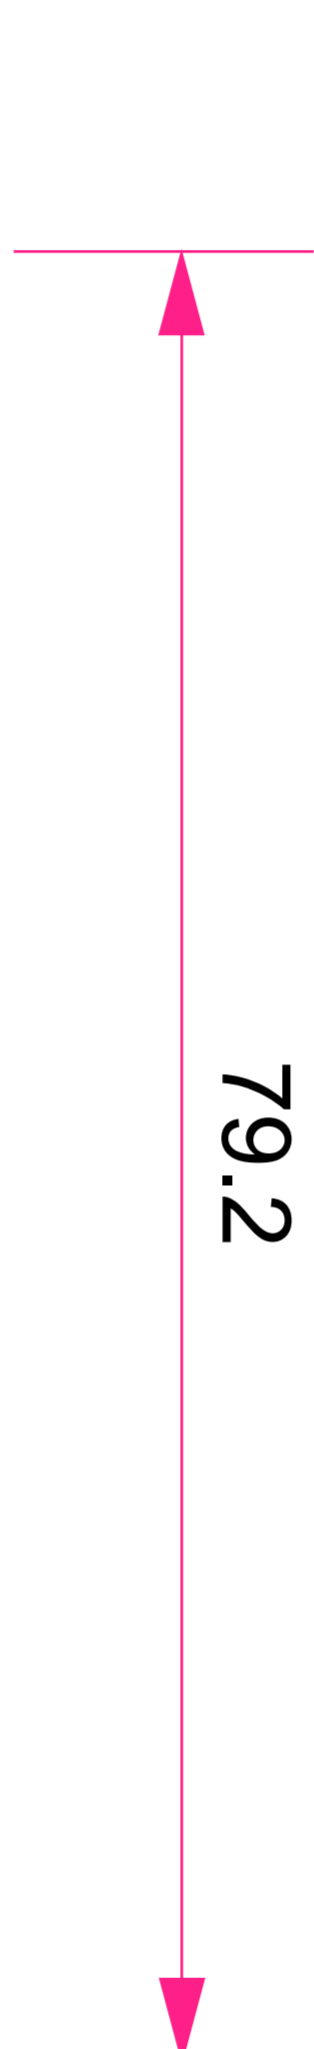

Arial Regular 5pt

Arial Regular 5pt

Arial Regular 5pt

Univers Medium Medium 3.23pt

Arial Regular 5pt

ARRIS

Model: NVG348BQ  
 Input Voltage: 12V --- 2.0 A  
 P/N: 123456-000-00  
 Wi-Fi Network Name, 2.4GHz  
 ARRIS1NNNN  
 Wi-Fi Network Name, 5.0GHz  
 ARRIS2NNNN  
 Wi-Fi Password:  
 1234567890  
 Serial Number:  
  
 M9XXYYGSNNNN  
 Base MAC Address:  
  
 AA:BB:CC:DD:EE:F0  
 Advanced Device Configuration:  
<http://192.168.1.254>  
 Device Access Code:  
 1234567890

Made in China



**US:6EDDL01BNVG3XXX**  
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions :  
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.  
FCC ID : GZ5NVG3XXX





**LISTED I.T.E. E141744**

# Default Label

MATERIAL(SPEC.)										SCALE	<b>FOXCONN</b> HON HAI PRECISION IND. CO., LTD. CNSBG			
FINISH										SHEET				
										1/1	LABEL SAFETY PRINT CONTENT FOR Default			
Select	A	B	C	EPS	EPE	BAG	CTN	Label	USR	UNIT				PART NAME
0-6	0.05	0.05	0.10	/	/	/	/	0.20		MM	MODEL			
6-30	0.10	0.15	0.20	0.50	0.50	3.00	/	0.20		A3	FTTH/VDSL Default	PART NO.	DESIGNED	
30-120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25					Shawn	
120-300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30			CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED	
300-450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50					Charge	
450-600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80						
DRAFT TOLERANCE										±0.20*	CRITICAL DIM. MARK		ANGLE	