
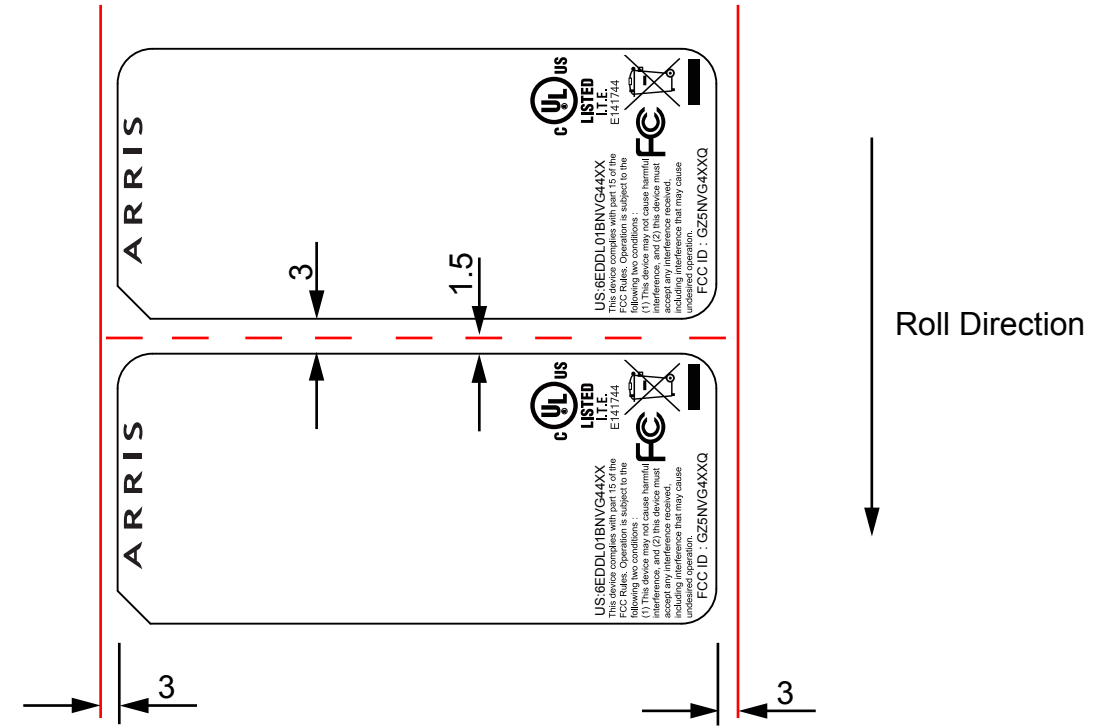


VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00			2016/05/13	First Release	Dennis
01			2016/05/20	Revise US Number	Dennis

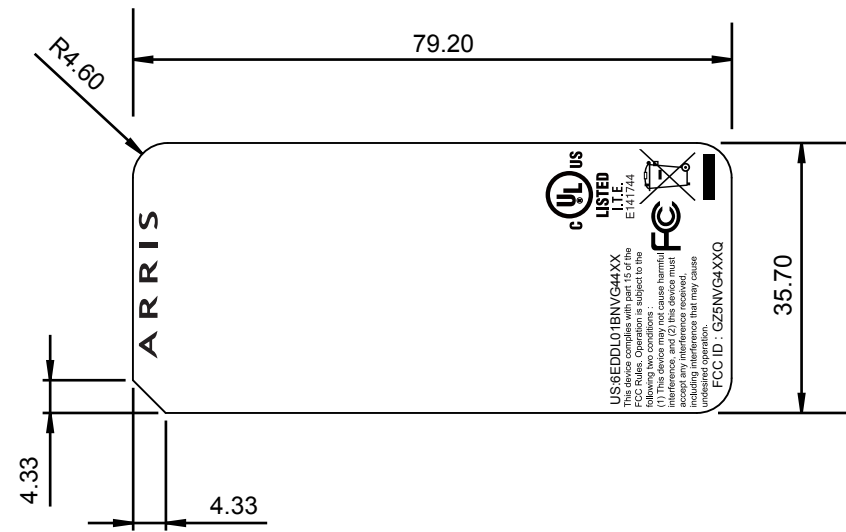

- Notes:
1. Size: 79.2\*35.7 mm
  2. Material: Flexcon 21944E ( See Tab-1 )

METERIAL MAKER	Flexcon
MODEL NO	21944E
SURFACE MATERIAL THICKNESS (mm)	0.05 ± 10%
ADHESIVE NO	Arcylic
ADHESIVE THICKNESS (mm)	0.02
TOTAL THICKNESS (mm)	0.07 ± 10%

TAB-1

3. Adhesive (背膠種類): Arcylic
4. Adhesive thickness (厚度及公差): 0.07 +/- 10%
5. Adhesive to steel (180度鋼粘著力): 1.0min kg/25mm
6. Initial Tack (初粘力): 6min #/boll
7. Release Power (90度剝離力): 7±3 kg/25mm
8. Holding power (持粘力/保持力): 1min hr/kg/20mm
9. Package Styles: Reel or sheet
10. This part must comply with ROHS.

MATERIAL(SPEC.)	See Notes								SCALE	1:1			
FINISH	See Notes								SHEET	1/1			
Select								*		UNIT	PART NAME		
DIM. TOL.	A	B	C	EPS	EPE	BAG	CTN	Label	USR	MM	LABEL BLANK 79.2*35.7mm REV.00 WHITE GP U62L049.10		
0-6	0.05	0.05	0.10	/	/	/	/	/	0.20	SIZE	MODEL	PART NO.	DESIGNED
6-30	0.10	0.15	0.20	0.50	0.50	3.00	/	0.20		A3	U62L049.10	500.02048.005	Dennis
30-120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25		VIEW	CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED
120-300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30		TRL			Loran
300-450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50		ANGLE			
450-600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80					
DRAFT TOLERANCE	±0.20			CRITICAL DIM. MARK									

**FOXCONN**  
HON HAI PRECISION IND. CO., LTD.  
CNSBG