

MIC1

MIC2

MIC3

MIC4

MIC15

MIC6

2-TRACKIN/OUT

L

R

TAPEIN TAPEOUT

LINEIN LEFT (MONO)

LINEIN RIGHT (MONO)

LAMP 12V0.5A

## LTO

### LYNX-MIX124 USB

20-CHCOMPACTINTEGRATEDLIVESOUNDMIXERWITHDIGITALEFFECTS

24BITs DIGITALSTEREOEFFECTSPROCESSOR

- 1. VOCAL1
- 2. VOCAL2
- 3. LARGEHALL
- 4. SMALLHALL
- 5. LARGEROOM
- 6. SMALLROOM
- 7. PLATE
- 8. TAPEREVERB

- 9. SPRINGREVERB
- 10. MONODELAY
- 11. STEREODELAY
- 12. FLANGER
- 13. CHORUS
- 14. REVERB+DELAY
- 15. REVERB+FLANGER
- 16. REVERB+CHORUS

TRIM

LEVEL SET

TRIM

LEVEL SET

TRIM

LEVEL SET

TRIM

LEVEL SET

TRIM

LEVEL SET

TRIM

LEVEL SET

LINE GAIN

LEVEL SET

LINE GAIN

LEVEL SET

LOWCUT 75Hz 18dB/Oct

EQ

EQ

EQ

EQ

EQ

EQ

EQ

AUX

AUX

AUX

AUX

AUX

AUX

AUX

AUX

DPFX1 (EXT)

DPFX2 (INT)

DPFX1 (EXT)

DPFX2 (INT)

DPFX1 (EXT)

DPFX2 (INT)

DPFX1 (EXT)

DPFX2 (INT)

PAN

PAN

PAN

PAN

BAL

BAL

BAL

BAL

PEAK

PEAK

PEAK

PEAK

PEAK

PEAK

PEAK

PEAK

SUB1-2

SUB1-2

SUB1-2

SUB1-2

SUB1-2

SUB1-2

SUB1-2

SUB1-2

SUB3-4

SUB3-4

SUB3-4

SUB3-4

SUB3-4

SUB3-4

SUB3-4

SUB3-4

MAINL-R

MAINL-R

MAINL-R

MAINL-R

MAINL-R

MAINL-R

MAINL-R

MAINL-R

SOLO

SOLO

SOLO

SOLO

SOLO

SOLO

SOLO

SOLO

STEREOAUXRETURNS

STEREOAUXRETURNS

CTRLROOMSOURCE

AUXSENDS

STEREOAUXRETURNS

CTRLROOMSOURCE

EQ OFF

EQ ON

STEREOGRAPHICEQ

SUBGROUPSASSIGNTO MAINMIX

SUBGROUPSASSIGNTO MAINMIX

SUBGROUPSASSIGNTO MAINMIX

LEFT

LEFT

LEFT

LEFT

RIGHT

RIGHT

RIGHT

RIGHT

SOLOACTIVE

SOLOACTIVE

SOLOACTIVE

SOLOACTIVE

SOLOMODE

SOLOMODE

SOLOMODE

SOLOMODE

PFL

PFL

PFL

PFL

OUTPUT LEVEL

OUTPUT LEVEL

OUTPUT LEVEL

OUTPUT LEVEL

1

2

7/8

4

5/6

7/8

9/10

11/12

SUB1


SUB2

SUB3

SUB4


MAINMIXLEVEL

LYNX-MIX124 USB

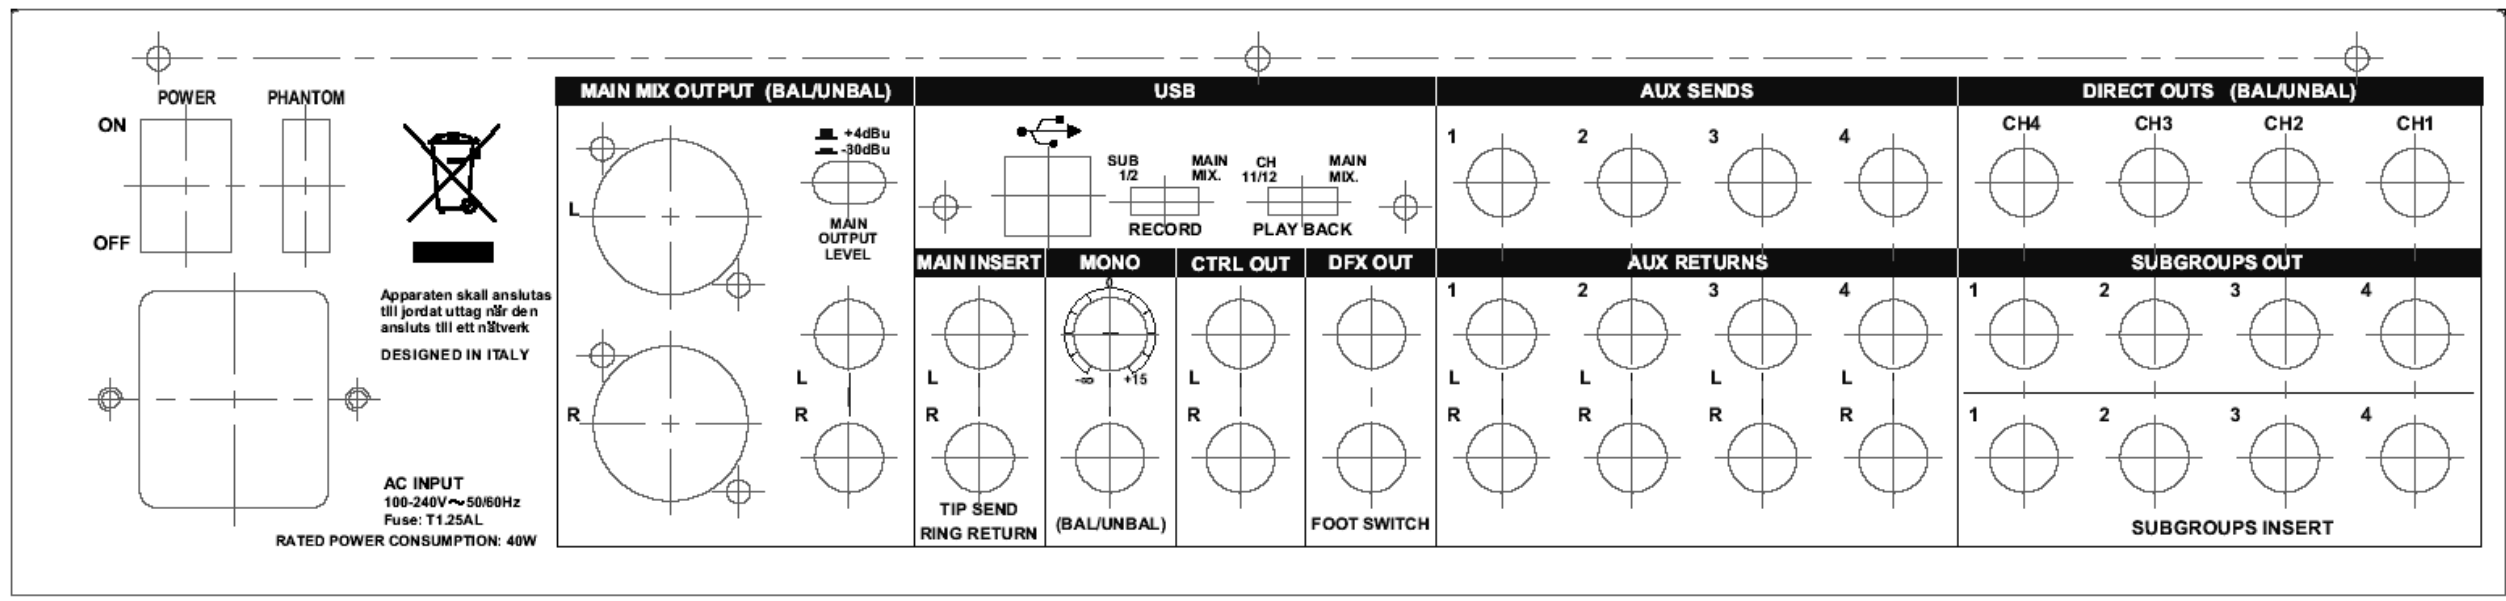


LYNX-MIX124 USB




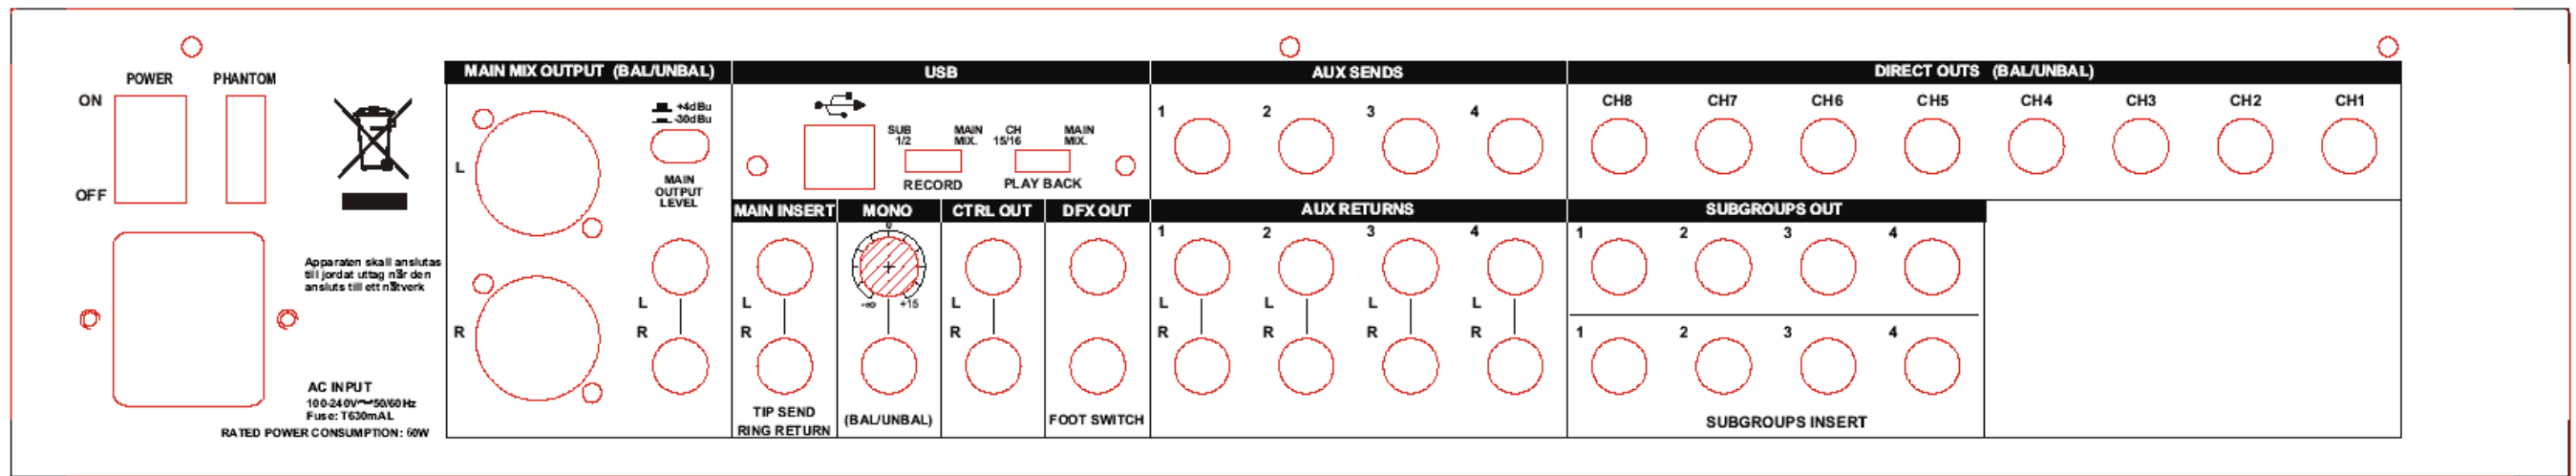

LYNX-MIX164 USB

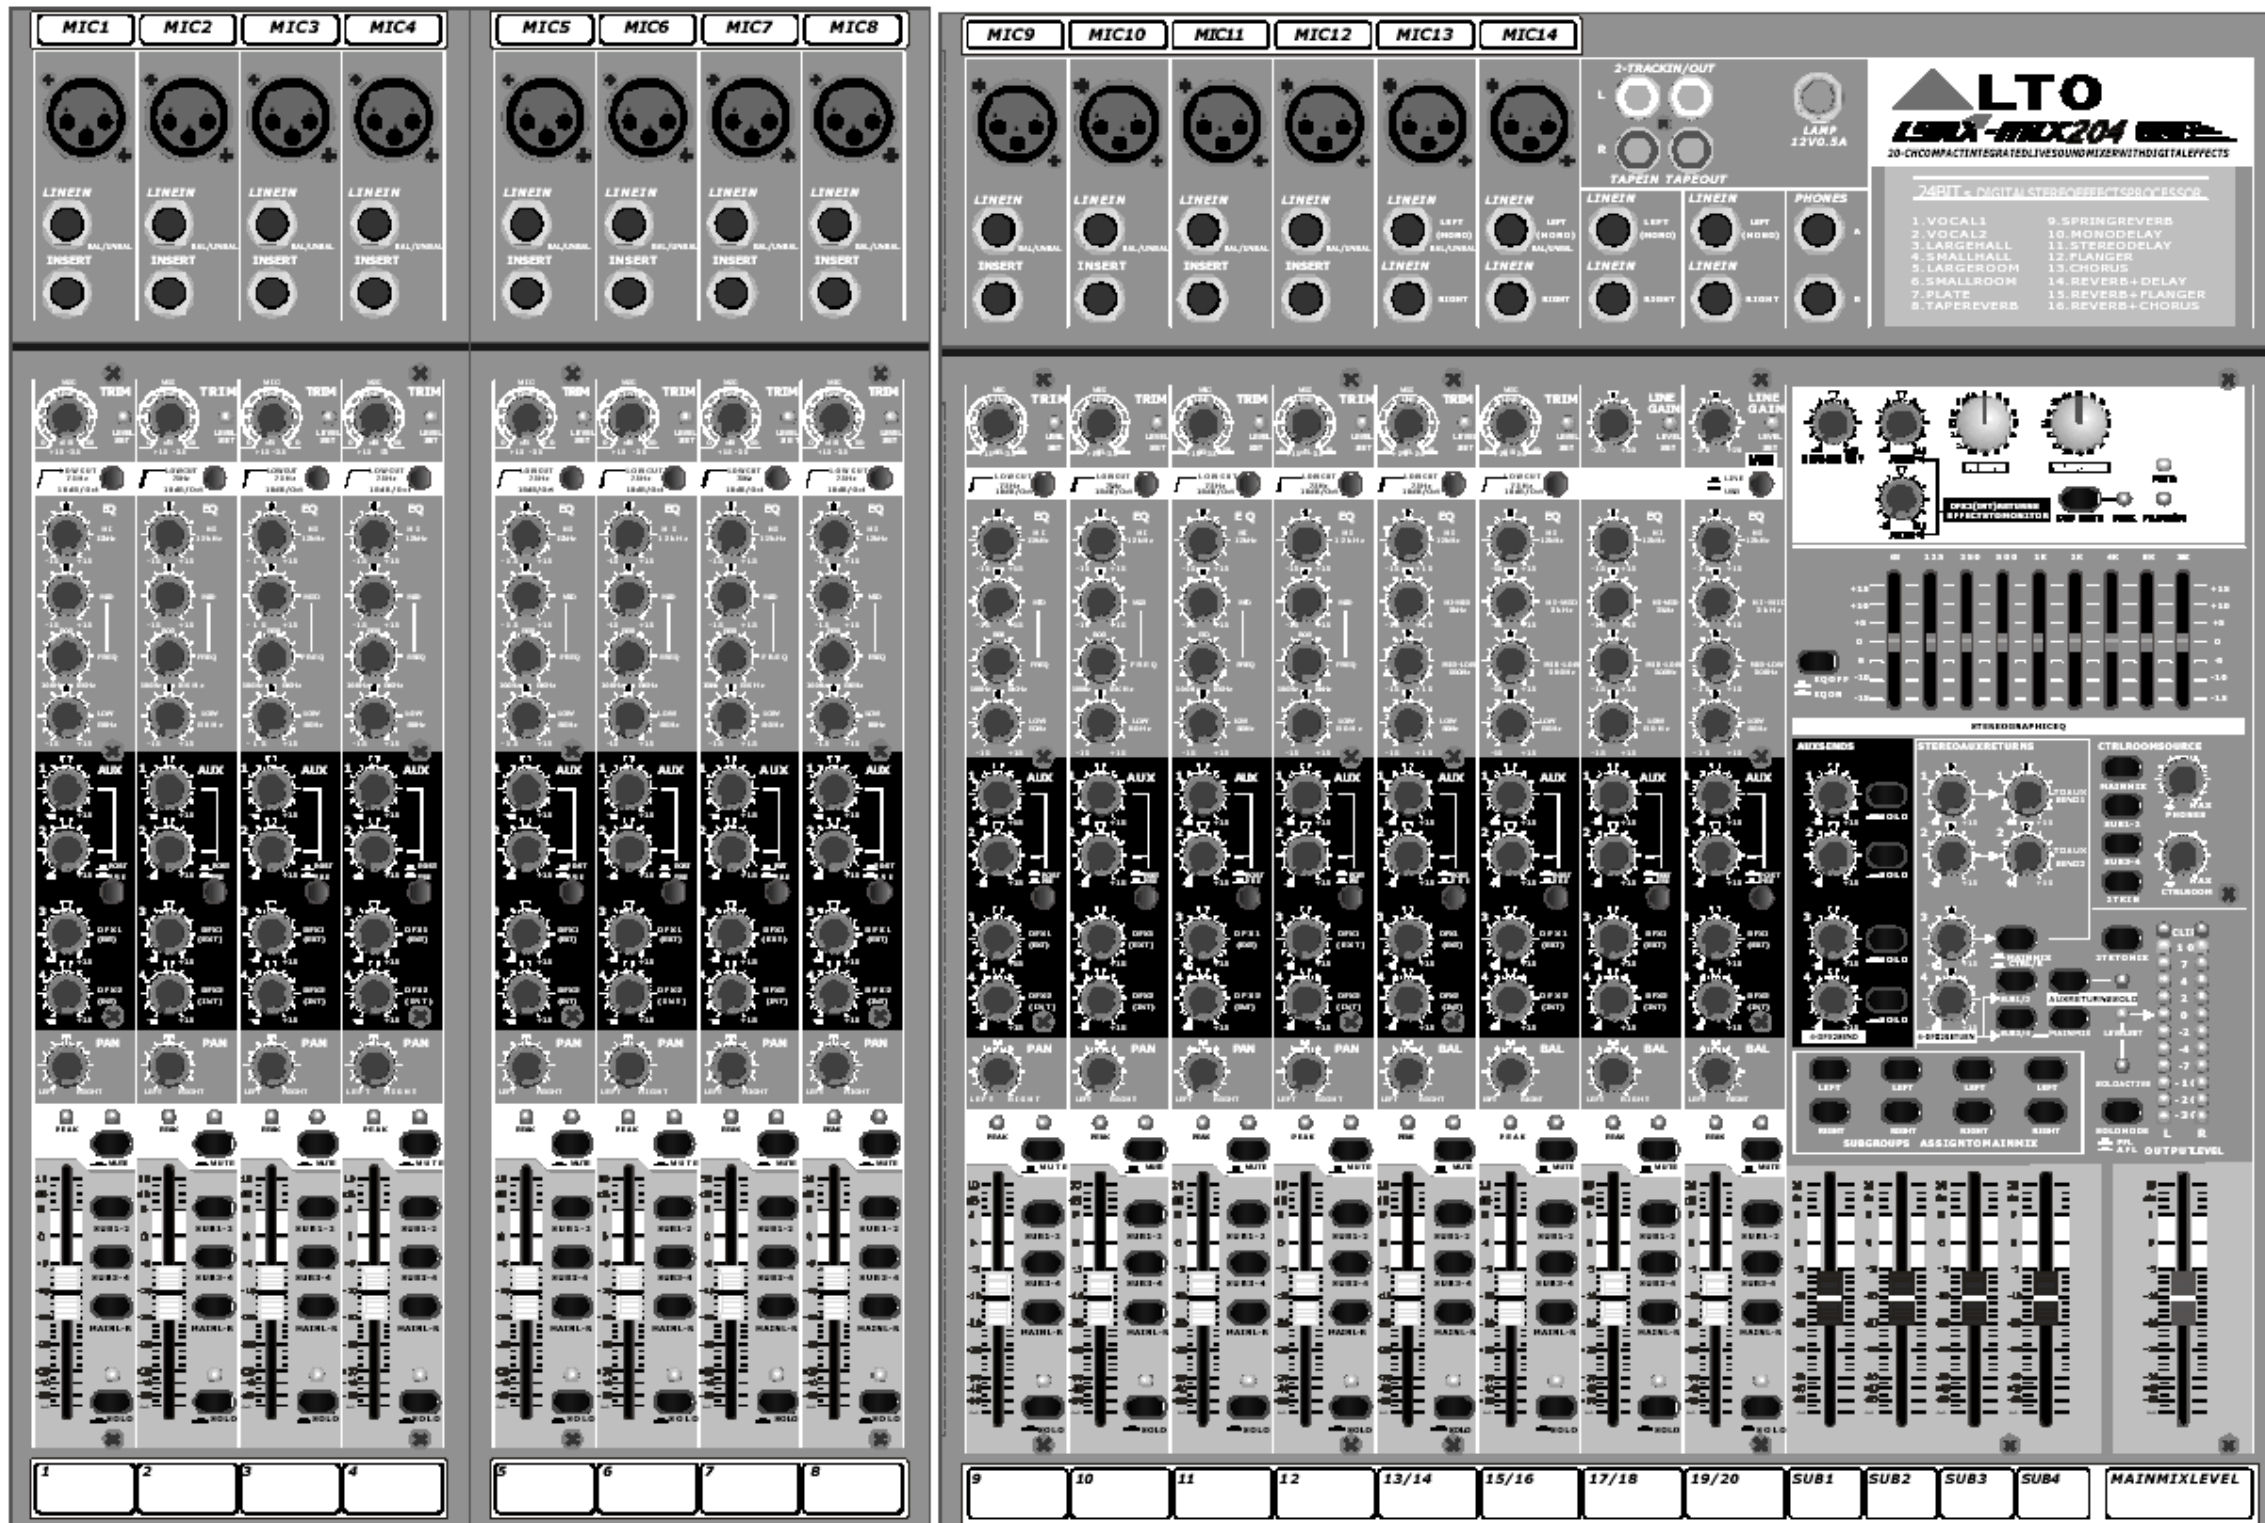


LYNX-MIX204 USB

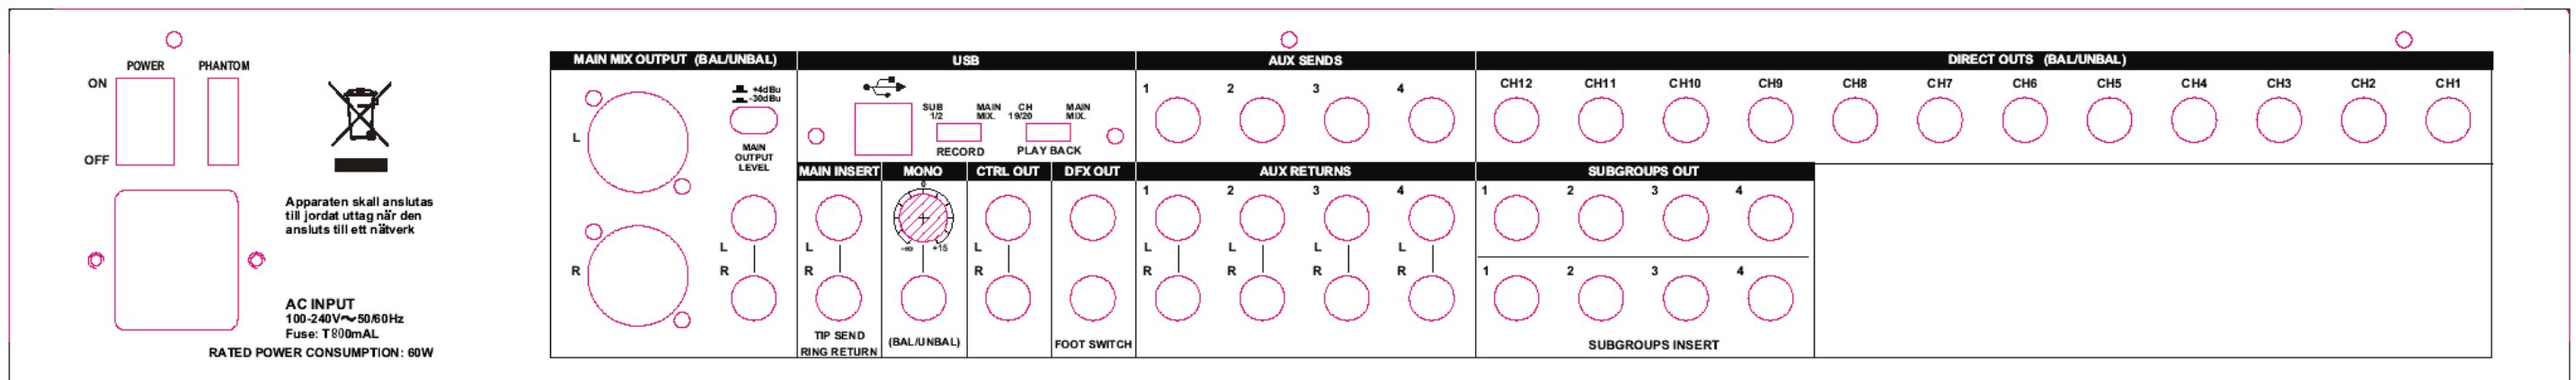

LYNX-MIX204 USB



FCC ID

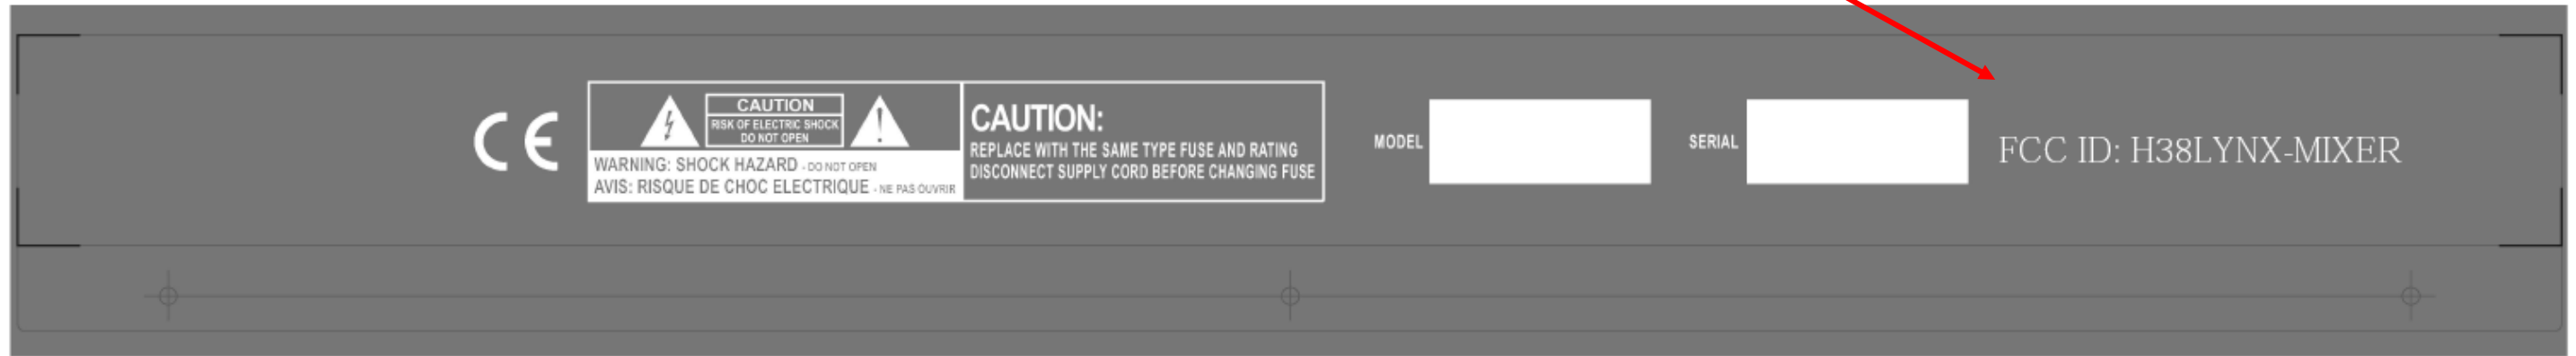

**NOTICE**

**THIS DEVICE COMPLIES WITH PART  
15 OF FCC. RULES  
OPERATING IS SUBJECT TO THE  
FOLLOWING 2 CONDITIONS:  
1-THIS DEVICE MUST NOT CAUSE  
HARMFUL INTERFERENCE .  
2-THIS DEVICE MUST ACCEPT ANY  
INTERFERENCE RECEIVED  
INCLUDING INTERFERENCE THAT MAY  
CAUSE UNDESIRED OPERATION**