

Prüfbericht-Nr.: <i>Test Report No.:</i>	16070601 001		Auftrags-Nr.: <i>Order No.:</i>	174030253	Seite 1 von 38 <i>Page 1 of 38</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	352690	Auftragsdatum: <i>Order date.:</i>	04 Jan 2015		
Auftraggeber: <i>Client:</i>	Seikaku Technical Group Limited Offshore Chambers, P. O. Box 217 Apia, Samoa				
Prüfgegenstand: <i>Test item:</i>	UHF Wireless System				
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	U-299H, TMW U-100T, U-899H				
Auftrags-Inhalt: <i>Order content:</i>	TUV Rheinland - EMC service				
Prüfgrundlage: <i>Test specification:</i>	TIA/EIA-603-D-2010 FCC 47 CFR Part 74.861, Subpart H: 2013				
Wareneingangsdatum: <i>Date of receipt:</i>	04 Jan 2015				
Prüfmuster-Nr.: <i>Test sample No.:</i>	174030253-001				
Prüfzeitraum: <i>Testing period:</i>	Refer to test report				
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Guangdong) Ltd.				
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Guangdong) Ltd. EMC Laboratory				
Prüfergebnis*: <i>Test result*:</i>	Pass				
geprüft von / tested by:	kontrolliert von / reviewed by:  				
31 Mar 2016 Storm Shu / Assistant Project Manager	31 Mar 2016 Max Y. C. Yao / Department Manager				
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>
Sonstiges / Other:					
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>			Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(pass) = entspricht o.g. Prüfgrundlage(n) F(fail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(pass) = passed a.m. test specifications(s) F(fail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested					
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

Prüfbericht - Nr.: 16070601 001
Test Report No.

Seite 2 von 38
Page 2 of 38

TEST SUMMARY

5.1 CONDUCTED OUTPUT POWER

RESULT: Pass

5.2 SPURIOUS RADIATION MEASUREMENT (TX)

RESULT: Pass

5.3 MODULATION CHARACTERISTICS MEASUREMENT

RESULT: Pass

5.4 OCCUPIED BANDWIDTH

RESULT: Pass

5.5 FREQUENCY TOLERANCE

RESULT: Pass

5.6 EMISSION MASK

RESULT: Pass

5.7 ELECTROMAGNETIC FIELDS

RESULT: Pass

Contents

1.	GENERAL REMARKS.....	5
1.1.	COMPLEMENTARY MATERIALS	5
2.	TEST SITES.....	5
2.1.	TEST FACILITIES.....	5
2.2.	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3.	TRACEABILITY.....	6
2.4.	CALIBRATION.....	6
2.5.	ABBREVIATIONS	6
2.6.	MEASUREMENT UNCERTAINTY	7
3.	GENERAL PRODUCT INFORMATION.....	8
3.1.	PRODUCT FUNCTION AND INTENDED USE	8
3.2.	RATING AND PHYSICAL CHARACTERISTICS.....	8
3.3.	NOISE GENERATING OR SOURCES OF INTERFERENCE	8
3.4.	NOISE SUPPRESSING PARTS	8
3.5.	SUBMITTED DOCUMENTS	8
4.	TEST SET-UP AND OPERATION MODES.....	9
4.1.	TEST METHODOLOGY	9
4.2.	INDEPENDENT AND TEST OPERATION MODES	9
4.3.	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4.	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	9
4.5.	TEST SETUP	10
5.	TEST RESULTS EMISSION	12
5.1.	CONDUCTED OUTPUT POWER	12
5.2.	SPURIOUS RADIATION MEASUREMENT.....	14
5.3.	MODULATION CHARACTERISTICS MEASUREMENT.....	26
5.4.	OCCUPIED BANDWIDTH.....	28
5.5.	FREQUENCY TOLERANCE	29
5.6.	EMISSION MASK	30
5.7.	ELECTROMAGNETIC FIELDS.....	35
6.	PHOTOGRAPHS OF TEST SETUP	36

Prüfbericht - Nr.: 16070601 001
Test Report No.

Seite 4 von 38
Page 4 of 38

7.	LIST OF TABLES	37
8.	LIST OF FIGURES	37
9.	LIST OF PICTURES.....	38

1. General Remarks

1.1. Complementary Materials

All attachments are integral parts of this test report.

2. Test Sites

2.1. Test Facilities

TÜV Rheinland(Guangdong) Ltd. EMC Laboratory.
No.102, 1F of Southwest and No.205, 2F of West Warehouse Building, No.767 Tianyuan Road, Tianhe District, Guangzhou, Guangdong, P.R.China

2.2. List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Type	Manufacturer	S/N	Calibrated until	Calibrated Interval
EMI Test Receiver	ESCI-3	Rohde & Schwarz	100216	16.Mar.2016	1 year
Spectrum Analyzer	FSP30	Rohde & Schwarz	100286	16.Mar.2016	1 year
Trilog-Broadband Antenna	VULB9168 (30MHz-1GHz)	SCHWARZBECK MESSELEKTRONIK	209	16.Mar.2016	2 years
Double-Ridged Waveguide Horn Antenna	HF906 (1-18GHz)	Rohde & Schwarz	100385	16.Mar.2016	2 years
Pre-amplifier	AFS42-00101800-25-S-42	MITEQ	1101599	16.Mar.2016	2 years
Band Reject Filter	BRM50702	Micro-Tronics	023	16.Mar.2016	2 years
Standard Gain Horn Antenna	3160-09 (18-26.5GHz)	EMCO	21642	16.Mar.2016	5 years
Pre-amplifier	AFS33-18002650-30-8P-44	MITEQ	1108282	16.Mar.2016	2 years
3m Anechoic Chamber	N/A	Albatross Project GmbH	N/A	16.Mar.2016	1 year
Loop Antenna	HFH2-Z2 (<30MHz)	Rohde & Schwarz	100111	16.Mar.2016	2 years
EMI Test Receiver	ESCS30	Rohde & Schwarz	100316	16.Mar.2016	1 year

Prüfbericht - Nr.: 16070601 001
Test Report No.

 Seite 6 von 38
 Page 6 of 38

Kind of Equipment	Type	Manufacturer	S/N	Calibrated until	Calibrated Interval
Two-Line V-Network	ESH3-Z5	Rohde & Schwarz	100308	16.Mar.2016	1 year
Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100701	16.Mar.2016	1 year
Trilog-Broadband Antenna	VULB9168 (30MHz-1GHz)	SCHWARZBECK MESSELEKTRONIK	210	16.Mar.2016	2 years
Double-Ridged Waveguide Horn Antenna	HF906 (1-18GHz)	Rohde & Schwarz	100407	16.Mar.2016	2 years
Signal Generator	SMR27 (10M-27GHz)	Rohde & Schwarz	100125	16.Mar.2016	1 years

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing.

2.3. Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4. Calibration

All equipment requiring calibration is calibrated periodically by the manufacturer or accredited calibration services according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5. Abbreviations

PASS means 'complied with requirement'	N/A means 'not applicable'
FAIL means 'not complied'	N.C.R. means 'no calibration required'

2.6. Measurement Uncertainty

Table 2: Measurement Uncertainty

Testing Item	Frequency Range	Uncertainty
Conducted Emission (Mains port)	0.09MHz - 30MHz	2.26 dB
Radiated Emission (966 Chamber: 3m)	0.09MHz - 30MHz	4.42 dB
Radiated Emission (966 Chamber: 3m)	30MHz – 1000MHz	5.16 dB
Radiated Emission (966 Chamber: 3m)	Above 1000MHz	2.22 dB

Note:

The uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Prüfbericht - Nr.: 16070601 001
Test Report No.

Seite 8 von 38
Page 8 of 38

3. General Product Information

3.1. Product Function and Intended Use

The tested sample is a "**UHF Wireless Microphone**" with model number as shown in the cover page of test report for new approval.

The tested sample has microphone input function.

U-299H, TMW U-100T and U-899H are same except the model names and appearance, therefore the all tests were performed on U-299H only.

3.2. Rating and Physical Characteristics

Product name:	Wireless Microphone
Model name:	U-299H, TMW U-100T, U-899H
Rating:	3Vdc
Frequency range:	470 ~ 494MHz
	494 ~ 518MHz
	518 ~ 542MHz
	542 ~ 566MHz
Channel numbers:	320
Bandwidth:	200kHz
Modulation:	FM
Antenna:	Integral
Temperature	-10 ~ +60 °C

3.3. Noise Generating or Sources of Interference

- 1) IC circuits

3.4. Noise Suppressing Parts

Please refer to Attachment Photo Documentation for details.

3.5. Submitted Documents

- 1) Circuit diagram
- 2) Block diagram
- 3) User manual
- 4) PCB Layout
- 5) BOM List

Prüfbericht - Nr.: 16070601 001
Test Report No.

Seite 9 von 38
Page 9 of 38

4. Test Set-up and Operation Modes

4.1. Test Methodology

The test methodology used is based on the requirement of 47 CFR PART 15, section 15.31, 15.33, 15.35, 15.107 and 15.109, or of ICES-003.

The test methods, which have been used, are based on ANSI C63.10 or CAN/CSA-CEI/IEC CISPR 22.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the instructions for use.

4.2. Independent and Test Operation Modes

The basic operation mode is:

- A. Transmitter mode
 - 1. Low CH
 - 2. Middle CH
 - 3. High CH

4.3. Special Accessories and Auxiliary Equipment

The EUT was tested as an independent unit with the following equipment:

Description	Manufacturer	Model No.	S/N	Certification
N/A	N/A	N/A	N/A	N/A

4.4. Countermeasures to achieve EMC compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

4.5. Test Setup

The test setup was realized on a table of 80cm height during all the tests.

The test arrangement is configured and set according to manufacturer's installations.

Diagram 1 of Configuration for testing other test items

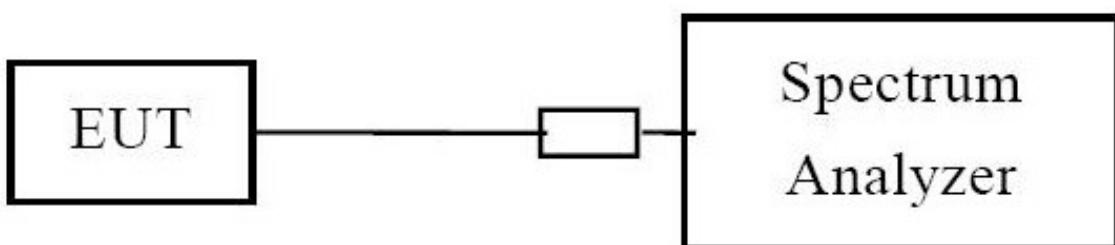


Diagram 2 of Measurement Equipment Configuration for Testing Radiated Emission

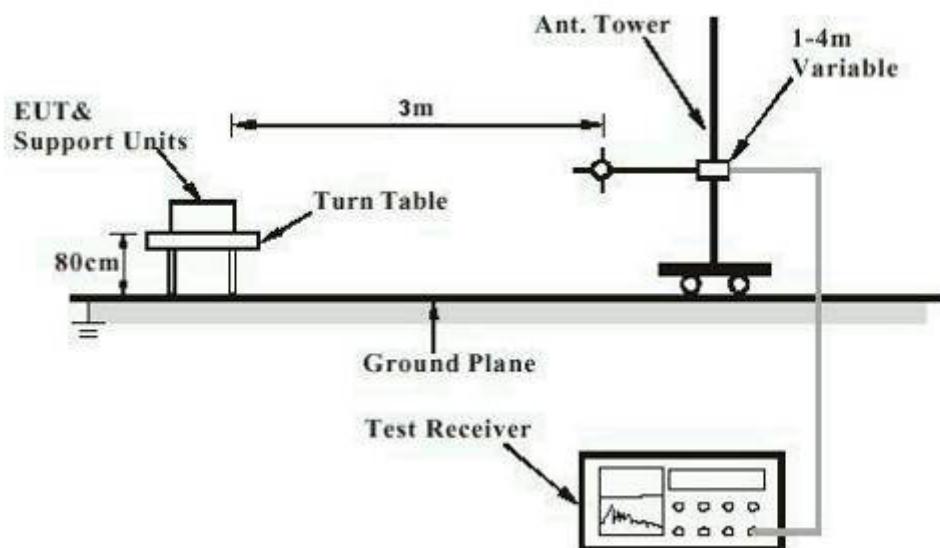
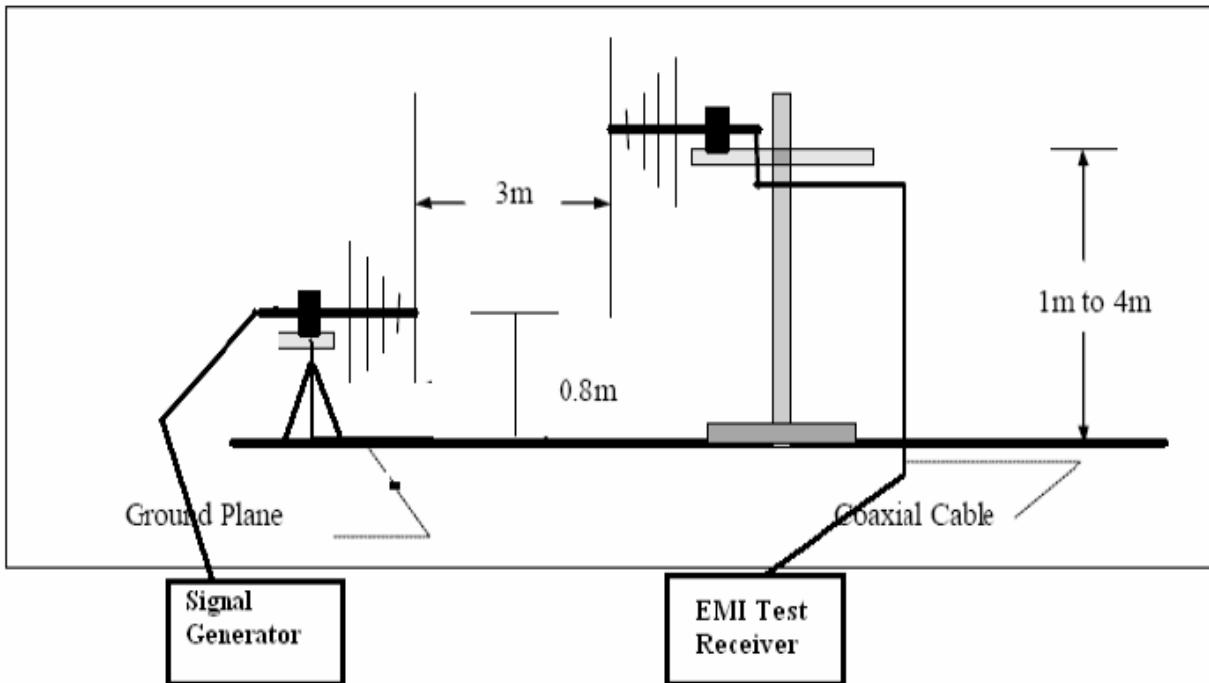


Diagram 3 of Measurement Equipment Configuration for Substitution Method

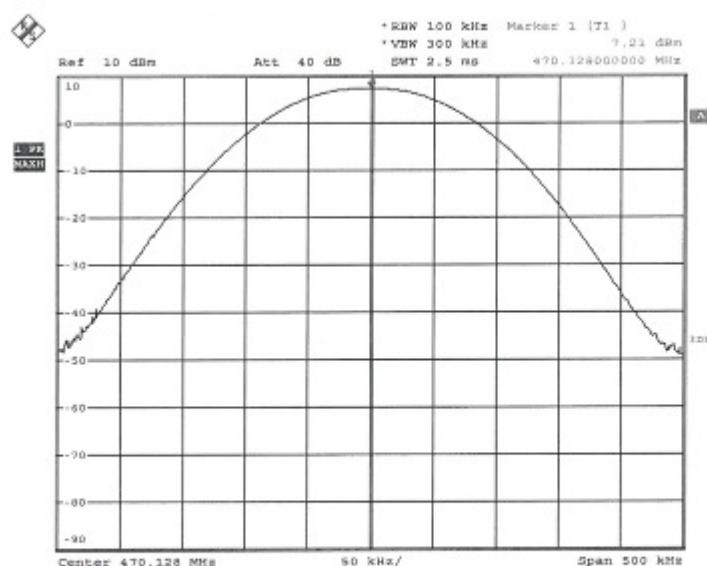


5. Test Results EMISSION

5.1. Conducted Output Power

RESULT:**PASS**

Date of testing	:	28 Jan 2016
Test specification	:	FCC Part 2 Per Section 2.1046(a)
Guide	:	ANSI/TIA-603-D-2010, clause 2.2.1
Limits	:	FCC Part 74 Per Section 74.861(e)(1)
Kind of test site	:	3m Anechoic Chamber
Operation mode	:	Transmitting (unmodulated)
Temperature	:	23°C
Humidity	:	50%
Limit	:	174-216MHz: 50mW (17dBm) 470-608MHz: 250mW (17dBm) 614-806MHz: 250mW (24dBm)

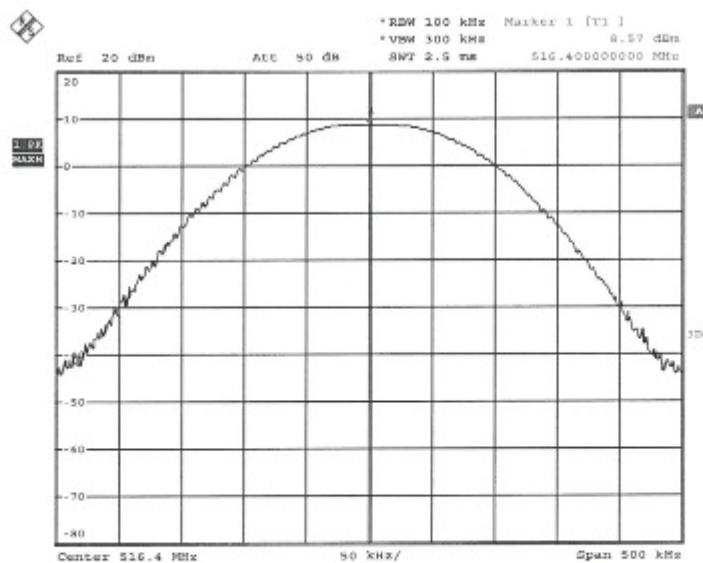
Figure 1: Conducted Output Power**Low CH (470.125MHz):**

Date: 28.JAN.2016 02:38:25

U-299H peak power L

Prüfbericht - Nr.: 16070601 001
Test Report No.Seite 13 von 38
Page 13 of 38

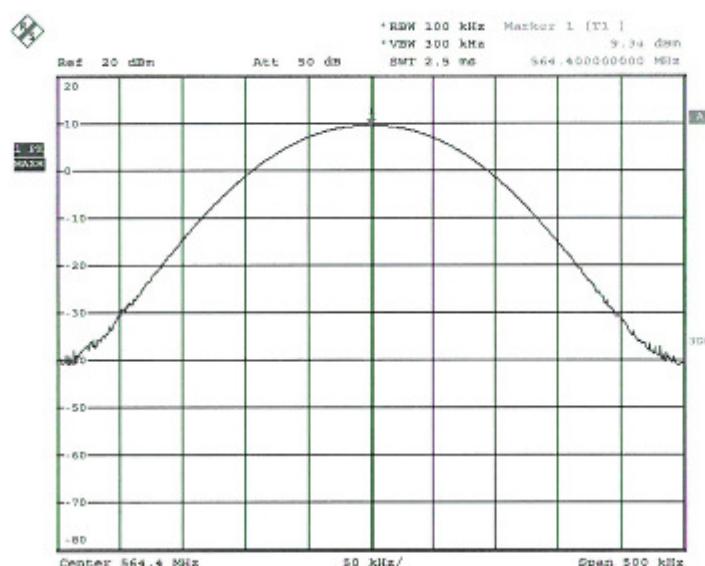
Middle CH (516.4MHz):



Date: 28.JAN.2016 05:03:18

U-299H peak power M
sign-off test Data

High CH (564.4MHz):



Date: 28.JAN.2016 02:47:20

U-299H peak power H

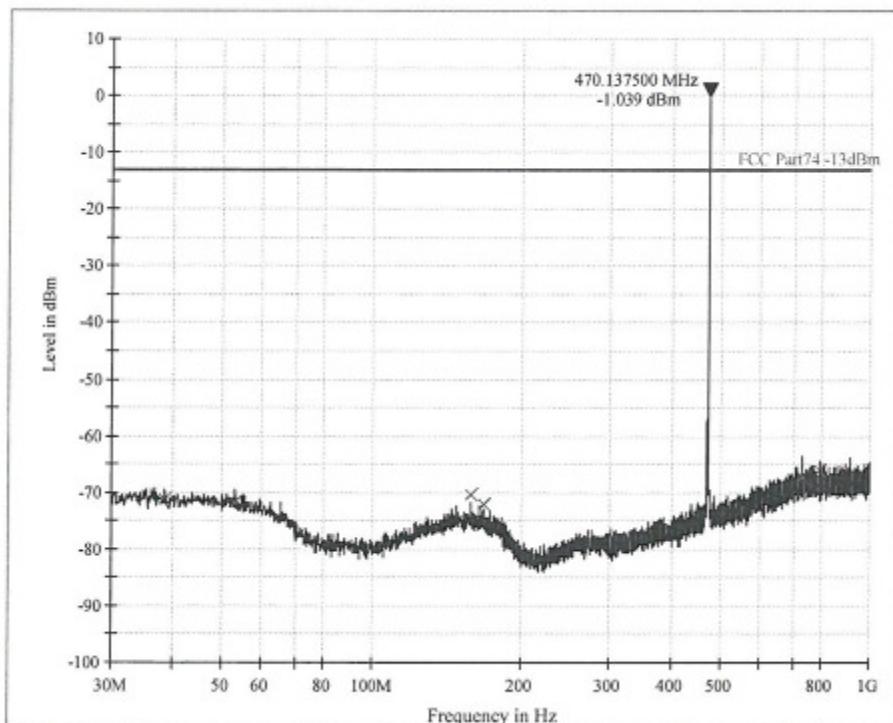
5.2. Spurious Radiation Measurement

RESULT:

PASS

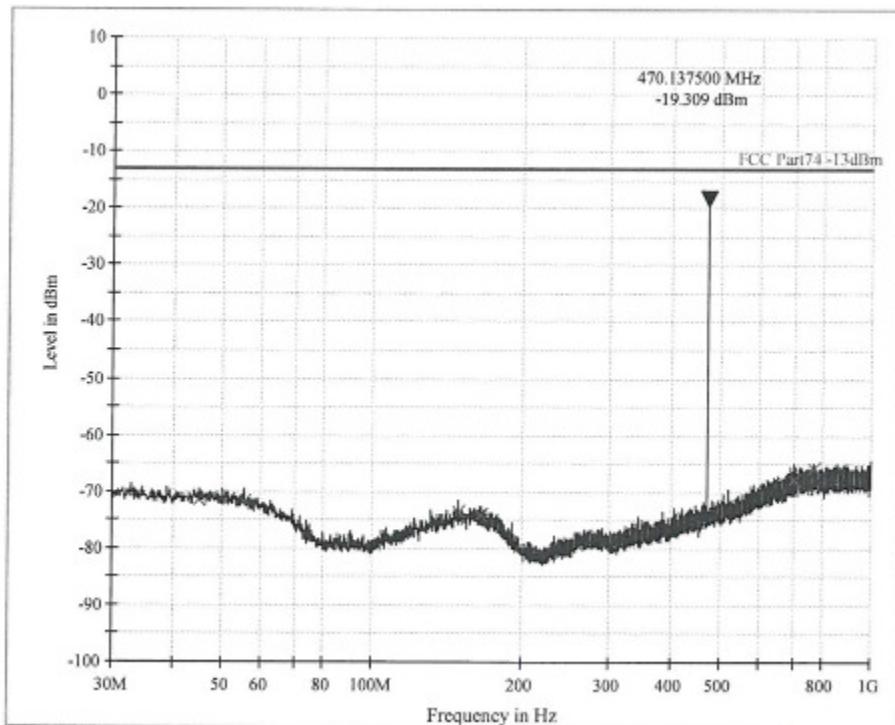
Date of testing : 16 Sep 2015 & 18 Sep 2015
 Test specification : FCC Part 2 Per Section 2.1053(a) and 2.1057
 Guide : ANSI/TIA-603-D-2010, clause 2.2.12
 Limits : FCC Part 74 Per Section 74.861(e)(6)(iii)
 Kind of test site : 3m Full-Anechoic Chamber
 Operation mode : Transmitting (unmodulated)
 Temperature : 23°C
 Humidity : 50%

Figure 2: TX Spurious Radiation, 30 – 1000 MHz, Vertical (U-299H, Low CH)



Limit and Margin PK

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
38.460000	-71.3	1000.0	100.000	V	-75.0	58.3	-13.0	
53.280000	-71.9	1000.0	100.000	V	-75.6	58.9	-13.0	
158.040000	-70.2	1000.0	100.000	V	-77.4	57.2	-13.0	
168.360000	-72.1	1000.0	100.000	V	-77.8	59.1	-13.0	
728.880000	-67.1	1000.0	100.000	V	-70.9	54.1	-13.0	
792.180000	-66.2	1000.0	100.000	V	-70.9	53.2	-13.0	

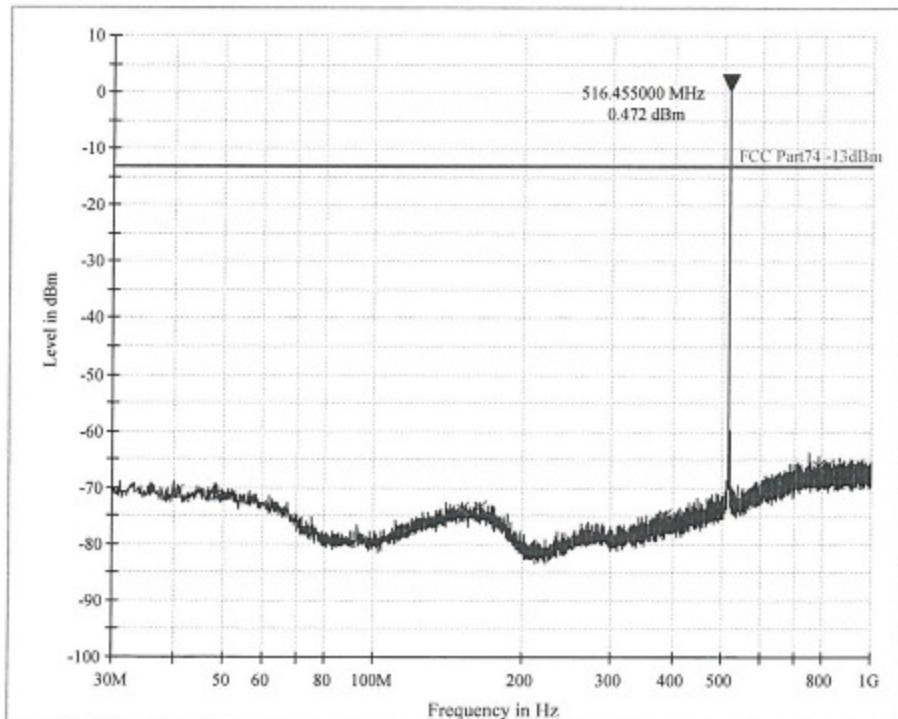
Figure 3: TX Spurious Radiation, 30 – 1000 MHz, Horizontal (U-299H, Low CH)


Limit and Margin PK

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
45.180000	-71.4	1000.0	100.000	H	-74.7	58.4	-13.0	
55.440000	-71.8	1000.0	100.000	H	-75.9	58.8	-13.0	
148.680000	-73.6	1000.0	100.000	H	-77.9	60.6	-13.0	
165.660000	-74.0	1000.0	100.000	H	-77.6	61.0	-13.0	
700.740000	-67.9	1000.0	100.000	H	-71.6	54.9	-13.0	
769.500000	-65.8	1000.0	100.000	H	-70.7	52.8	-13.0	

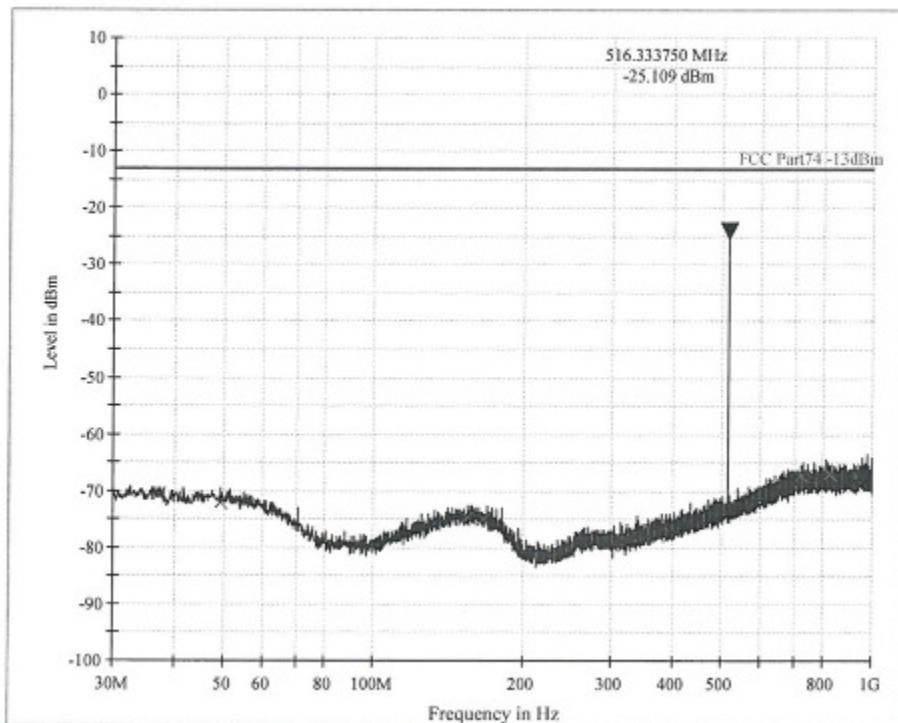
Prüfbericht - Nr.: 16070601 001
Test Report No.

 Seite 16 von 38
 Page 16 of 38

Figure 4: TX Spurious Radiation, 30 – 1000 MHz, Vertical (U-299H, Middle CH)

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
40.560000	-70.7	1000.0	100.000	V	-75.2	57.7	-13.0	
48.300000	-71.5	1000.0	100.000	V	-75.0	58.5	-13.0	
150.780000	-73.9	1000.0	100.000	V	-77.7	60.9	-13.0	
164.460000	-73.5	1000.0	100.000	V	-77.6	60.5	-13.0	
385.740000	-75.0	1000.0	100.000	V	-79.2	62.0	-13.0	
786.960000	-66.2	1000.0	100.000	V	-70.9	53.2	-13.0	

Figure 5: TX Spurious Radiation, 30 – 1000 MHz, Horizontal (U-299H, Middle CH)

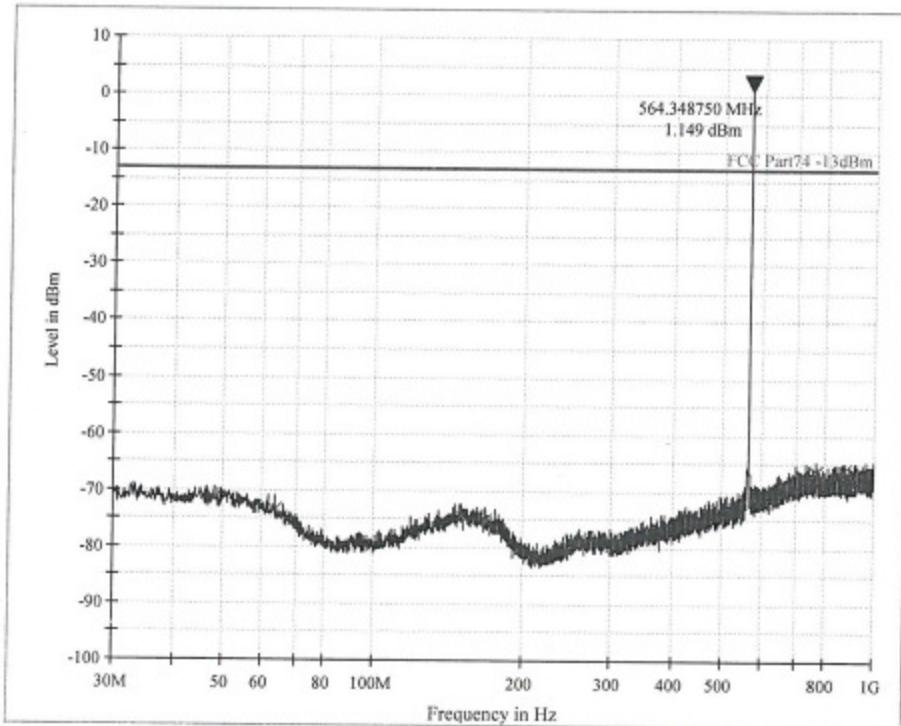


Limit and Margin PK

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
36.900000	-70.7	1000.0	100.000	H	-74.8	57.7	-13.0	
49.260000	-72.2	1000.0	100.000	H	-75.0	59.2	-13.0	
154.380000	-74.6	1000.0	100.000	H	-77.6	61.6	-13.0	
166.380000	-75.0	1000.0	100.000	H	-77.7	62.0	-13.0	
721.620000	-67.2	1000.0	100.000	H	-71.0	54.2	-13.0	
821.520000	-66.8	1000.0	100.000	H	-70.8	53.8	-13.0	

Prüfbericht - Nr.: 16070601 001
Test Report No.

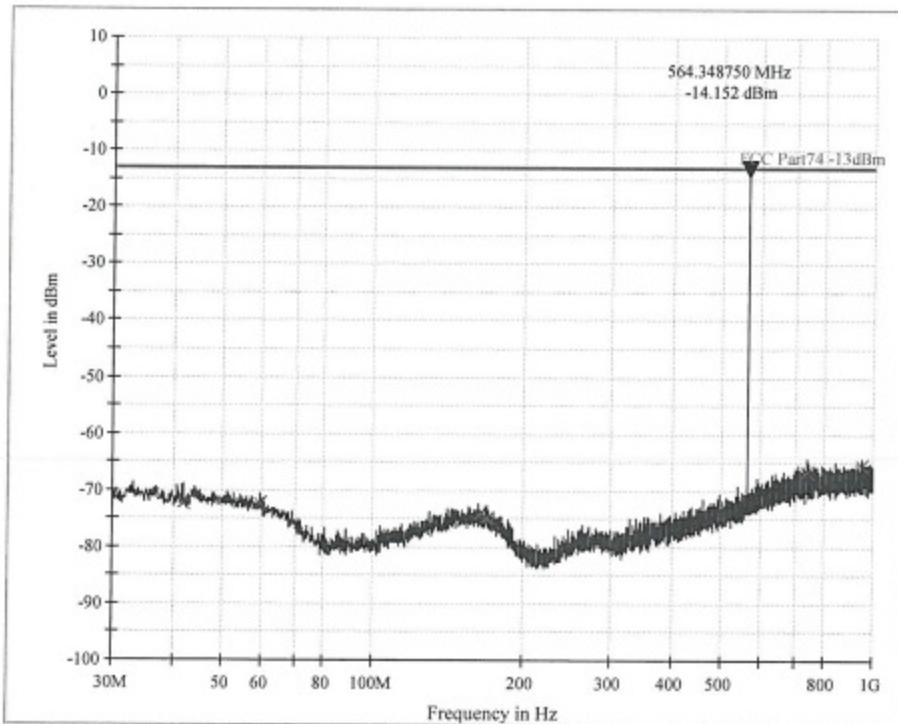
 Seite 18 von 38
 Page 18 of 38

Figure 6: TX Spurious Radiation, 30 – 1000 MHz, Vertical (U-299H, High CH)

Limit and Margin PK

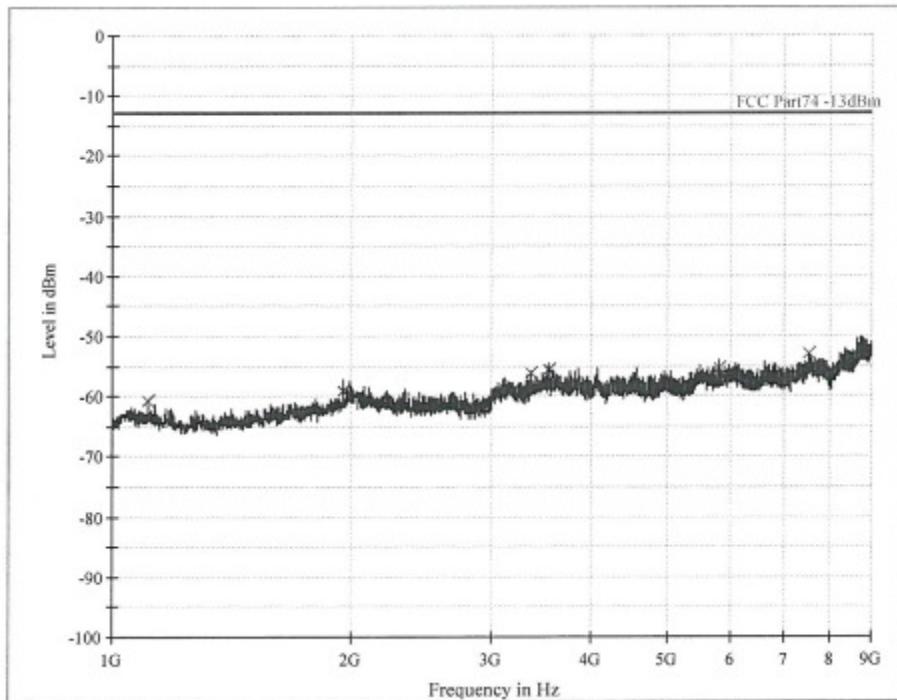
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin -PK+ (dB)	Limit -PK+ (dBm)	Comment
48.060000	-71.5	1000.0	100.000	V	-74.9	58.5	-13.0	
63.600000	-73.5	1000.0	100.000	V	-77.6	60.5	-13.0	
149.820000	-74.5	1000.0	100.000	V	-77.7	61.5	-13.0	
168.600000	-75.3	1000.0	100.000	V	-77.8	62.3	-13.0	
770.700000	-66.3	1000.0	100.000	V	-70.7	53.3	-13.0	
870.600000	-66.2	1000.0	100.000	V	-70.7	53.2	-13.0	

Prüfbericht - Nr.: 16070601 001
Test Report No.

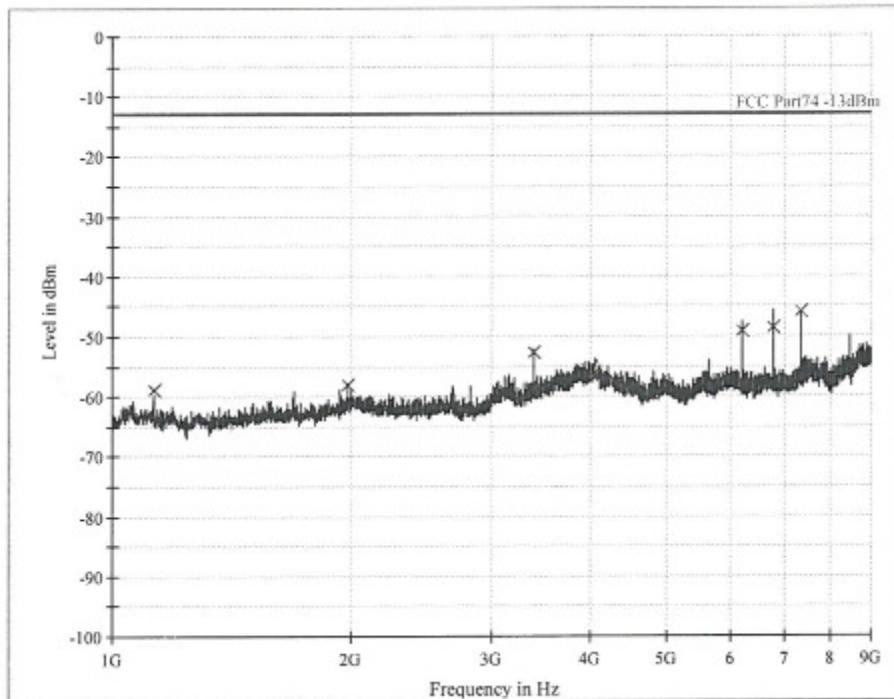
 Seite 19 von 38
 Page 19 of 38

Figure 7: TX Spurious Radiation, 30 – 1000 MHz, Horizontal (U-299H, High CH)

Limit and Margin PK

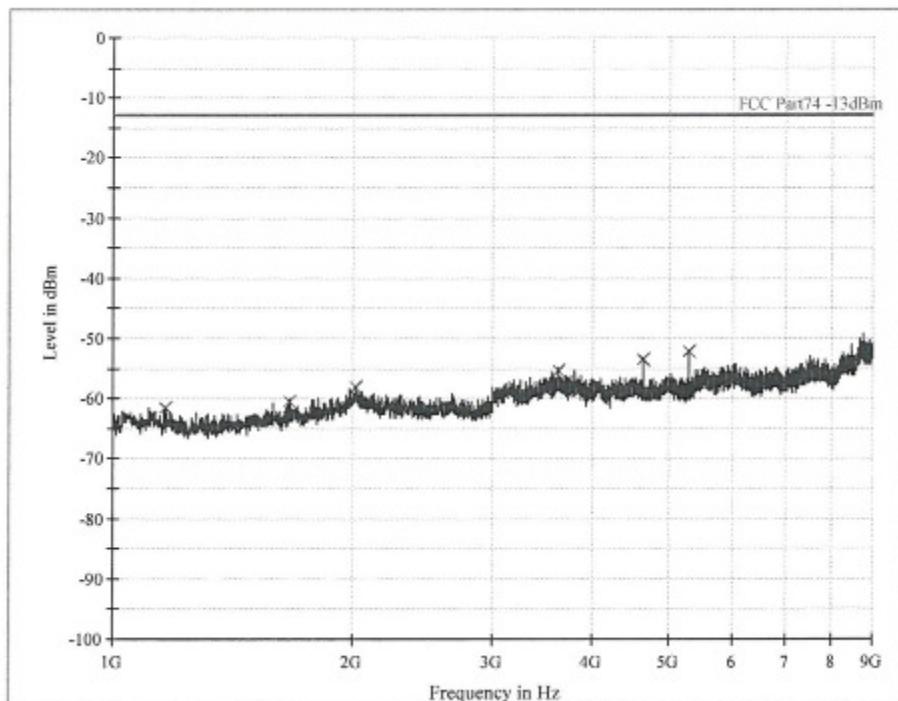
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
41.640000	-72.3	1000.0	100.000	H	-75.1	59.3	-13.0	
59.700000	-72.4	1000.0	100.000	H	-76.6	59.4	-13.0	
162.660000	-74.4	1000.0	100.000	H	-77.5	61.4	-13.0	
169.800000	-74.9	1000.0	100.000	H	-77.9	61.9	-13.0	
742.800000	-66.5	1000.0	100.000	H	-70.9	53.5	-13.0	
951.000000	-65.6	1000.0	100.000	H	-70.4	52.6	-13.0	

Figure 8: TX Spurious Radiation, Above 1GHz, Vertical (U-299H, Low CH)

Limit and Margin PK

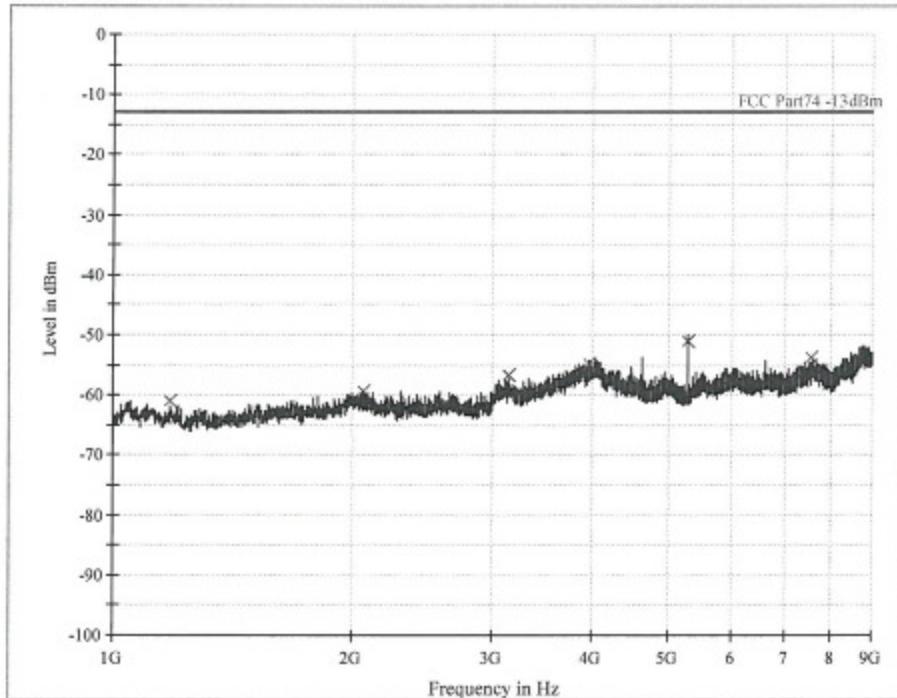
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
1109.000000	-60.7	1000.0	1000.000	V	-115.0	47.7	-13.0	
1951.000000	-59.2	1000.0	1000.000	V	-112.0	46.2	-13.0	
3357.000000	-56.3	1000.0	1000.000	V	-109.6	43.3	-13.0	
3530.000000	-55.7	1000.0	1000.000	V	-109.4	42.7	-13.0	
5802.000000	-55.3	1000.0	1000.000	V	-107.5	42.3	-13.0	
7522.000000	-53.0	1000.0	1000.000	V	-103.3	40.0	-13.0	

Figure 9: TX Spurious Radiation, Above 1GHz, Horizontal (U-299H, Low CH)

Limit and Margin PK

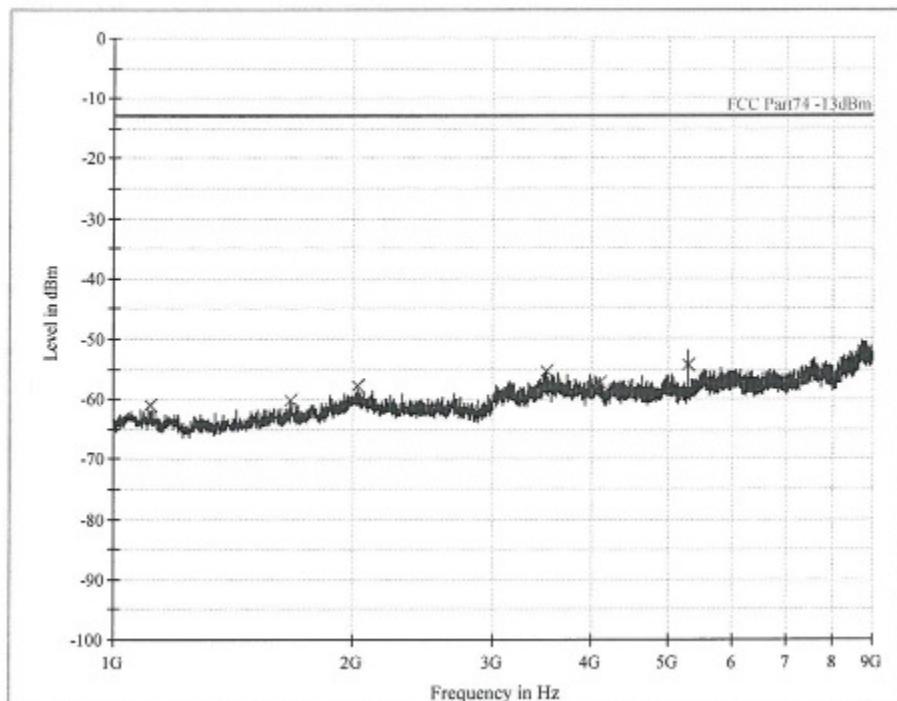
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
1128.000000	-58.8	1000.0	1000.000	H	-114.4	45.8	-13.0	
1979.000000	-58.1	1000.0	1000.000	H	-112.2	45.1	-13.0	
3387.000000	-52.7	1000.0	1000.000	H	-110.0	39.7	-13.0	
6209.000000	-49.3	1000.0	1000.000	H	-107.4	36.3	-13.0	
6774.000000	-48.6	1000.0	1000.000	H	-106.9	35.6	-13.0	
7337.000000	-46.1	1000.0	1000.000	H	-104.5	33.1	-13.0	

Figure 10: TX Spurious Radiation, Above 1GHz, Vertical (U-299H, Middle CH)

Limit and Margin PK

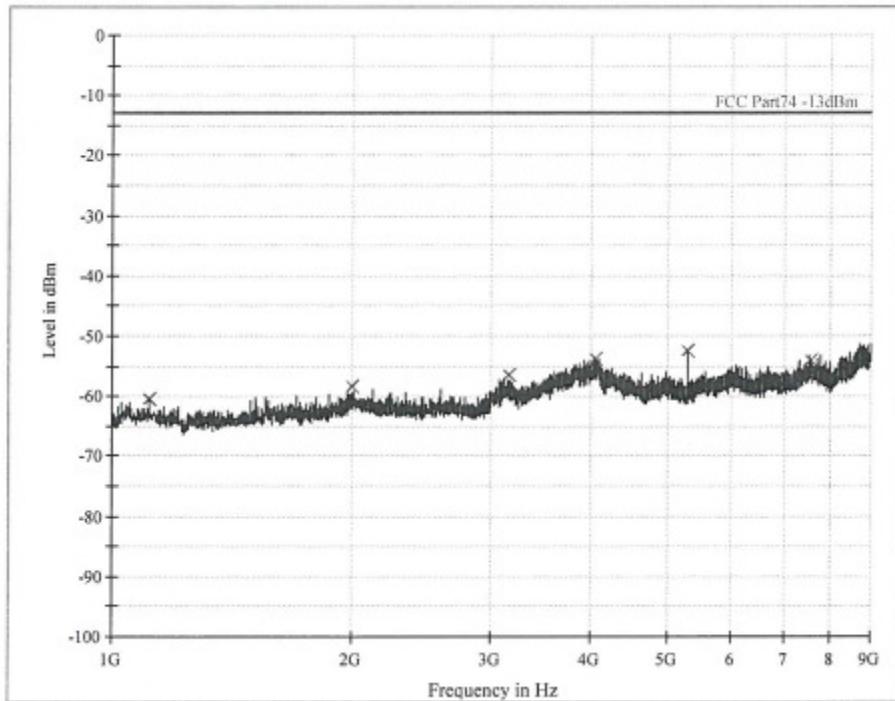
Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
1163.000000	-61.5	1000.0	1000.000	V	-115.0	48.5	-13.0	
1667.000000	-60.4	1000.0	1000.000	V	-113.8	47.4	-13.0	
2021.000000	-58.0	1000.0	1000.000	V	-111.3	45.0	-13.0	
3629.000000	-55.5	1000.0	1000.000	V	-109.4	42.6	-13.0	
4623.000000	-53.6	1000.0	1000.000	V	-109.4	40.6	-13.0	
5283.000000	-52.1	1000.0	1000.000	V	-107.9	39.1	-13.0	

Figure 11: TX Spurious Radiation, Above 1GHz, Horizontal (U-299H, Middle CH)

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
1182.000000	-60.9	1000.0	1000.000	H	-114.5	47.9	-13.0	
2065.000000	-59.4	1000.0	1000.000	H	-112.4	46.4	-13.0	
3143.000000	-56.6	1000.0	1000.000	H	-110.3	43.6	-13.0	
3971.000000	-54.7	1000.0	1000.000	H	-107.4	41.7	-13.0	
5283.000000	-51.0	1000.0	1000.000	H	-108.6	38.0	-13.0	
7545.000000	-53.9	1000.0	1000.000	H	-103.6	40.9	-13.0	

Figure 13: TX Spurious Radiation, Above 1GHz, Vertical (U-299H, High CH)

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
1114.000000	-61.2	1000.0	1000.000	V	-115.0	48.2	-13.0	
1675.000000	-60.3	1000.0	1000.000	V	-113.7	47.3	-13.0	
2029.000000	-57.7	1000.0	1000.000	V	-111.4	44.7	-13.0	
3498.000000	-55.4	1000.0	1000.000	V	-109.3	42.4	-13.0	
4098.000000	-57.2	1000.0	1000.000	V	-109.8	44.2	-13.0	
5284.000000	-54.3	1000.0	1000.000	V	-107.9	41.3	-13.0	

Figure 13: TX Spurious Radiation, Above 1GHz, Horizontal (U-299H, High CH)

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBm)	Comment
1113.000000	-60.5	1000.0	1000.000	H	-114.4	47.5	-13.0	
2002.000000	-58.3	1000.0	1000.000	H	-111.9	45.3	-13.0	
3161.000000	-56.6	1000.0	1000.000	H	-110.3	43.6	-13.0	
4053.000000	-53.8	1000.0	1000.000	H	-107.1	40.8	-13.0	
5283.000000	-52.3	1000.0	1000.000	H	-108.6	39.3	-13.0	
7574.000000	-54.0	1000.0	1000.000	H	-103.6	41.0	-13.0	

5.3. Modulation Characteristics measurement

RESULT:
PASS

Date of testing	:	01 Feb 2016
Test specification	:	FCC Part 2 Per Section 2.1047(a) and (b)
Guide	:	ANSI/TIA-603-D-2010, clause 2.2.3
Limits	:	FCC Part 74 Per Section 74.861(e)(3) FCC Part 2 Per Section 2.1047(a) and (b)
Operation mode	:	Transmitting
Temperature	:	20°C
Humidity	:	51%

Figure 14: Modulation Characteristics measurement (U-299H)
Modulation Limiting

Frequency (Hz)	Deviation (kHz)	Frequency (Hz)	Deviation (kHz)
100	7.7	4000	10.9
200	8.2	5000	12.9
300	8.5	6000	13.7
400	8.6	7000	14.6
500	8.5	8000	15.3
600	8.6	9000	16.1
700	8.6	10000	16.5
800	8.7	12000	16.9
900	8.8	13000	16.4
1000	9.2	14000	15.1
1500	9.4	15000	13.1
2000	9.9	16000	10.9
3000	10.9	17000	8.8

Modulation (dB)	-20	-10	0	5	15	20
400Hz	kHz	8.1	14.1	24.7	32.3	47.7
800Hz	kHz	8.2	14.4	25.3	32.1	46.5
2kHz	kHz	9.4	16.5	28.9	36.8	46.7
5kHz	kHz	12.2	21.5	36.2	43.8	56.5
9kHz	kHz	16.2	26.8	43.4	49.8	57.9
12kHz	kHz	16.1	28.1	43.5	49.8	55.5
14kHz	kHz	14.3	25.1	38.6	42.6	46.6

Prüfbericht - Nr.: 16070601 001
Test Report No.Seite 27 von 38
Page 27 of 38

Maximum Deviation

Maximum Deviation	Limit
71kHz	75kHz

Audio Frequency Response

Modulation Frequency (Hz)	Input Level (mV)	Audio Frequency Response (dB)
100	22.75	1.08
300	21.91	0.75
500	21.51	0.59
700	21.10	0.43
1000	20.09	0
1500	17.90	-1.0
2000	13.58	-2.02
2500	15.92	-3.40
3500	11.37	-4.94
5000	8.72	-7.25

5.4. Occupied Bandwidth

RESULT:
PASS

Date of testing : 01 Feb 2016
 Test specification : FCC Part 2 Per Section 2.1049(c)1
 Guide : ANSI/TIA-603-D-2010, clause 2.2.11
 Limits : FCC Part 74 Per Section 74.861(e)(3),
 74.861(e)(5) and 74.861(e)(6)
 Operation mode : Transmitting (modulated)
 Temperature : 22°C
 Humidity : 54%

Figure 15: Occupied Bandwidth (U-299H)

Occupied Bandwidth

Equipment under test: U-299H
 Ambient temperature: 22
 Relative humidity: 54
 Result: pass
 Remark: RBW = 300Hz VBW = 1kHz

Channel	Frequency (GHz)	Test Result (kHz)
H	564.4MHz	84
M	516.4MHz	80
L	472.125MHz	74

5.5. Frequency tolerance

RESULT:
PASS

Date of testing	:	01 Feb 2016
Test specification	:	FCC Part 2 Per Section 2.1055
Guide	:	ANSI/TIA-603-C-2004, clause 2.2.2
Limits	:	FCC Part 74 Per Section 74.861(e)(4)
Operation mode	:	Transmitting (unmodulated)
Temperature	:	-30°C to 60°C
Humidity	:	51%

Figure 16: Frequency tolerance (U-299H)

The Frequency Tolerance (temperature) *U-299H*

Test condition	Power supply	Low Frequency (MHz) (470.125)	Middle Frequency (MHz) (516.4)	High Frequency (MHz) (564.4)
-30°C	DC 3.0V	470.12482	516.3974	564.397
-20°C	DC 3.0V	470.12480	516.3976	564.3972
-10°C	DC 3.0V	470.12498	516.3980	564.3976
0°C	DC 3.0V	470.12501	516.3986	564.3998
10°C	DC 3.0V	470.12513	516.3988	564.4002
20°C	DC 3.0V	470.12541	516.4002	564.4004
30°C	DC 3.0V	470.12562	516.4004	564.4008
40°C	DC 3.0V	470.12563	516.4012	564.401
50°C	DC 3.0V	470.12577	516.4024	564.4016
60°C	DC 3.0V	470.12582	516.4027	564.4018
Frequency Error:		0.00082	0.0027	0.003
Frequency tolerance:		0.0017%	0.00052%	0.0053%
Frequency Tolerance Limit:			0.005%	

U-299H
Table 1: The measurement of Frequency Tolerance (supply voltage)

Temperatur e (°C)	Power supply	Low Frequency (MHz) (470.125)	Middle Frequency (MHz) (516.4)	High Frequency (MHz) (564.4)
20	DC3.3	470.12566	516.4024	564.4044
20	DC3.0	470.1258	516.4004	564.4012
20	DC2.7	470.12596	516.4012	564.4032
Frequency Error:		0.00076	0.0024	0.0044
Frequency tolerance:		0.0002%	0.00046%	0.00078%
Frequency Tolerance Limit:			0.005%	

Prüfbericht - Nr.: 16070601 001
Test Report No.

Seite 30 von 38
Page 30 of 38

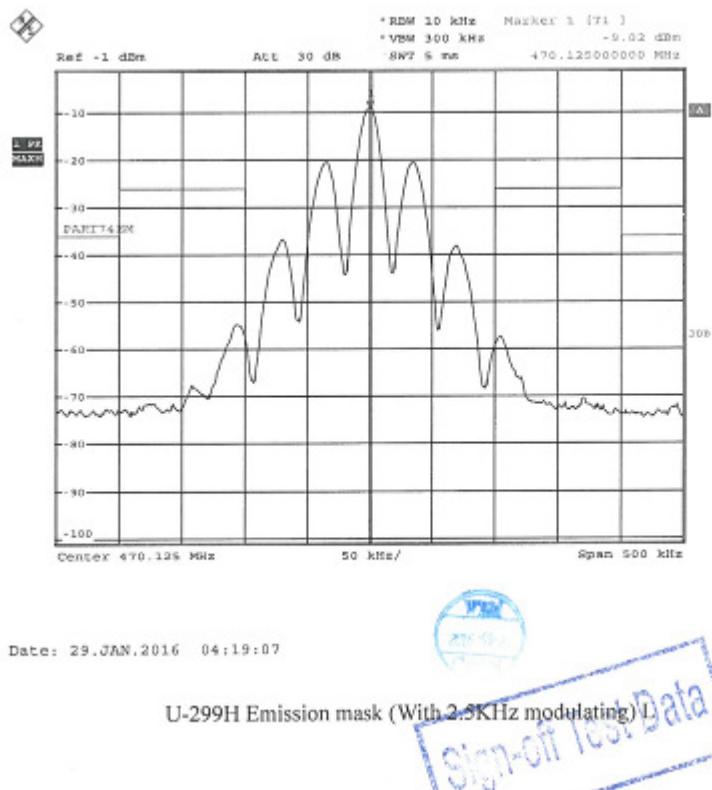
5.6. Emission Mask

RESULT:

PASS

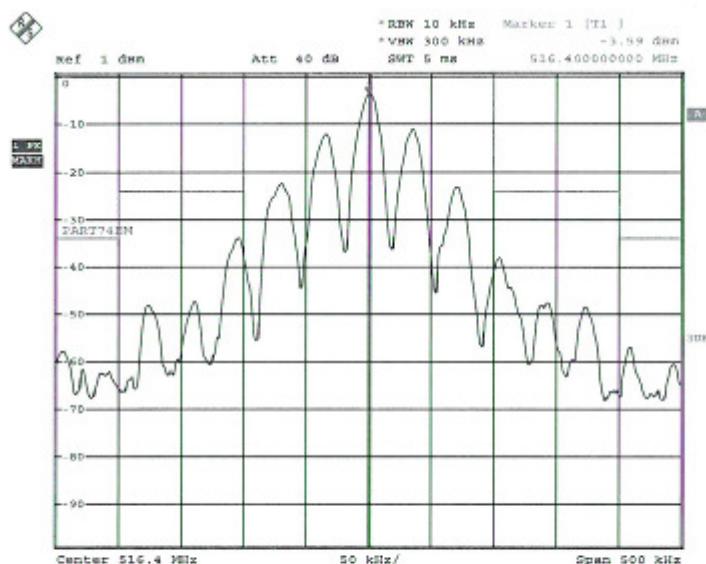
Date of testing : 29 Jan 2016 & 15 Feb 2016
Test specification : FCC Part 2 Per Section 2.1053(a) and 2.1057
Guide : ANSI/TIA-603-C-2004, clause 2.2.12
Limits : FCC Part 74 Per Section 74.861(e)(6)(7)
Operation mode : Transmitting (modulated)
Temperature : 20°C
Humidity : 51%

Figure 17: Emission Mask (U-299H, Low CH)



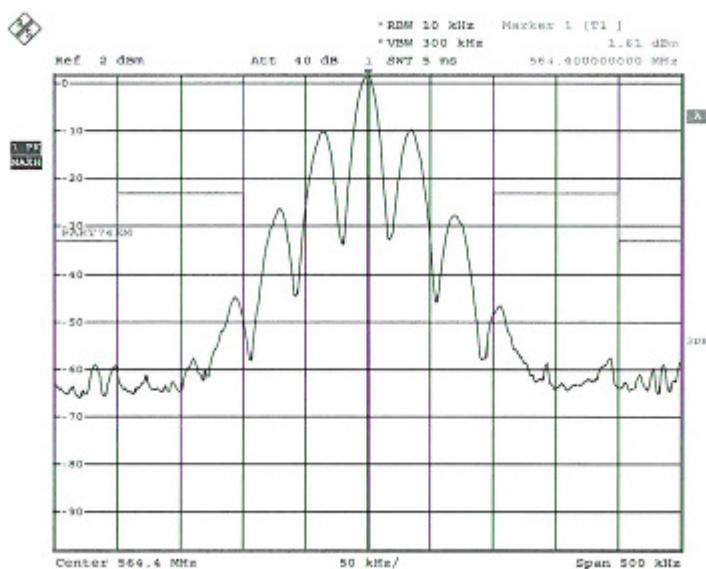
Prüfbericht - Nr.: 16070601 001
Test Report No.

 Seite 31 von 38
 Page 31 of 38

Figure 18: Emission Mask (U-299H, Middle CH)


Date: 28.JAN.2016 04:58:47

U-299H Emission mask (With 2.5KHz modulating) M

Figure 19: Emission Mask (U-299H, High CH)


Date: 29.JAN.2016 05:19:37



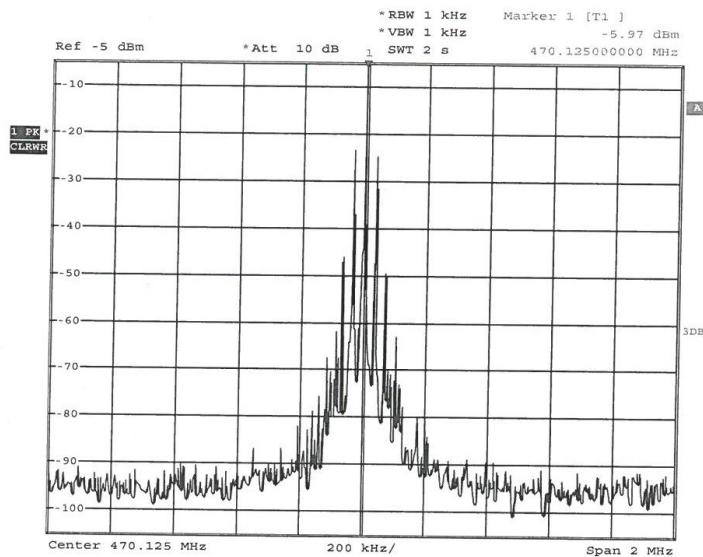
U-299H Emission mask (With 2.5KHz modulating) H

Scan-off Test Data

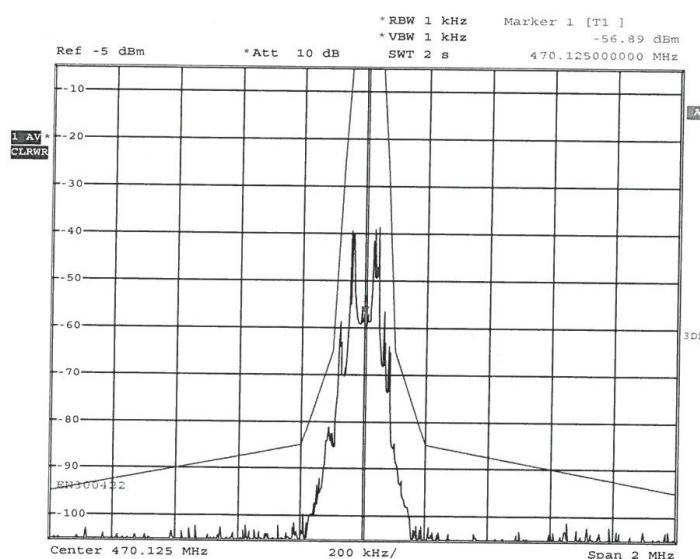


Prüfbericht - Nr.: 16070601 001
Test Report No.

 Seite 32 von 38
 Page 32 of 38

Figure 20: Emission Mask in ETSI EN300 422-1 V1.4.2 (U-299H, Low CH)


Date: 15.FEB.2016 20:34:01

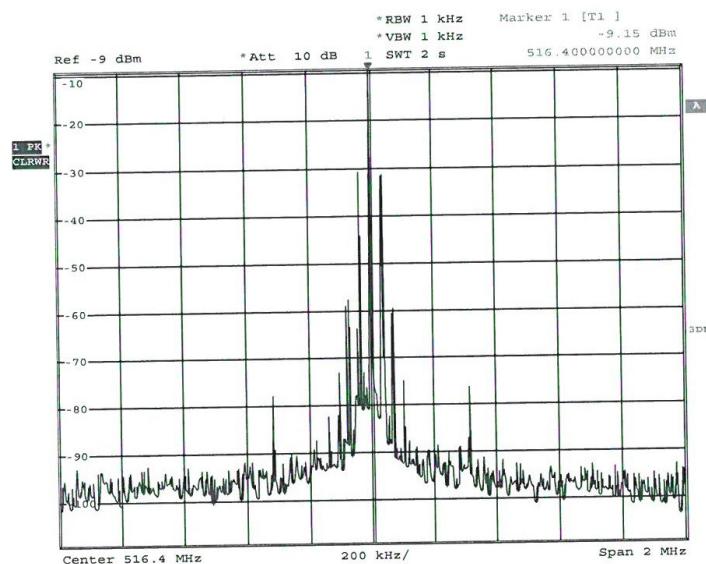
U-299H Necessary bandwidth Low without Modulating (470.125MHz)


Date: 15.FEB.2016 20:36:41

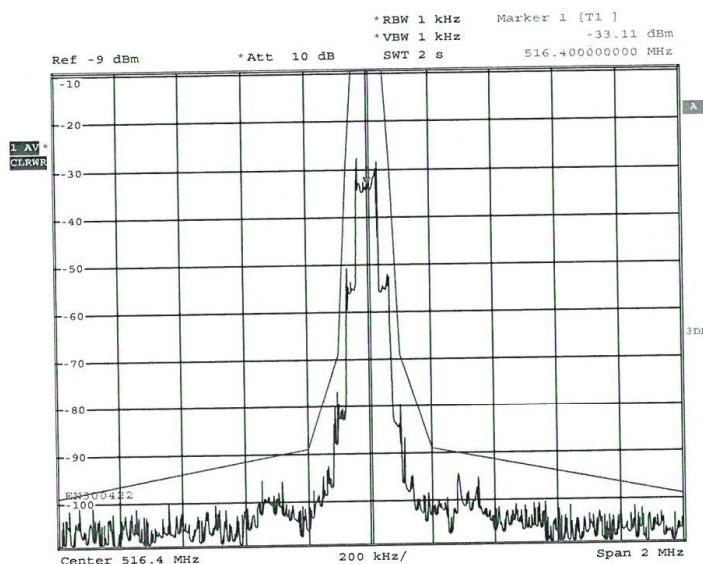
U-299H Necessary bandwidth Low with Modulating (470.125MHz)


Prüfbericht - Nr.: 16070601 001
Test Report No.

 Seite 33 von 38
 Page 33 of 38

Figure 21: Emission Mask in ETSI EN300 422-1 V1.4.2 (U-299H, Middle CH)


Date: 15.FEB.2016 21:38:06

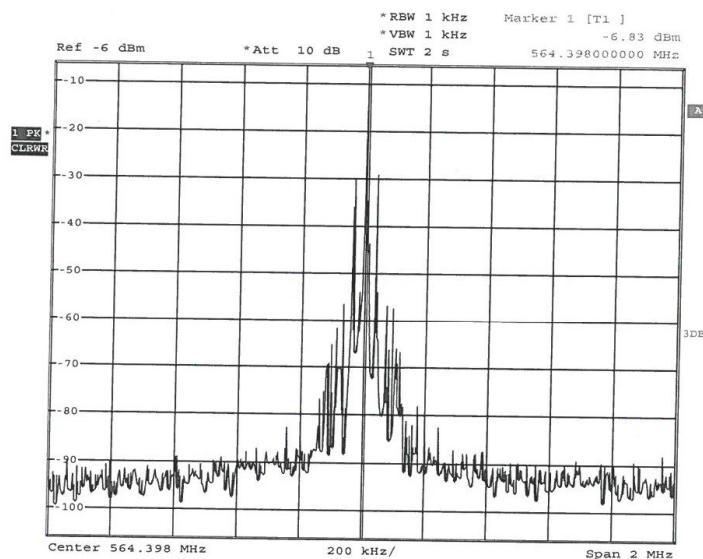
U-299H Necessary bandwidth Middle without Modulating (516.4MHz)


Date: 15.FEB.2016 21:38:45

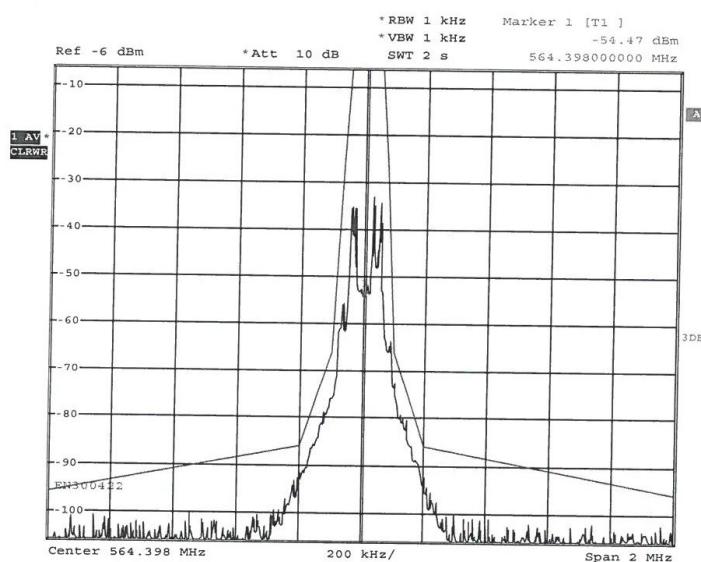
U-299H Necessary bandwidth Middle with Modulating (516.4MHz)


Prüfbericht - Nr.: 16070601 001
Test Report No.

 Seite 34 von 38
 Page 34 of 38

Figure 22: Emission Mask in ETSI EN300 422-1 V1.4.2 (U-299H, High CH)


Date: 15.FEB.2016 20:55:35

U-299H Necessary bandwidth High without Modulating (564.4MHz)


Date: 15.FEB.2016 20:57:19

U-299H Necessary bandwidth High with Modulating (564.4MHz)


Prüfbericht - Nr.: 16070601 001
Test Report No.

Seite 35 von 38
Page 35 of 38

5.7. Electromagnetic Fields

RESULT:

PASS

Date of testing : 28 Jan 2016
Guide : FCC KDB Publication 447498

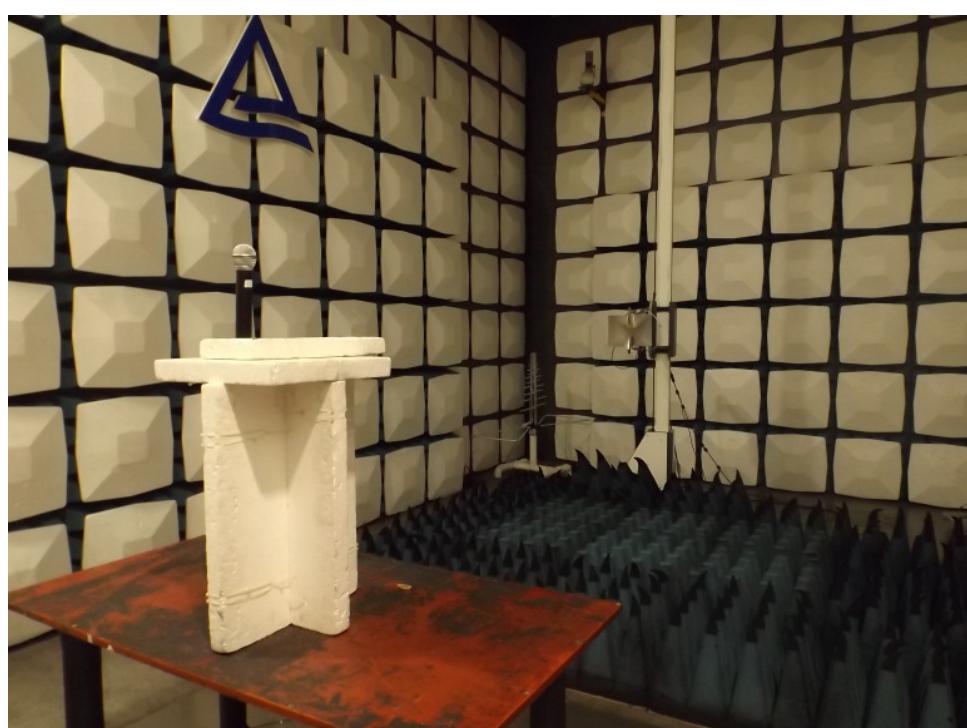
The minimum distance for the EUT is <5mm, since maximum peak output power of the transmitter is 8.59mW(9.34dBm)<22mW, hence the EUTs are excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile and Portable RF Exposure. Guidance v06.

6. Photographs of Test Setup

Picture 1: Spurious Radiation Measurement, 30MHz-1GHz (U-299H)



Picture 2: Spurious Radiation Measurement, Above 1GHz (U-299H)



7. List of Tables

TABLE 1: LIST OF TEST AND MEASUREMENT EQUIPMENT.....	5
TABLE 2: MEASUREMENT UNCERTAINTY.....	7

8. List of Figures

FIGURE 1: CONDUCTED OUTPUT POWER	12
FIGURE 2: TX SPURIOUS RADIATION, 30 – 1000 MHz, HORIZONTAL (U-299H, Low CH).....	14
FIGURE 3: TX SPURIOUS RADIATION, 30 – 1000 MHz, VERTICAL (U-299H, Low CH).....	15
FIGURE 4: TX SPURIOUS RADIATION, 30 – 1000 MHz, HORIZONTAL (U-299H, MIDDLE CH).16	16
FIGURE 5: TX SPURIOUS RADIATION, 30 – 1000 MHz, VERTICAL (U-299H, MIDDLE CH).....	17
FIGURE 6: TX SPURIOUS RADIATION, 30 – 1000 MHz, HORIZONTAL (U-299H, HIGH CH)	18
FIGURE 7: TX SPURIOUS RADIATION, 30 – 1000 MHz, VERTICAL (U-299H, HIGH CH)	19
FIGURE 8: TX SPURIOUS RADIATION, ABOVE 1GHz, HORIZONTAL (U-299H, Low CH)	20
FIGURE 9: TX SPURIOUS RADIATION, ABOVE 1GHz, VERTICAL (U-299H, Low CH)	21
FIGURE 10: TX SPURIOUS RADIATION, ABOVE 1GHz, HORIZONTAL (U-299H, MIDDLE CH) ..	22
FIGURE 11: TX SPURIOUS RADIATION, ABOVE 1GHz, VERTICAL (U-299H, MIDDLE CH)	23
FIGURE 12: TX SPURIOUS RADIATION, ABOVE 1GHz, HORIZONTAL (U-299H, HIGH CH).....	24
FIGURE 13: TX SPURIOUS RADIATION, ABOVE 1GHz, VERTICAL (U-299H, HIGH CH)	24
FIGURE 14: MODULATION CHARACTERISTICS MEASUREMENT (U-299H)	26
FIGURE 15: OCCUPIED BANDWIDTH (U-299H)	28
FIGURE 16: FREQUENCY TOLERANCE (U-299H).....	29
FIGURE 17: EMISSION MASK (U-299H, Low CH)	30
FIGURE 18: EMISSION MASK (U-299H, MIDDLE CH)	31
FIGURE 19: EMISSION MASK (U-299H, HIGH CH).....	31

Prüfbericht - Nr.: 16070601 001
Test Report No.

Seite 38 von 38
Page 38 of 38

FIGURE 20: EMISSION MASK IN ETSI EN300 422-1 V1.4.2 (U-299H, Low CH).....	30
FIGURE 21: EMISSION MASK IN ETSI EN300 422-1 V1.4.2 (U-299H, MIDDLE CH).....	31
FIGURE 22: EMISSION MASK IN ETSI EN300 422-1 V1.4.2 (U-299H, HIGH CH)	32

9. List of Pictures

PICTURE 1: SPURIOUS RADIATION MEASUREMENT, 30MHz-1GHz (U-299H)	36
PICTURE 2: SPURIOUS RADIATION MEASUREMENT, ABOVE 1GHz (U-299H).....	36