



Prüfbericht - Nr.: 16015130 001		Seite 1 von 30			
<i>Test Report No.:</i>		<i>Page 1 of 30</i>			
Auftraggeber: Seikaku Technical Group Limited					
<i>Client:</i> Offshore Chambers, P. O. Box 217, Apia, Samoa					
Gegenstand der Prüfung: Wireless Microphone Transmitter					
<i>Test item:</i>					
Bezeichnung: VT-22P		FCC ID: H38VT-22P			
<i>Identification:</i> WHX21 (PROEL)		<i>FCC ID</i>			
Wareneingangs-Nr.: 173040862		Eingangsdatum: 30.10.2008			
<i>Receipt No.:</i>		<i>Date of receipt:</i>			
Prüfört: TÜV Rheinland (Guangdong) Ltd. EMC Laboratory Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650 P. R. China		Listed test laboratory according to FCC rules section 2.948 for measuring devices under Parts 74			
Prüfgrundlage: TIA/EIA-603-C-2004					
<i>Test specification:</i> FCC "Rules and Regulations", Part 74: 01, Oct., 2008 Subpart H, Section 74.861					
Prüfergebnis: Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n).					
<i>Test Result:</i> The test item passed the test specification(s).					
Prüflaboratorium: TÜV Rheinland (Guangdong) Ltd.					
<i>Testing Laboratory:</i>					
geprüft / tested by:		kontrolliert / reviewed by:			
					
20. Oct. 2009 Liangdong Xie Project Manager		20. Oct. 2009 Ricky Liu Project Manager			
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>		
			Name/Stellung <i>Name/Position</i>		
			Unterschrift <i>Signature</i>		
Sonstiges / Other Aspects:					
<table style="width:100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top;"> Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet </td> <td style="width: 50%; vertical-align: top;"> Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested </td> </tr> </table>				Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet	Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested
Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet	Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested				
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i></p>					

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 2 von 30
Page 2 of 30

TEST SUMMARY

5.1 RADIATED POWER OUTPUT MEASUREMENT FOR FCC PART 74 PER SECTION 74.861(E)(1)
RESULT: Pass

5.2 SPURIOUS RADIATION MEASUREMENT FOR FCC PART 74 PER SECTION 74.861(E)(6)(III)
RESULT: Pass

5.3 MODULATION CHARACTERISTICS MEASUREMENT
RESULT: Pass

**5.4 OCCUPIED BANDWIDTH FOR FCC PART 74 PER SECTION 74.861(E)(3), 74.861(E)(5)
AND 74.861(E)(6)**
RESULT: Pass

5.5 FREQUENCY TOLERANCE FOR FCC PART 74 PER SECTION 74.861(E)(4)
RESULT: Pass

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 3 von 30
Page 3 of 30

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACE ABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	SUBMITTED DOCUMENTS	9
4	TEST SET-UP AND OPERATION MODE	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SET-UP	11
5	TEST RESULTS EMISSION	14
5.1	RADIATED POWER OUTPUT MEASUREMENT FOR FCC PART 74 PER SECTION 74.861(E)(1) 14	
5.2	SPURIOUS RADIATION MEASUREMENT FOR FCC PART 74 PER SECTION 74.861(E)(6)(III) 16	
5.3	MODULATION CHARACTERISTICS MEASUREMENT	20
5.4	OCCUPIED BANDWIDTH FOR FCC PART 74 PER SECTION 74.861(E)(3), 74.861(E)(5) AND 74.861(E)(6)	21
5.5	FREQUENCY TOLERANCE FOR FCC PART 74 PER SECTION 74.861(E)(4)	23
6	PHOTOGRAPHS OF THE TEST SET-UP	26

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 4 von 30
Page 4 of 30

7	LIST OF TABLES.....	30
8	LIST OF PHOTOGRAPHS.....	30

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 5 von 30
Page 5 of 30

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory

Guangzhou Auto Market, Yuan Gang Section of Guangshan Road
Guangzhou 510650

P. R. China

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 6 von 30
Page 6 of 30

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Equipment	Manufacturer	Type	Serial No.	Calibrated until
TÜV Rheinland (Guangdong) Ltd.				
EMI Test Receiver	Rohde & Schwarz	ESCI-3	100216	16.Mar.2010
Spectrum Analyzer	Rohde & Schwarz	FSP30	100286	16.Mar.2010
Trilog-Broadband Antenna	SCHWARZBECK MESS- ELEKTRONIK	VULB9168	209	07.Nov.2009
Trilog-Broadband Antenna	SCHWARZBECK MESS- ELEKTRONIK	VULB9168	210	26.Jun.2011
Double-Ridged Waveguide Horn Antenna	Rohde & Schwarz	HF906	100385	18.Jul.2010
Double-Ridged Waveguide Horn Antenna	Rohde & Schwarz	HF906	100407	26.Jun.2011
Pre-amplifier	MITEQ	AFS42-00101800- 25-S-42	1101599	31.Jul.2010
Band Reject Filter	Micro-Tronics	BRM50702	023	14.Mar.2010
Standard Gain Horn Antenna	EMCO	3160-09	21642	26.Jun.2014
Standard Gain Horn Antenna	EMCO	3160-09	21645	N/A
Pre-amplifier	MITEQ	AFS33-18002650- 30-8P-44	1108282	16.Mar.2010
3m Anechoic Chamber	Albatross Project GmbH	N/A	N/A	16.Apr.2010
Climatic Chamber	ESPEC	EL-04 KA	6107116	16.Mar.2010
Audio analyzer	KENWOOD	10087290	VA-2230A	16.Mar.2010
RF communication test set	HP	8920A	3417A04617	07.Jan.2010

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 7 von 30
Page 7 of 30

2.3 Trace ability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Uncertainty for conducted emissions measurements is $\pm 2.68\text{dB}$.
Uncertainty for radiated emissions measurements is $\pm 4.94\text{dB}$ (30MHz-1GHz), $\pm 4.88\text{dB}$ (>1GHz).

The reported expanded uncertainty is based on a standard uncertainty multiply by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

2.6 Location of original data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangzhou) file for certification follow-up purposes.

2.7 Status of facility used for testing

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory; Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650, P. R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements, the register no. 833845

3 General Product Information

The submitted sample VT-22P and WHX21 (PROEL) are transmitters of wireless microphone system. They are both single channel equipment.

Model WHX21 (PROEL) is identical with VT-22P except model name and brand name.

All the tests are performed on model VT-22P.

3.1 Product Function and Intended Use

For details, refer to technical document and the user manual.

3.2 Ratings and System Details

Frequency range	:	174 - 216MHz
RF output power	:	10mW(e.r.p)
Channel bandwidth	:	200 kHz
Type of antenna	:	Integral antenna
FCC ID:		H38VT-22P
Power supply		DC 9V
	:	(Powered by alkaline Battery)
Frequency Response	:	50Hz-15kHz
Frequency Stability	:	0.003%
Emission designator	:	131KF3E
Ports	:	Connected with external audio source or headset microphone
Protection Class	:	III

Refer to the technical document for further information.

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 9 von 30
Page 9 of 30

3.3 Independent Operation Modes

The basic operation modes are:

- Transmitting without modulation
- Transmitting with modulation

For further information refer to User Manual

3.4 Submitted Documents

- Block Diagram
- Circuit Diagram
- Components List
- PCB layout
- FCC label
- User Manual
- Photo document

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to Test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

None

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

4.5 Test set-up

Diagram 1 of Measurement Equipment Configuration for Testing Radiated Emission

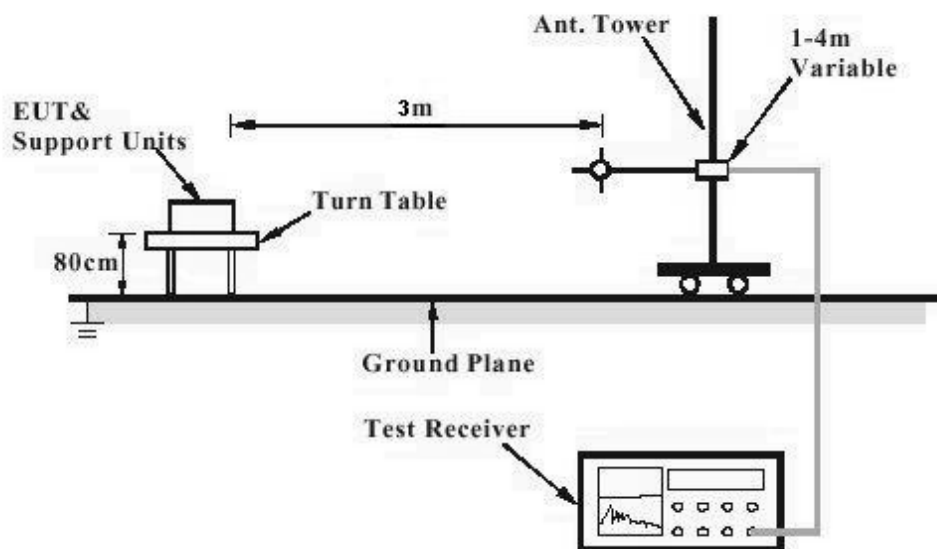


Diagram 2 of Measurement Equipment Configuration for Substitution Method



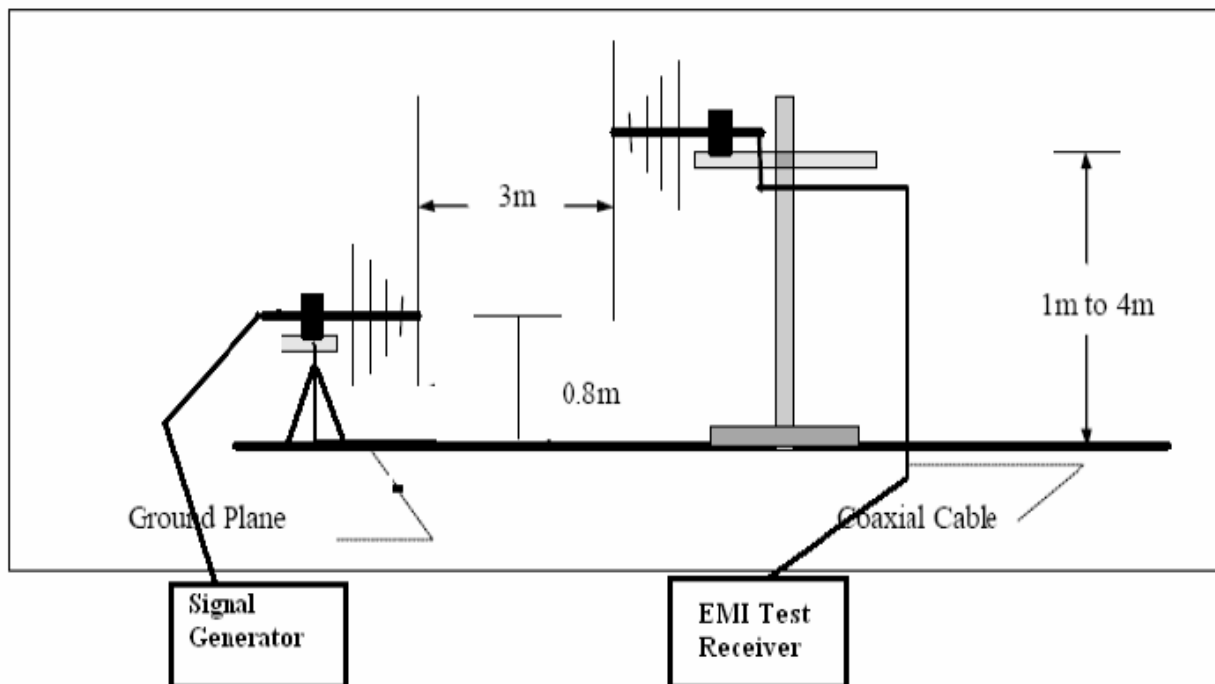


Diagram 3 of Measurement Equipment Configuration for Testing Modulation Characteristics measurement



Diagram 4 of Measurement Equipment Configuration for Testing Frequency Tolerance

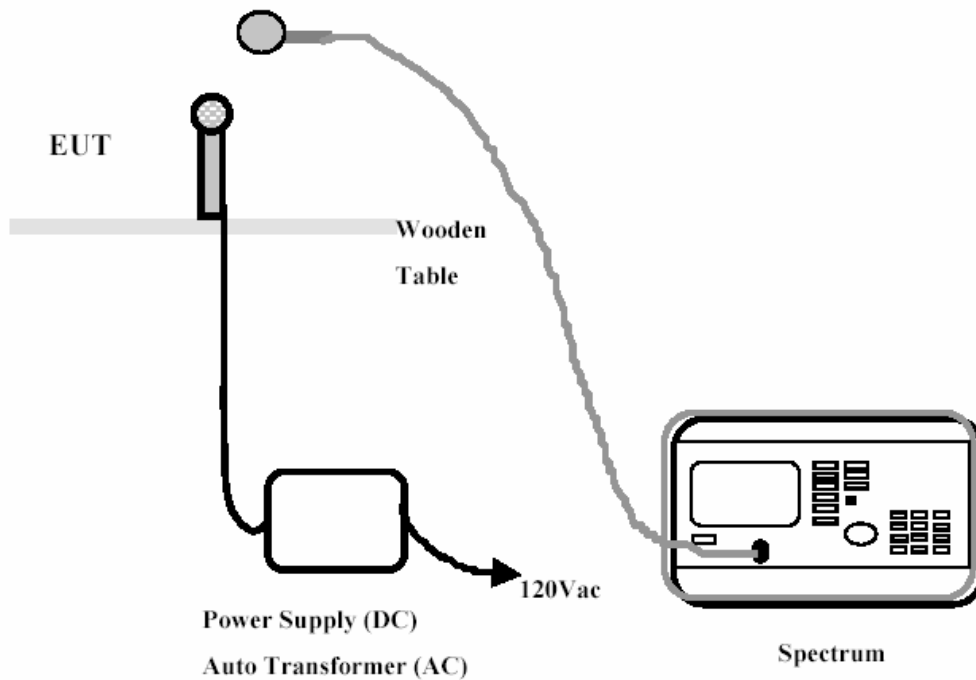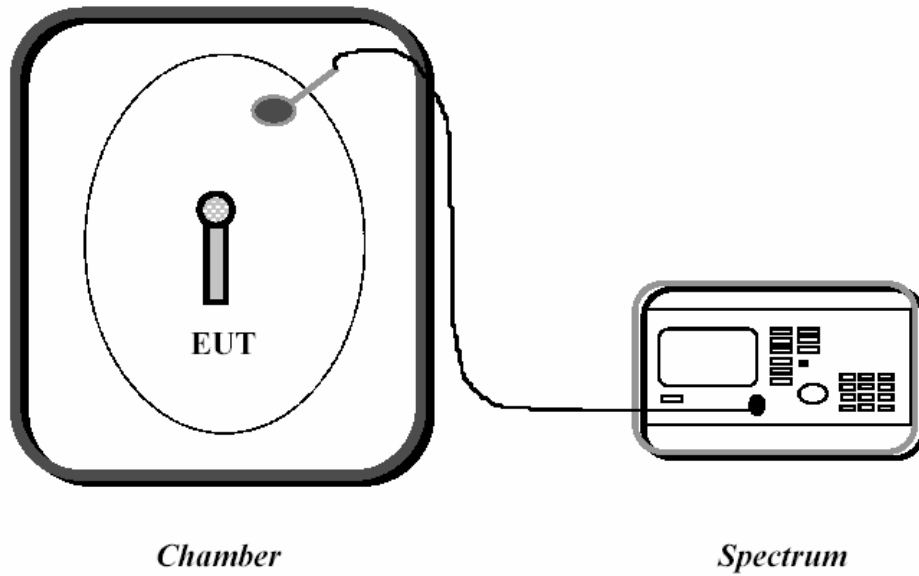

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 14 von 30
Page 14 of 30

5 Test Results EMISSION

5.1 Radiated Power output measurement for FCC part 74 Per Section 74.861(e)(1)

RESULT:

Pass

Date of testing	:	30.Dec.2008 / 16.Sep.2009
Test specification	:	FCC Part 2 Per Section 2.1046(a)
Guide	:	ANSI/TIA-603-C-2004, clause 2.2.17
Limits	:	FCC Part 74 Per Section 74.861(e)(1)
Kind of test site	:	3m Anechoic Chamber
Operation mode	:	Transmitting (unmodulated)
Temperature	:	22°C
Humidity	:	50%

Measurement procedure:

1. The EUT was placed on a 0.8 m high turntable in the anechoic chamber.
2. For radiated power output of the EUT, the measuring antenna was raised and lowered to obtain a maximum reading on the spectrum analyzer with the test antenna polarized vertically and horizontally. The turntable was rotated 360 to further searching the maximum reading on the spectrum analyzer. Then the max value on spectrum was recorded.
3. The EUT was removed and replaced with a substitute dipole antenna. The length of the antenna was adjusted to a half-wave of transmitting frequency measured. The centre of the dipole antenna was placed approximately at the same location as the centre place of the EUT in step 1 and 2.
4. The dipole antenna was connected to a signal generator with a coaxial cable.
5. The signal generator is tuned to the transmitting frequency with the substitute antenna polarized both vertically and horizontally, the output level of the signal generator output was then adjusted to get a maximum reading in the spectrum with the same value recorded in the step 2.
6. The input RF power in the dipole antenna was calculated from the coaxial cable loss and the signal generator output level obtained in step 5. This value was regarded as final result and recorded in following table 2.

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 15 von 30
Page 15 of 30

Note: While in Step 2, the EUT was placed in 3 orthogonal planes to find a maximum reading.

Table 2: Measurement Result of output power at low, mid and high channel

Channel	Freq. (MHz)	Polarization (V/H)	Transmit power (dBm) (ERP)	RF power (mW) (ERP)	Limit (mW)
Lowest	174.100	V	-10.147	0.10	50
		H	-11.398	0.07	50
Mid	194.600	V	-8.782	0.13	50
		H	-10.167	0.10	50
High	215.200	V	2.145	1.64	50
		H	-2.196	0.60	50

As the EUT has three cable combinations, the cables are LM-10/4B, LS-16/4B and HM-26/4B, the maximum RF values of EUT were measured on EUT with cable LM-10/4B.

Prüfbericht - Nr.: 16015130 001
Test Report No.:

Seite 16 von 30
Page 16 of 30

5.2 Spurious Radiation Measurement for FCC Part 74 Per Section 74.861(e)(6)(iii)

RESULT:

Pass

Date of testing	:	30.Dec.2008 / 16.Sep.2009
Test specification	:	FCC Part 2 Per Section 2.1053(a) and 2.1057
Guide	:	ANSI/TIA-603-C-2004, clause 2.2.12
Limits	:	FCC Part 74 Per Section 74.861(e)(6)(iii)
Kind of test site	:	3m Full-Anechoic Chamber
Operation mode	:	Transmitting (unmodulated)
Temperature	:	22°C
Humidity	:	50%

Measurement procedure:

1. Adjust the spectrum analyzer for the following settings:

- a. RBW = 10kHz for spurious emissions below 1 GHz, and 1 MHz for spurious emissions above 1GHz.
- b. VBW = 300 kHz for spurious emissions below 1 GHz, and 3 MHz for spurious emissions above 1GHz.
- c. Sweep speed slow enough to maintain measurement calibration.
- d. Detector Mode = Positive Peak

2. The EUT was turned on and placed on the top of a rotatable table 0.8 meters above the ground with 3-orthogonal XYZ direction and be kept close enough to the measurement receiving antenna (especially for the measurement frequency range above 1 GHz). The table was then rotated 360 degrees to detect the suspected emission frequency points. The position of the worst radiation case with both horizontal and vertical receiving antenna polarization was then recorded together with the suspected emission frequency points above-mentioned.

3. The EUT was then set 3 meters away from the receiving antenna, which was mounted on a variable-height antenna tower.

4. For each suspected emission frequency point recorded in step 1, the EUT was arranged to its worst case that the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to read the maximum emission.

5. The EUT was removed and be replaced with substitute antenna correspondent to the suspected frequency point mentioned in Step 3 (if necessary, characteristic frequency of the antenna is adjusted to a half-wave of the suspected frequency point). The substitute antenna was then connected to a signal generator with a coaxial cable and its center is placed approximately at the same location as the centre place of the EUT in Step 3.

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 17 von 30
Page 17 of 30

6. The signal generator is tuned to the suspected frequency point mentioned in Step 3 with the substitute antenna polarized both vertically and horizontally, the output level of the signal generator output was then adjusted to get a maximum reading in the spectrum with the same value recorded in the step 3.

7. For each suspected frequency point, the input RF power in the substitute antenna was calculated from the coaxial cable loss, antenna factor and the signal generator output level obtained in step 5. This value was regarded as final result and recorded in following table 3, table 4 and table 5.

The allowed emissions for transmitters operating in the 174 MHz to 216 MHz bands are found under Part 74, Section 74.861, Paragraph (e) (6) for Low Power Auxiliary Stations. This paragraph states the mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

(1) On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least $43+10\text{Log}_{10}$ (mean output power in watts) dB.

To determine the Limit for Spurious Emissions the following method was used:

Maximum output power in watts:

Maximum output power in Watt: 0.00164 W (see table 2)

The emission must be reduced by:

$$43+10*\text{Log}(0.00164) = 15.145 \text{ dB}$$

Therefore, the Emission Limit equals:

$$10*\text{Log}(0.00164*1000) - 15.145 \text{ dB} = -13 \text{ dBm}$$

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 18 von 30
Page 18 of 30

While testing, the EUT was placed in 3 orthogonal planes and the maximum reading was recorded in the following tables.

Table 3: Spurious Emission: EUT operated at low channel 174.1 MHz

Freq. (MHz)	Polarization (V/H)	Max Level (dBm) (ERP)	Limit (dBm)
348.20096	V	- 59.6	- 13
522.30144	V	- 50.7	- 13
696.40192	V	- 57.2	- 13
870.50240	V	- 59.1	- 13
1044.60288	V	- 55.3	- 13
1218.70336	V	- 50.3	- 13
1392.80384	V	*	- 13
1566.90432	V	*	- 13
1741.0048	V	- 50.1	- 13
348.20096	H	- 56.2	- 13
522.30144	H	- 52.1	- 13
696.40192	H	- 55.4	- 13
870.5024	H	- 52.1	- 13
1044.60288	H	- 58.8	- 13
1218.70336	H	- 60.3	- 13
1392.80384	H	*	- 13
1566.90432	H	*	- 13
1741.0048	H	*	- 13
*)			

Table 4: Spurious Emission: EUT operated at middle channel 194.6 MHz

Freq. (MHz)	Polarization (V/H)	Max Level (dBm) (ERP)	Limit (dBm)
389.20952	V	- 49.6	- 13
583.81428	V	- 51.7	- 13
778.41904	V	- 44.2	- 13
973.0238	V	- 46.3	- 13
1167.62856	V	- 37.6	- 13
1362.23332	V	- 36.5	- 13
1556.83808	V	- 34.7	- 13
1751.44284	V	*	- 13
1946.04760	V	*	- 13
389.20952	H	- 53.2	- 13
583.81428	H	- 50.6	- 13
778.41904	H	- 48.2	- 13
973.0238	H	- 48.4	- 13
1167.62856	H	- 47.1	- 13
1362.23332	H	- 38.6	- 13
1556.83808	H	- 34.2	- 13
1751.44284	H	*	- 13
1946.04760	H	*	- 13
*)			

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 19 von 30
Page 19 of 30

Table 5: Spurious Emission: EUT operated at high channel 215.2 MHz

Freq. (MHz)	Polarization (V/H)	Max Level (dBm) (ERP)	Limit (dBm)
430.3964	V	*	- 13
645.5946	V	- 45.5	- 13
860.7928	V	- 41.2	- 13
1075.991	V	- 46.3	- 13
1291.1892	V	- 32.4	- 13
1506.3874	V	- 34.7	- 13
1721.5856	V	*	- 13
1936.7838	V	*	- 13
2151.9820	V	*	- 13
430.3964	H	*	- 13
645.5946	H	- 42.3	- 13
860.7928	H	- 41.8	- 13
1075.9910	H	- 48.4	- 13
1291.1892	H	- 33.9	- 13
1506.3874	H	- 36.2	- 13
1721.5856	H	- 41.2	- 13
1936.7838	H	- 42.5	- 13
2151.9820	H	*	- 13
*)			

*) means disturbances are far below the limit.

As the EUT has three cable combinations, the cables are LM-10/4B, LS-16/4B and HM-26/4B, the maximum RF values of EUT were measured on EUT with cable LM-10/4B.

Please refer to the Appendix 1 for the measured noise floor at high, mid and low channels.

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 20 von 30
Page 20 of 30

5.3 Modulation Characteristics measurement

RESULT:

Pass

Date of testing	:	31.Aug.2009
Test specification	:	FCC Part 2 Per Section 2.1047(a) and (b)
Guide	:	ANSI/TIA-603-C-2004, clause 2.2.3
Limits	:	FCC Part 2 Per Section 2.1047(a) and (b)
Operation mode	:	Transmitting
Temperature	:	22°C
Humidity	:	50%

Measurement procedure:

Audio frequency response:

- 1) Configure the EUT as shown in diagram 3.
- 2) Adjust the audio input for about 30% of rated system deviation at 1 kHz using this level as a reference (0 dB).
- 3) Vary the Audio frequency from 200 Hz to 20 kHz and record the frequency deviation

Modulation limit:

- 1). Configure the EUT as shown in diagram 3, adjust the audio input to produce 60 percent modulation at 1 kHz, this level is as a reference (0dB) and then vary the input level from -20dB to +20dB. Record the frequency deviation obtained as a function of the input level.
- 2). Repeat step 1 with input frequency changing to 400Hz, 800Hz, 2kHz, 5kHz, 9kHz, 12kHz and 14kHz in sequence.

Refer to appendix for curves.

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 21 von 30
Page 21 of 30

5.4 Occupied Bandwidth for FCC Part 74 Per Section 74.861(e)(3), 74.861(e)(5) and 74.861(e)(6)

RESULT:

Pass

Date of testing	:	30.Dec.2008
Test specification	:	FCC Part 2 Per Section 2.1049(c)1
Guide	:	ANSI/TIA-603-C-2004, clause 2.2.11
Limits	:	FCC Part 74 Per Section 74.861(e)(3), 74.861(e)(5) and 74.861(e)(6)
Operation mode	:	Transmitting (modulated)
Temperature	:	22°C
Humidity	:	50%

Measurement procedure:

1. Connect the EUT as diagram 3 in Section 4.5.
2. Plot the unmodulated chart shows on spectrum.
3. Set to 2500 Hz tone at an input level to produce the 50 percent modulation.
4. According to the result of Modulation Characteristics, set 300Hz, 500Hz, 1 kHz, 5 kHz, 10 kHz and 15 kHz to the input level 16 dB greater than that necessary to produce 50 percent modulation, until maximum modulation is shown on the spectrum analyzer.
5. The allowed emissions for transmitters operating in the 174 MHz to 216 MHz bands are found under Part 74, Section 74.861, Paragraph (e) (6) for Low Power Auxiliary Stations. This paragraph states the mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:
 - (1) On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB.
 - (2) On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB.
 - (3) On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least $43+10\text{Log}_{10}$ (mean output power in watts) dB.
6. The Occupied Bandwidth was measured in appendix of this report

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 22 von 30
Page 22 of 30

According to modulation limit of Modulation Characteristics, the maximum deviation and operation bandwidth are list in the following table, the rule for operation bandwidth is according to part 2.202(g).

Table 6: Maximum Deviation

Reading:	56.3kHz
Limit:	± 75kHz

Table 7: Operation Bandwidth (Bn)

Parameter:	M	D
Reading	9kHz	56.3kHz
Bn:	131kHz	
Limit:	200kHz	
Emission Designator:	131KF3E	
$B_n = 2M + 2D \cdot K$ Bn: operation bandwidth M: Max. Modulation Frequency D: Peak Frequency Deviation K=1		

Refer for appendix for measurements.

Prüfbericht - Nr.: 16015130 001
Test Report No.:

Seite 23 von 30
Page 23 of 30

5.5 Frequency tolerance for FCC Part 74 Per Section 74.861(e)(4)

RESULT:

Pass

Date of testing	:	18.Aug.2009
Test specification	:	FCC Part 2 Per Section 2.1055
Guide	:	ANSI/TIA-603-C-2004, clause 2.2.2
Limits	:	FCC Part 74 Per Section 74.861(e)(4)
Operation mode	:	Transmitting (unmodulated)
Temperature	:	-30°C to 50°C
Humidity	:	50%

Measurement procedure:

A. Frequency stability versus environmental temperature

1. Setup the configuration as diagram 4 in section 4.5 for frequency measured inside an environment chamber and install new battery in the EUT.
2. Turn on EUT and set spectrum analyzer center frequency to the EUT operating frequency. Set spectrum analyzer Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1 kHz and Frequency Span to 50kHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

B. Frequency stability versus input voltage

1. Setup the configuration as diagram 4 for frequencies measurement at temperature range from 15 °C to 25°C. Otherwise, an environment chamber set for a temperature of 20°C shall be used.
2. Set spectrum analyzer center frequency to the EUT operating frequency. Set spectrum analyzer Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1 kHz. Record this frequency as reference frequency.
3. Set the supply voltage to the nominal voltage of the EUT.
4. Turn the EUT on and measure the EUT operating frequency
5. Repeat step 4 with decreased supply voltage, record all measured frequencies on each voltage step.

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 24 von 30
Page 24 of 30

6. Stop the test until the lowest voltage specified by the manufacturer is reached or the EUT case to emission radio signal.

Table 8: the measurement of Frequency tolerance (temperature)

Test condition	Power supply (VDC)	Low Frequency (MHz) (174.100)	Mid Frequency (MHz) (194.600)	High Frequency (MHz) (215.200)
-30°C	9	174.099400	194.604760	215.207080
-20°C	9	174.099600	194.603240	215.205760
-10°C	9	174.100560	194.599880	215.202800
0°C	9	174.100480	194.598140	215.200600
10°C	9	174.100600	194.597240	215.199460
20°C	9	174.100180	194.597180	215.198200
30°C	9	174.099820	194.598560	215.198980
40°C	9	174.099280	194.600480	215.200300
50°C	9	174.098920	194.602160	215.202460
Frequency Error:		0.001	0.005	0.007
Frequency tolerance:		0.0006%	0.002%	0.003%
Frequency Tolerance Limit:		0.005%		

Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 25 von 30
Page 25 of 30

Table 9: the measurement of Frequency tolerance (supply voltage)

Temperature (°C)	Power supply (VDC)	Low Frequency (MHz) (174.100)	High Frequency (MHz) (194.600)	High Frequency (MHz) (215.200)
25	9.0V	174.100060	194.597660	215.198200
25	8.0V	174.100000	194.597720	215.198260
25	7.0V	174.100000	194.597720	215.198260
25	6.0V	174.099940	194.597660	215.198260
25	5.0V	174.099580	194.597660	215.197840
25	4.0V	174.092920	194.596580	215.197540
25	3.0V	No signal	No signal	No signal
Frequency Error:		0.007	0.003	0.002
Frequency tolerance:		0.003%	0.0017%	0.0011%
Frequency Tolerance Limit:		0.005%		

The equipment remains on channel when the power source was reduced below the lower extreme test voltage limit until zero. The EUT ceases to function at voltage DC 3.0V.

6 Photographs of the Test Set-Up

Photograph 1: Set-up for Radiation Measurement Below 1GHz

Remark: VT-22P has three cable combinations, the cables are LM-10/4B, LS-16/4B and HM-26/4B.

With cable LM-10/4B




Prüfbericht - Nr.:
Test Report No.:

16015130 001

Seite 27 von 30
Page 27 of 30

With cable LS-16/4B

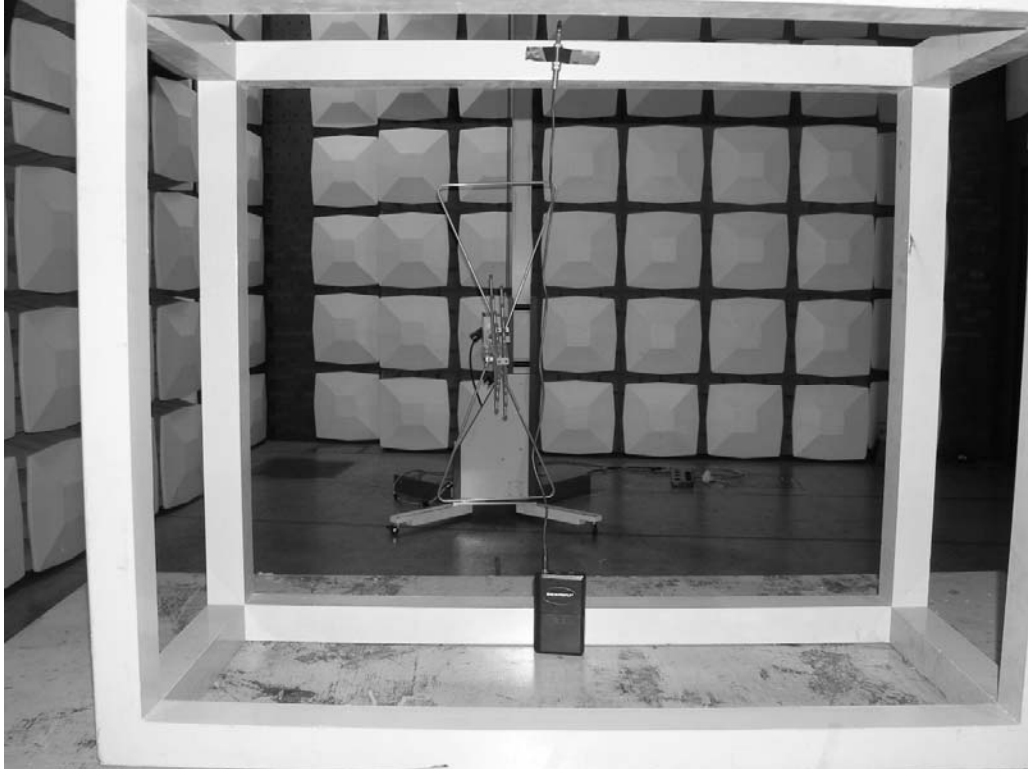

With cable HM-26/4B




Prüfbericht - Nr.:
Test Report No.:

16015130 001


Seite 28 von 30
Page 28 of 30

Photograph 2: Set-up for Radiation Measurement above 1GHz


With cable LM-10/4B

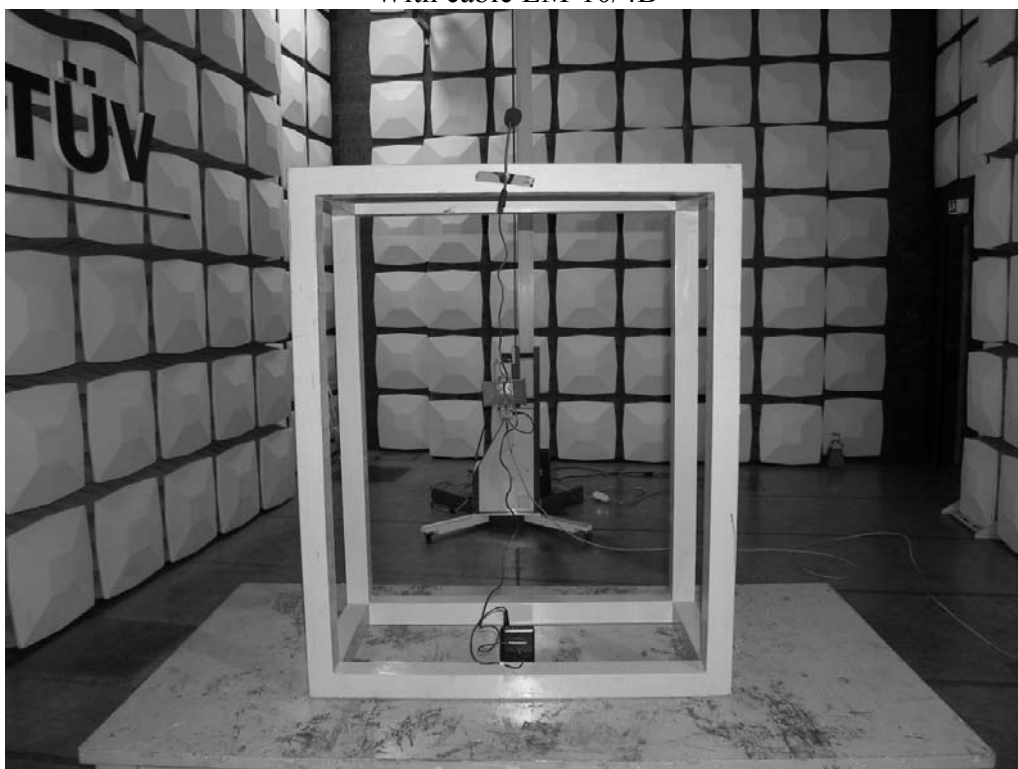

With cable LS-16/4B

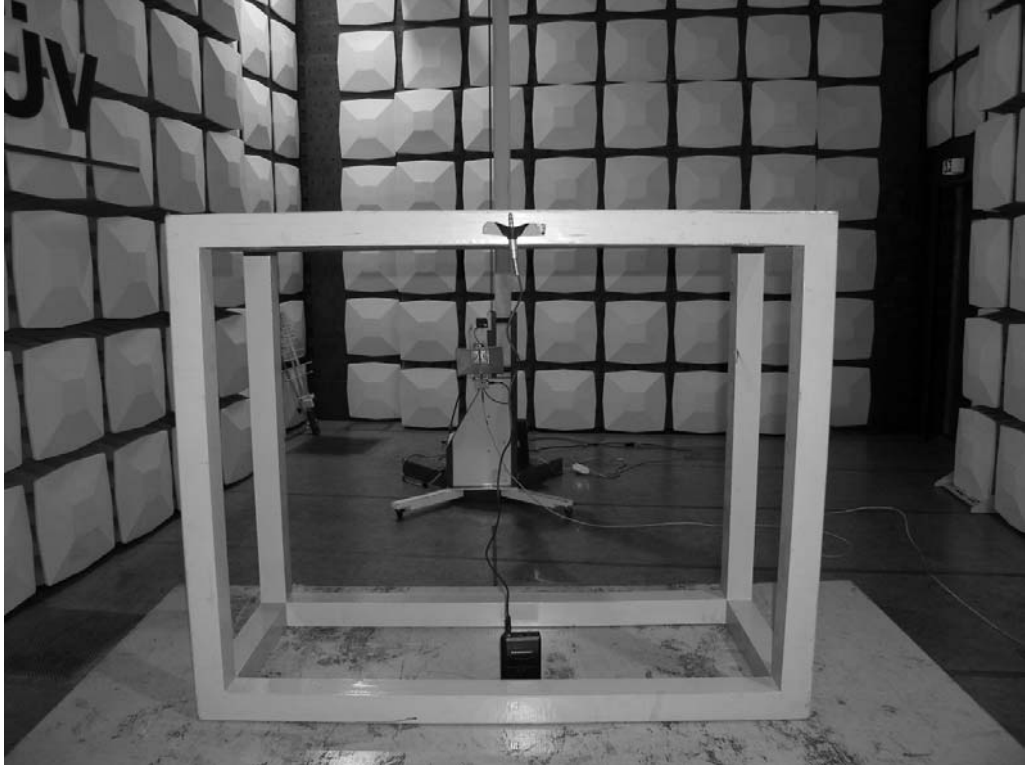

With cable HM-26/4B

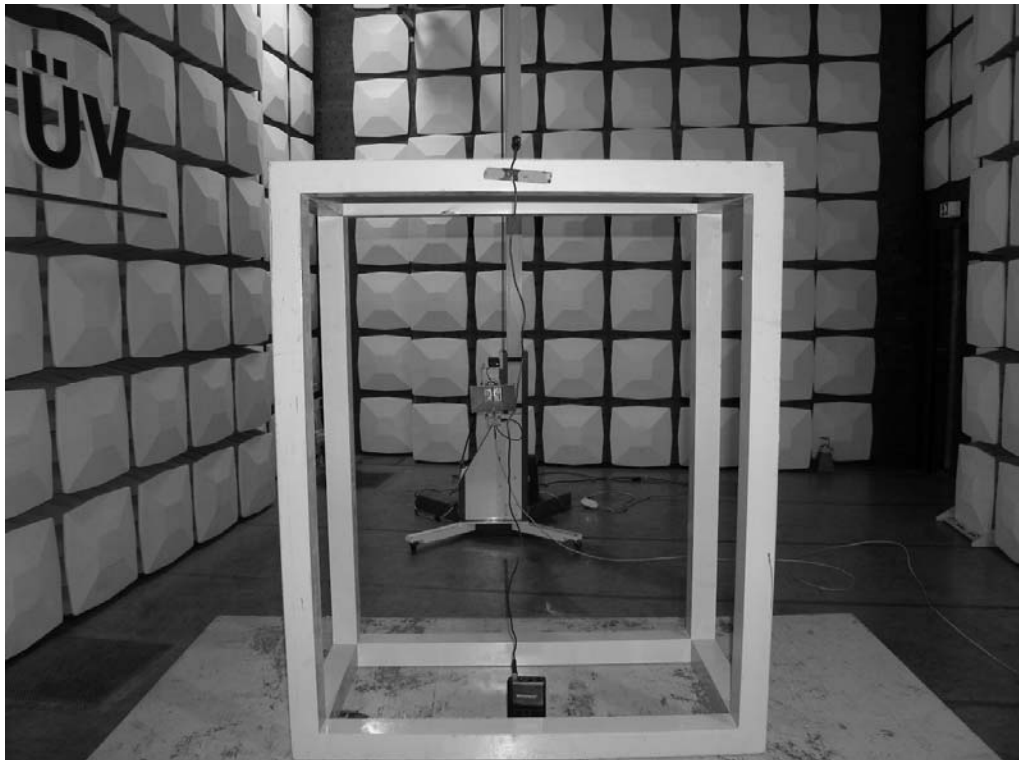

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Result of output power at low, mid and high channel.....	15
Table 3: Spurious Emission: EUT operated at low channel 174.1 MHz.....	18
Table 4: Spurious Emission: EUT operated at middle channel 194.6 MHz.....	18
Table 5: Spurious Emission: EUT operated at high channel 215.2 MHz.....	19
Table 6: Maximum Deviation.....	22
Table 7: Operation Bandwidth (Bn).....	22
Table 8: the measurement of Frequency tolerance (temperature).....	24
Table 9: the measurement of Frequency tolerance (supply voltage).....	25

8 List of Photographs

Photograph 1: Set-up for Radiation Measurement Below 1GHz.....	26
Photograph 2: Set-up for Radiation Measurement above 1GHz.....	28

Prüfbericht - Nr.:

16015130 001

Seite 1 von 25


Test Report No.

Page 1 of 25

Occupied Bandwidth:

High frequency

Unmodulated RF carrier

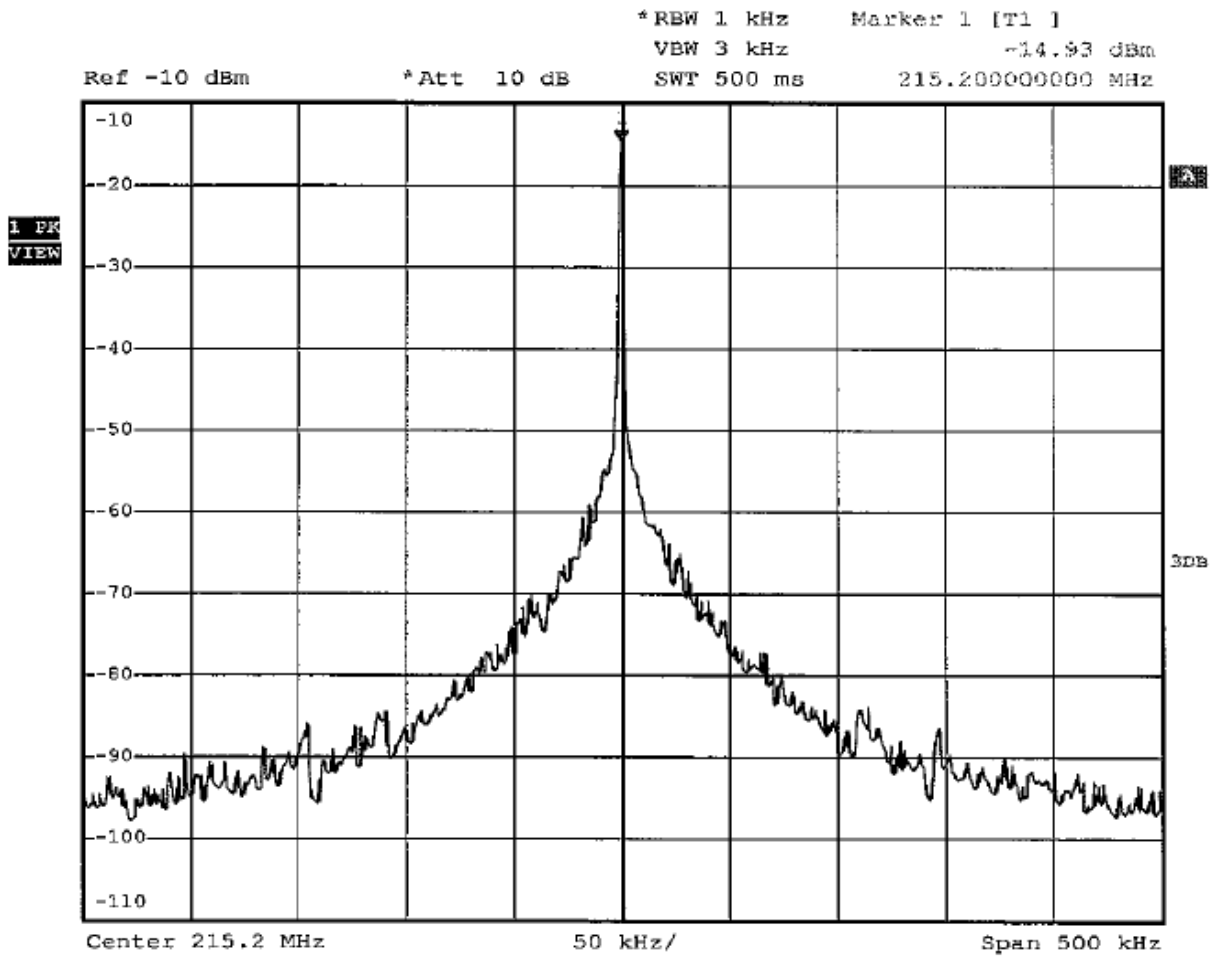

down 3dB

Date: 30.DEC.2008 02:24:18

Prüfbericht - Nr.:

16015130 001

Seite 2 von 25

Test Report No.

Page 2 of 25

Input Audio signal: 300Hz

*RBW 1 kHz

Marker 1 [T1]

VBW 3 kHz


-31.06 dBm

Ref -10 dBm

*Att 10 dB

SWT 500 ms

215.20000000 MHz

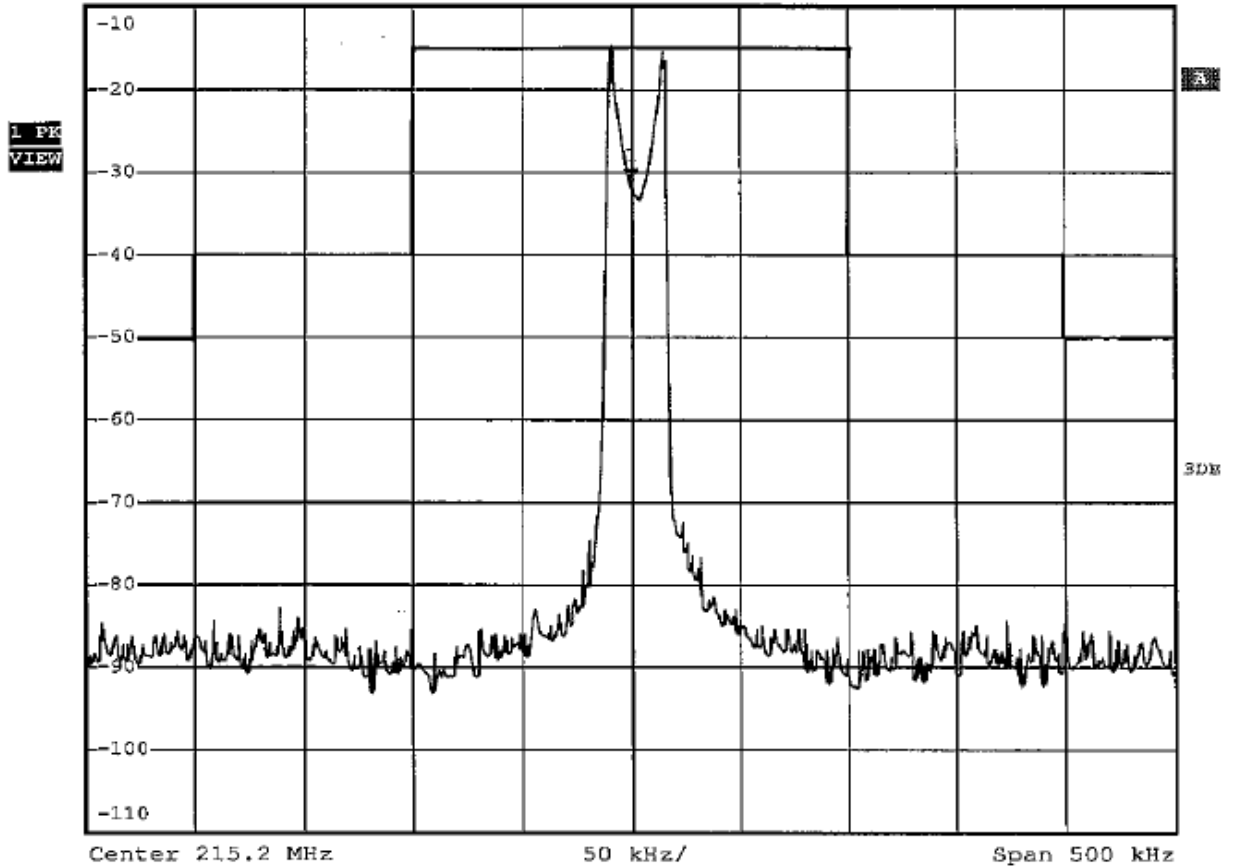

down 3dB

Date: 30.DEC.2008 02:39:44

Prüfbericht - Nr.:

16015130 001

Seite 3 von 25


Test Report No.

Page 3 of 25

Input Audio signal: _500Hz

*RBW 1 kHz Marker 1 [T1]
VBW 3 kHz -34.16 dBm


Ref -10 dBm *Att 10 dB SWT 500 ms 215.200000000 MHz

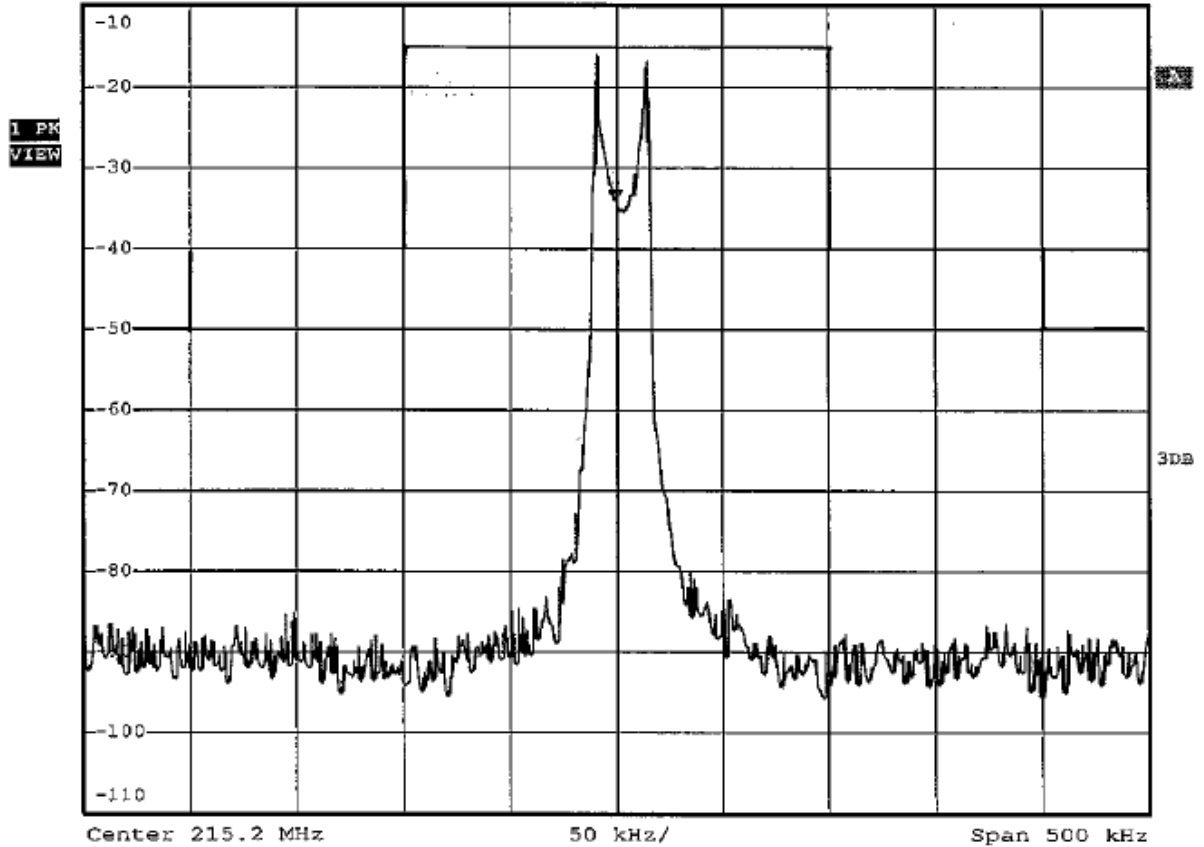

down 3dB

Date: 30.DEC.2008 02:38:56

Input Audio signal: 1 kHz

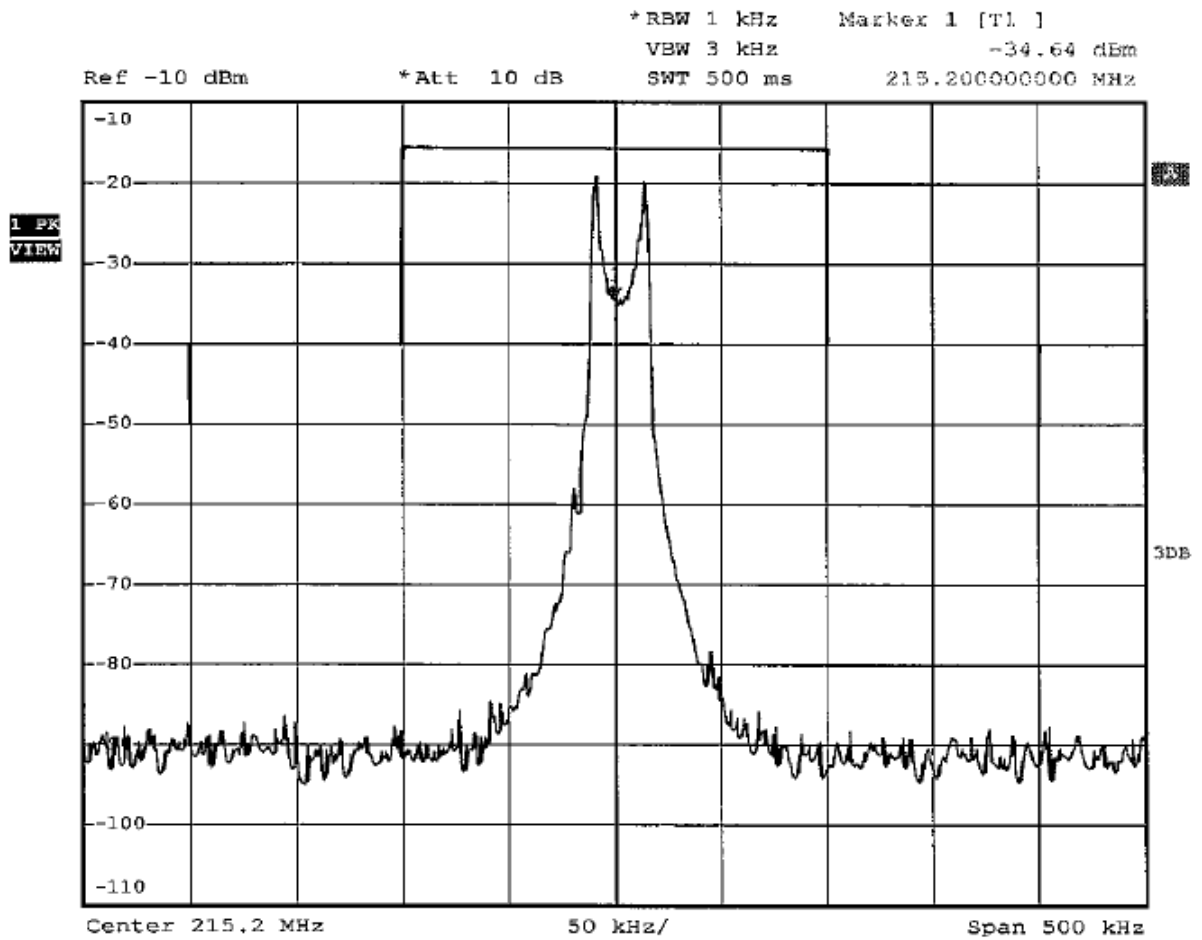

down 3dB


Date: 30.DEC.2008 02:37:46

Prüfbericht - Nr.:
Test Report No.

16015130 001

Seite 5 von 25
Page 5 of 25

Input Audio signal: 3 kHz

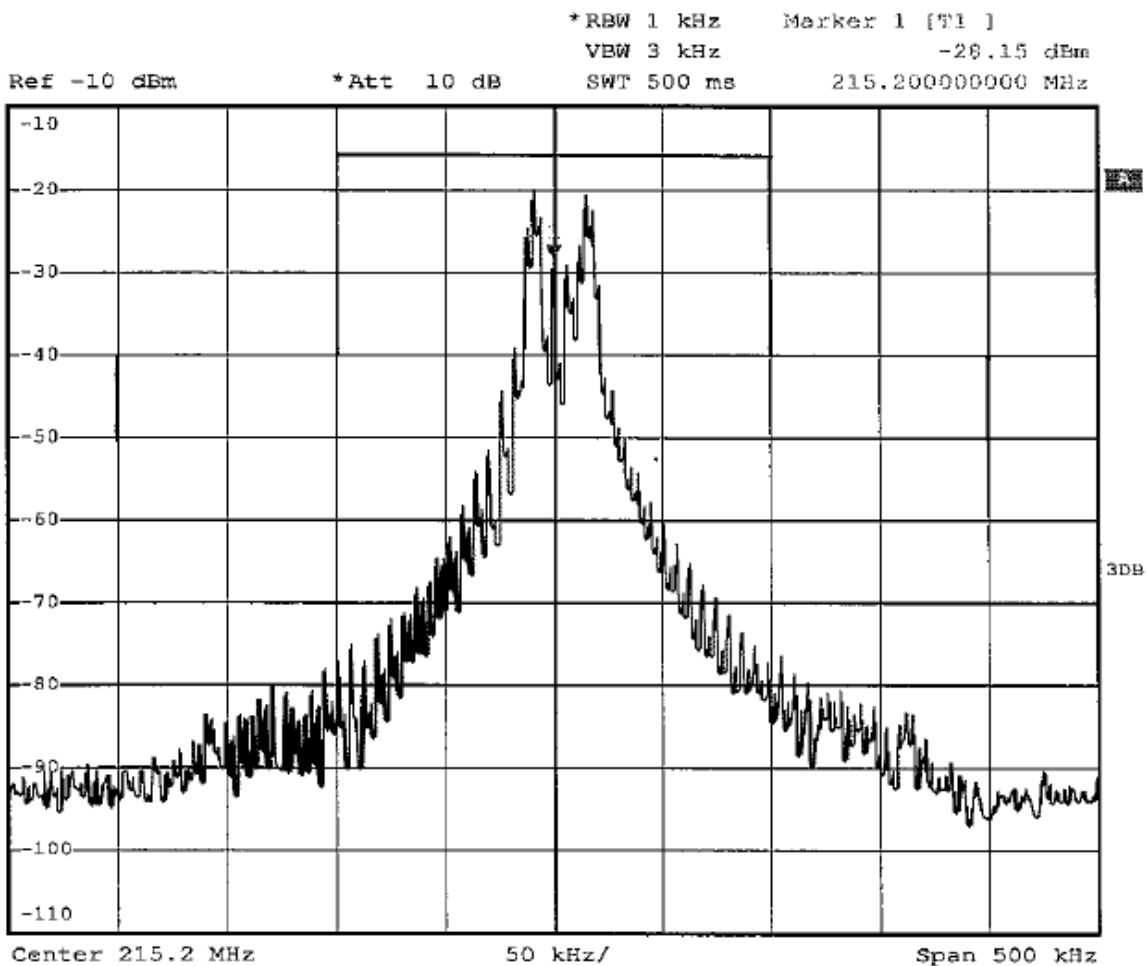

down 3dB

Date: 30.DEC.2008 02:37:05


Prüfbericht - Nr.:

16015130 001

Seite 6 von 25

Test Report No.

Page 6 of 25

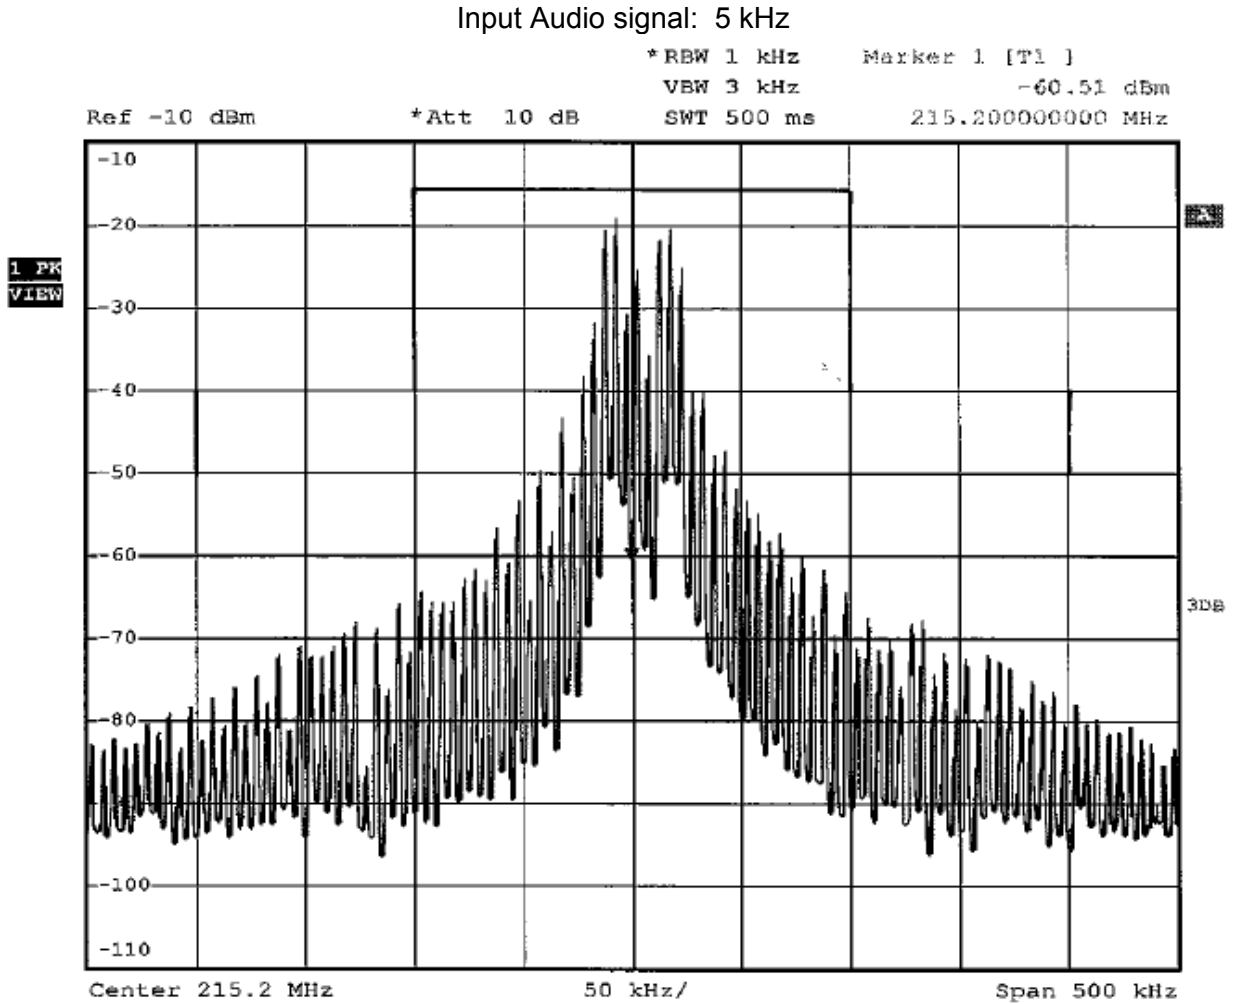

down 3dB


Date: 30.DEC.2008 02:36:34

Input Audio signal: 10 kHz

*RBW 1 kHz Marker 1 [T1]

VBW 3 kHz -59.21 dBm

Ref -10 dBm *Att 10 dB SWT 500 ms 215.200000000 MHz

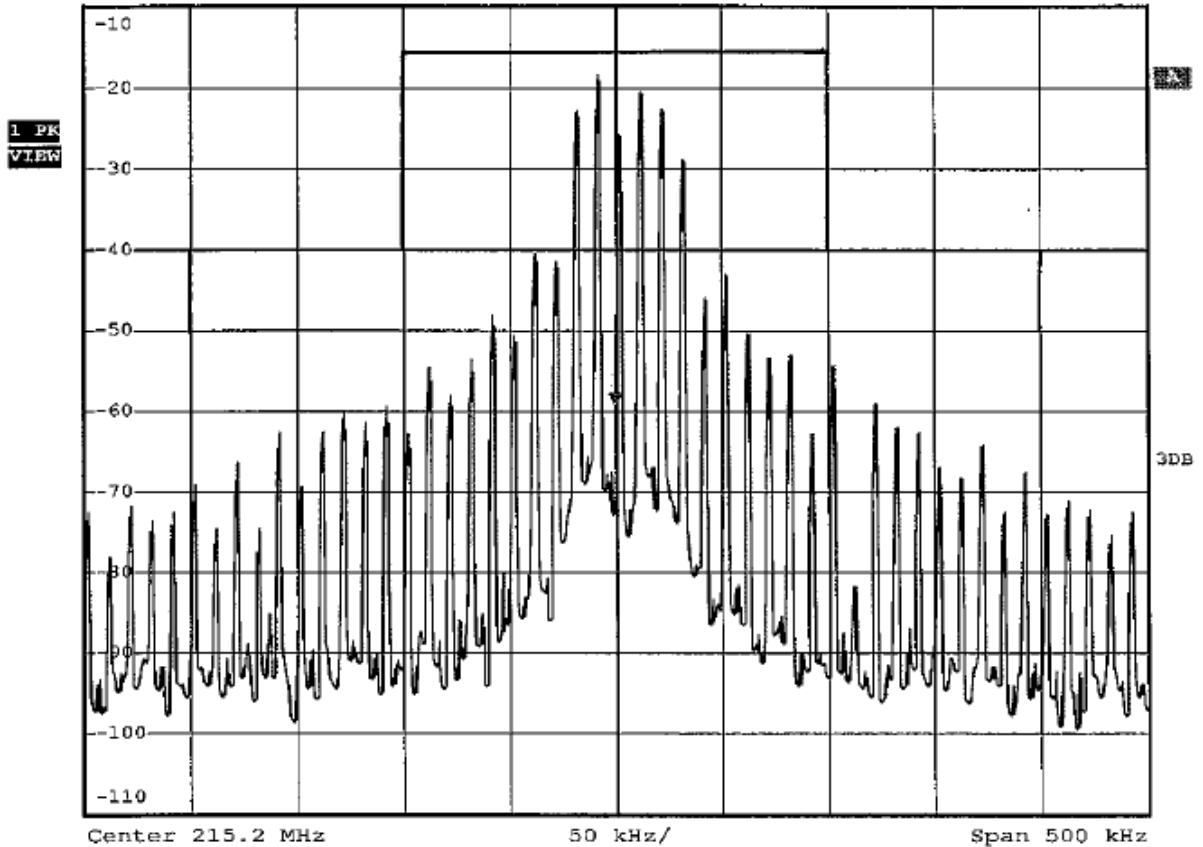


down 3dB

Date: 30.DEC.2008 02:27:27

Prüfbericht - Nr.:
Test Report No.

16015130 001

Seite 8 von 25
Page 8 of 25

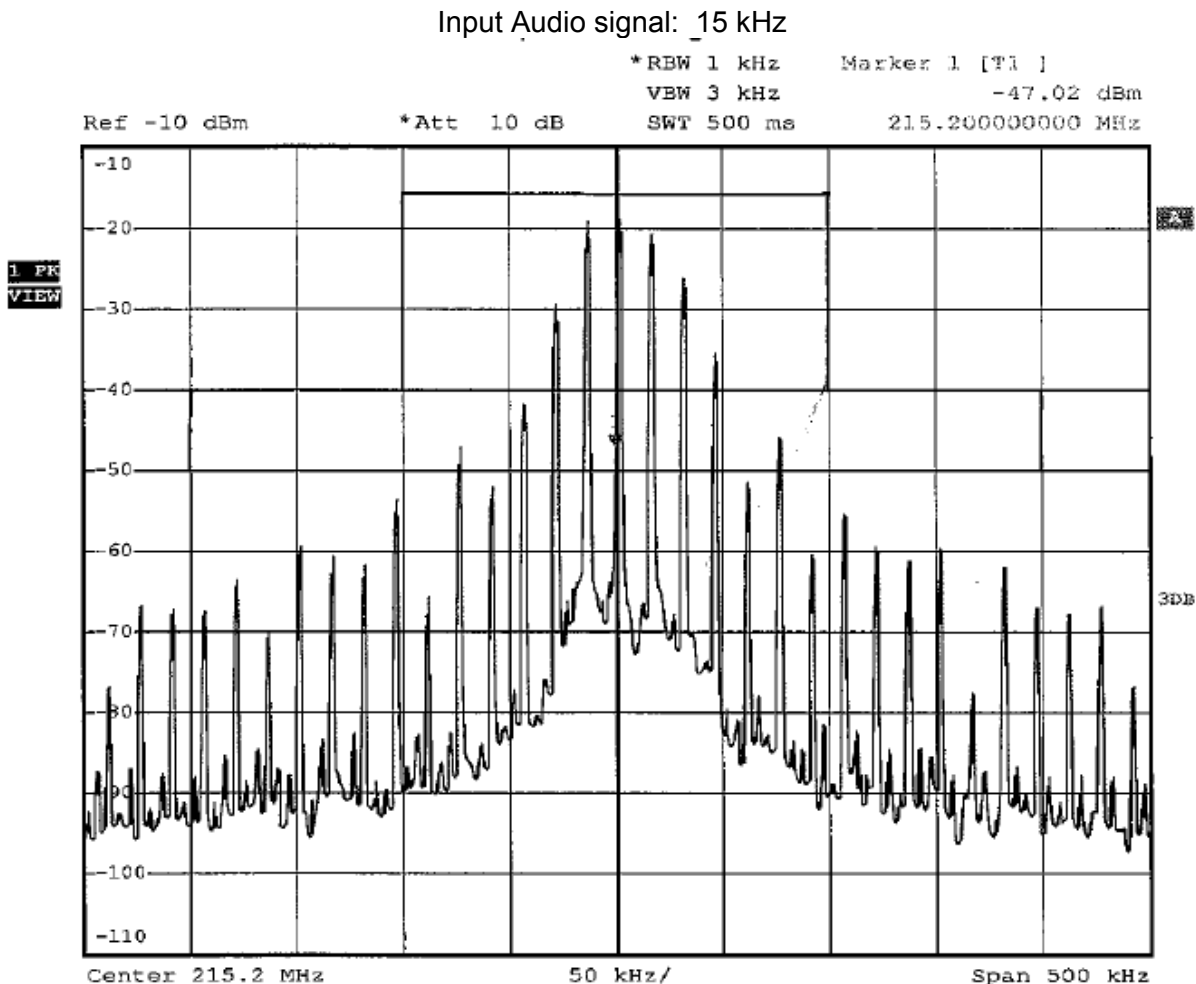

down 3dB

Date: 30.DEC.2008 02:26:40

Prüfbericht - Nr.:

16015130 001


Seite 9 von 25

Test Report No.

Page 9 of 25

Middle frequency

Unmodulated RF carrier

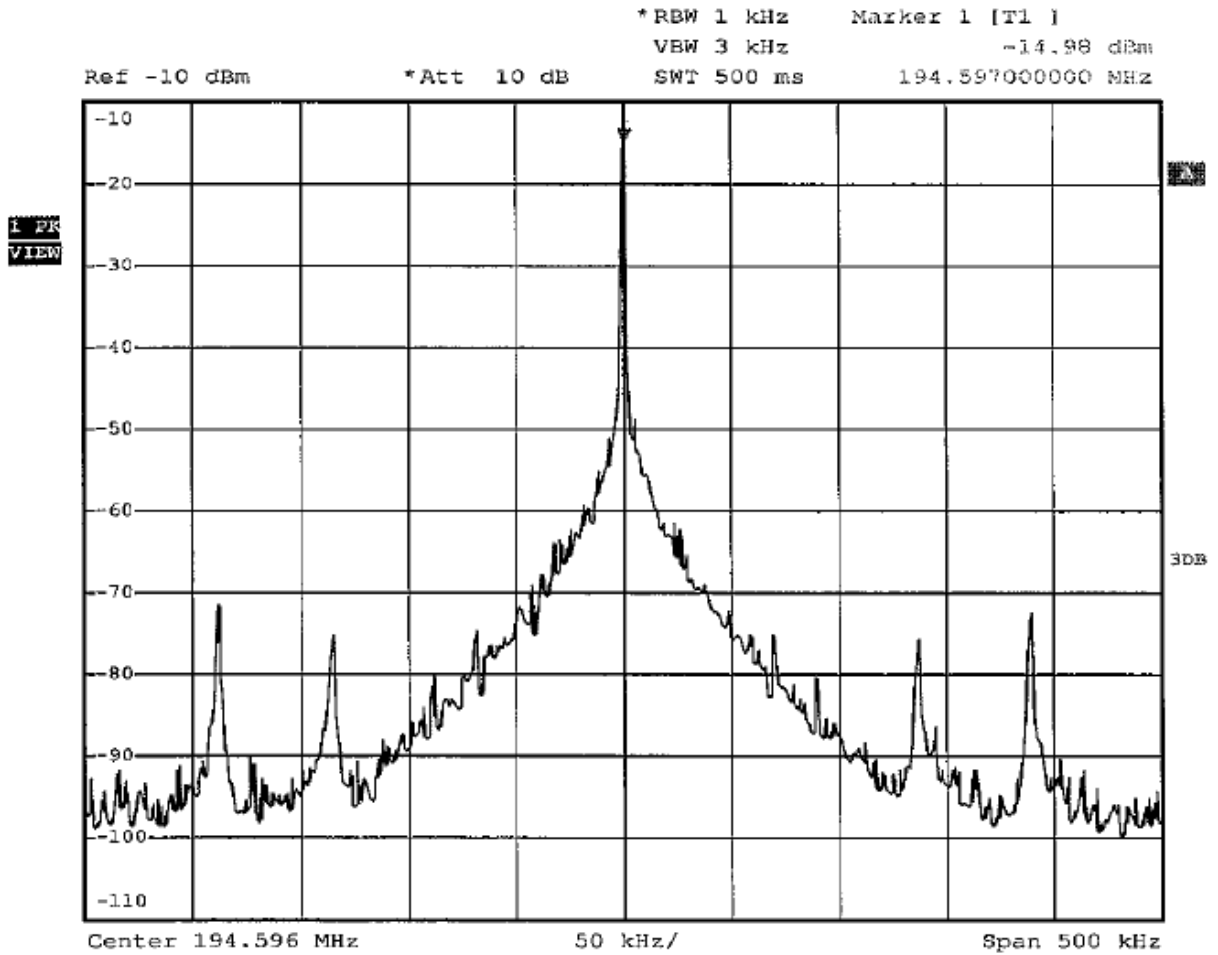

down 3dB

Date: 30.DEC.2008 02:06:28

Prüfbericht - Nr.:


16015130 001

Seite 10 von 25

Test Report No.

Page 10 of 25

Input Audio signal: 300Hz

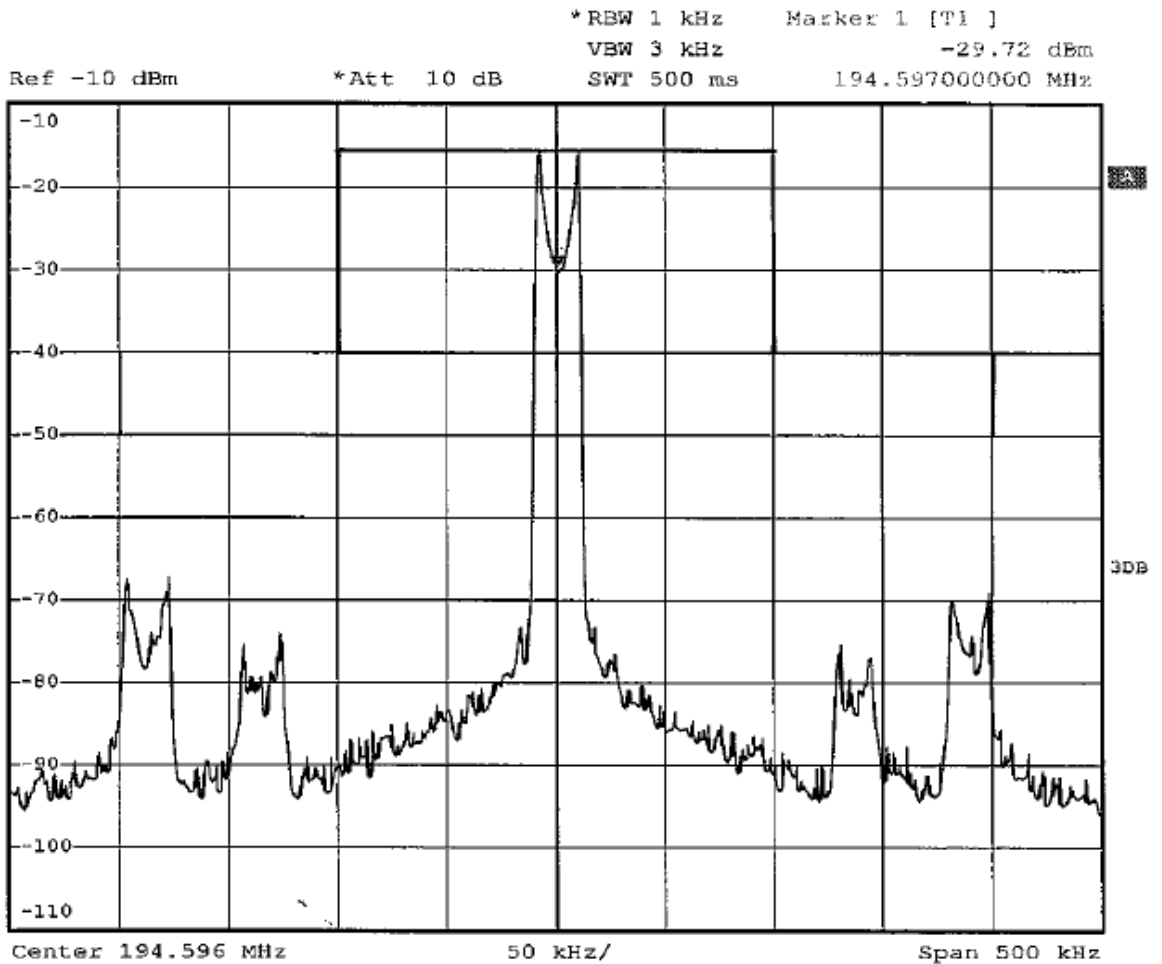

down 3dB

Date: 30.DEC.2008 02:10:23

Prüfbericht - Nr.:

16015130 001


Seite 11 von 25

Test Report No.

Page 11 of 25

Input Audio signal: 500Hz

Ref -10 dBm *Att 10 dB *RBW 1 kHz Marker 1 [T1]
 VBW 3 kHz -31.96 dBm
 SWT 500 ms 194.597000000 MHz

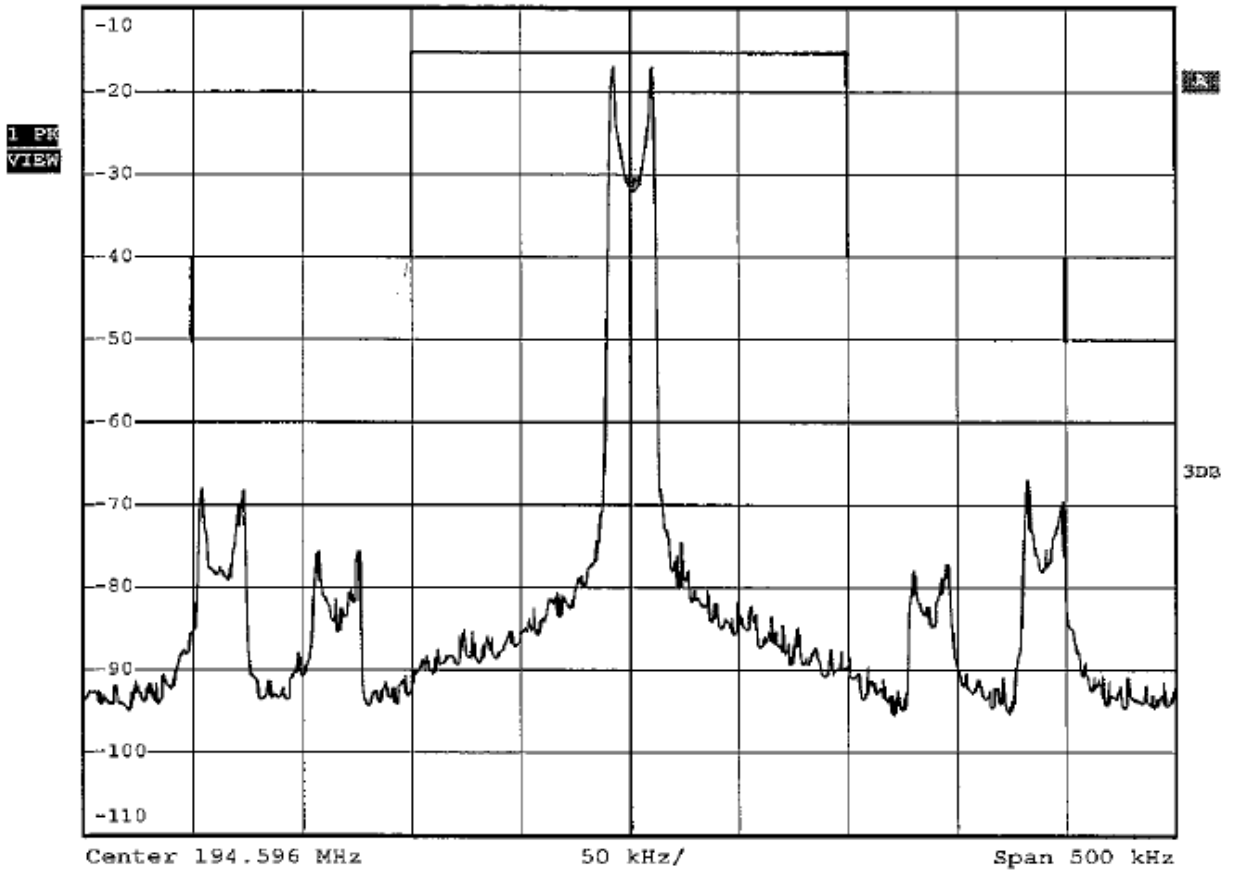

down 3dB

Date: 30.DEC.2008 02:11:05

Prüfbericht - Nr.:

16015130 001

Seite 12 von 25

Test Report No.

Page 12 of 25

Input Audio signal: 1 kHz

*RBW 1 kHz

Marker 1 [T1]

VBW 3 kHz


-31.61 dBm

Ref -10 dBm

*Att 10 dB

SWT 500 ms

194.597000000 MHz

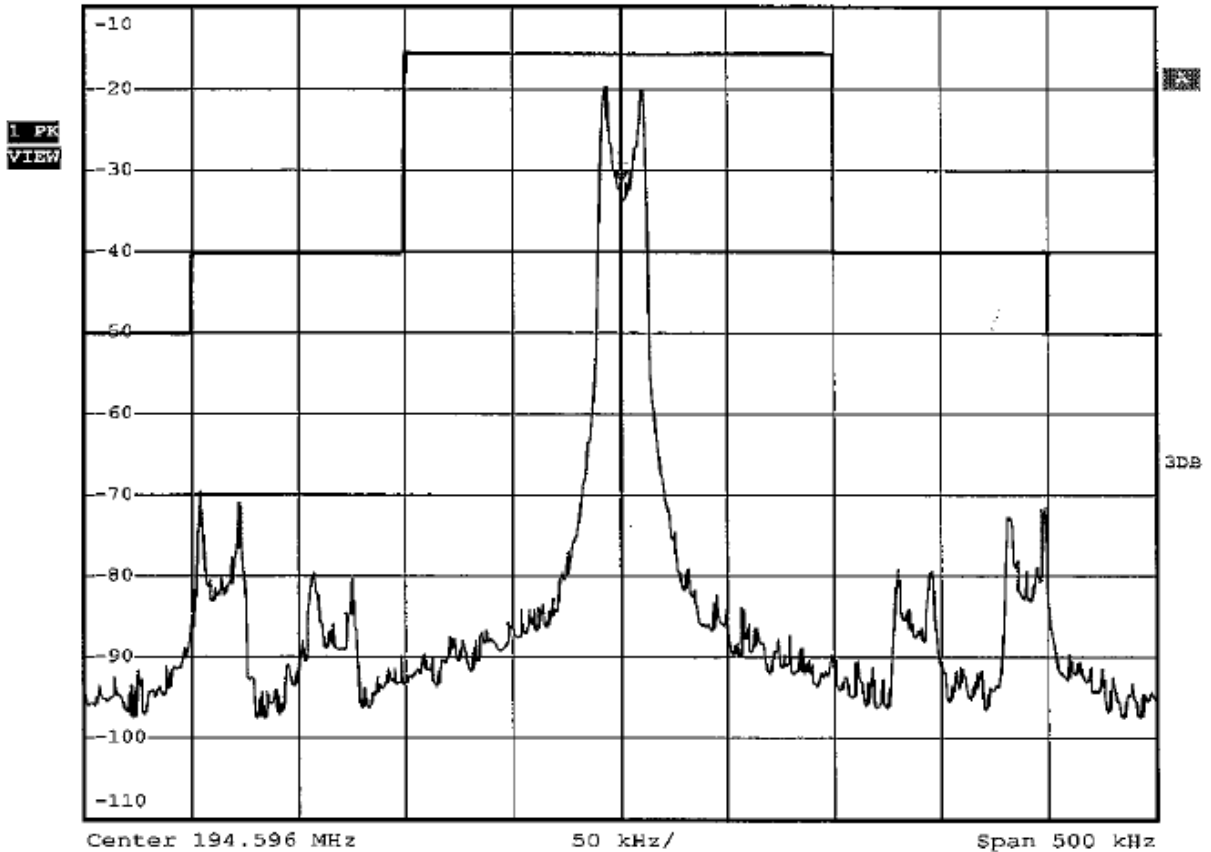

down 3dB

Date: 30.DEC.2008 02:13:30

Prüfbericht - Nr.:

16015130 001

Seite 13 von 25

Test Report No.

Page 13 of 25

Input Audio signal: 5kHz

*RBW 1 kHz

Marker 1 [F1]

VBW 3 kHz


-38.69 dBm

Ref -10 dBm

*Att 10 dB

SWT 500 ms

194.597000000 MHz

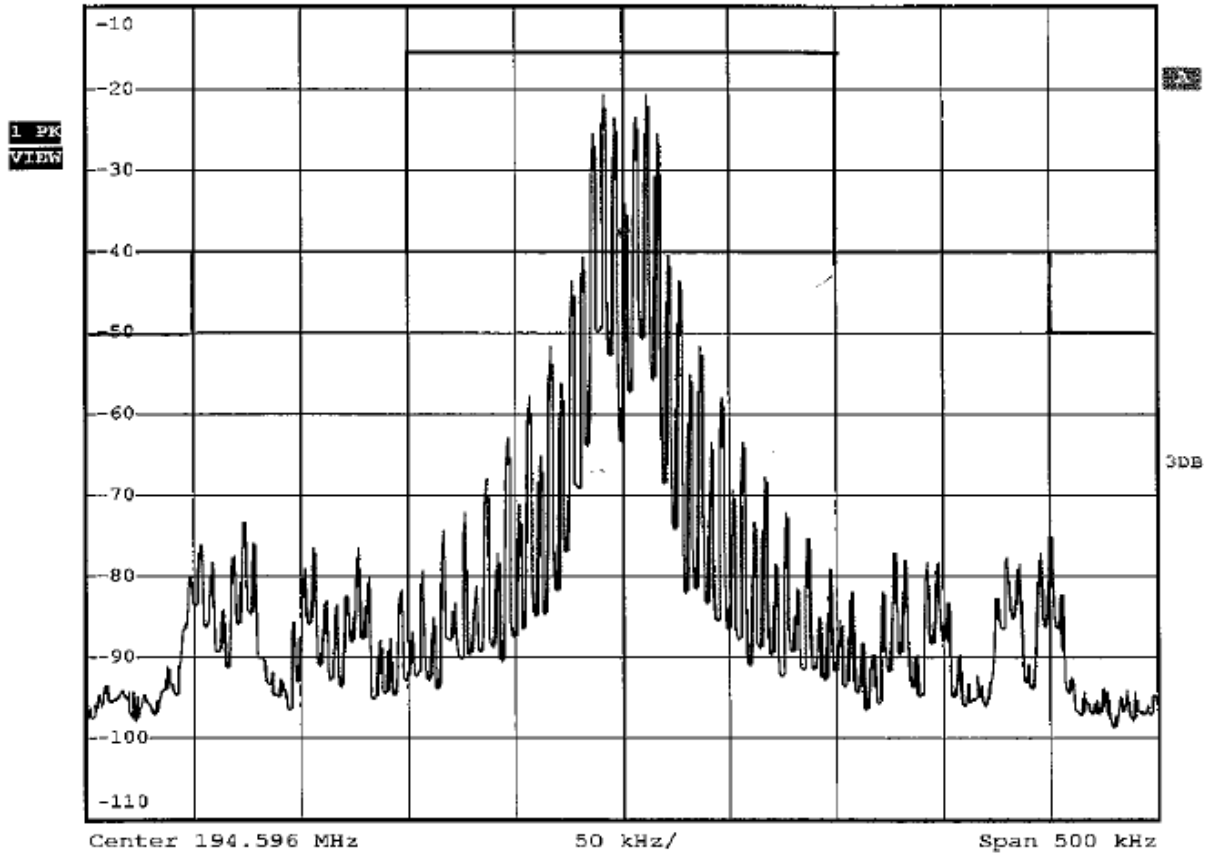

down 3dB

Date: 30.DEC.2008 02:14:57

Prüfbericht - Nr.:

16015130 001

Seite 14 von 25

Test Report No.

Page 14 of 25

Input Audio signal: 10 kHz

*RBW 1 kHz

Marker 1 [T1]

VBW 3 kHz


-27.85 dBm

Ref -10 dBm

*Att 10 dB

SWT 500 ms

194.597000000 MHz

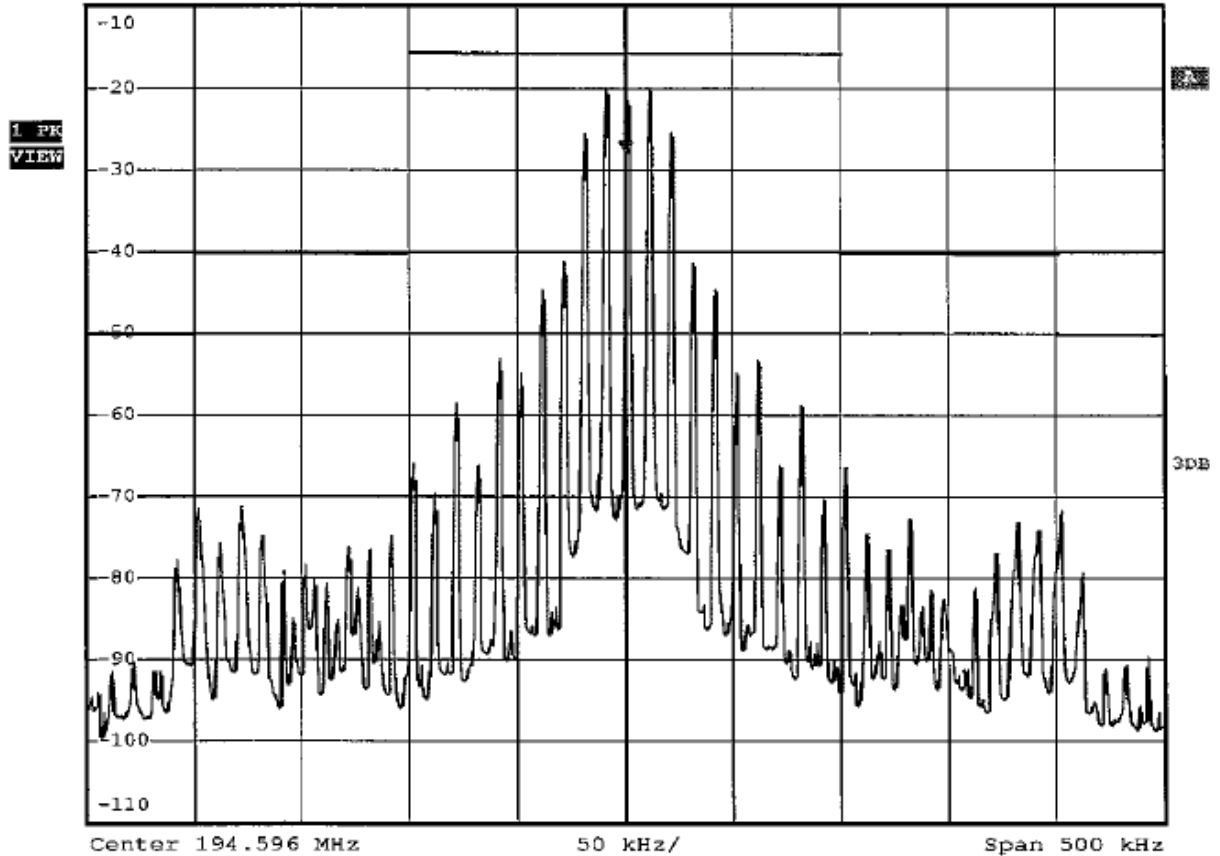

down 3dB

Date: 30.DEC.2008 02:15:43

Prüfbericht - Nr.:

16015130 001


Seite 15 von 25

Test Report No.

Page 15 of 25

Input Audio signal: 15 kHz

*RBW 1 kHz Marker 1 [T1]
VBW 3 kHz -25.14 dBm
SWT 500 ms 194.597000000 MHz

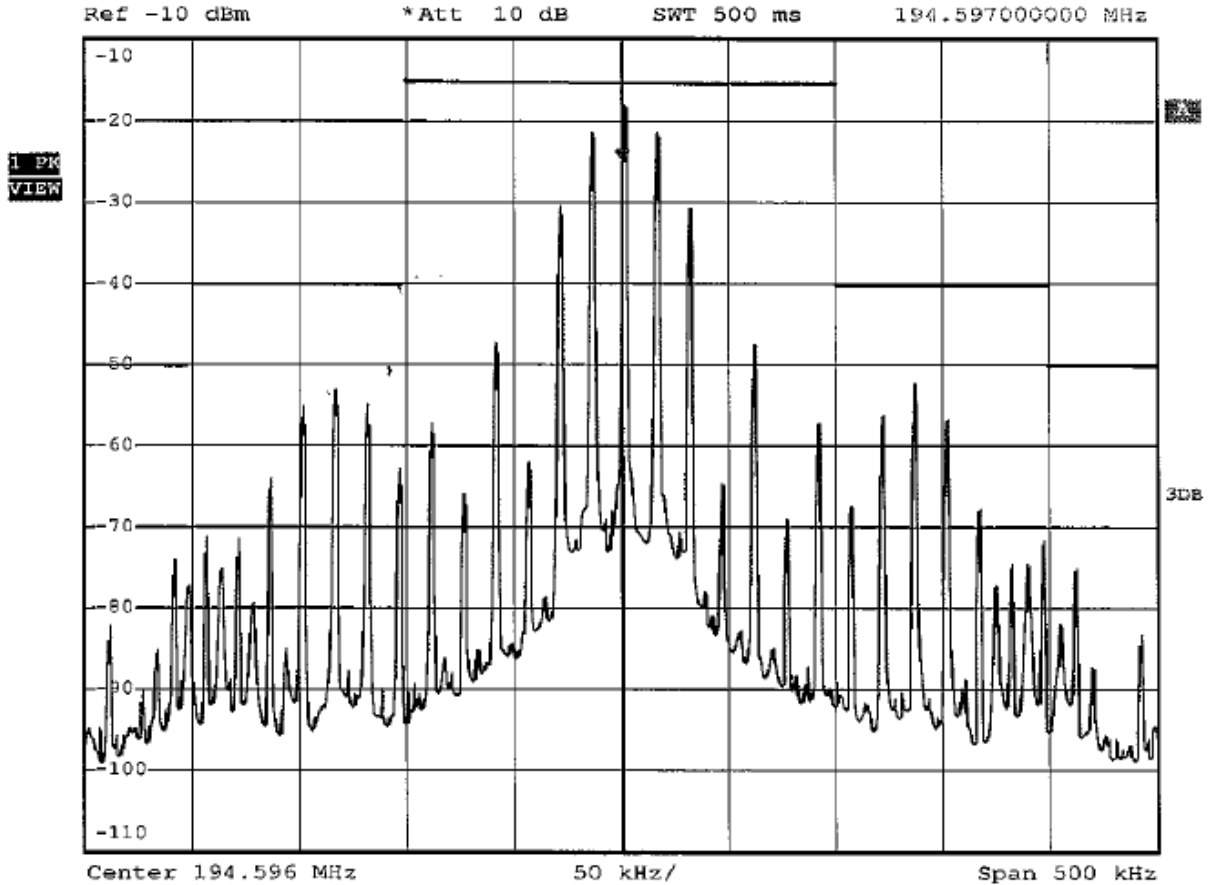


down 3dB

Date: 30.DEC.2008 02:16:15

Low frequency

Unmodulated RF carrier

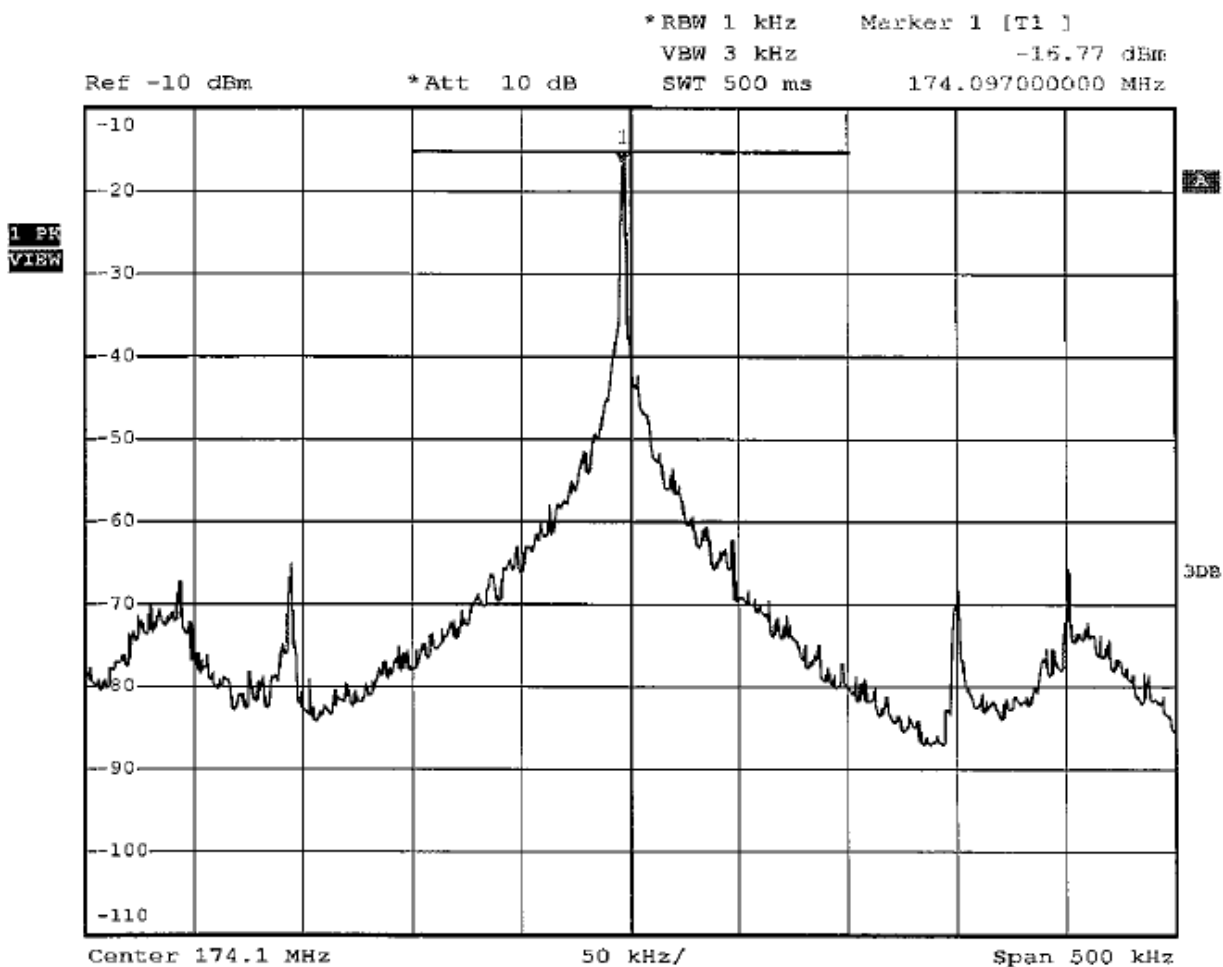

down 3dB

Date: 30.DEC.2008 02:46:39

Prüfbericht - Nr.:

16015130 001


Seite 17 von 25

Test Report No.

Page 17 of 25

Input Audio signal: 300Hz

*RBW 1 kHz Marker 1 [T1]
 VBW 3 kHz -40.40 dBm
 SWT 500 ms 174.099000000 MHz

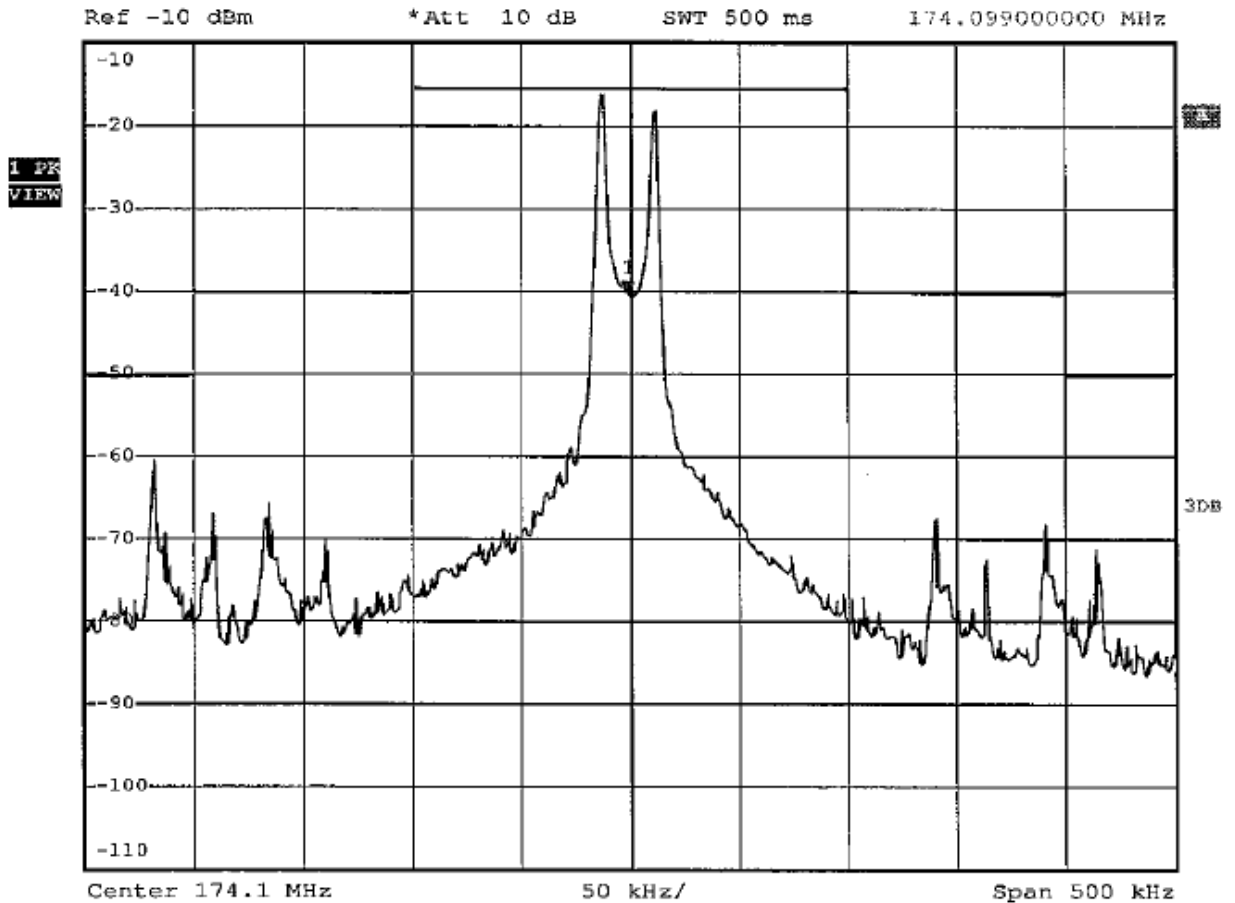

down 3dB


Date: 30.DEC.2008 02:54:22

Prüfbericht - Nr.:
Test Report No.

16015130 001

Seite 18 von 25
Page 18 of 25

Input Audio signal: 500Hz

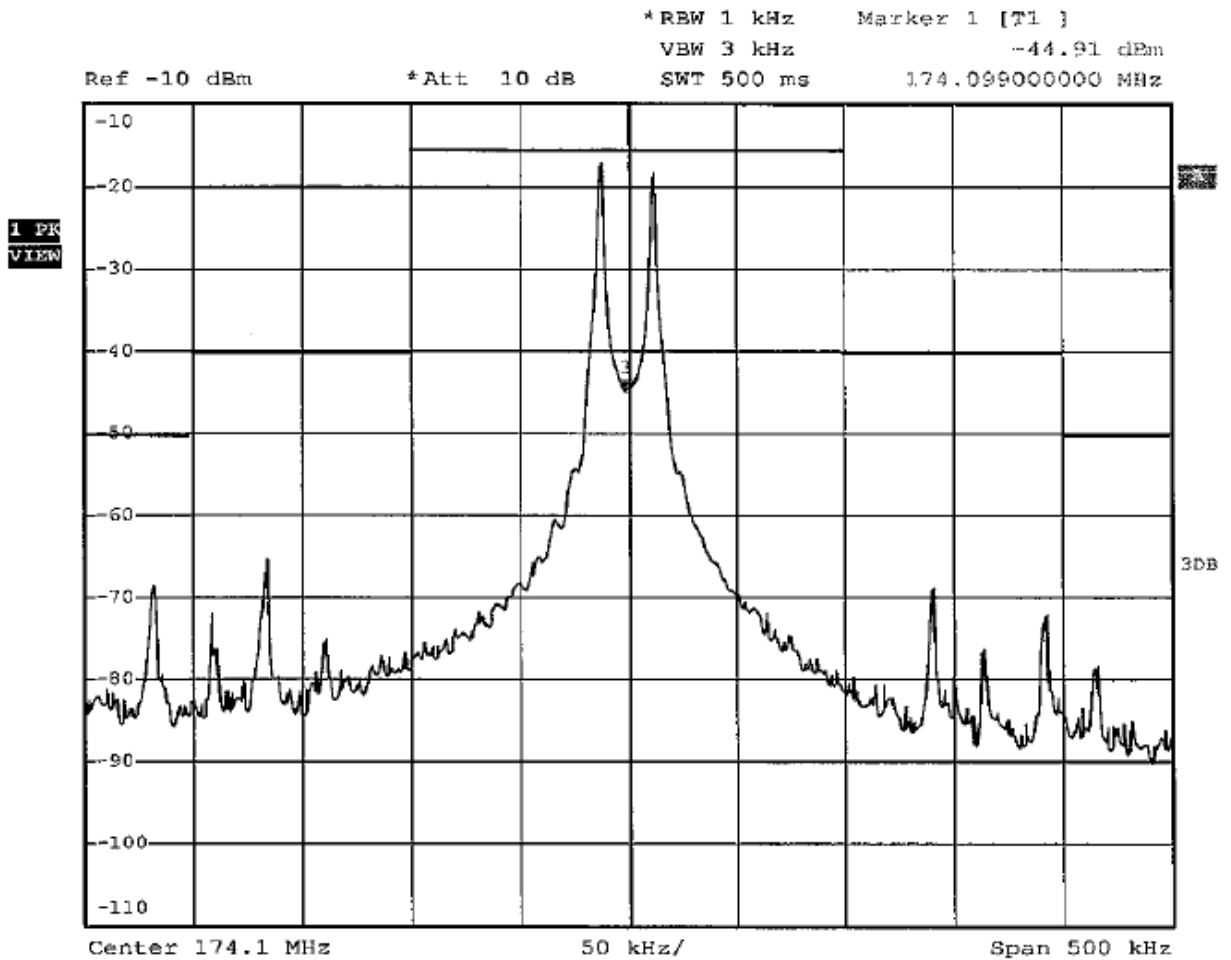

down 3dB

Date: 30.DEC.2008 02:54:59

Prüfbericht - Nr.:


16015130 001

Seite 19 von 25

Test Report No.

Page 19 of 25

Input Audio signal: 1 kHz

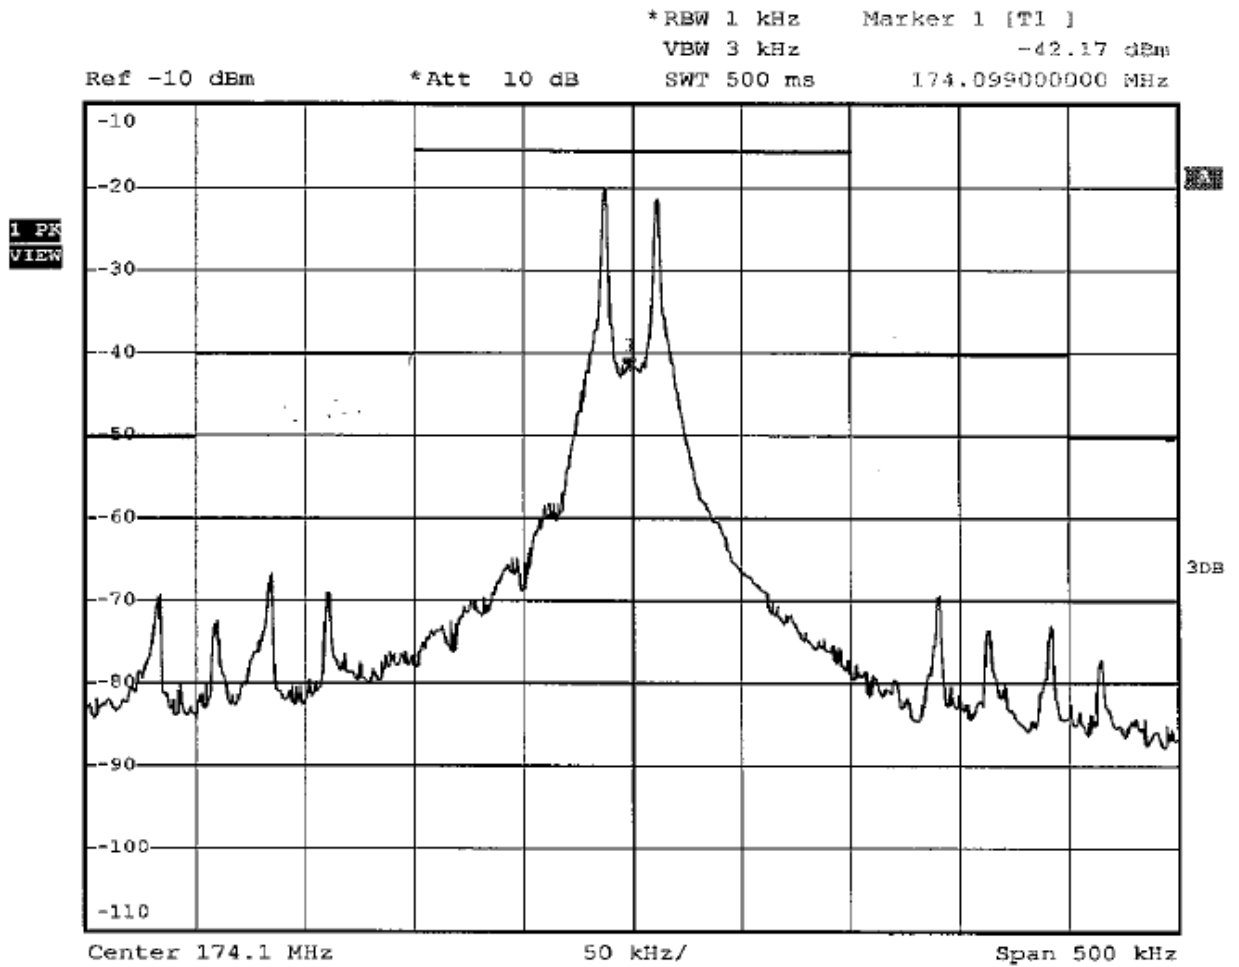

down 3dB


Date: 30.DEC.2008 02:57:00

Prüfbericht - Nr.:
Test Report No.

16015130 001

Seite 20 von 25
Page 20 of 25

Input Audio signal: 5 kHz

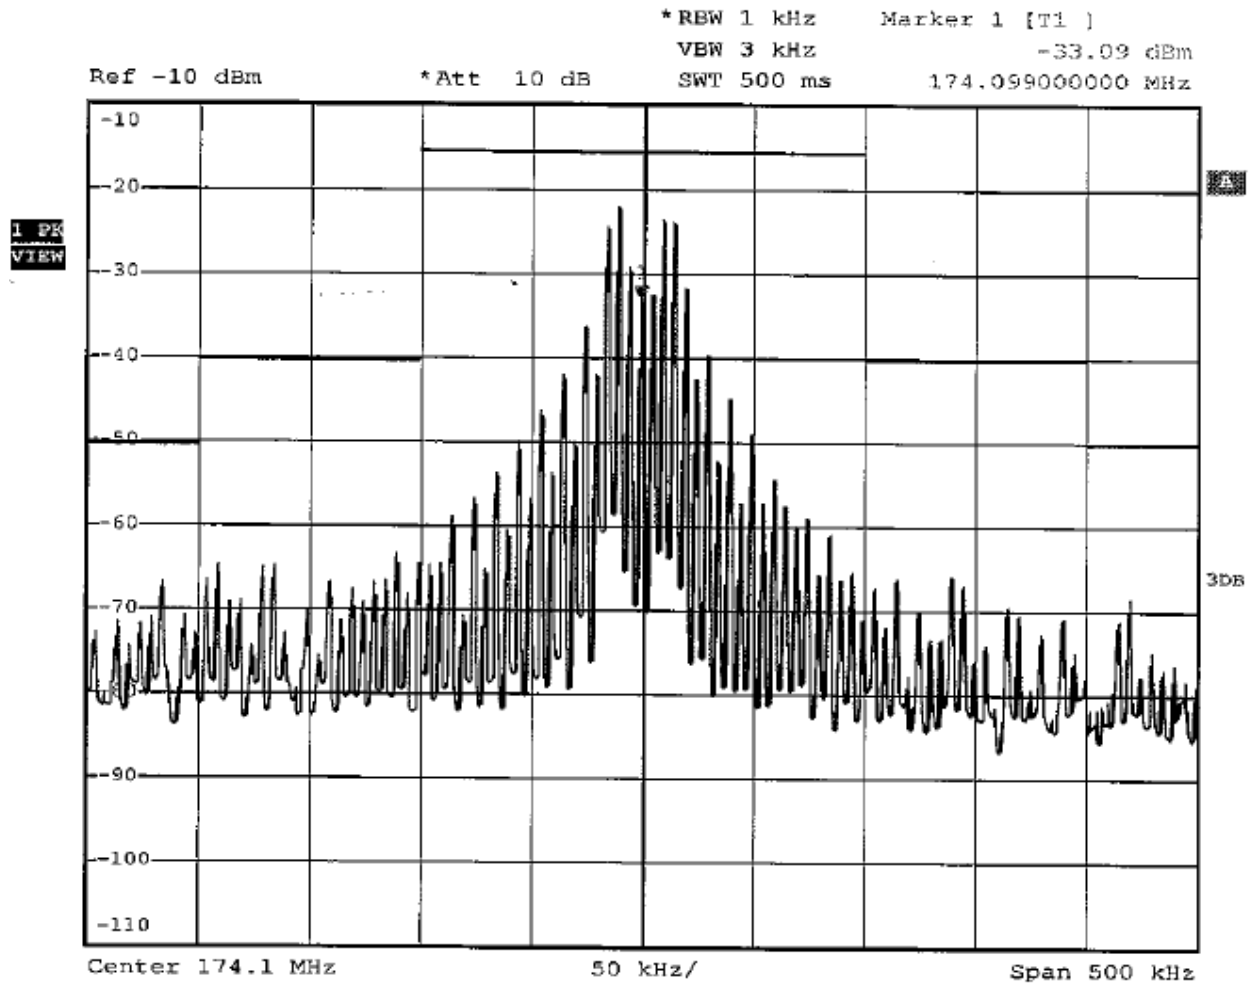

down 3dB

Date: 30.DEC.2008 02:58:18

Prüfbericht - Nr.:


16015130 001

Seite 21 von 25

Test Report No.

Page 21 of 25

Input Audio signal: 10 kHz

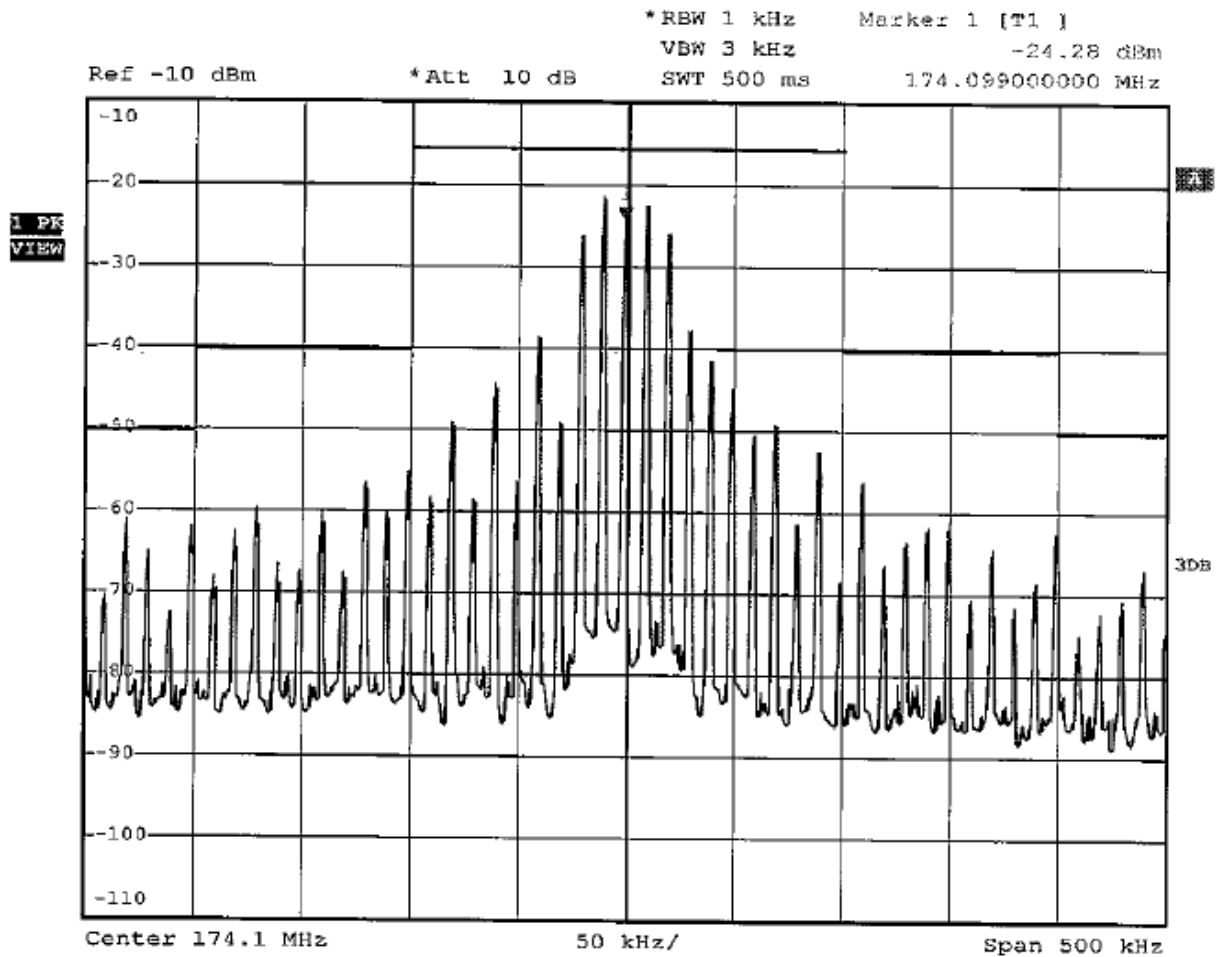

down 3dB

Date: 30.DEC.2008 02:59:05

Prüfbericht - Nr.:


16015130 001

Seite 22 von 25

Test Report No.

Page 22 of 25

Input Audio signal: 15 kHz

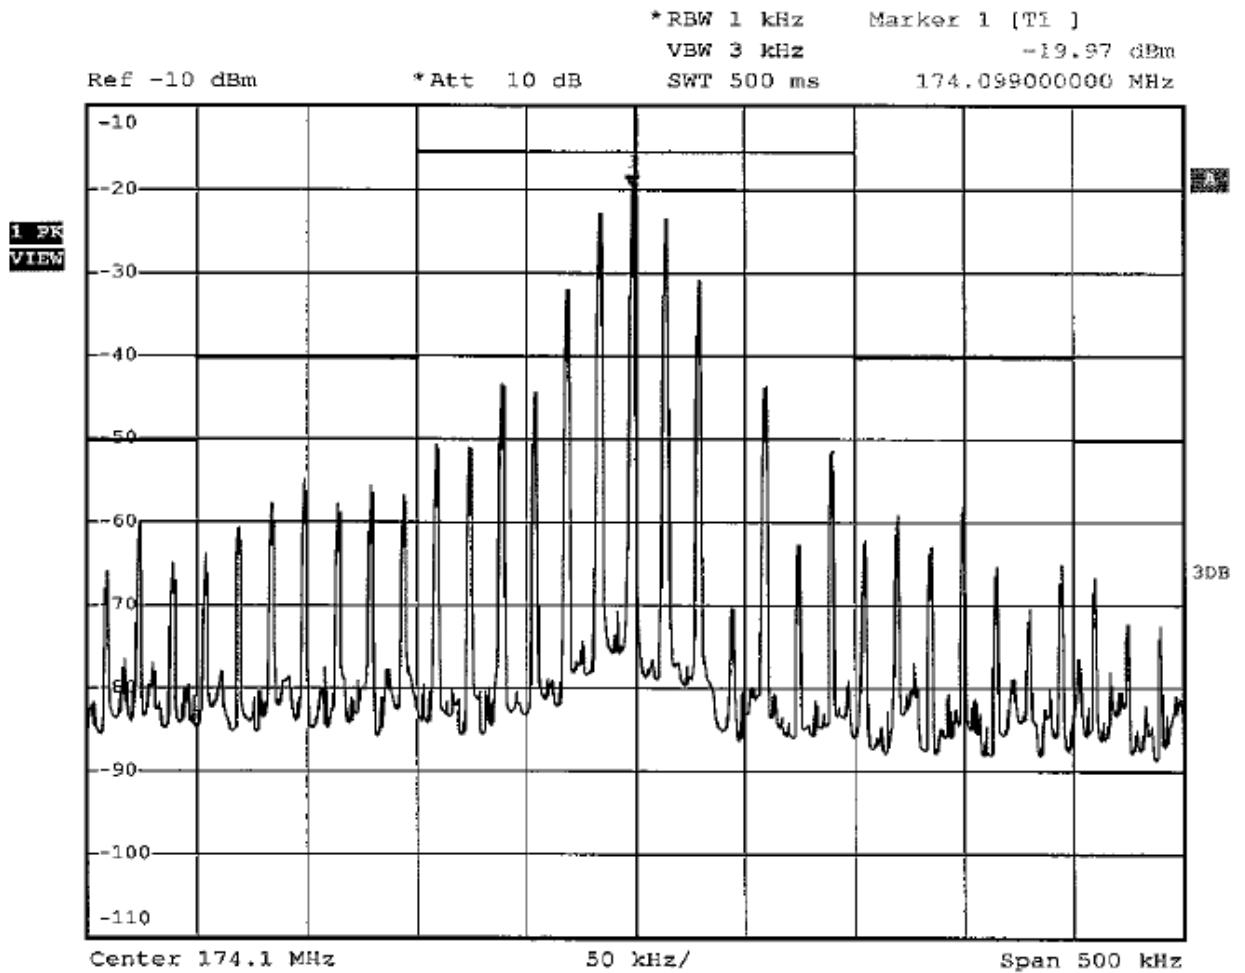

down 3dB

Date: 30.DEC.2008 02:59:56

Prüfbericht - Nr.:**16015130 001**


Seite 23 von 25

Test Report No.

Page 23 of 25

Modulation characteristics:

Frequency (Hz)	Deviation (kHz)
100	---
200	---
300	23.2
400	30.6
500	26.5
600	15.4
700	14.7
800	13.8
900	13.4
1000	13.1
1500	20.6
2000	7.3
3000	9.9
4000	12.6
5000	7.5
6000	6.8
7000	6.6
8000	9.5
9000	7.9
10000	6.5
12000	7.8
13000	6.6
14000	6.0
15000	6.4
16000	3.2
17000	---

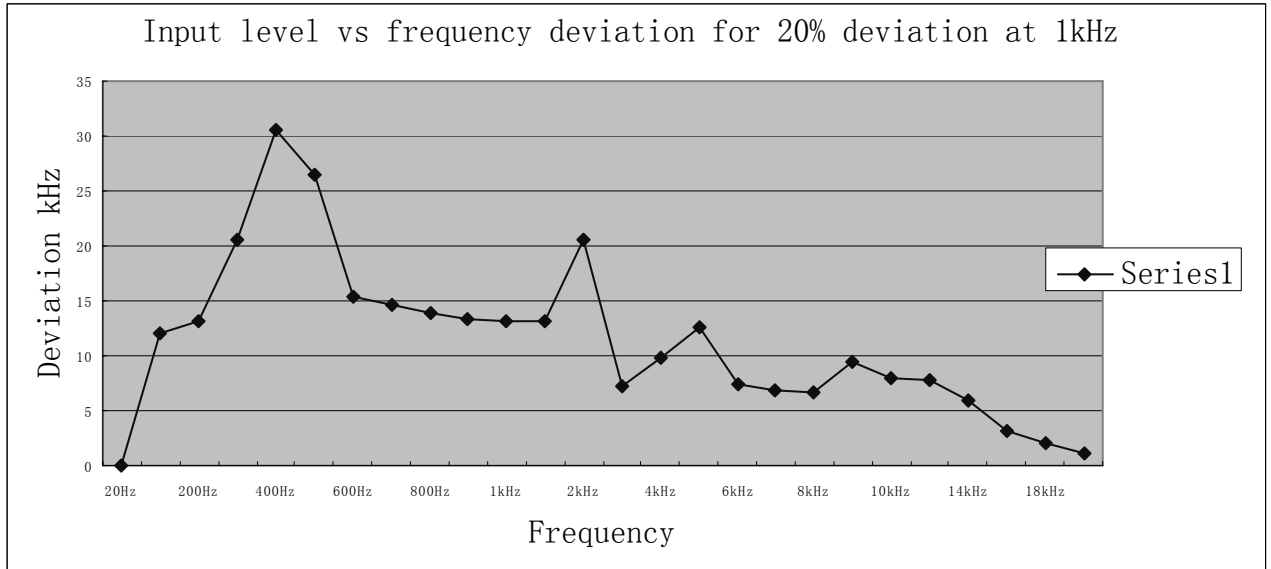

Modulation (dB)		-20	-10	0	5	15	20
400Hz	kHz	29.6	39.4	50.7	49.7	48.6	49.3
800Hz	kHz	12.0	15.9	28.0	36.5	50.1	49.2
2kHz	kHz	17.5	23.9	39.0	49.0	48.1	48.5
5kHz	kHz	10.7	12.8	22.9	39.8	52.1	51.9
9kHz	kHz	7.3	10.5	20.2	30.3	56.3	54.6
12kHz	kHz	5.2	7.5	15.9	22.9	48.1	48.5
14kHz	kHz	4.2	5.9	11.9	16.0	37.1	38.3

