

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

TLV CO.,LTD.

RF Module

Model No.: iT-ZB-R

FCC ID: H3RTZRR1001

Prepared for : TLV CO.,LTD.
881 Nagasuna, Noguchi, Kakogawa, Hyogo 675-8511
Japan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F17124
Date of Test : Jun.21~27,2017
Date of Report : Jul.19,2017

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. SUMMARY OF STANDARDS AND RESULTS	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT)	2-1
2.2. Tested Supporting System Details	2-2
2.3. Block diagram of connection between the EUT and simulators	2-2
2.4. Test Facility	2-3
2.5. Measurement Uncertainty (95% confidence levels, k=2)	2-3
3. POWER LINE CONDUCTED EMISSION TEST	3-1
4. RADIATED EMISSION MEASUREMENT	4-1
4.1. Test Equipment	4-1
4.2. Block Diagram of Test Setup	4-2
4.3. Radiated Emission Limit Standard:	4-3
4.4. EUT Configuration on Test	4-3
4.5. Operating Condition of EUT	4-3
4.6. Test Procedure	4-3
4.7. Radiated Emission Test Results	4-4
5. CONDUCTED SPURIOUS EMISSIONS	5-1
5.1. Test Equipment	5-1
5.2. Limit	5-1
5.3. Test Procedure	5-1
5.4. Test result	5-1
6. 6dB BANDWIDTH TEST	6-1
6.1. Test Equipment	6-1
6.2. Limit	6-1
6.3. Test Procedure	6-1
6.4. Test Results	6-1
7. MAXIMUM PEAK OUTPUT POWER TEST	7-1
7.1. Test Equipment	7-1
7.2. Limit	7-1
7.3. Test Procedure	7-1
7.4. Test Results	7-1
8. BAND EDGE COMPLIANCE TEST	8-1
8.1. Test Equipment	8-1
8.2. Limit	8-1
8.3. Test Produce	8-1
8.4. Test Results	8-1
9. POWER SPECTRAL DENSITY TEST	9-1
9.1. Test Equipment	9-1
9.2. Limit	9-1
9.3. Test Procedure	9-1
9.4. Test Results	9-1
10. MPE ESTIMATION	10-1
10.1. Limit for General Population/ Uncontrolled Exposures	10-1

	10.2. Estimation Result	10-1
11.	ANTENNA REQUIREMENT	11-1
	11.1. STANDARD APPLICABLE	11-1
	11.2. ANTENNA CONNECTED CONSTRUCTION	11-1
12.	DEVIATION TO TEST SPECIFICATIONS.....	12-1
13.	PHOTOGRAPH OF TEST	13-1
	13.1. Photos of Radiated Emission Test.....	13-1
14.	PHOTOS OF THE EUT.....	14-1

TEST REPORT CERTIFICATION

Applicant : TLV CO.,LTD.
 Manufacture : TLV CO.,LTD.
 Product : RF Module
 FCC ID : H3RTZRR1001
 (A)Model No. : iT-ZB-R
 (B) Power Supply : DC 3.6V
 (C) Test Voltage : DC 3.6V

Tested for comply with:

FCC CFR 47 Part 15 Subpart C
 Test procedure used: ANSI C63.10: 2013;
 KDB558074 D01 v04

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Jun.21~27,2017 Report of date: Jul.19,2017

Prepared by : Brave Zhang Reviewed by : Sunny Lu
 Brave Zhang / Assistant Sunny Lu/ Deputy Manager



Approved & Authorized Signer : David Jin
 David Jin / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10 :2013	N/A
Radiated Emission Test	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 : 2013	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(a)(1) ANSI C63.10 : 2013	PASS
6dB Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10 : 2013	PASS
Maximum Peak Output Power Test	FCC Part 15: 15.247(b)(1) ANSI C63.10 : 2013	PASS
Band Edge Compliance Test	FCC Part 15: 15.247(d) ANSI C63.10 : 2013	PASS
Power Spectral Density Test	FCC Part 15: 15.247(d) ANSI C63.10 : 2013	PASS
MPE Estimation	FCC Part 15: 15.247	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

N/A is an abbreviation for Not Applicable

2. GENERAL INFORMATION


2.1. Description of Device (EUT)

Product	: RF Module
Model No.	: iT-ZB-R
Hardware version	: iT-ZB-R
Firmware version	: 1.00
FCC ID	: H3RTZRR1001
Radio	: 2.4GHz Wireless
Operation frequency	: 2405MHz-2480MHz
Antenna	: Collinear Antenna, 2.14dBi PK gain
Modulation	: O-QPSK
Applicant	: TLV CO.,LTD. 881 Nagasuna, Noguchi, Kakogawa, Hyogo 675-8511 Japan
Manufacturer	: TLV CO.,LTD. 881 Nagasuna, Noguchi, Kakogawa, Hyogo 675-8511 Japan
Audio Cable	: Unshielded, Detachable; 1.4m
Date of Test	: Jun.21~27,2017
Date of Receipt	: Jun.19,2017
Sample Type	: Prototype production

2.2. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1	Notebook	N/A	HP	TPN-C116	N/A
		Power Cord: Unshielded, Detachable, 1.5m			
2	iTrapSensor Monitoring System, Repeater Unit	N/A	TLV	iT5-ZB-RUN	N/A
3	USB Cable: Shielded, Detachable, 1.5m				

2.3. Block diagram of connection between the EUT and simulators

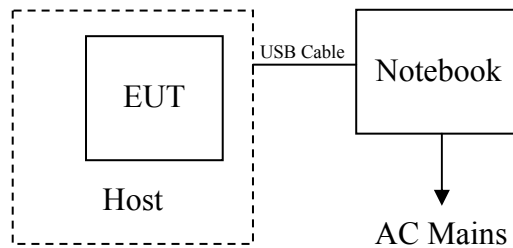

(EUT: RF Module)

2.4. Test Facility
Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China

EMC Lab. : Certificated by Industry Canada
Registration Number: IC 5183A-1
Valid Date: May.07, 2020

: Certificated by DAkkS, Germany
Registration No: D-PL-12151-01-00
Valid Date: Dec.07, 2021

: Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2018

2.5. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Radiation Emission test in 3m chamber	2.8 dB(30~200MHz, Polarization: H)
	2.8 dB(30~200MHz, Polarization: V)
	3.0 dB(200M~1GHz, Polarization: H)
	3.0 dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	5.8 dB (1~6GHz, Distance: 3m)
	5.8 dB (6~18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.6 dB
Uncertainty for Conduction Spurious emission test	2.0 dB
Uncertainty for Output power test	0.8 dB
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.1 %
Uncertainty for test site temperature and humidity	0.6 °C
	3%

3. POWER LINE CONDUCTED EMISSION TEST

According to Paragraph (c) of FCC Part 15 section 15.207, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipment

Frequency range: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Mar.28,17	1 Year
2.	Spectrum Analyzer	Agilent	N9010A	MY52220804	Oct.15,16	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.22,17	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr.22,17	1 Year
5.	Bi-log Antenna	TESEQ	CBL6112D	25237	Aug.03,16	1 Year
6.	Loop Antenna	Chase	HLA6120	1062	Sep.25,16	1 Year
7.	RF Cable	MIYAZAKI	CFD400NL-LW	No.3	Sep.26.16	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.22,17	1 Year
9.	Attenuator	EMCI	EMCI-N-6-06	AT-N0639	Sep.26.16	1 Year
10.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A


Note: N/A means Not applicable.

Frequency range: above 1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Mar.28,17	1 Year
2.	Spectrum Analyzer	Agilent	E4446A	US44300459	Apr.22,17	1 Year
3.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	May.15,17	1 Year
4.	Horn Antenna	ETS	3116	00060089	Nov.16,16	1 Year
5.	Amplifier	Agilent	8449B	3008A02495	Apr.22,17	1 Year
6.	RF Cable	Hubersuhner	SUCOFLEX104	274094/4	Apr.22,17	1 Year
7.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup
For frequency range 30MHz-1000MHz

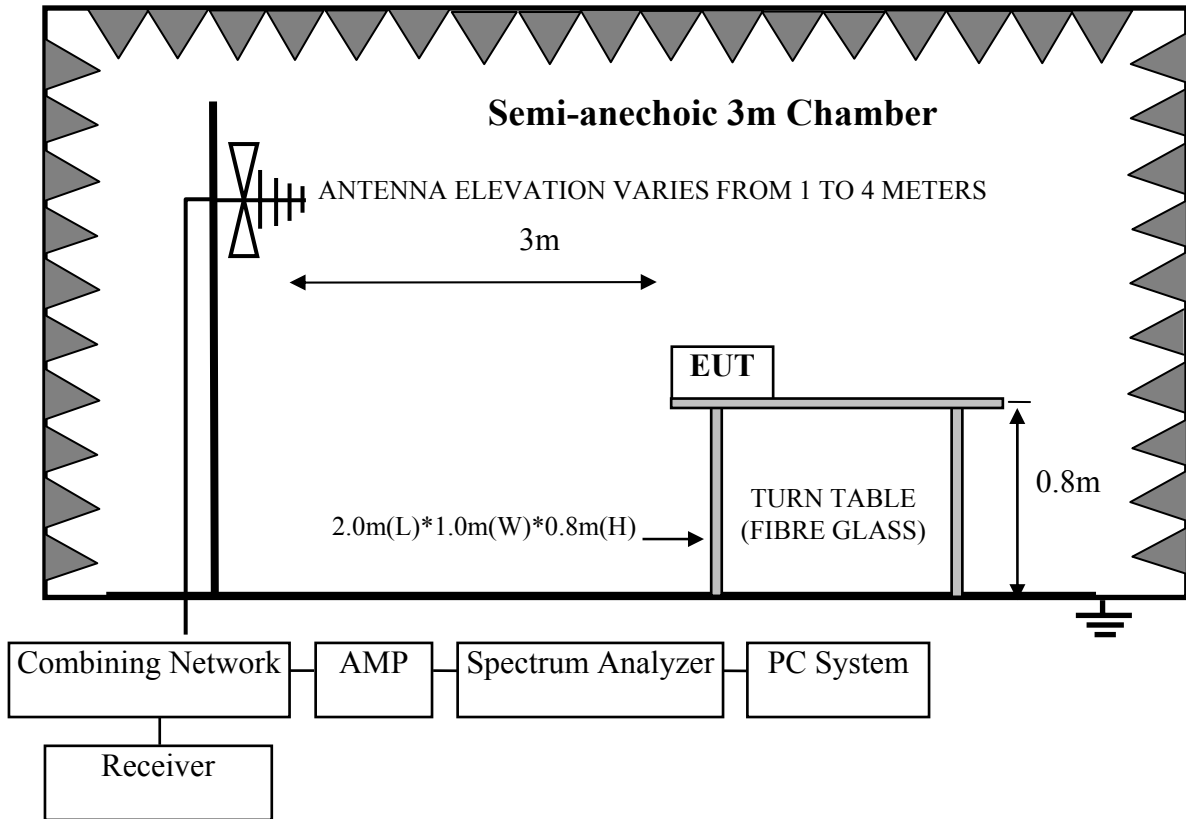

For frequency range 1GHz-25GHz

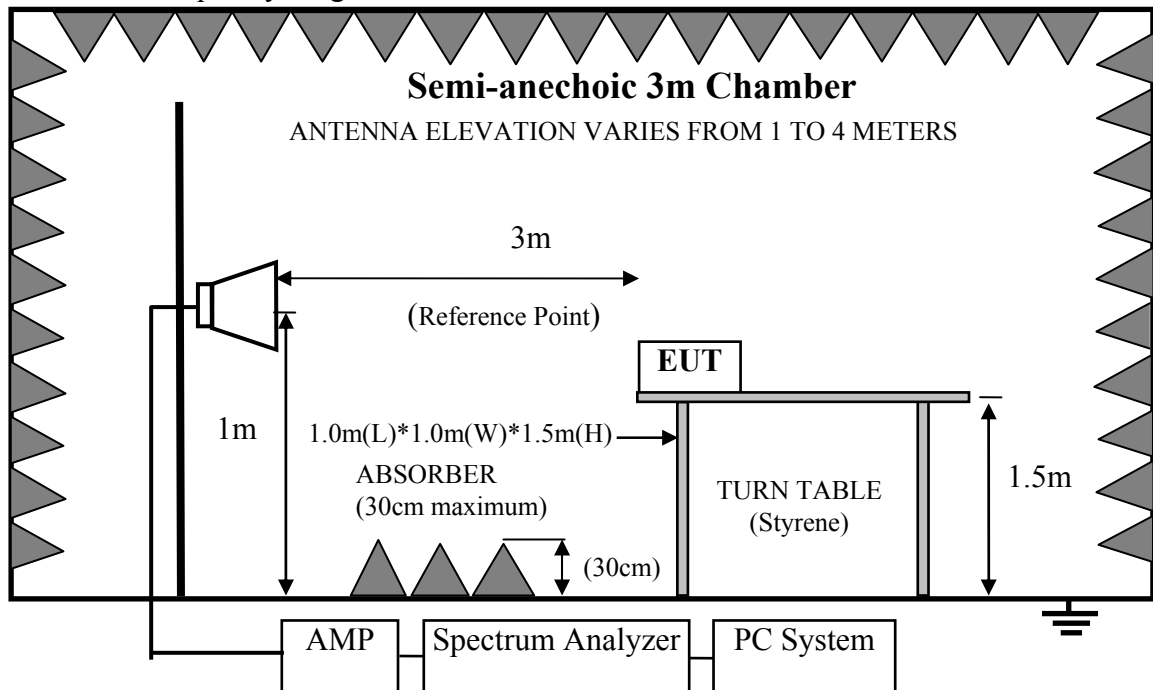

4.3. Radiated Emission Limit Standard:

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

- Remark :
- (1) Emission level dBμV = 20 log Emission level μV/m
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. RF Module (EUT)

Model No. : iT-ZB-R
Serial No. : N/A

4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turn on the power of all equipments.
- 4.5.3. Let EUT work in Tx mode.

4.6. Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it.EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as the test photo indicated.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement and RBW is set at 1MHz, VBW is set at 10Hz for average measurement

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.


4.7. Radiated Emission Test Results
PASS.

All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.


Note 1: For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.

Duty cycle

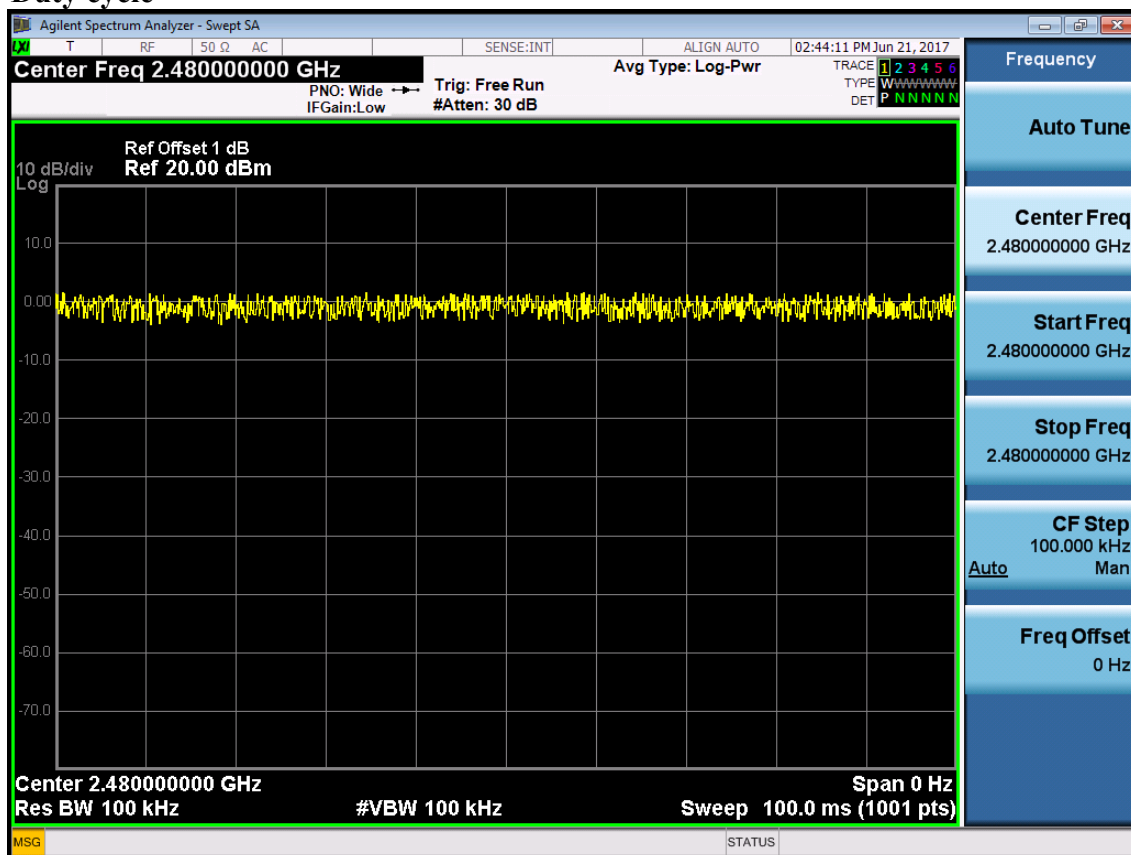

Note: The Duty Cycle is close to 100%.

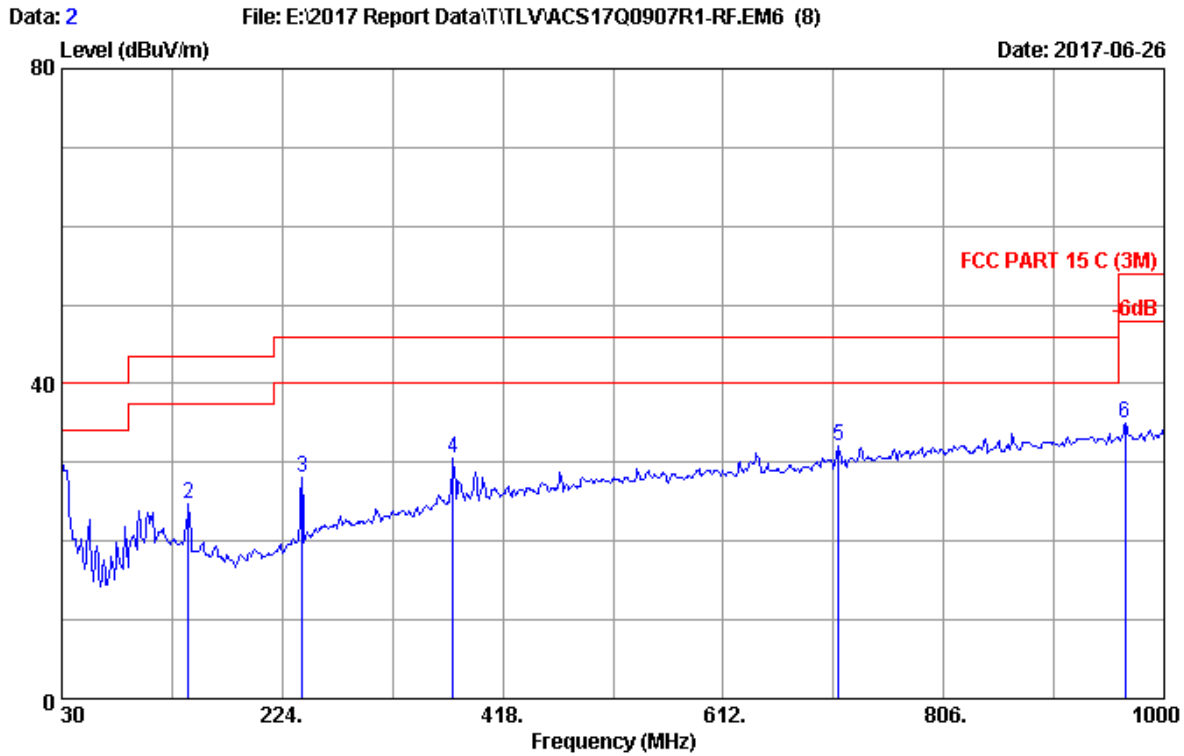


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2016 CBL6112D 25237 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.5°C/49.2% Engineer : Frank
 EUT : iT-ZB-R
 Power rating : DC 3.6V
 Test Mode : TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	22.20	6.42	1.45	30.07	40.00	9.93	QP
2	141.550	12.10	6.99	5.60	24.69	43.50	18.81	QP
3	241.460	12.51	7.31	8.20	28.02	46.00	17.98	QP
4	374.350	15.93	8.21	6.40	30.54	46.00	15.46	QP
5	713.850	19.94	9.48	2.58	32.00	46.00	14.00	QP
6	966.050	22.00	10.38	2.70	35.08	54.00	18.92	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

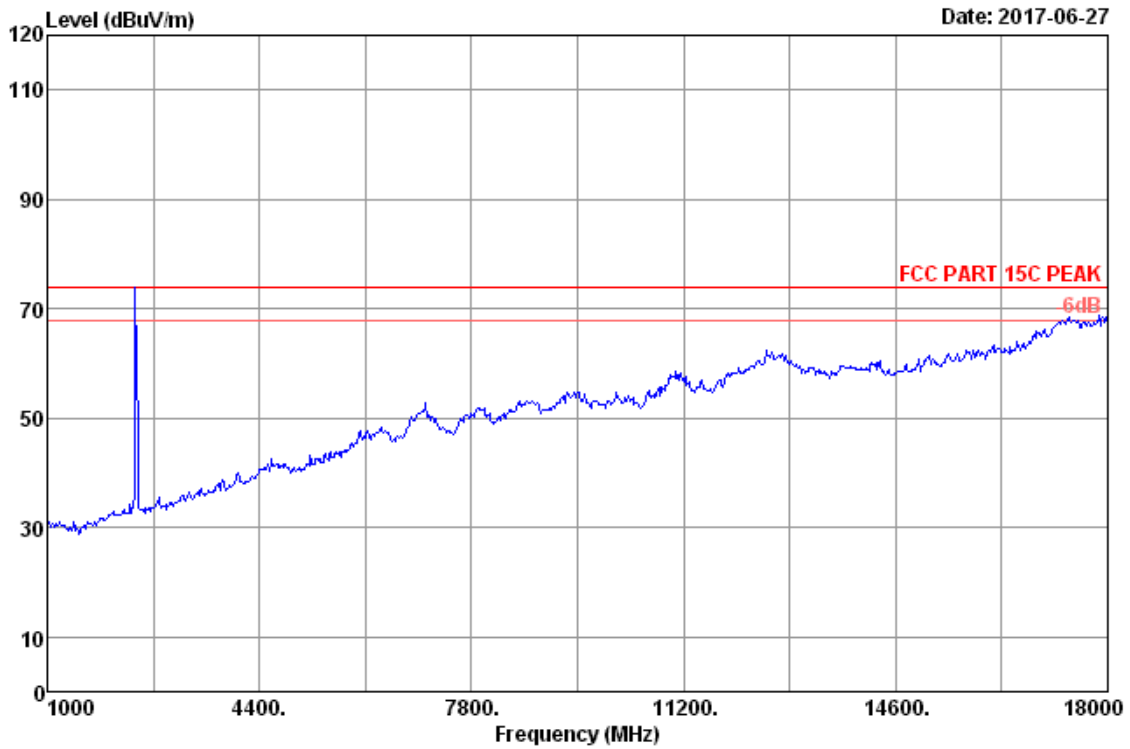


Site no.	: 3m Chamber	Data no.	: 1
Dis. / Ant.	: 3m 2017 ANT 3007 HF	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK	Pre	: 101.2kPa
Env. / Ins.	: 23.1*C/53.2%	Engineer	: zack_zhu
EUT	: iT-ZB-R		
Power	: DC 3.6V		
Test Mode	: 2405MHz TX Mode		

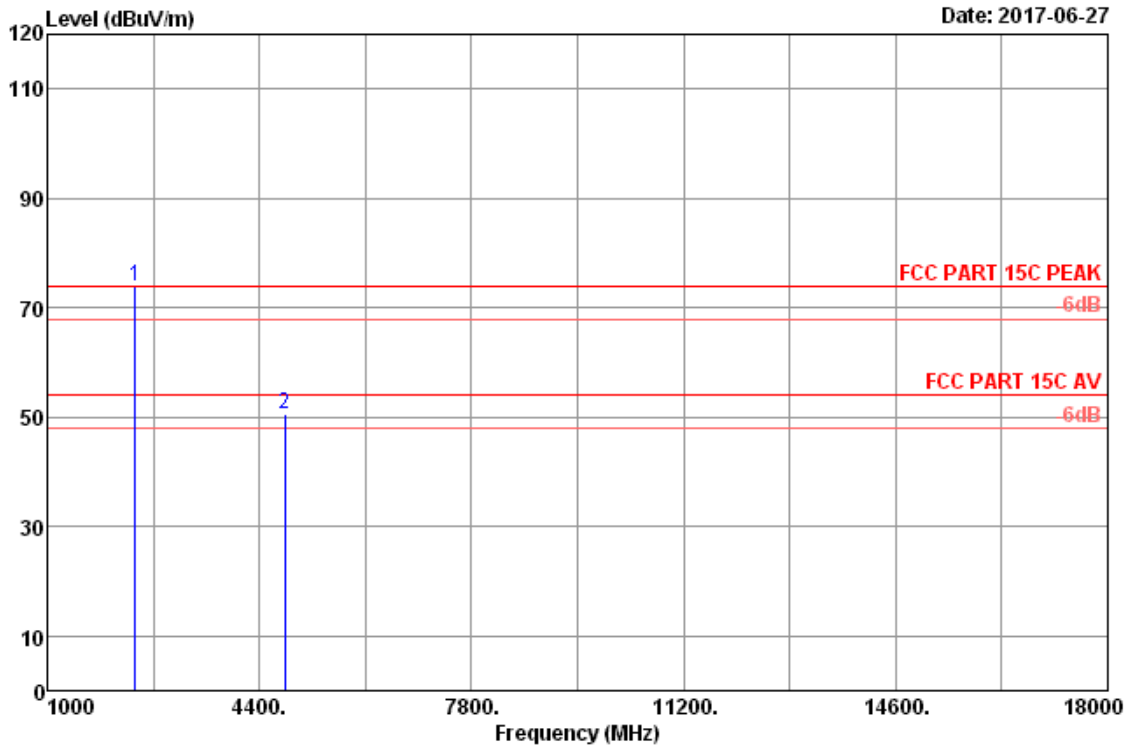


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/53.2% Engineer : zack_zhu
 EUT : iT-ZB-R
 Power : DC 3.6V
 Test Mode : 2405MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2405.00	27.73	7.88	74.55	36.39	73.77	74.00	0.23	Peak
2	4810.00	32.25	12.07	41.89	35.67	50.54	74.00	23.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

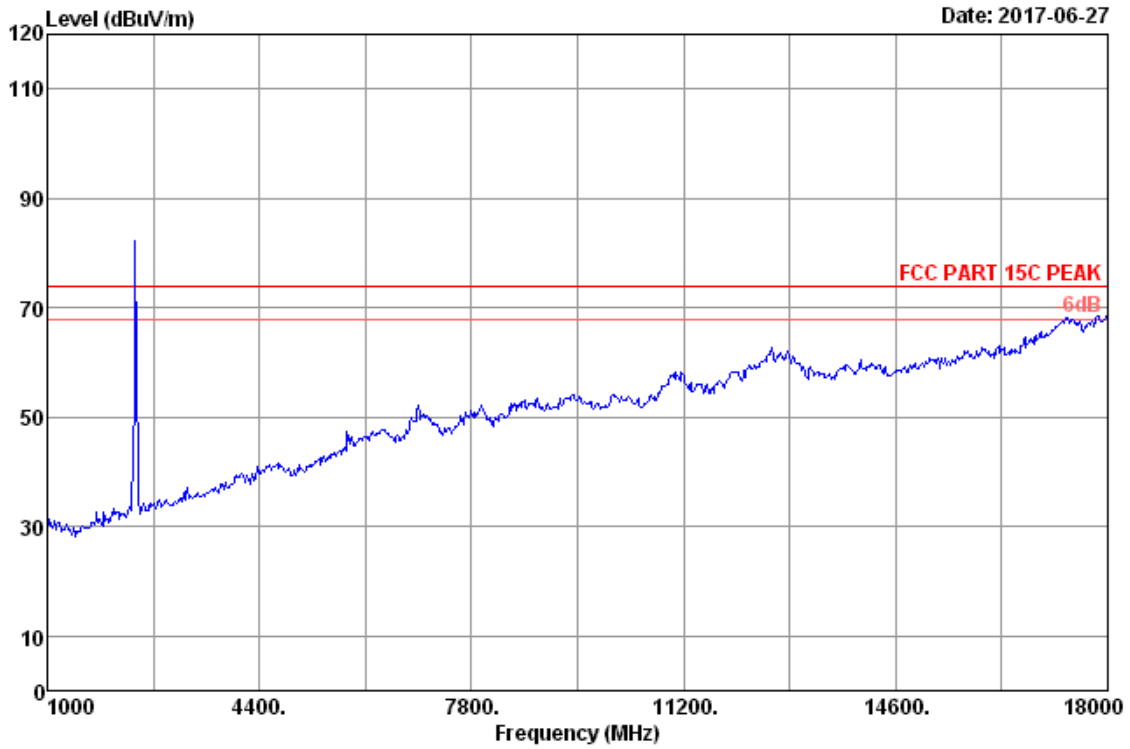


Site no. : 3m Chamber Data no. : 5
Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1*C/53.2% Engineer : zack_zhu
EUT : iT-ZB-R
Power : DC 3.6V
Test Mode : 2405MHz TX Mode

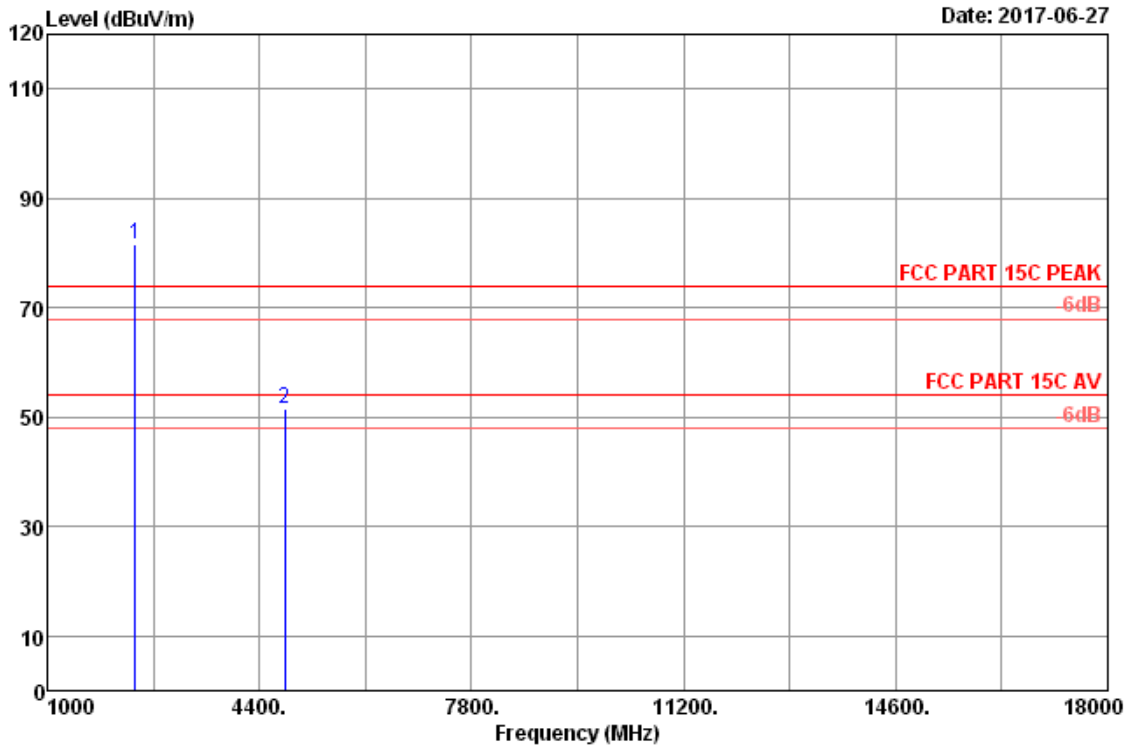


Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/53.2% Engineer : zack_zhu
 EUT : iT-ZB-R
 Power : DC 3.6V
 Test Mode : 2405MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2405.00	27.73	7.88	82.35	36.39	81.57	74.00	-7.57	Peak
2	4810.00	32.25	12.07	43.00	35.67	51.65	74.00	22.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

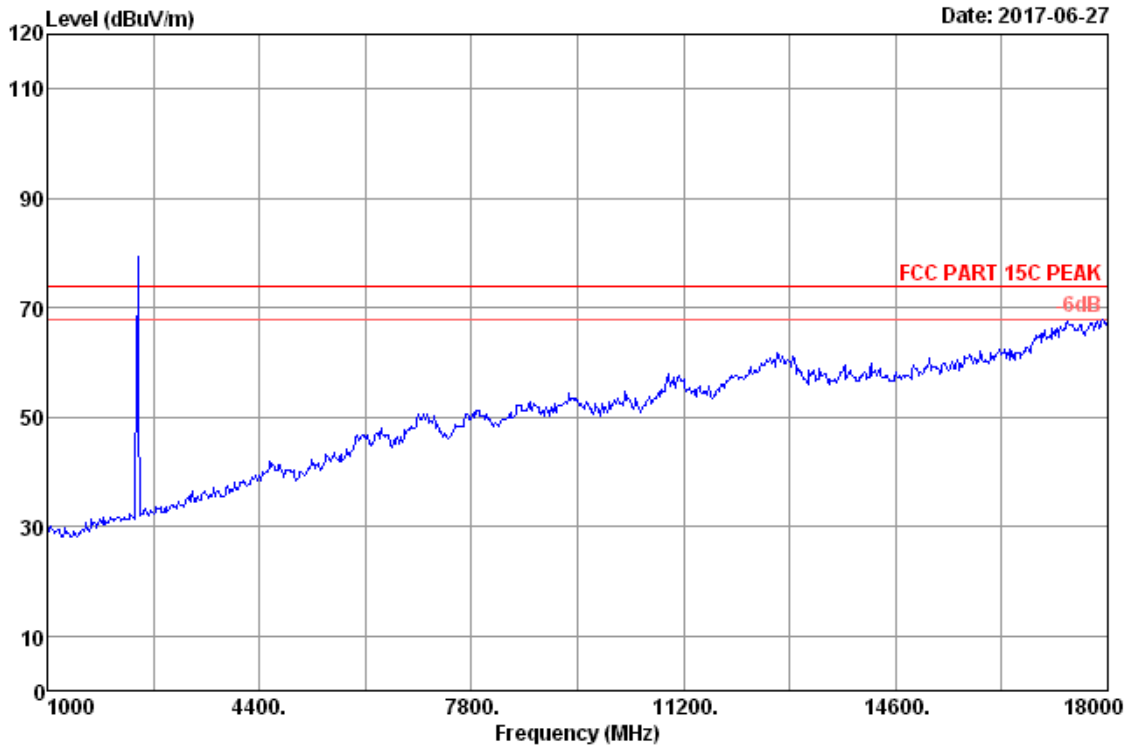


Site no. : 3m Chamber Data no. : 7
Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1*C/53.2% Engineer : zack_zhu
EUT : iT-ZB-R
Power : DC 3.6V
Test Mode : 2440MHz TX Mode

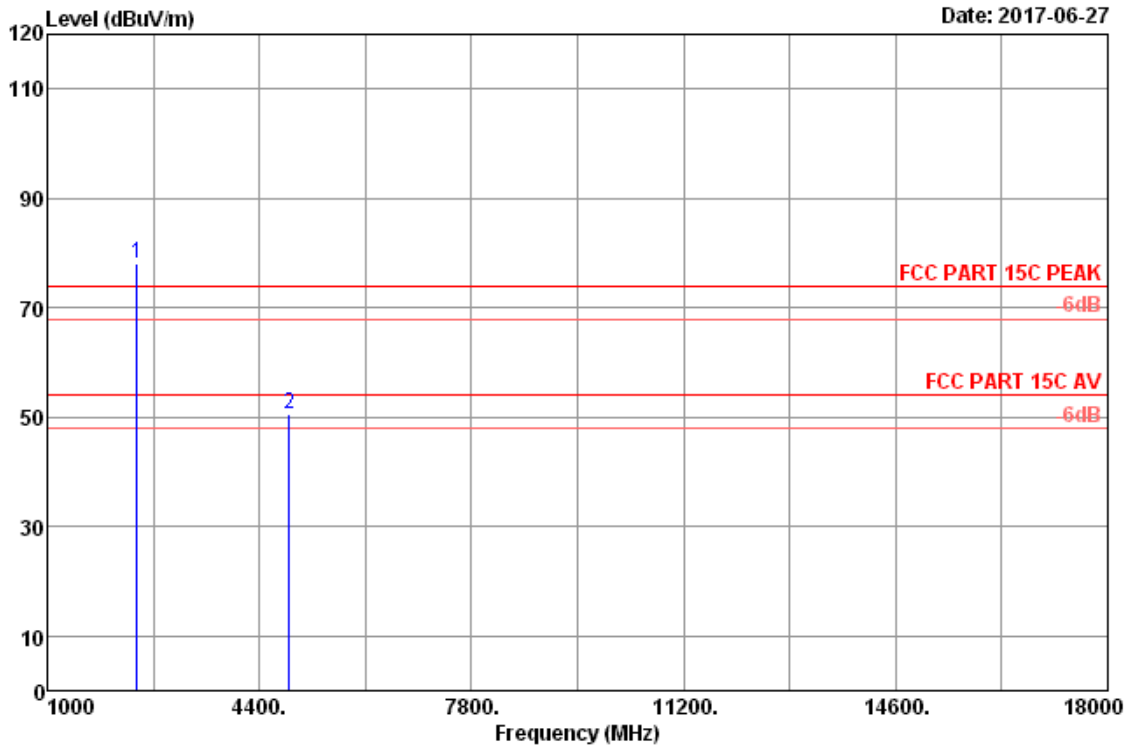


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/53.2% Engineer : zack_zhu
 EUT : iT-ZB-R
 Power : DC 3.6V
 Test Mode : 2440MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.80	7.95	78.87	36.38	78.24	74.00	-4.24	Peak
2	4880.00	32.20	12.22	41.88	35.69	50.61	74.00	23.39	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

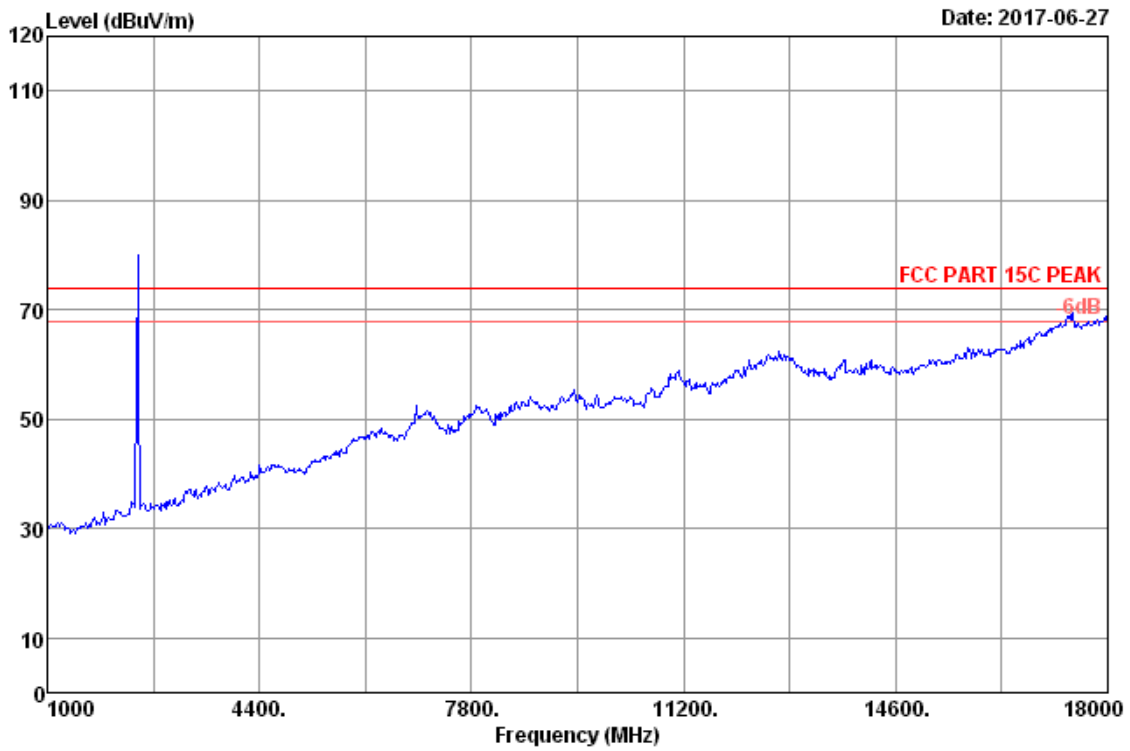


Site no. : 3m Chamber Data no. : 9
Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1°C/53.2% Engineer : zack_zhu
EUT : iT-ZB-R
Power : DC 3.6V
Test Mode : 2440MHz TX Mode

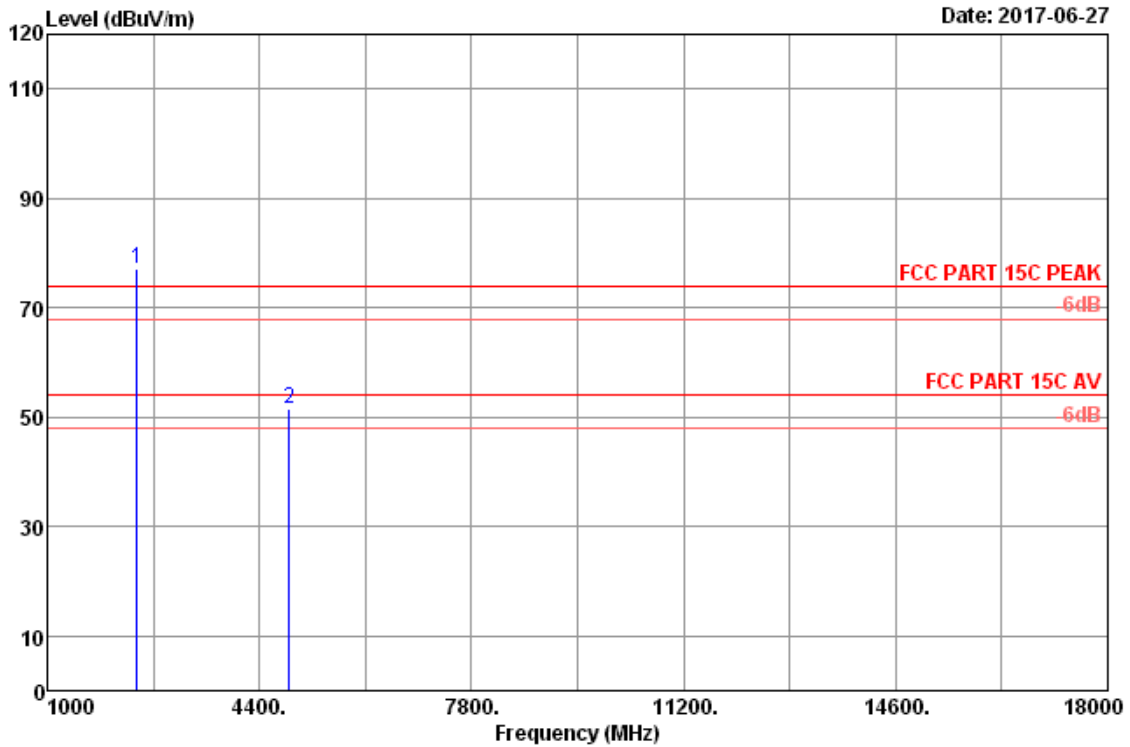


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/53.2% Engineer : zack_zhu
 EUT : iT-ZB-R
 Power : DC 3.6V
 Test Mode : 2440MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.80	7.95	77.79	36.38	77.16	74.00	-3.16	Peak
2	4880.00	32.20	12.22	42.80	35.69	51.53	74.00	22.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

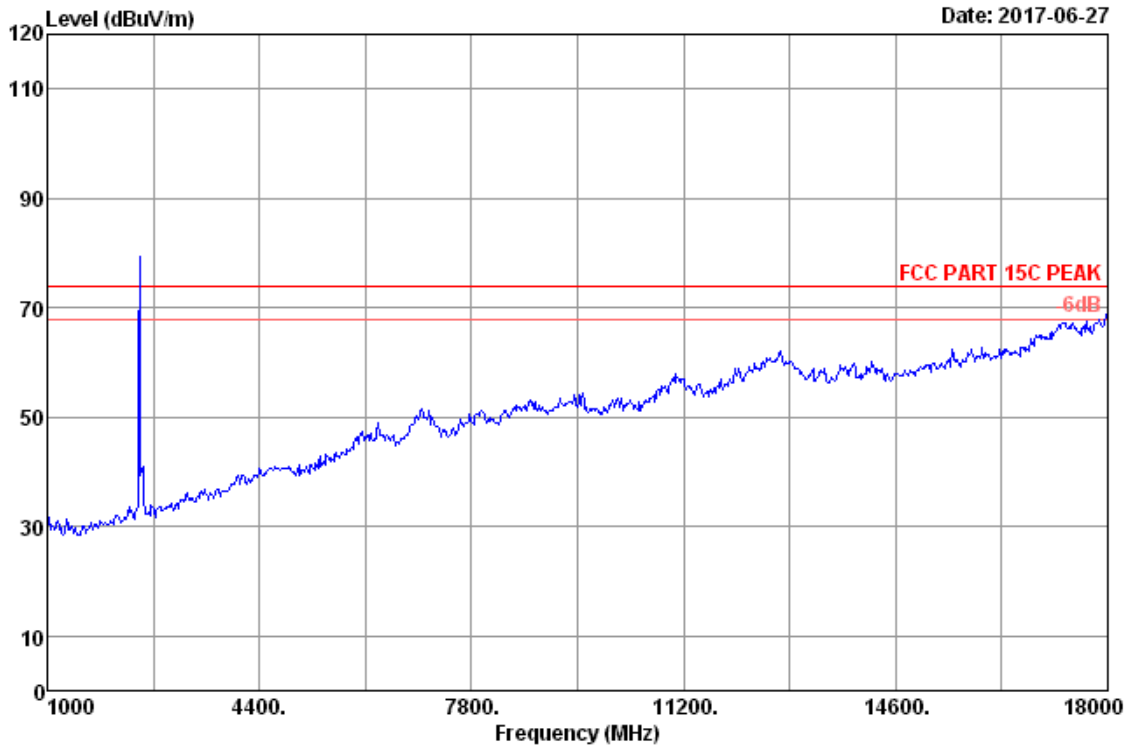


Site no.	: 3m Chamber	Data no.	: 11
Dis. / Ant.	: 3m 2017 ANT 3007 HF	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Pre	: 101.2kPa
Env. / Ins.	: 23.1°C/53.2%	Engineer	: zack_zhu
EUT	: iT-ZB-R		
Power	: DC 3.6V		
Test Mode	: 2480MHz TX Mode		

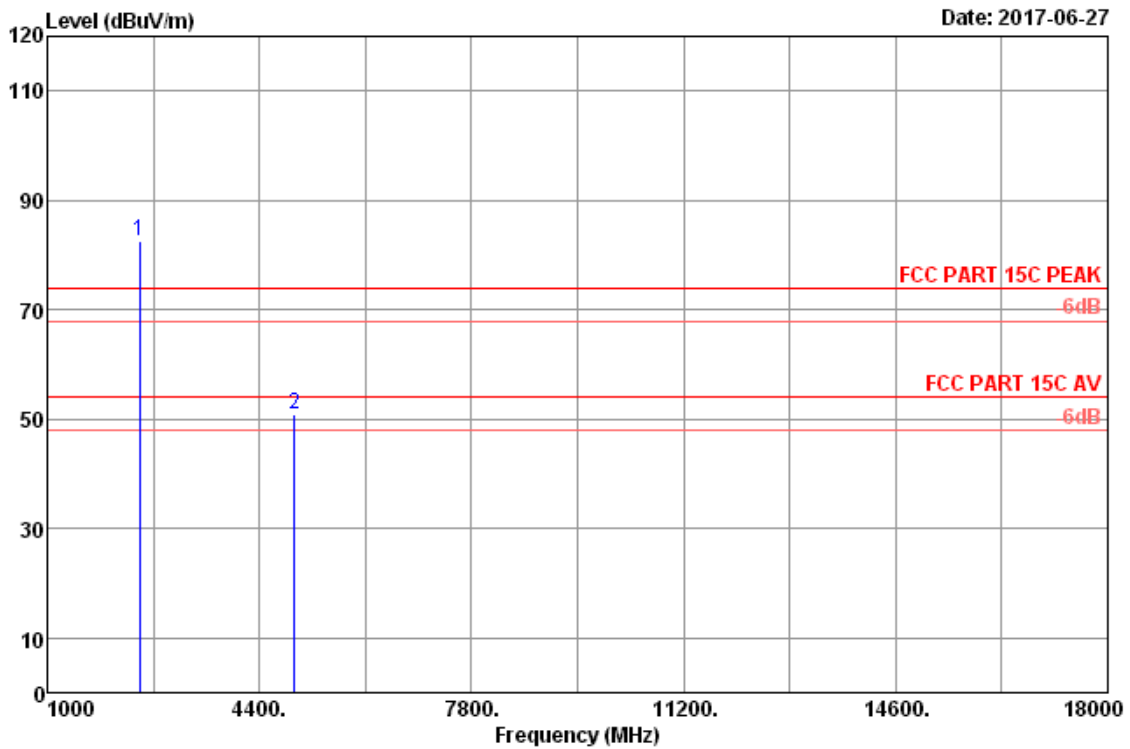


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/53.2% Engineer : zack_zhu
 EUT : iT-ZB-R
 Power : DC 3.6V
 Test Mode : 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.87	8.02	83.05	36.38	82.56	74.00	-8.56	Peak
2	4960.00	32.13	12.38	42.11	35.71	50.91	74.00	23.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

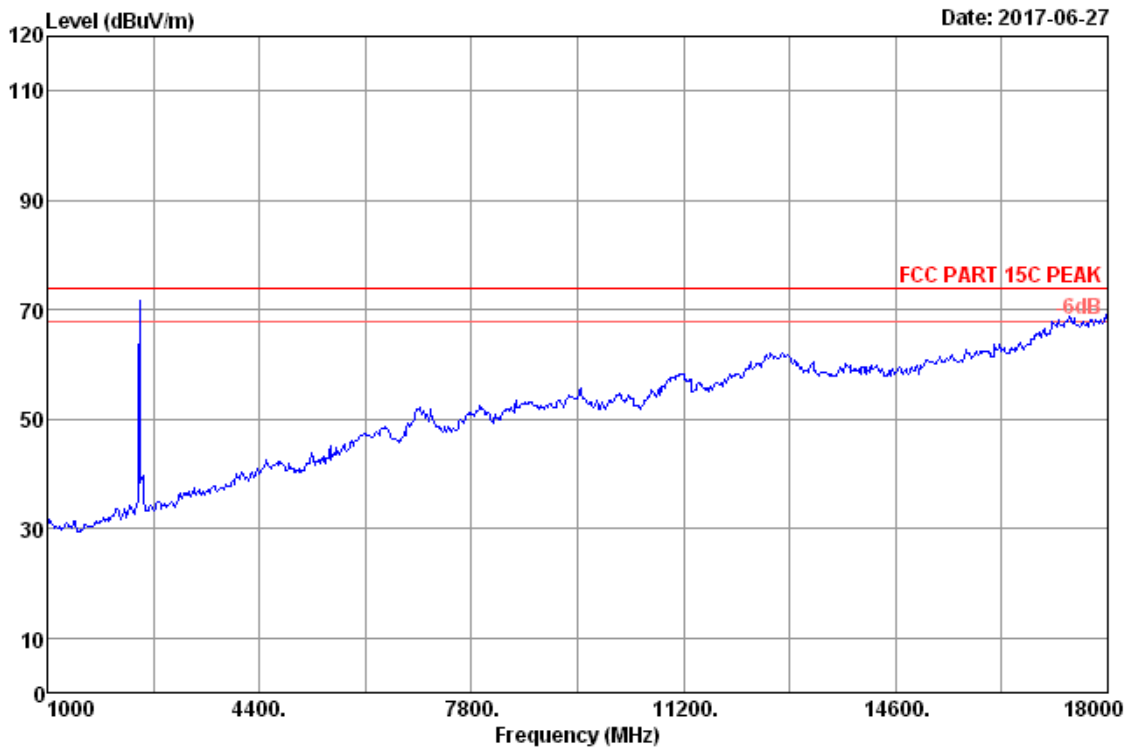

Site no. : 3m Chamber Data no. : 15
Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.1*C/53.2% Engineer : zack_zhu
EUT : iT-ZB-R
Power : DC 3.6V
Test Mode : 2480MHz TX Mode

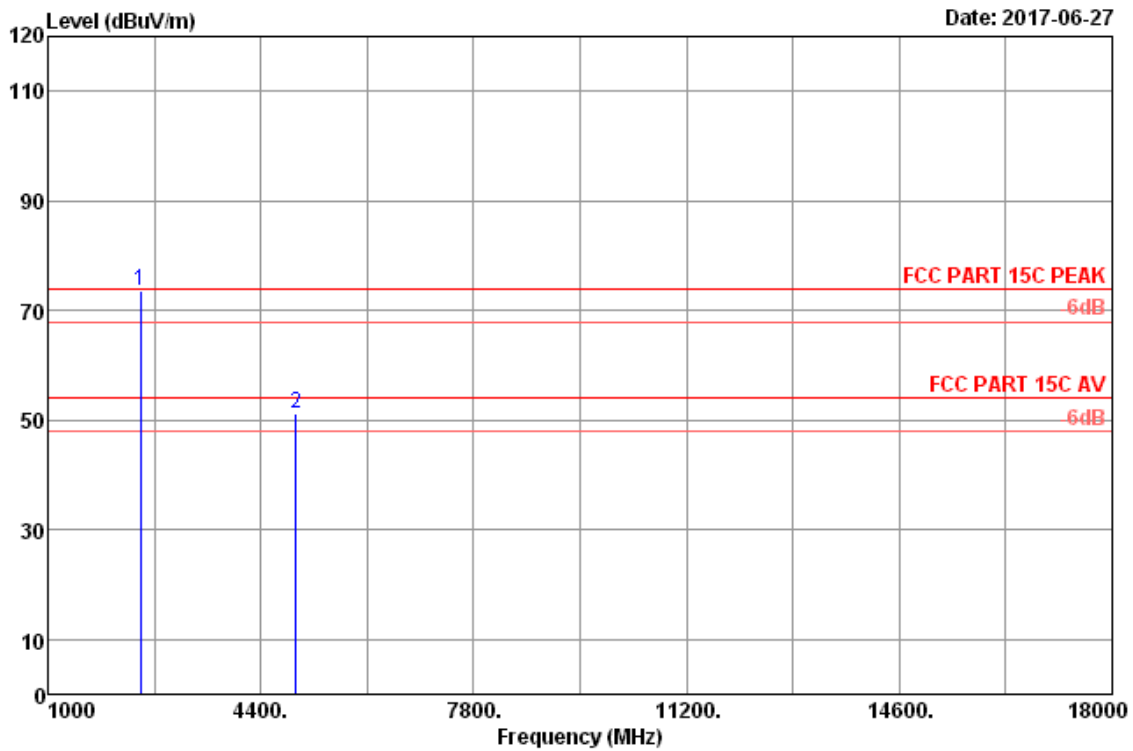

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/53.2% Engineer : zack_zhu
 EUT : iT-ZB-R
 Power : DC 3.6V
 Test Mode : 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.87	8.02	74.18	36.38	73.69	74.00	0.31	Peak
2	4960.00	32.13	12.38	42.25	35.71	51.05	74.00	22.95	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52220804	Oct.15,16	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	Apr.27,17	1 Year
3.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,16	1 Year

5.2. Limit


In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.3. Test Procedure


The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.

5.4. Test result


PASS (The testing data was attached in the next pages.)

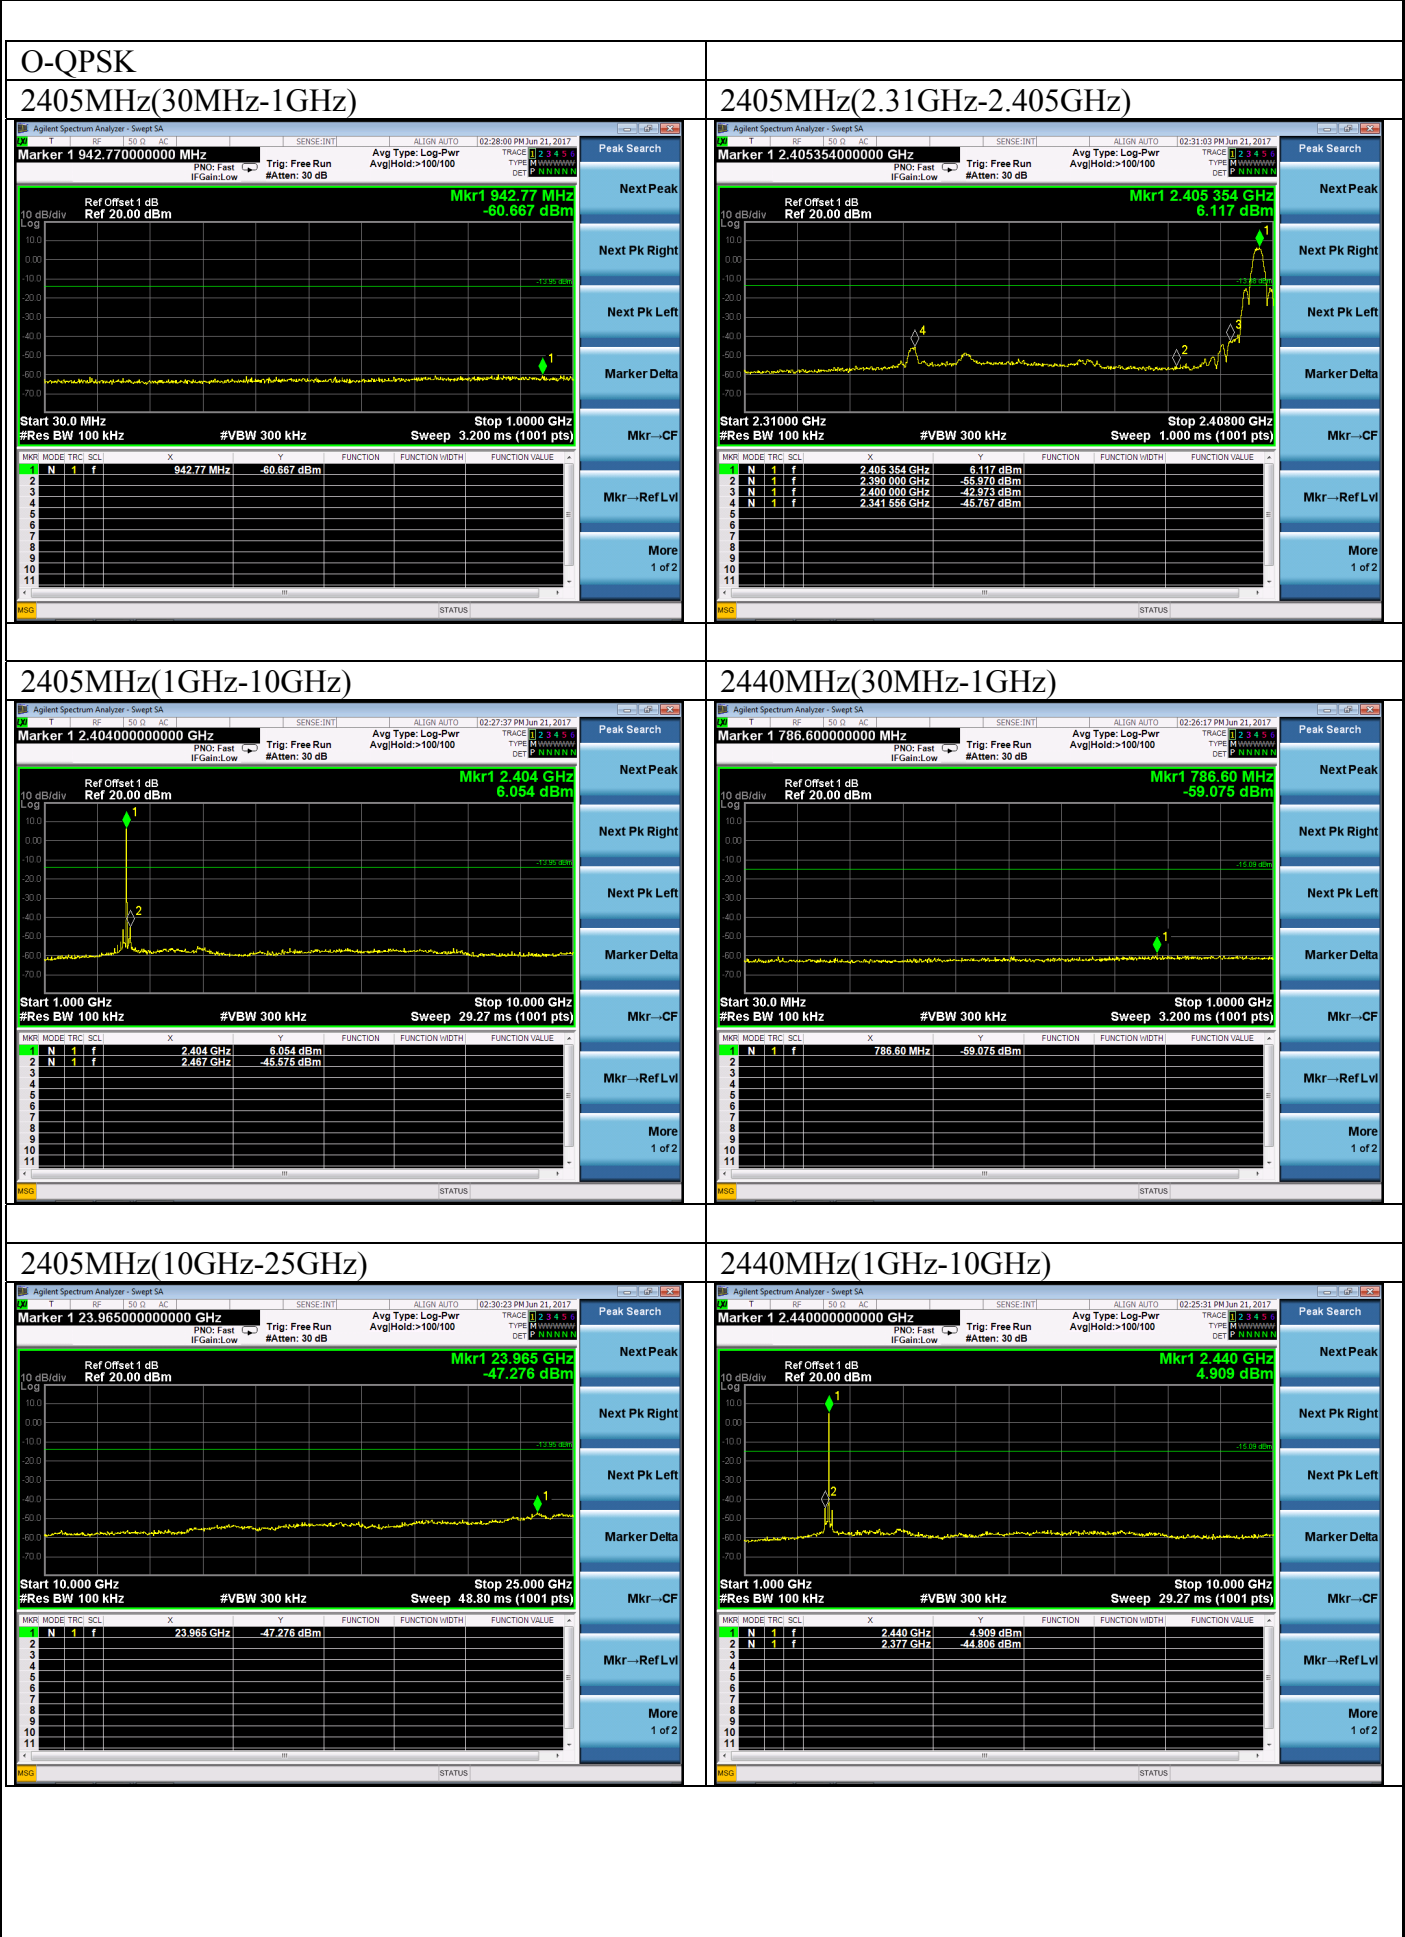


2440MHz(10GHz-25GHz)

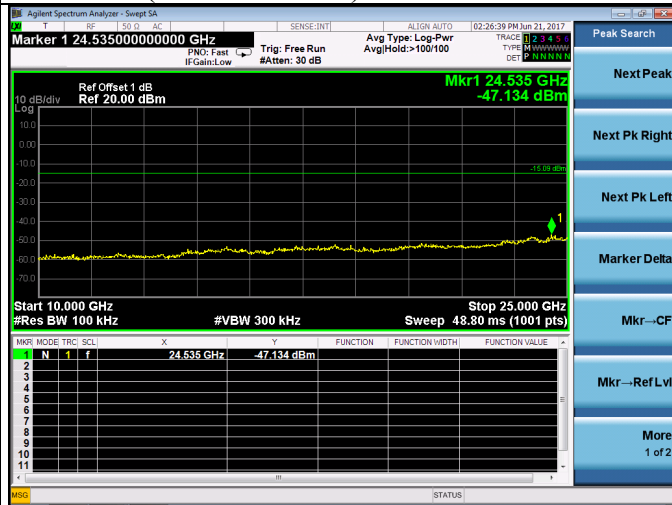


2480MHz(10GHz-25GHz)

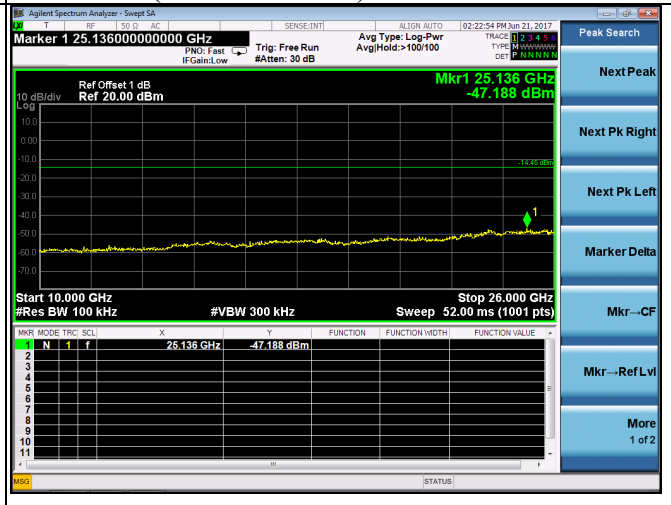


2480MHz(30MHz-1GHz)

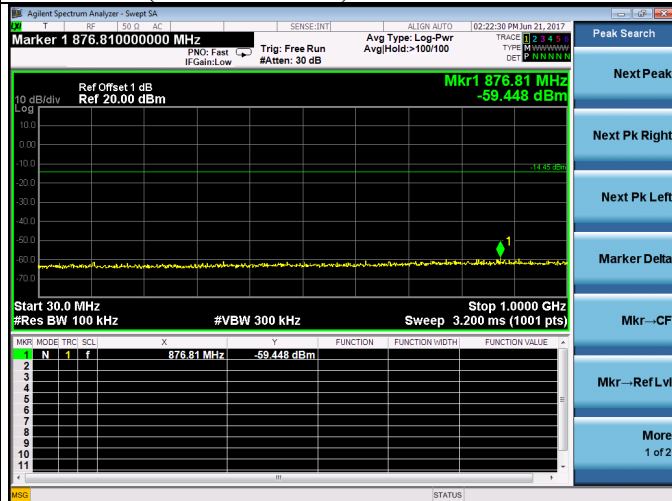

2480MHz(2.477GHz-2.51GHz)

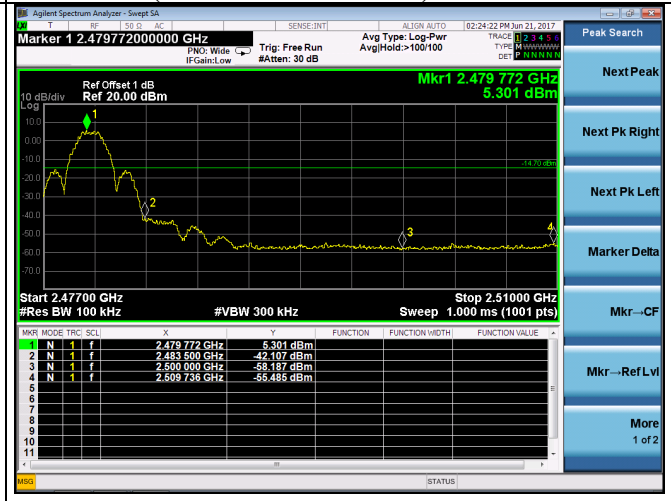

2480MHz(1GHz-10GHz)

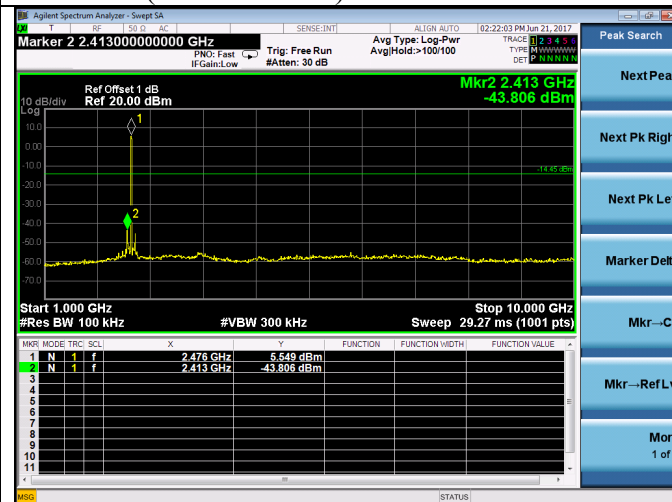

6. 6dB BANDWIDTH TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52220804	Oct.15,16	1 Year
2.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,16	1 Year

6.2. Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

6.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

6.4. Test Results

EUT: RF Module		
M/N: iT-ZB-R		
Test date: 2017-06-21	Pressure: 102.5±1.0 kpa	Humidity: 52.6±3.0%
Tested by: zack_zhu	Test site: RF site	Temperature: 23.4±0.6 °C

Test Mode	Frequency (MHz)	6 dB bandwidth (kHz)	Limit (KHz)
O-QPSK	2405	1641	≥500
	2440	1652	≥500
	2480	1637	≥500
Conclusion : PASS			

O-QPSK	
<p>2405MHz</p> <p>Center Freq: 2.405 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 10 MHz Sweep: 5 ms CF Step: 1.000000 MHz Total Power: 18.9 dBm Occupied Bandwidth: 3.1474 MHz Transmit Freq Error: 9.826 kHz OBW Power: 99.00 % x dB Bandwidth: 1.641 MHz</p>	<p>2480MHz</p> <p>Center Freq: 2.480 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 10 MHz Sweep: 5 ms CF Step: 1.000000 MHz Total Power: 17.3 dBm Occupied Bandwidth: 3.2857 MHz Transmit Freq Error: 17.342 kHz OBW Power: 99.00 % x dB Bandwidth: 1.637 MHz</p>
<p>2440MHz</p> <p>Center Freq: 2.44 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 10 MHz Sweep: 5 ms CF Step: 1.000000 MHz Total Power: 17.9 dBm Occupied Bandwidth: 3.2733 MHz Transmit Freq Error: 22.263 kHz OBW Power: 99.00 % x dB Bandwidth: 1.652 MHz</p>	

7. MAXIMUM PEAK OUTPUT POWER TEST

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52220804	Oct.15,16	1 Year
2.	Power meter	Anritsu	ML2487A	6K00002472	Apr.22,17	1 Year
3.	Power sensor	Anritsu	MA2491A	0033005	Apr.22,17	1 Year
4.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,16	1 Year

7.2. Limit

For systems using digital modulation in the 2400—2483.5MHz, The Peak output Power shall not exceed 1W(30dBm).

7.3. Test Procedure

Connected the EUT's antenna port to Power Sensor, and use power meter to test peak output power.

7.4. Test Results

EUT: RF Module			
M/N: iT-ZB-R			
Test date: 2017-06-21		Pressure: 102.9±1.0 kpa	Humidity: 53.6±3.0%
Tested by: zack_zhu		Test site: RF site	Temperature:23.2±0.6 °C
Test Mode	Frequency (MHz)	Peak output Power (dBm)	Limit (dBm)
O-QPSK	2405	6.791	30
	2440	7.266	30
	2480	7.718	30
Conclusion: PASS			

8. BAND EDGE COMPLIANCE TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	Apr.22,17	1 Year
2.	Amp	HP	8449B	3008A02495	Apr.22.17	1 Year
3.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	May.15,17	1 Year
4.	HF Cable	Hubersuhner	Sucoflex104	274094/4	Apr.22,17	1 Year

8.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

8.3. Test Produce

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relevant band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4 .The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205


For emissions above two bandwidths away from the band-edge use below produce:

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz, PK detector, Sweep=AUTO
 - (b) Average: RBW=1MHz; VBW=10Hz, Sweep=AUTO

8.4. Test Results

Pass (The testing data was attached in the next pages.)


Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

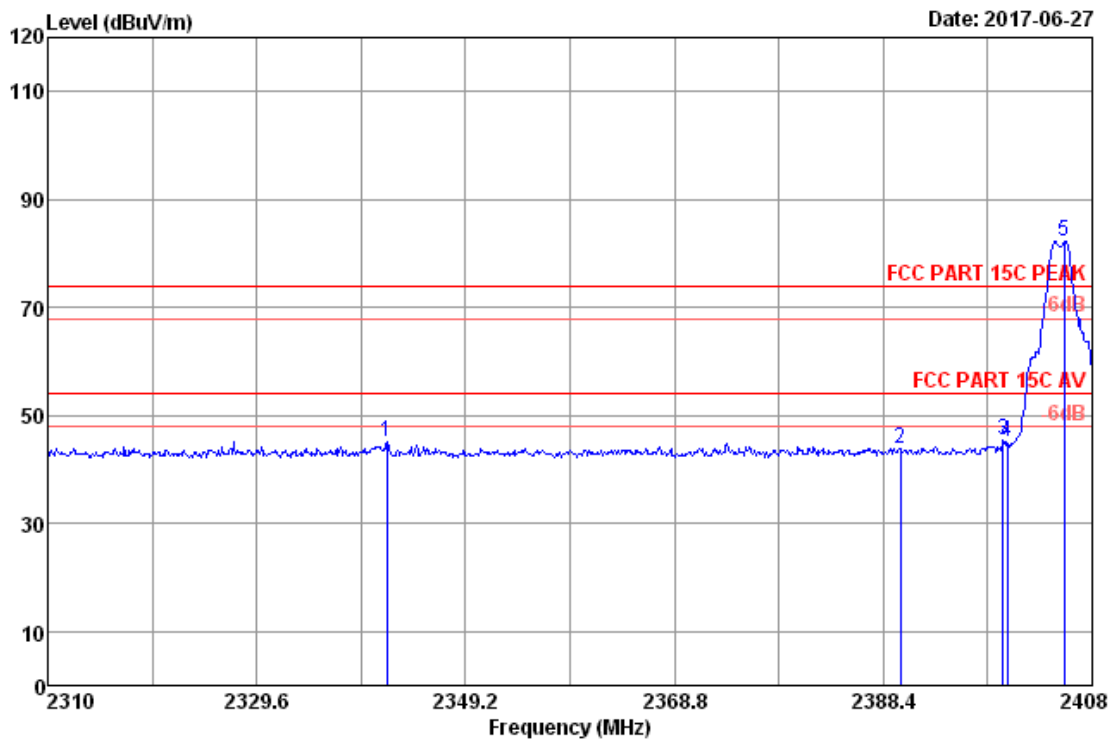

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/53.2% Engineer : zack_zhu
 EUT : iT-ZB-R
 Power : DC 3.6V
 Test Mode : 2405MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2341.85	27.59	7.77	46.16	36.39	45.13	74.00	28.87	Peak
2	2390.00	27.69	7.84	44.67	36.39	43.81	74.00	30.19	Peak
3	2399.67	27.69	7.88	46.40	36.39	45.58	74.00	28.42	Peak
4	2400.00	27.69	7.88	45.82	36.39	45.00	74.00	29.00	Peak
5	2405.35	27.73	7.88	82.92	36.39	82.14	74.00	-8.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

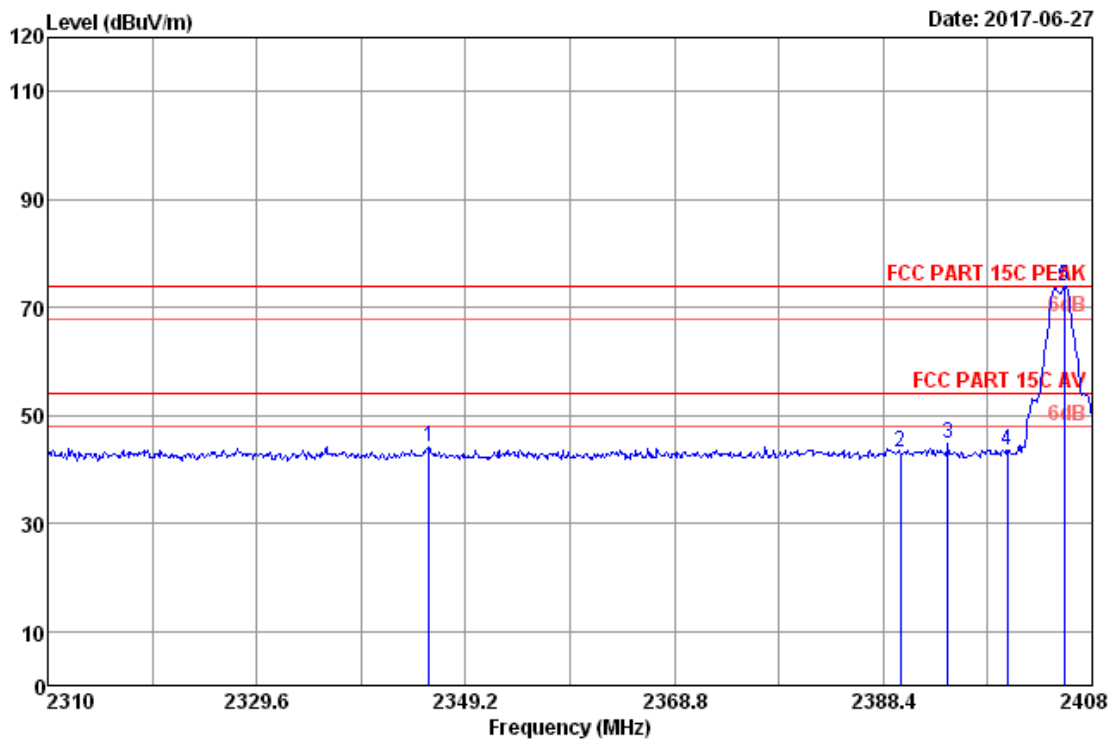

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1°C/53.2% Engineer : zack_zhu
 EUT : iT-ZB-R
 Power : DC 3.6V
 Test Mode : 2405MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2345.77	27.59	7.77	45.32	36.39	44.29	74.00	29.71	Peak
2	2390.00	27.69	7.84	44.06	36.39	43.20	74.00	30.80	Peak
3	2394.48	27.69	7.88	45.68	36.39	44.86	74.00	29.14	Peak
4	2400.00	27.69	7.88	44.37	36.39	43.55	74.00	30.45	Peak
5	2405.35	27.73	7.88	74.66	36.39	73.88	74.00	0.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

9. POWER SPECTRAL DENSITY TEST

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52220804	Oct.15,16	1 Year
2.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,16	1 Year

9.2. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.3. Test Procedure

1. Connected the EUT's antenna port to spectrum analyzer device by 20dB attenuator.
2. Set the test frequency as center frequency, Set RBW=3KHz,VBW=10KHz,Span large enough capture the entire frequency, Read out maximum peak level frequency
3. Set the span to 1.5 times of the DTS Bandwidth Detector= Peak; Sweep time= Auto Couple; Trace Mode= Max hold.
4. Allow trace to fully stabilize use the peak marker function to determine the maximum amplitude level within the RBW.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude

9.4. Test Results

EUT: RF Module		
M/N: iT-ZB-R		
Test date: 2017-06-21	Pressure: 102.4±1.0 kpa	Humidity: 52.7±3.0%
Tested by: zack_zhu	Test site: RF site	Temperature:23.3±0.6 °C

Test Mode	CH (MHz)	Power density (dBm/3KHz)	Limit (dBm/3KHz)
O-QPSK	2405	-5.327	8
	2440	-4.737	8
	2480	-6.305	8
Conclusion : PASS			

O-QPSK

2405MHz



2480MHz



2440MHz



10.MPE ESTIMATION

10.1.Limit for General Population/ Uncontrolled Exposures

Frequency	Power density (mW/cm2)	Averaging time(minutes)
300MHz----1.5GHz	F/1500	30
1.5GHz---100GHz	1.0	30

Frequency	Power density (mW/cm2)	Averaging time(minutes)
2405	1	30
2440	1	30
2480	1	30

Note: F= Frequency in MHz

10.2.Estimation Result

EUT: RF Module		
M/N: iT-ZB-R		
Test date: 2017-6-21	Pressure: 102.6±1.0kpa	Humidity: 53.5±3.0%
Tested by: Zack Zhu	Test site: RF site	Temperature: 22.4±0.6°C

Test Mode	Frequency (MHz)	Peak output power (dBm)	Output power (mW)	Antenna Gain(dBi)	Antenna Gain(Linear)	MPE PSD(mW/cm ²)
TX	2405	6.791	4.78	2.14	1.64	0.0016
	2440	7.266	5.33	2.14	1.64	0.0017
	2480	7.718	5.91	2.14	1.64	0.0019

$$MPE = \frac{PG}{4\pi R^2} \quad (R=20 \text{ cm})$$

11. ANTENNA REQUIREMENT

11.1. STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. ANTENNA CONNECTED CONSTRUCTION

The antennas used for this product are Collinear Antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.14dBi.


12. DEVIATION TO TEST SPECIFICATIONS

[NONE]


13. PHOTOGRAPH OF TEST

13.1.Photos of Radiated Emission Test

30-1000MHz

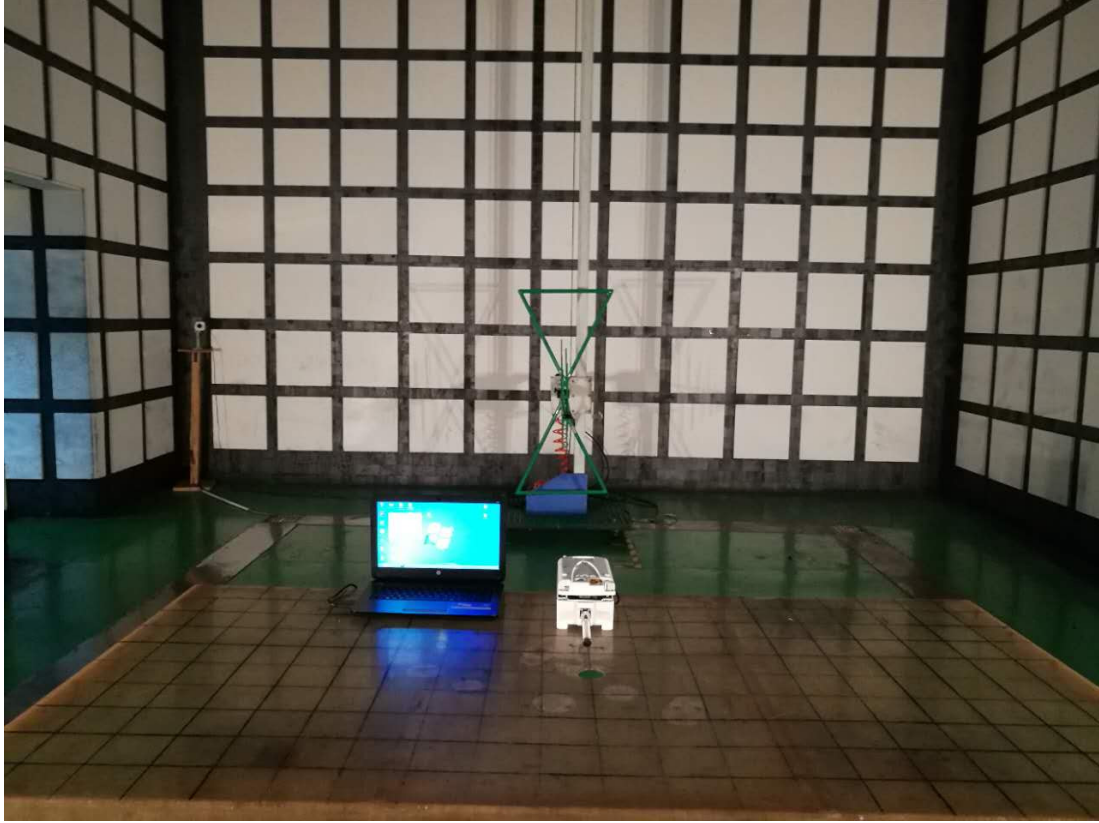

Above 1000MHz

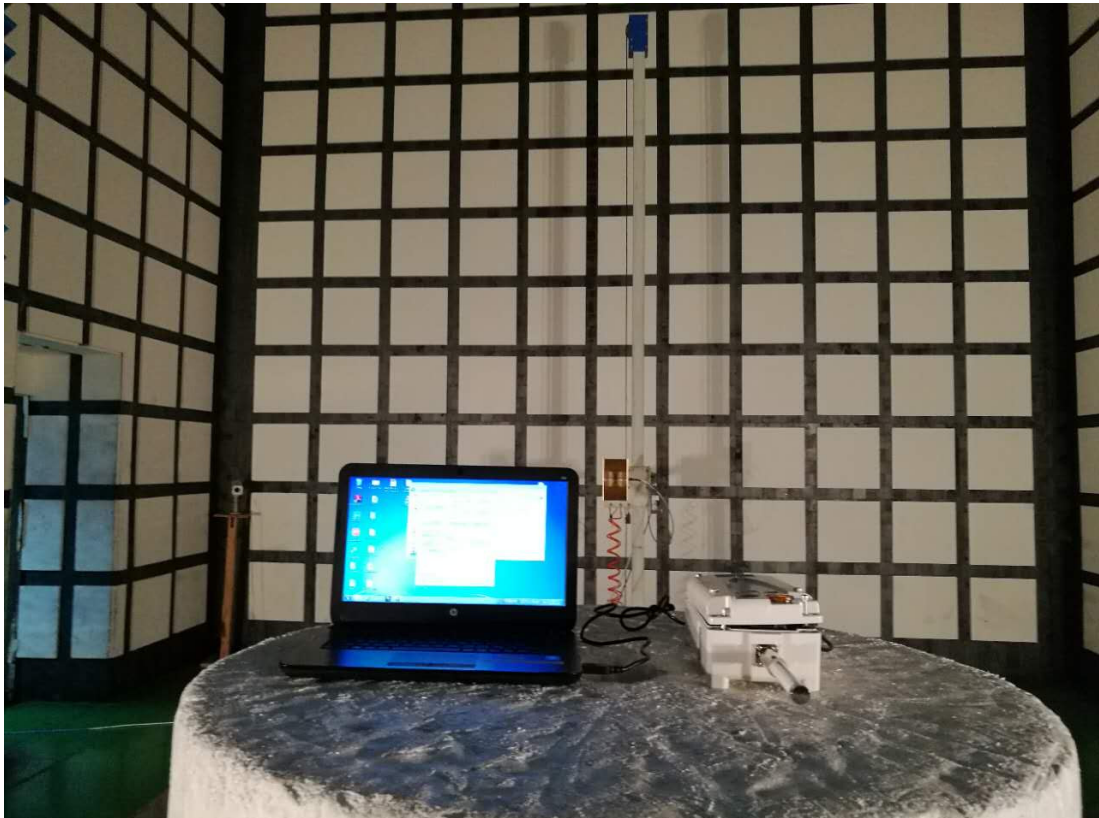

14. PHOTOS OF THE EUT

Figure 1
General Appearance of the EUT



Figure 2
General Appearance of the EUT

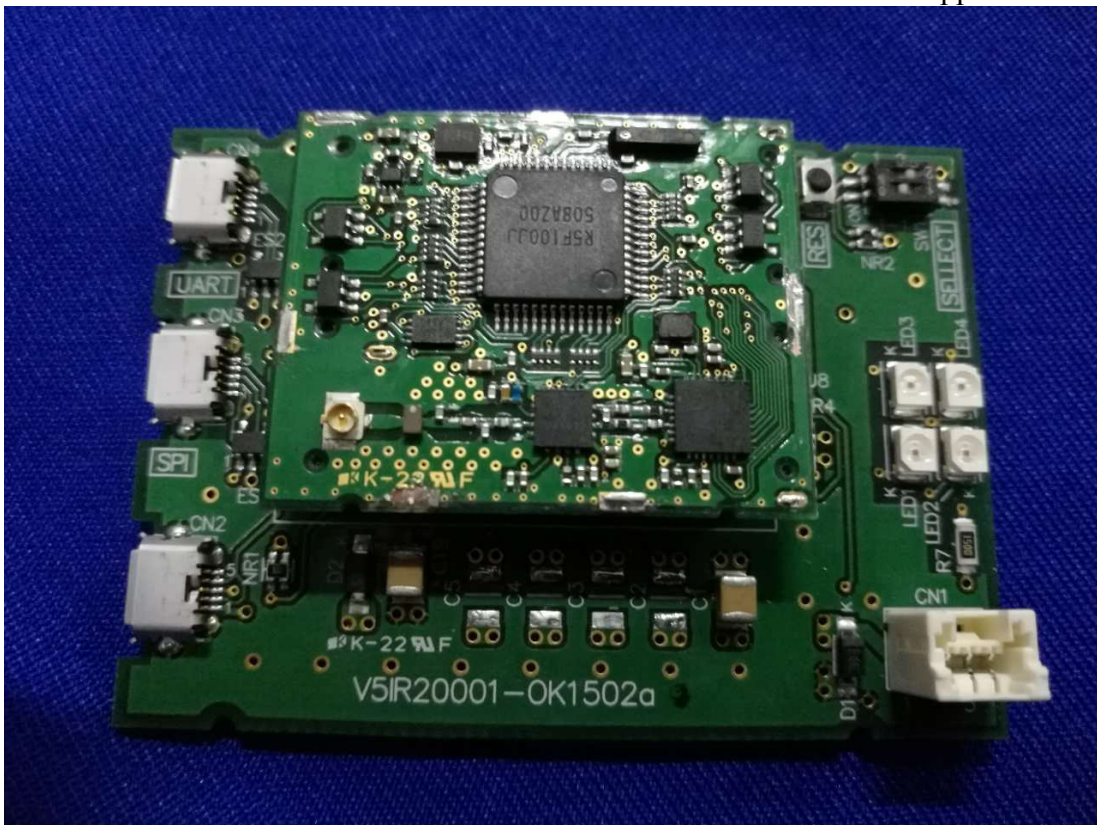


Figure 3
General Appearance of the EUT

