


MARK	ISSUE	DATE	REVER	DCN NO.
1				
2				

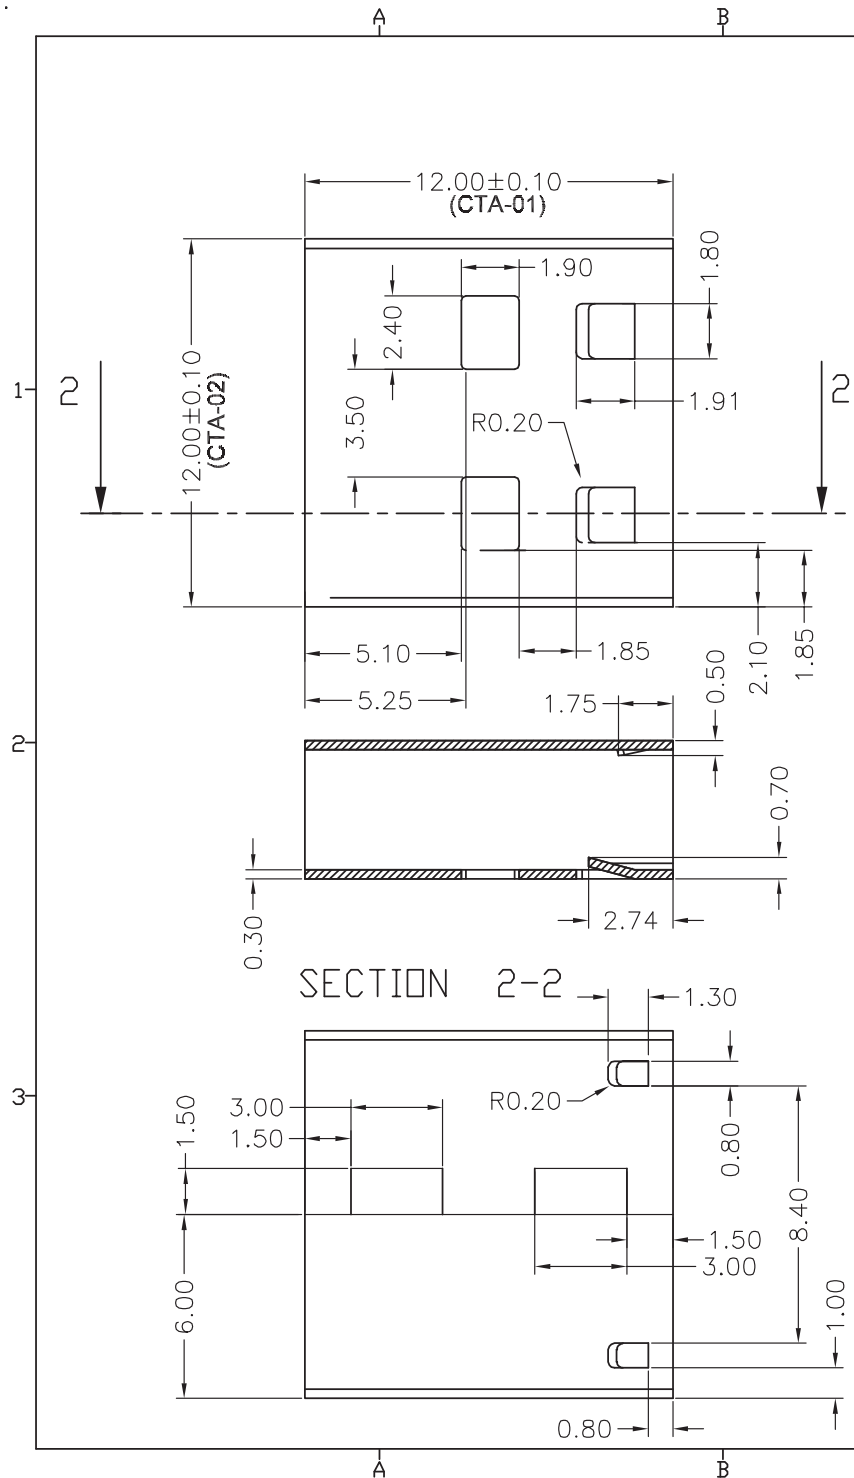

- Notes:
1. Material: SUS304+SWIC(plated with nickel)
 - 2.3D surface and curve refer to Pro/E file.
 - 3.CTA=Critical to assemble(01~03)
 4. the part is according to the latest version version"HS-301" of LITEON.
 5. Unspecified tolerance:

SELECT V		V		
DIM. LEVEL	A	B	C	D
~ 5	±0.03	±0.05	±0.08	±0.10
5 ~ 10	±0.05	±0.08	±0.10	±0.15
10 ~ 50	±0.08	±0.10	±0.15	±0.20
50 ~ 100	±0.10	±0.15	±0.20	±0.25
100 ~	±0.10	±0.15	±0.20	±0.25

6. Test1:Salt Spray test specification:
 concentration of sodium Chloride solution:
 40~60 g/l pH value;6.5~7.2
 Pressure of air supply:0.7~1.8kgf/cm²
 Spray rate:1.0~2.0ml/80cm²-hr Temp.
 of pressure tank:47+/-1 C/Temp. of salt
 tank:35+/-1 . Temp. of test tank:35+/-1C/
 Humidity of test tank:85%RH
 Test Time:8hrs
 Sample size for 5 units
 Analysis/Observation:
 the test samples cosmetic check can
 pass after salt spray 8 hours test

FC

FCC ID: H4IDG9087
CMIIT ID:2016XXXXXX
IFT: XXXXXXXX-XXXX

MADE IN CHINA

Model :
 SD-9087
 RATING:
 5V=100mA

CE

ANATEL
 XXXXX-XX-XXXX

PART NO	DESCRIPTION	QTY	MAT'L	TRETING	REMARK
SCALE: free	TOLERANCE : UNSPECIFIED	LITEON SILITEK ELECTRONICS(DONGGUAN)CO.,LTD DONGGUAN LITE-ON COMPUTER CO., LTD.			
UNIT: mm	.XXX +0.05 .XX +0.1 .X +0.15 ANGLE ±0.25 ±0.5				
DRAWN:		SHEET 1 OF 1		TITLE: SD9087	
DESIGER:					
CHECKED:		DRAWING NO:			
APPROVED:					