
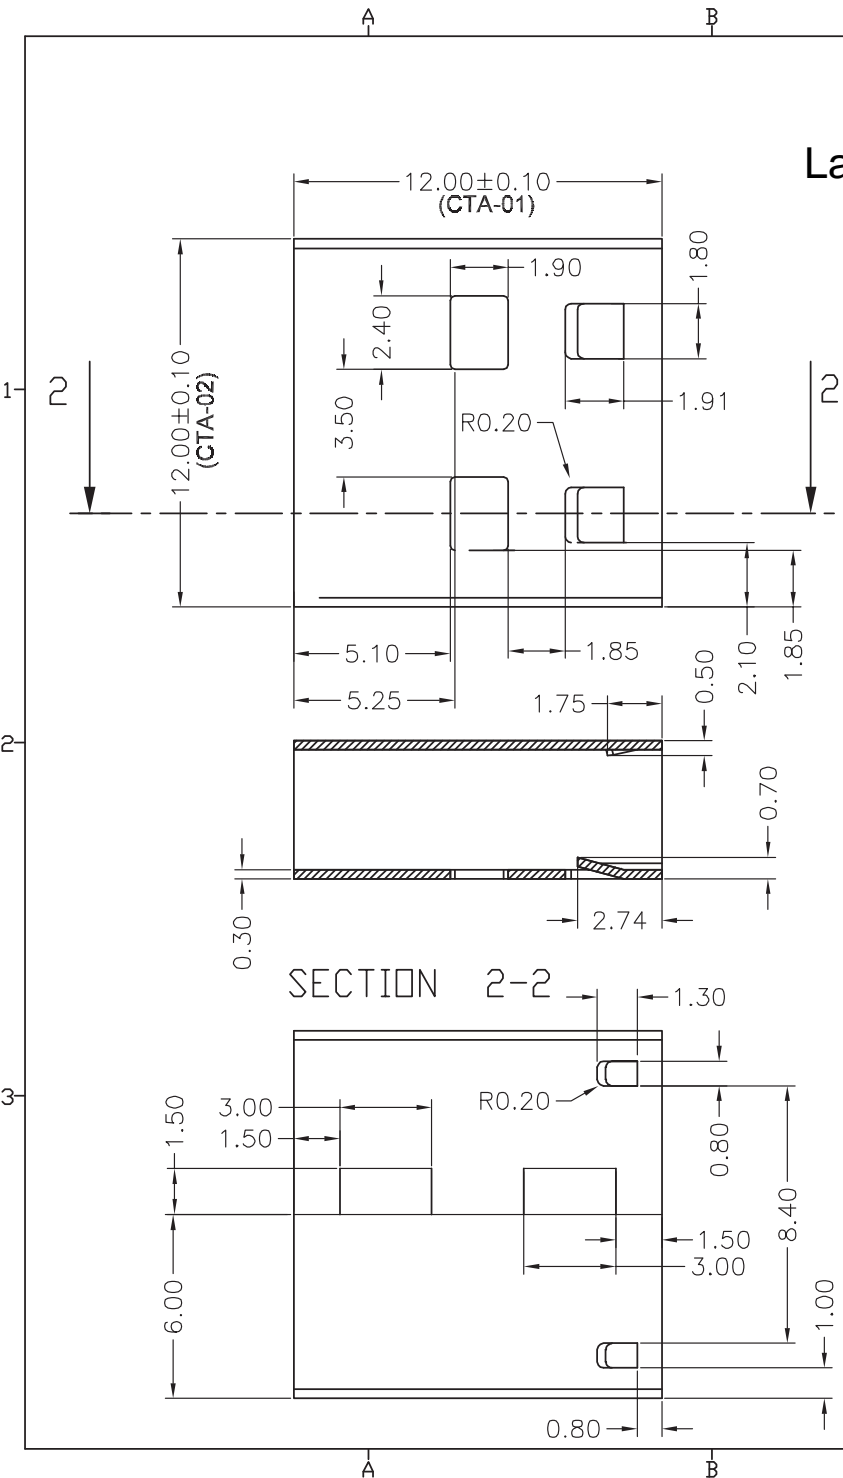
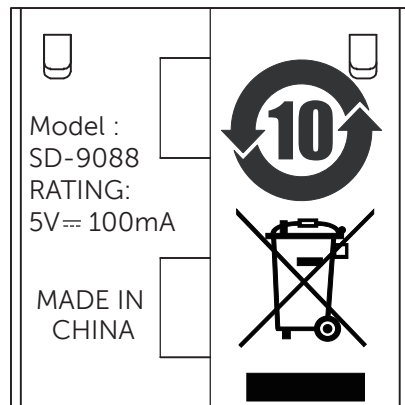
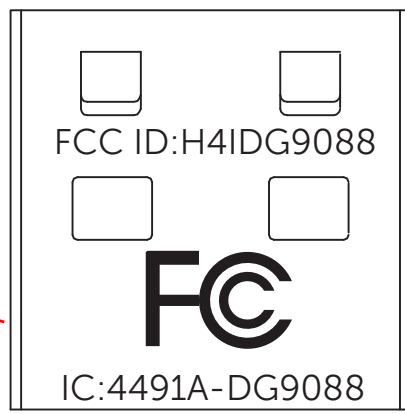


MARK	ISSUE	DATE	REVER	DCN NO.
1				
2				

### Label location

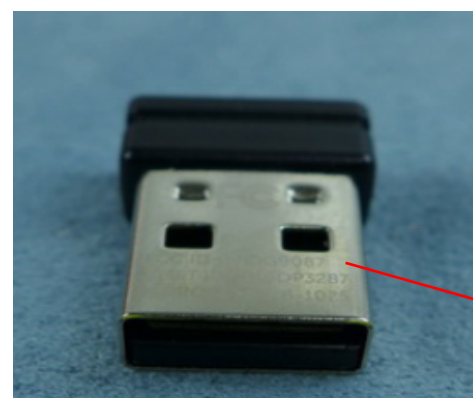

- Notes:
1. Material: SUS304+SWIC(plated with nickel)
  2. 3D surface and curve refer to Pro/E file.
  3. CTA=Critical to assemble(01~03)
  4. the part is according to the latest version version"HS-301" of LITEON.
  5. Unspecified tolerance:

SELECT V		V		
DIM. LEVEL	A	B	C	D
~ 5	±0.03	±0.05	±0.08	±0.10
5 ~ 10	±0.05	±0.08	±0.10	±0.15
10 ~ 50	±0.08	±0.10	±0.15	±0.20
50 ~ 100	±0.10	±0.15	±0.20	±0.25
100 ~	±0.10	±0.15	±0.20	±0.25

6. Test1: Salt Spray test specification:  
 concentration of sodium Chloride solution:  
 40~60 g/l pH value;6.5~7.2  
 Pressure of air supply:0.7~1.8kgf/cm<sup>2</sup>  
 Spray rate:1.0~2.0ml/80cm<sup>2</sup>-hr Temp.  
 of pressure tank:47+/-1 C/Temp. of salt  
 tank:35+/-1 . Temp. of test tank:35+/-1C/  
 Humidity of test tank:85%RH  
 Test Time:8hrs  
 Sample size for 5 units  
 Analysis/Observation:  
 the test samples cosmetic check can  
 pass after salt spray 8 hours test

PART NO	DESCRIPTION	QTY	MAT'L	TRETING	REMARK
SCALE: free	TOLERANCE : UNSPECIFIED .XXX + 0.05 .XX + 0.1 .X + 0.15 ANGLE ± 0.5°	<b>LITEON® SILITEK ELECTRONICS(DONGGUAN)CO.,LTD</b> DONGGUAN LITE-ON COMPUTER CO., LTD.			
UNIT: mm					
DRAWN:		TITLE: SD9088			
DESIGER:		SHEET 1 OF 1			
CHECKED:		DRAWING NO:			
APPROVED:					