

FCC TEST REPORT

for

CISPR PUB.22 CLASS B

Equipment : 15" Monitor

MODEL NO. : G54

MACHINE TYPE : 6546-02N, 6546-92N

F C C I D : H4IG54

Filing Type : Original Certification

APPLICANT : **LITE-ON TECHNOLOGY CORP.**
5F, 16, Sec. 4, Nanking E. Rd.,
Taipei, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of the U.S Government.

SPORTON INTERNATIONAL INC.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

TABLE OF CONTENT

SECTION TITLE	PAGE
CERTIFICATE OF COMPLIANCE	3
1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	4
1.1. APPLICANT	4
1.2. MANUFACTURER	4
1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST.....	4
1.4. FEATURE OF EQUIPMENT UNDER TEST	4
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	5
2.1. TEST MANNER	5
2.2. DESCRIPTION OF TEST SYSTEM	5
2.3. CONNECTION DIAGRAM OF TEST SYSTEM	7
3. TEST SOFTWARE	8
4. GENERAL INFORMATION OF TEST.....	9
4.1. TEST FACILITY	9
4.2. STANDARD FOR METHODS OF MEASUREMENT	9
4.3. TEST IN COMPLIANCE WITH.....	9
4.4. FREQUENCY RANGE INVESTIGATED	9
4.5. TEST DISTANCE.....	9
5. TEST OF CONDUCTED POWERLINE.....	10
5.1. MAJOR MEASURING INSTRUMENTS.....	10
5.2. TEST PROCEDURES	11
5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE	12
5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION.....	13
5.5. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION	15
6. TEST OF RADIATED EMISSION.....	15
6.1. MAJOR MEASURING INSTRUMENTS.....	17
6.2. TEST PROCEDURES	18
6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION	19
6.4. TEST RESULT OF RADIATED EMISSION.....	20
6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION.....	22
7. ANTENNA FACTOR AND CABLE LOSS.....	22
8. LIST OF MEASURING INSTRUMENTS USED.....	24

CERTIFICATE OF COMPLIANCE

for

CISPR PUB.22 CLASS B

Equipment : 15" Monitor

MODEL NO. : G54

MACHINE TYPE : 6546-02N, 6546-92N

F C C I D : H4IG54

APPLICANT : **LITE-ON TECHNOLOGY CORP.**
5F, 16, Sec. 4, Nanking E. Rd.,
Taipei, Taiwan, R.O.C.

I HEREBY CERTIFY THAT :

The measurement shown in this report were made in accordance with the procedures given in **ANSI C63.4 -1992** and the energy emitted by this equipment was **passed** CISPR PUB.22 both radiated and conducted emissions class B limits. Testing was carried out on **Jul. 01, 1999** at **SPORTON INTERNATIONAL INC. LAB.**

Lenore Chang
President

SPORTON INTERNATIONAL INC.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST**1.1. APPLICANT**

LITE-ON TECHNOLOGY CORP.

5F, 16, Sec. 4, Nanking E. Rd.,

Taipei, Taiwan, R.O.C.

1.2. MANUFACTURER

Same as 1.1.

1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

EQUIPMENT : 15" Monitor

MODEL NO. : G54

Machine Type : 6546-02N, 6546-92N

TRADE NAME : **LITE-ON**

VGA DATA CABLE : Shielded, 1.75m

POWER SUPPLY TYPE : Switching

INPUT POWER CORD : Non-shielded, 1.8m, 3pin

1.4. FEATURE OF EQUIPMENT UNDER TEST

- Image : Maximum Height : 8.3 inch (210 mm)
Maximum Width : 11.0 inch (280 mm)
Dot Pitch : 0.28 mm
- Power Input : Supply Voltage : 100-240 Vac, 50/60 Hz
Max Supply Current : 1.6A at 100 Vac
- Video input : Input Signal : Analogue Direct Drive, 75 ohm 0-0.7v
H. Addressability : 1280 pels (max.)
V. Addressability : 1024 lines (max.)
Clock Rate : 110 Mpels/sec
- Synchronization Range : Horiz. Frequency : 30kHz – 69kHz
Vert. Frequency : 50Hz – 120Hz
- Power Consumption (Typical) : Normal Operation : <100W

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST

2.1. TEST MANNER

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The HP printer, ACEEX modem, IBM PS/2 mouse, IBM PS/2 keyboard and EUT were connected to the IBM P.C. for EMI test.
- c. The following display resolution were investigated during the compliance test :
 1. Horizontal frequency (640 x 480 to 1280 x 1024, 31.5Khz to 69KHz)
 2. Vertical frequency (60Hz to 85Hz)
- d. According to the above tests, we listed the flowing display modes as the worst cases :
 1. 1280x1024 / 64KHz / 60 Hz
 2. 1024x768 / 69KHz / 85 Hz
- e. Frequency range investigated: Conduction 150 KHz to 30 MHz, Radiation 30 MHz to 2000MHz.

2.2. DESCRIPTION OF TEST SYSTEM

Support Device 1. --- PRINTER (HP)

FCC ID	: B94C2642X
Model No.	: DESK JET 400
Serial No.	: SP1040
Data Cable	: Shielded, 360 degree via metal backshells, 1.35m
Power Supply Type	: Linear, Adapter
Power Cord	: Non-shielded

Support Device 2. --- MODEM (ACEEX)

FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear, AC Adapter
Power Cord : Non-shielded
Serial No. : SP1018
Data Cable : Shielded, 360 degree via metal backshells, 1.15m

Support Device 3. --- PS/2 MOUSE (IBM)

FCC ID : DZL211120
Model No. : 12J3618
Serial No. : SP1024
Data Cable : Shielded, 1.8m

Support Device 4. --- KEYBOARD (IBM)

FCC ID : N/A
Model No. : KB-7953
Serial No. : 0024981
Data Cable : Shielded, 360 degree via metal backshells, 1.8m


(Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.)

Support Device 5. --- P.C. (IBM)

FCC ID : N/A
Model No. : 6862-310
Serial No. : 553F34N
Data Cable : Shielded
Power Cord : Non-shielded
Power Supply Type : Switching

(Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.)

2.3. CONNECTION DIAGRAM OF TEST SYSTEM

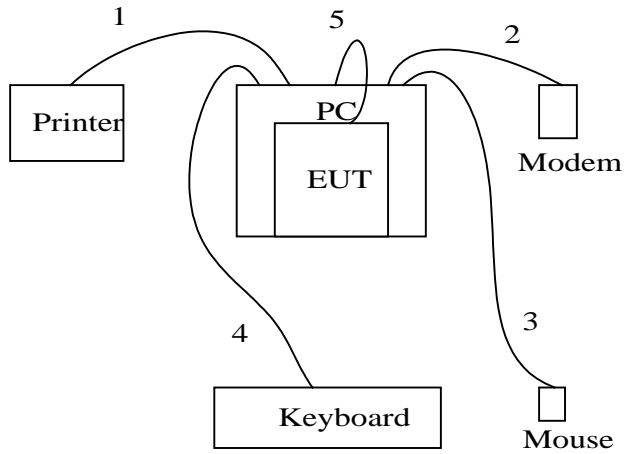

1. The I/O cable is connected from the support unit 5 to the support unit 1.
2. The I/O cable is connected from the support unit 5 to the support unit 2.
3. The I/O cable is connected from the support unit 5 to the support unit 3.
4. The I/O cable is connected from the support unit 5 to the support unit 4.
5. The I/O cable is connected from the support unit 5 to the EUT.

3. TEST SOFTWARE

An executive program, TESTPATS/PATTERNS/SCROLLING "H" under WIN NT, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

4. GENERAL INFORMATION OF TEST

4.1. TEST FACILITY

This test was carried out by SPORTON INTERNATIONAL INC. in an openarea test site.

Openarea Test Site Location : No. 30-1, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

4.2. STANDARD FOR METHODS OF MEASUREMENT

ANSI C63.4-1992

4.3 .TEST IN COMPLIANCE WITH

CISPR PUB.22 CLASS B

4.4. FREQUENCY RANGE INVESTIGATED

- a. Conduction : from 150 KHz to 30 MHz
- b. Radiation : from 30 MHz to 2000 MHz.

4.5. TEST DISTANCE

The test distance of radiated emission from antenna to EUT is 10M.

5. TEST OF CONDUCTED POWERLINE

Conducted Emissions were measured from 150 KHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in Figure 5-3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


5.1. MAJOR MEASURING INSTRUMENTS

- Test Receiver (HP 8591EM)
 - Attenuation 0 dB
 - Start Frequency 0.15 MHz
 - Stop Frequency 30 MHz
 - Step MHz 0.007 MHz
 - IF Bandwidth 9 KHz

5.2. TEST PROCEDURES

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be retested on by one using the quasi-peak method and reported.

5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE

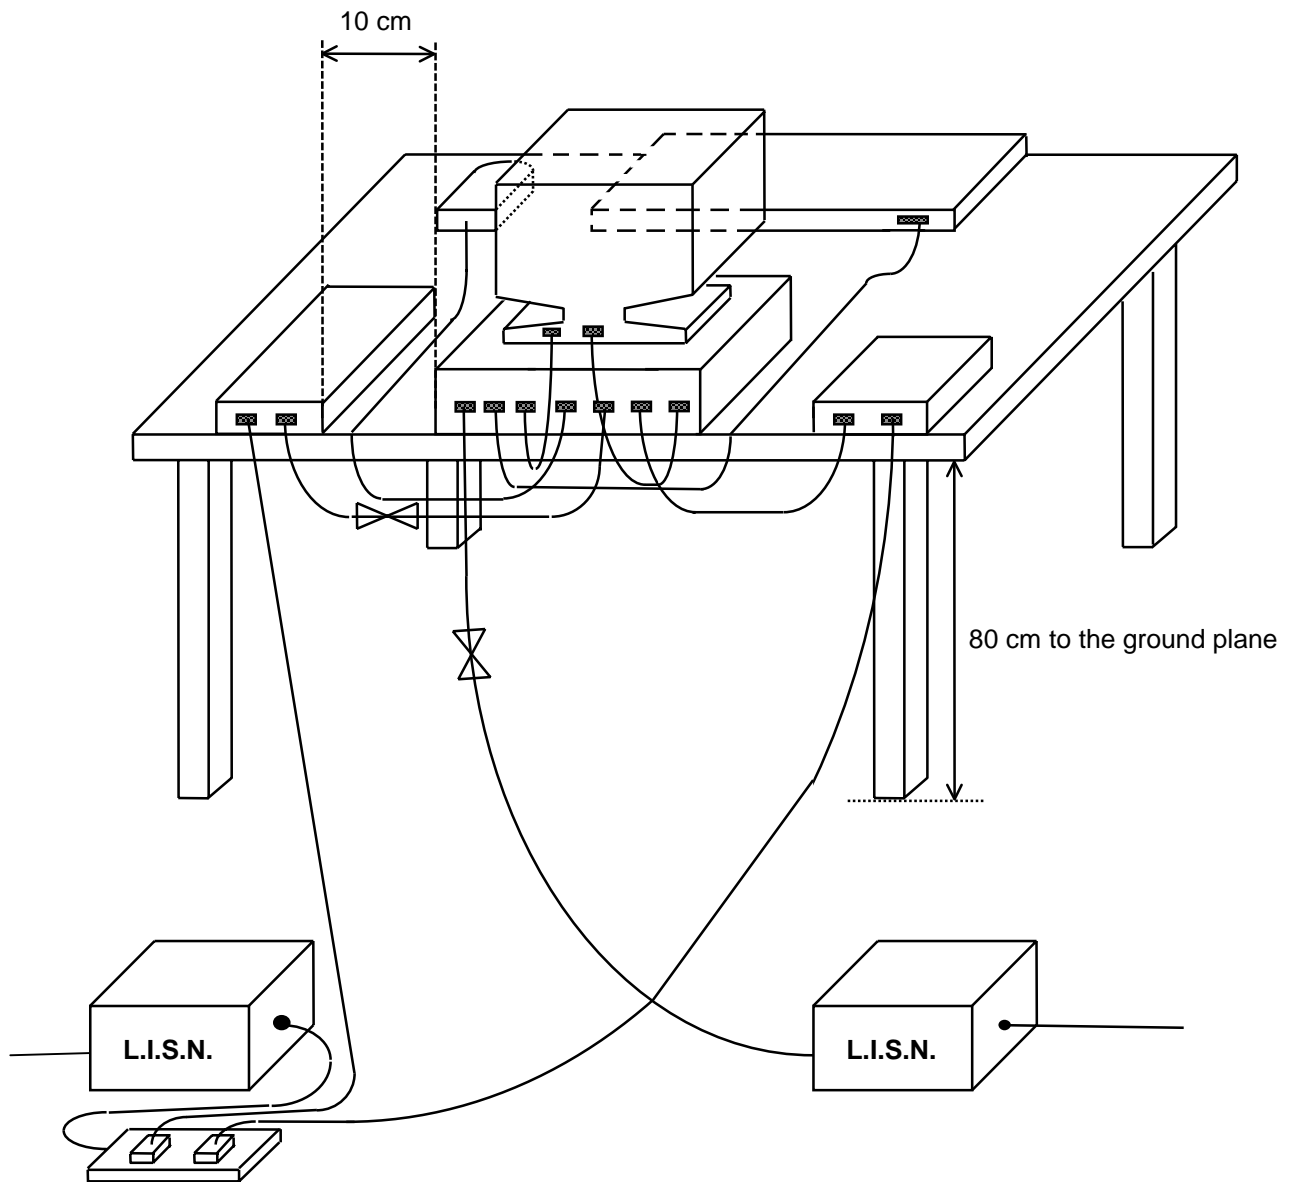

5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION

- All emissions not reported here are more than 10 dB below the prescribed limit.
- Frequency Range of Test : from 0.15 MHz to 30 MHz
- Temperature : 29
- Relative Humidity : 54% RH
- Test Mode : 1280x1024 / 60Hz / 64K
- Test Date : Jul. 01, 1999

The Conducted Emission test was passed at Neutral 0.578 MHz / 40.20 dBuV.

Frequency (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.193	Line	45.60	39.70	190.55	96.61	63.91	53.91	1567.92	495.82	-18.31	-14.21
0.578	Line	37.20	36.00	72.44	63.10	56.00	46.00	630.96	199.53	-18.80	-10.00
25.467	Line	41.80	40.20	123.03	102.33	60.00	50.00	1000.00	316.23	-18.20	-9.80
0.193	Neutral	46.70	41.70	216.27	121.62	63.92	53.92	1569.47	496.31	-17.22	-12.22
0.578	Neutral	40.20	38.60	102.33	85.11	56.00	46.00	630.96	199.53	-15.80	-7.40
25.467	Neutral	43.40	41.90	147.91	124.45	60.00	50.00	1000.00	316.23	-16.60	-8.10

Test Engineer :

Kenny Chuang

5.4.1. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION

- All emissions not reported here are more than 10 dB below the prescribed limit.
- Frequency Range of Test : from 0.15 MHz to 30 MHz
- Temperature : 29
- Relative Humidity : 54% RH
- Test Mode : 1024x768 / 85Hz / 69K
- Test Date : Jul. 01, 1999

The Conducted Emission test was passed at Neutral 0.205 MHz / 49.00 dBuV.

Frequency (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.205	Line	46.80	42.30	218.78	130.32	63.41	53.41	1480.04	468.03	-16.61	-11.11
0.686	Line	38.50	37.70	84.14	76.74	56.00	46.00	630.96	199.53	-17.50	-8.30
27.128	Line	41.80	41.00	123.03	112.20	60.00	50.00	1000.00	316.23	-18.20	-9.00
0.205	Neutral	49.00	44.60	281.84	169.82	63.41	53.41	1480.04	468.03	-14.41	-8.81
0.685	Neutral	40.10	38.80	101.16	87.10	56.00	46.00	630.96	199.53	-15.90	-7.20
0.959	Neutral	40.00	37.30	100.00	73.28	56.00	46.00	630.96	199.53	-16.00	-8.70

Test Engineer :

Kenny Chuang

5.5. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION

The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW



SIDE VIEW



6. TEST OF RADIATED EMISSION

Radiated emissions from 30 MHz to 2000 MHz were measured with a bandwidth of 120 KHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in Figure 6-3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. MAJOR MEASURING INSTRUMENTS


- Amplifier (HP 87405A)
 - Attenuation 0 dB
 - RF Gain 20 dB
 - Signal Input 10 MHz to 3 GHz

- Spectrum Analyzer (HP 8594A)
 - Attenuation 0 dB
 - Start Frequency 30 MHz
 - Stop Frequency 2000 MHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 9 KHz to 2.9 GHz

6.2. TEST PROCEDURES

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION

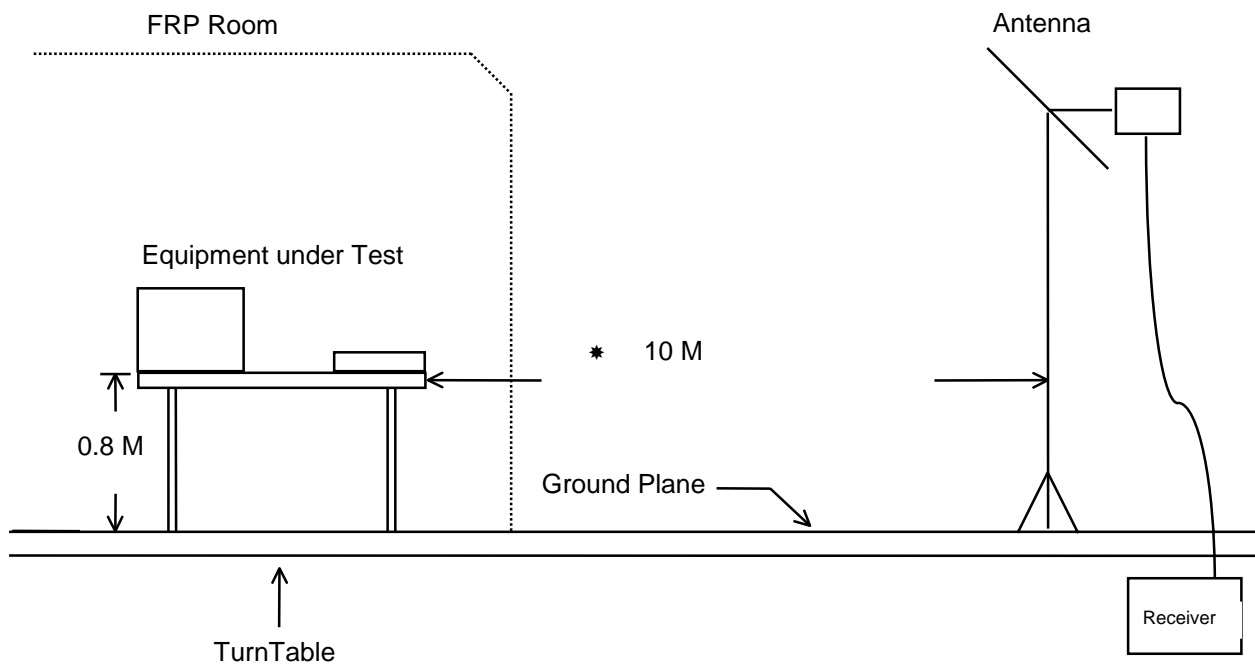

6.4. TEST RESULT OF RADIATED EMISSION

- Equipment meets the technical specifications of CISPR PUB.22
- Frequency Range of Test : from 30 MHz to 2000 MHz
- Test Distance : 10 M
- Temperature : 26
- Relative Humidity : 68% RH
- Test Mode : 1280x1024 / 60Hz / 64K
- Test Date : Jul. 01, 1999

- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading = Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at

Vertical 108.66 MHz / 24.98 dBuV

Antenna Height 1.0 Meter , Turntable Degree 301°

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	(uV/m)	Emission Level (dBuV/m)	(uV/m)	Margin (dB)
72.24	V	6.10	0.96	16.15	30.00	32	23.21	14.47	-6.79
108.66	V	11.95	1.19	11.84	30.00	32	24.98	17.74	-5.02
216.00	V	10.18	1.64	11.44	30.00	32	23.26	14.55	-6.74
638.40	V	19.86	2.88	7.99	37.00	71	30.73	34.40	-6.27
650.40	V	20.01	2.90	7.60	37.00	71	30.51	33.54	-6.49
215.20	H	10.10	1.63	11.43	30.00	32	23.16	14.39	-6.84

Test Engineer :

Terry Chang

6.4.1. TEST RESULT OF RADIATED EMISSION

- Equipment meets the technical specifications of CISPR PUB.22
- Frequency Range of Test : from 30 MHz to 2000 MHz
- Test Distance : 10 M
- Temperature : 26
- Relative Humidity : 68% RH
- Test Mode : 1024x768 / 85Hz / 69K
- Test Date : Jul. 01, 1999

- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading = Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at

Horizontal 157.11 MHz / 25.42 dBuV

Antenna Height 2.3 Meter , Turntable Degree 148°

Frequency (MHz)	Antenna Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Emission Level (dBuV/m)	Level (uV/m)	Margin (dB)
31.42	V	17.56	0.62	6.90	30.00	32	25.08	17.95	-4.92
52.40	V	7.43	0.74	14.80	30.00	32	22.97	14.08	-7.03
62.83	V	5.53	0.94	16.13	30.00	32	22.60	13.49	-7.40
188.50	V	9.06	1.58	14.21	30.00	32	24.85	17.48	-5.15
31.37	H	17.56	0.62	5.10	30.00	32	23.28	14.59	-6.72
157.11	H	10.51	1.37	13.54	30.00	32	25.42	18.66	-4.58

Test Engineer :

Terry Chang

6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW



7. ANTENNA FACTOR AND CABLE LOSS

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	17.9	0.6
35	16.1	0.7
40	14.0	0.7
45	10.5	0.8
50	7.9	0.7
55	6.7	0.8
60	5.5	1.0
65	5.5	0.9
70	5.6	0.9
75	6.5	1.0
80	7.5	0.9
85	8.5	1.0
90	9.4	1.0
95	10.4	1.1
100	11.5	1.1
110	12.1	1.2
120	12.6	1.2
130	12.0	1.3
140	11.6	1.3
150	10.5	1.3
160	10.5	1.4
170	9.8	1.4
180	9.2	1.5
190	9.0	1.6
200	8.8	1.4
220	10.5	1.7
240	12.2	1.5
260	13.1	1.8
280	13.2	1.8
300	13.4	1.9
320	13.4	1.9
340	13.4	2.0
360	13.9	2.2
380	14.9	2.1
400	15.6	2.1
450	16.4	2.3
500	16.6	2.5
550	19.7	2.4
600	19.3	2.8
650	20.0	2.9
700	19.5	2.9
750	18.5	2.7
800	17.8	3.5
850	18.3	3.3
900	20.5	3.2
950	21.4	4.5
1000	21.2	3.5
2000	31.57	6.2

8. LIST OF MEASURING INSTRUMENTS USED

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration	Remark
EMC Receiver (site 2)	HP	8591EM	3710A01187	9 KHz - 18 GHz	Sep. 15, 1998	Conduction
LISN (EUT) (site 2)	Telemeter	NNB-2/16Z	98009	50 ohm / 50 uH	Jan. 21, 1999	Conduction
LISN (Support Unit) (site 2)	EMCO	3810/2NM	9703-1839	50 ohm / 50 uH	Jul. 05, 1999	Conduction
Amplifier (Site 5)	HP	87405A	3207A01437	10MHz -3.0GHz	Jun. 25, 1999	Radiation
Spectrum Analyzer (Site 5)	HP	8594A	3051A00172	9KHz -2.9GHz	Apr. 16, 1999	Radiation
Bilog Antenna (Site 5)	CHASE	CBL6112A	2287	30MHz -2GHz	Jan. 07, 1999	Radiation
Half-wave dipole antenna (Site 5)	EMCO	3121C	9705-1285	28 M - 1GHz	May 18, 1999	Radiation
Turn Table (site 5)	EMCO	2080	9711-2021	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 5)	EMCO	2075	9711-2115	1 m- 4 m	N/A	Radiation

The column of Remark indicates that the instruments used for conduction ("C") or radiation ("R") test.