



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

FCC Test Report

FCC ID : H4ISMPJA
Equipment : MHL wireless adapter
Model No. : 2A6G / MWA2
Brand Name : Liteon / Acer
Applicant : LITE-ON TECHNOLOGY CORP.
Address : 18F, 392 RUEY KUANG RD NEIHU TAIPEI, 114
TAIWAN
Standard : 47 CFR FCC Part 15.407
Received Date : May 14, 2013
Tested Date : May 22 ~ Jun. 10, 2013

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:



Gary Chang / Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	The Equipment List	9
1.5	Testing Applied Standards	10
1.6	Measurement Uncertainty	11
2	TEST CONFIGURATION	12
2.1	Testing Condition	12
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS.....	13
3.1	Conducted Emissions.....	13
3.2	Emission Bandwidth	16
3.3	RF Output Power	19
3.4	Peak Power Spectral Density	21
3.5	Peak Excursion.....	24
3.6	Transmitter Radiated and Band Edge Emissions	27
3.7	Frequency Stability.....	75



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Release Record

Report No.	Version	Description	Issued Date
FR351401AN	Rev. 01	Initial issue	Jun. 26, 2013



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.192MHz 51.49 (Margin -12.44dB) - QP	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 11400.00MHz 52.90 (Margin -1.10dB) - AV	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Power [dBm]: 5150~5250 MHz:15.22 5250~5350 MHz:15.36 5470~5725 MHz:16.21	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(a)	Peak Excursion	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5150-5250 5250-5350 5470-5725	a	5180-5240 5260-5320 5500-5700	36-48 [4] 52-64 [4] 100-140 [8]	1	6-54 Mbps
5150-5250 5250-5350 5470-5725	n (HT20)	5180-5240 5260-5320 5500-5700	36-48 [4] 52-64 [4] 100-140 [8]	2	MCS 0-15
5150-5250 5250-5350 5470-5725	n (HT40)	5190-5230 5270-5310 5510-5670	38-46 [2] 54-62 [2] 102-134 [3]	2	MCS 0-15

Note 1: RF output power specifies that Maximum Conducted Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Type	Gain (dBi)	Connector	Remark
A	PCB	4.2	---	---
B	PCB	3.6	---	---

1.1.3 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> 5Vdc from Host

1.1.4 Accessories

N/A



1.1.5 Channel List

Frequency band (MHz)		5150~5725	
802.11 a / n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	54	5270
48	5240	62	5310
52	5260	102	5510
56	5280	110	5550
60	5300	134	5670
64	5320	-	-
100	5500	-	-
104	5520	-	-
108	5540	-	-
112	5560	-	-
116	5580	-	-
132	5660	-	-
136	5680	-	-
140	5700	-	-

1.1.6 Test Tool and Duty Cycle

Test Tool	MP tool V0.0016.0307.2012
Duty Cycle Of Test Signal (%)	100.00% - IEEE 802.11a 100.00% - IEEE 802.11n (HT20) 100.00% - IEEE 802.11n (HT40)
Duty Factor	0 - IEEE 802.11a 0 - IEEE 802.11n (HT20) 0 - IEEE 802.11n (HT40)



1.1.7 Power Setting


Channel	Frequency(MHz)	11a	HT20	HT40
CH 36	5180	54	48/48	---
CH 40	5200	54	49/48	---
CH 48	5240	54	49/49	---
CH 52	5260	54	49/48	---
CH 60	5300	56	53/47	---
CH 64	5320	55	50/47	---
CH 100	5500	49	49/42	---
CH 116	5580	49	49/38	---
CH 140	5700	48	48/40	---
CH 38	5190	---	---	50/51
CH 46	5230	---	---	52/52
CH 54	5270	---	---	50/48
CH 62	5310	---	---	52/51
CH 102	5510	---	---	51/42
CH 110	5550	---	---	51/41
CH 134	5670	---	---	51/42



1.2 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	E6430	---	DoC	USB 0.6m non-shielded cable w/o core.
2	Monitor	ACER	H226HGL	---	DoC	HDMI 1.2m shielded cable with one core.

1.3 Test Setup Chart

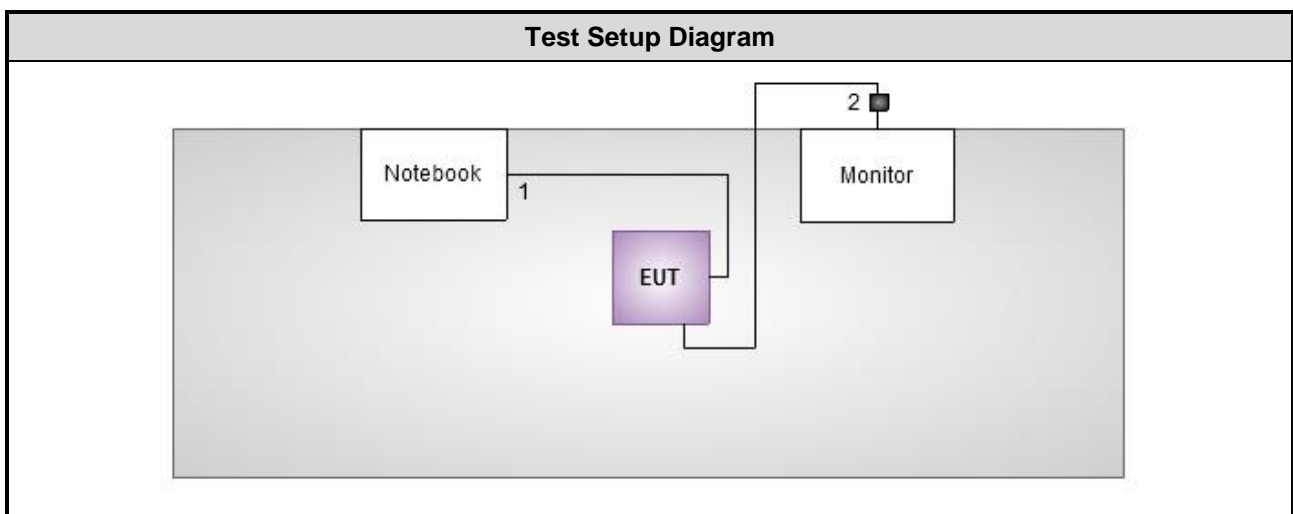



1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 02, 2012	Oct. 01, 2013
LISN	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-667	Dec. 04, 2012	Dec. 03, 2013
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-666	Dec. 04, 2012	Dec. 03, 2013
ISN	TESEQ	ISN T800	34406	Apr. 08, 2013	Apr. 07, 2014
ISN	TESEQ	ISN T200A	30494	Apr. 09, 2013	Apr. 08, 2014
ISN	TESEQ	ISN T8-Cat6	27262	Sep. 17, 2012	Sep. 16, 2013
ISN	TESEQ	ISN ST08	22589	Jan. 24, 2013	Jan. 23, 2014
RF Current Probe	FCC	F-33-4	121630	Dec. 04, 2012	Dec. 03, 2013
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 25, 2012	Dec. 24, 2013
ESH3-Z6 V-Network(+)	R&S	ESH3-Z6	100920	Nov. 21, 2012	Nov. 20, 2013
ESH3-Z6 V-Network(-)	R&S	ESH3-Z6	100951	Jan. 30, 2013	Jan. 29, 2014
Two-Line V-Network	R&S	ENV216	101579	Jan. 07, 2013	Jan. 06, 2014
50 ohm terminal	NA	50	01	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal	NA	50	02	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal	NA	50	03	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal (Support Unit)	NA	50	04	Apr. 22, 2013	Apr. 21, 2014
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
3m semi-anechoic chamber	CHAMPRO	SAC-03	03CH02-WS	Jan. 02, 2013	Jan. 01, 2014
Spectrum Analyzer	R&S	FSV40	101499	Jan. 28, 2013	Jan. 27, 2014
Receiver	R&S	ESR3	101657	Jan. 30, 2013	Jan. 29, 2014
Bilog Antenna	Schwarzbeck	VULB9168	VULB9168-524	Jan. 11, 2013	Jan. 10, 2014
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120D	BBHA 9120 D 1095	Jan. 29, 2013	Jan. 28, 2014
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Jan. 14, 2013	Jan. 13, 2014
Amplifier	Burgeon	BPA-530	100218	Dec. 14, 2012	Dec. 13, 2013
Amplifier	Agilent	83017A	MY39501309	Dec. 18, 2012	Dec. 17, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 25, 2012	Dec. 24, 2013



Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-003	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-004	Dec. 25, 2012	Dec. 24, 2013
control	EM Electronics	EM1000	060608	N/A	N/A
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Amplifier	MITEQ	AMF-6F-260400	9121372	Apr. 19, 2013	Apr. 18, 2015
Note: Calibration Interval of instruments listed above is two year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV 40	101063	Feb. 18, 2013	Feb. 17, 2014
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Nov. 29, 2012	Nov. 28, 2013
Power Meter	Anritsu	ML2495A	1241002	Oct. 15, 2012	Oct. 14, 2013
Power Sensor	Anritsu	MA2411B	1027366	Oct. 24, 2012	Oct. 23, 2013
Signal Generator	R&S	SMB100A	175727	Jan. 14, 2013	Jan. 13, 2014
Bluetooth Tester	R&S	CBT	100959	Jan. 09, 2013	Jan. 08, 2014
MXG-B RF Vector Signal Generator	Agilent	N5182B	MY53050081	Apr. 19, 2013	Apr. 18, 2014
Note: Calibration Interval of instruments listed above is one year.					

1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2009

FCC KDB 412172

FCC KDB 789033 D01 General UNII Test procedures v01r03

FCC KDB 662911 D01 Multiple Transmitter Output v02

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.



1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±74.147 Hz
Conducted power	±0.717 dB
Power density	±2.687 dB
Frequency error	±74.147 Hz
Temperature	±0.3 °C
AC conducted emission	±2.43 dB
Radiated emission	±2.49 dB



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 53%	Skys Huang
Radiated Emissions	03CH02-WS	23°C / 66%	Anderson Hong Mark Liao
RF Conducted	TH01-WS	25°C / 60%	Felix Sung

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-2

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data rate (Mbps)	Test Configuration
Conducted Emissions	HT40	5580	MCS 8	---
Radiated Emissions (below 1GHz)	HT40	5580	MCS 8	---
RF Output Power	11a	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700	6	---
	HT20	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700	MCS 8	---
	HT40	5190 / 5230 / 5270 / 5310 / 5510 5550 / 5670	MCS 8	---
Radiated Emissions >1GHz Emission Bandwidth Peak Power Spectral Density	11a	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700	6	---
	HT20	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700	MCS 8	---
	HT40	5190 / 5230 / 5270 / 5310 / 5510 5550 / 5670	MCS 8	---
Peak Excursion	11a	5180 / 5300 / 5580	6	---
	HT20	5240 / 5300 / 5500	MCS 8	---
	HT40	5190 / 5310 / 5550	MCS 8	---
Frequency Stability	Un-modulation	5320	---	---

NOTE:

- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.
- Modulation 802.11a has diversity function and Ant A is the worst for final test.



3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz

3.1.3 Test Setup

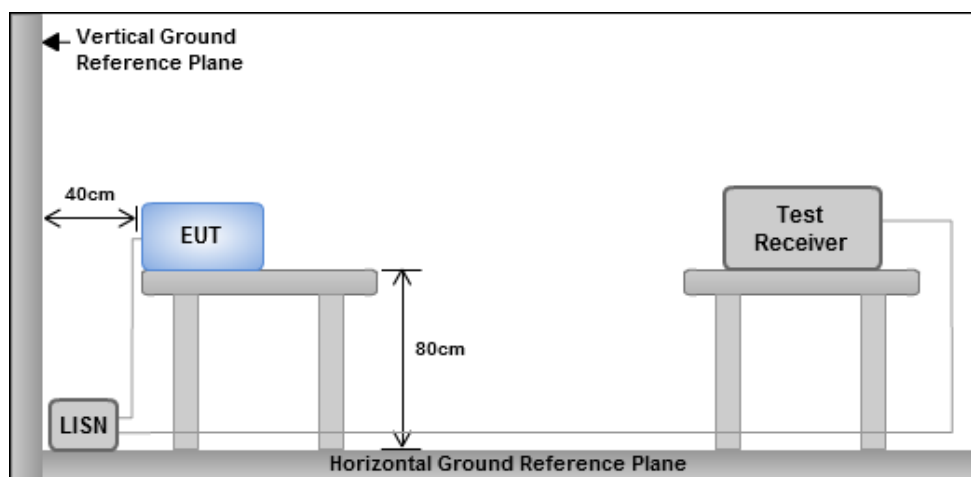



Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes



3.1.4 Test Result of Conducted Emissions

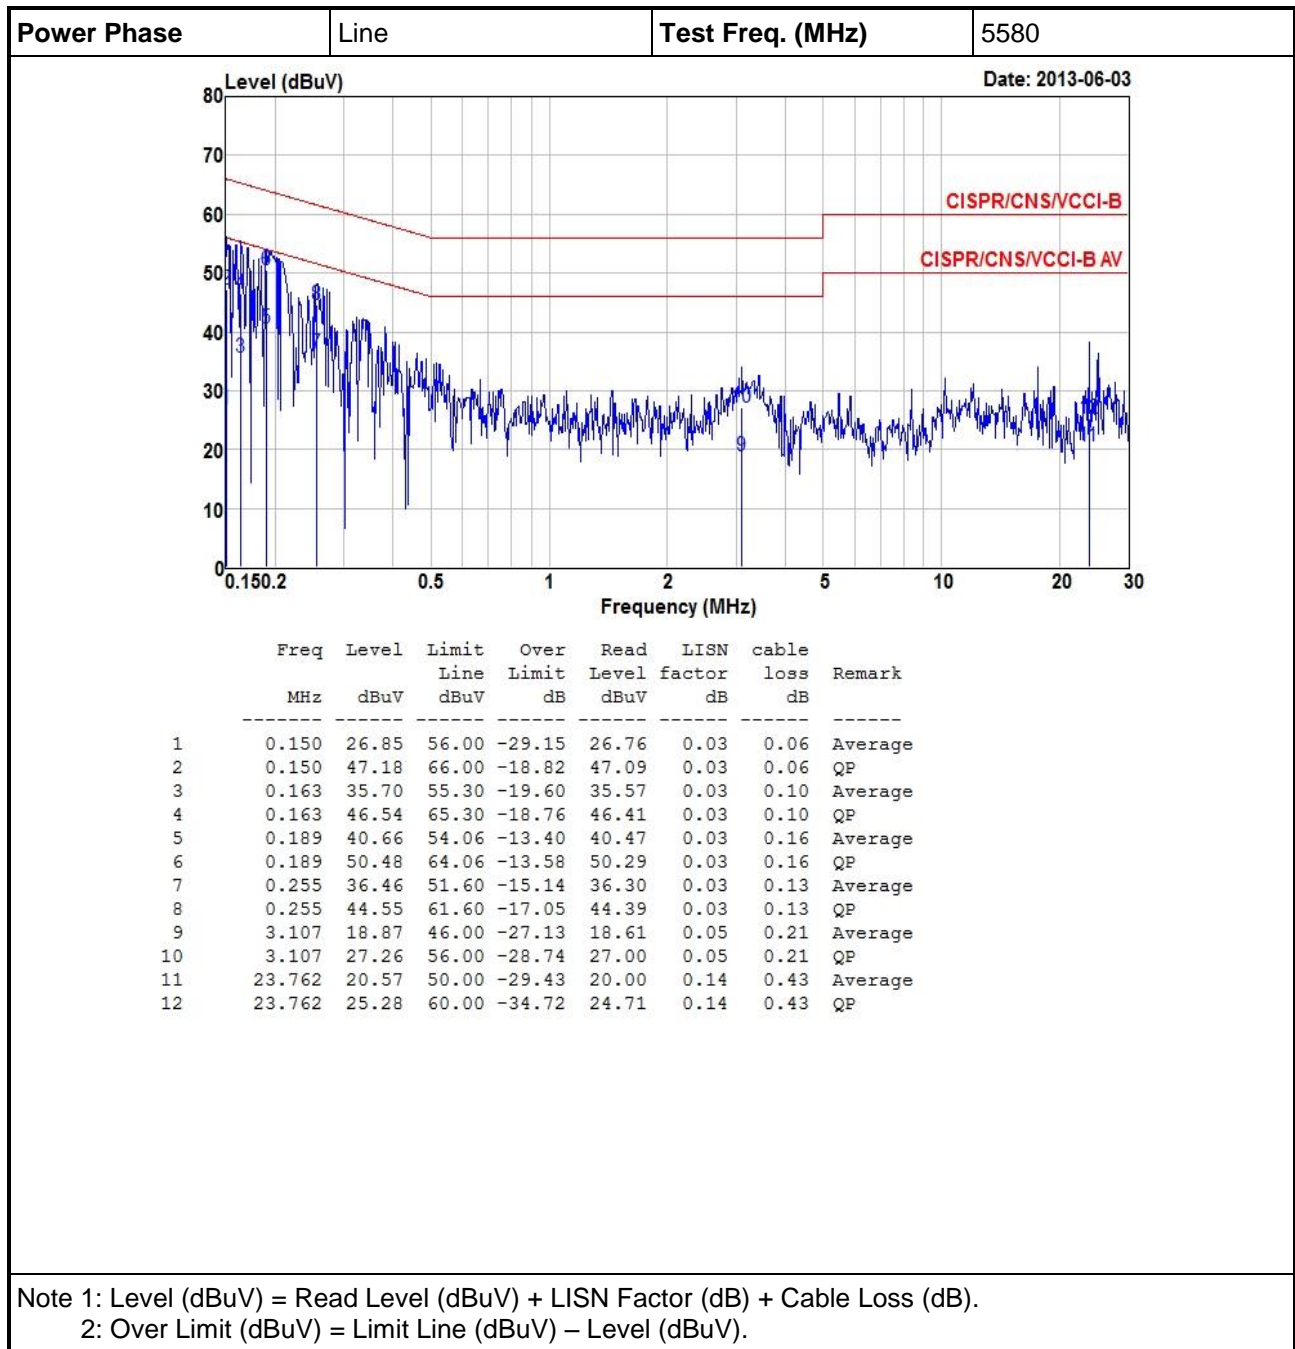

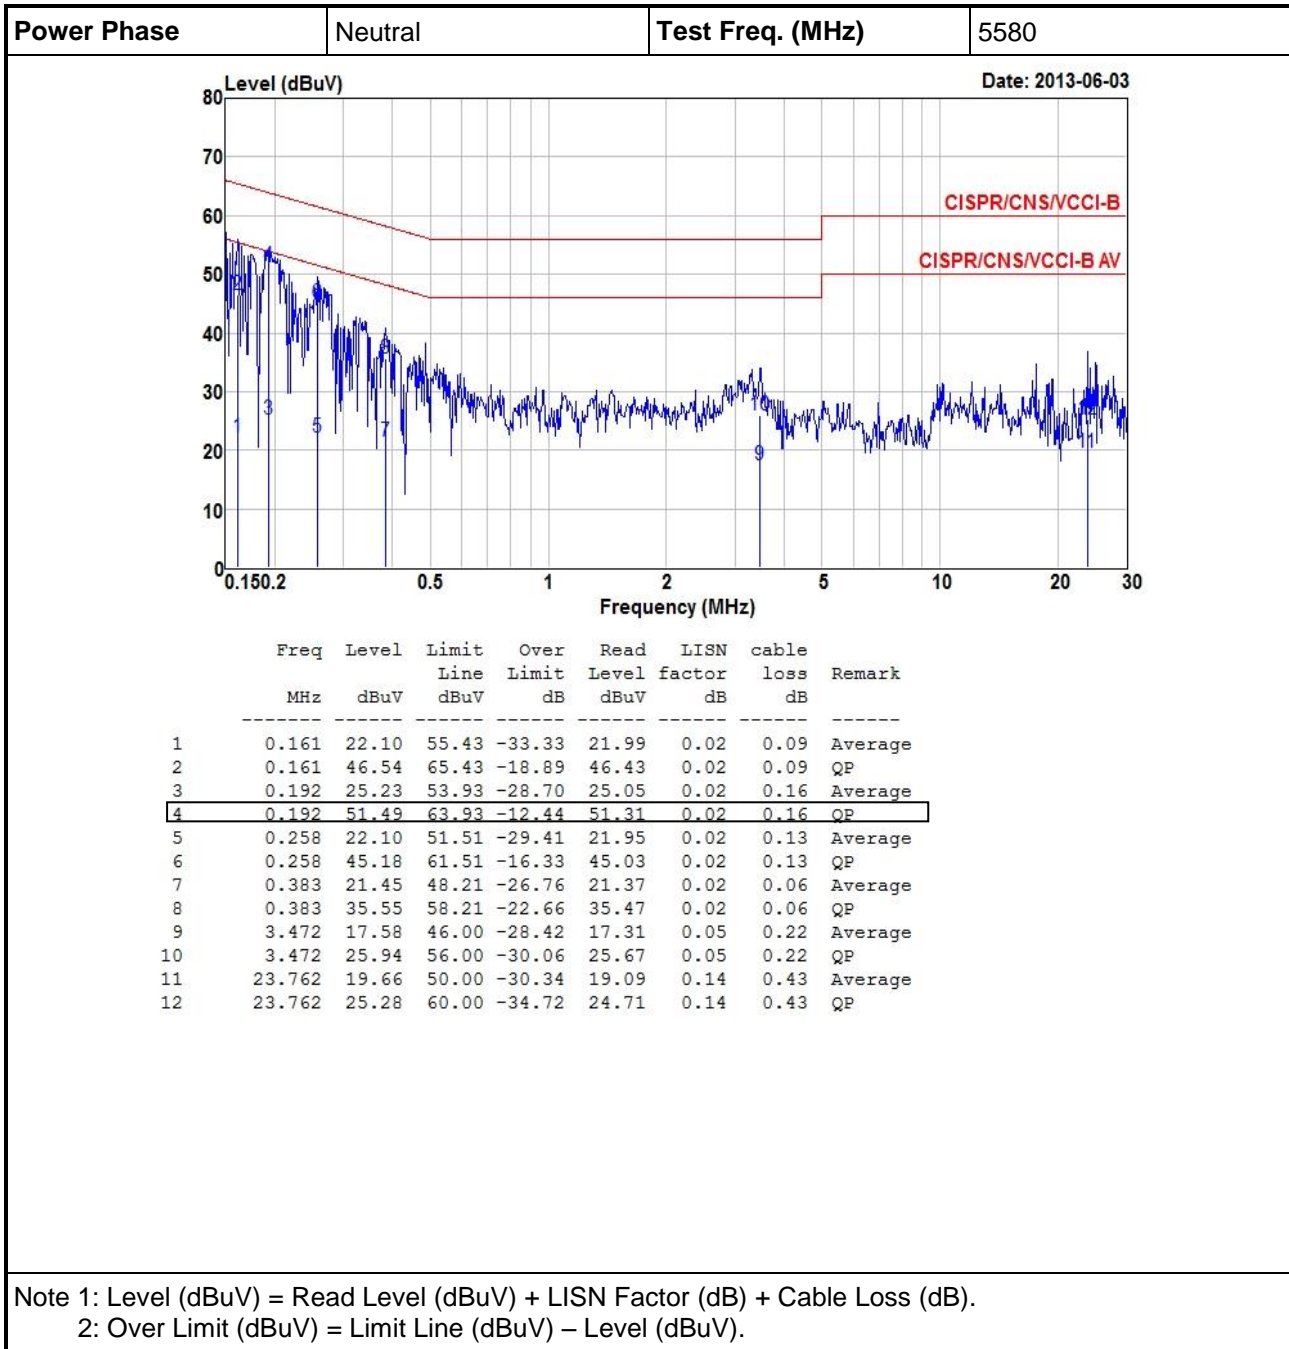




3.2 Emission Bandwidth

3.2.1 Test Procedures

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

3.2.2 Test Setup






3.2.3 Test Result of Emission Bandwidth

Modulation Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)				Limit (dBm)	
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	26dB BW	99% BW
11a	1	5180	26.09	---	---	---	17.13	---	---	---	17.00	16.34
11a	1	5200	30.38	---	---	---	17.13	---	---	---	17.00	16.34
11a	1	5240	30.55	---	---	---	17.13	---	---	---	17.00	16.34
11a	1	5260	30.49	---	---	---	17.13	---	---	---	24.00	23.34
11a	1	5300	30.38	---	---	---	17.13	---	---	---	24.00	23.34
11a	1	5320	26.09	---	---	---	17.13	---	---	---	24.00	23.34
11a	1	5500	37.62	---	---	---	17.48	---	---	---	24.00	23.43
11a	1	5580	37.74	---	---	---	18.76	---	---	---	24.00	23.73
11a	1	5700	36.64	---	---	---	17.77	---	---	---	24.00	23.50
HT20	2	5180	23.01	22.55	---	---	18.06	17.83	---	---	17.00	16.51
HT20	2	5200	23.30	22.49	---	---	18.06	17.83	---	---	17.00	16.51
HT20	2	5240	23.42	22.90	---	---	18.06	17.77	---	---	17.00	16.50
HT20	2	5260	23.30	22.72	---	---	18.00	17.83	---	---	24.00	23.51
HT20	2	5300	23.13	22.78	---	---	18.00	17.83	---	---	24.00	23.51
HT20	2	5320	22.96	22.49	---	---	18.00	17.83	---	---	24.00	23.51
HT20	2	5500	23.25	22.61	---	---	18.07	17.83	---	---	24.00	23.51
HT20	2	5580	23.36	22.43	---	---	18.07	17.77	---	---	24.00	23.50
HT20	2	5700	23.01	22.43	---	---	18.00	17.83	---	---	24.00	23.51
HT40	2	5190	44.99	42.09	---	---	36.58	36.24	---	---	17.00	17.00
HT40	2	5230	42.20	42.32	---	---	36.47	36.35	---	---	17.00	17.00
HT40	2	5270	42.55	42.20	---	---	36.47	36.35	---	---	24.00	24.00
HT40	2	5310	42.20	41.97	---	---	36.47	36.35	---	---	24.00	24.00
HT40	2	5510	42.55	41.86	---	---	36.58	36.24	---	---	24.00	24.00
HT40	2	5550	42.55	41.86	---	---	36.58	36.24	---	---	24.00	24.00
HT40	2	5670	42.55	41.97	---	---	36.70	36.24	---	---	24.00	24.00



Worst Plots

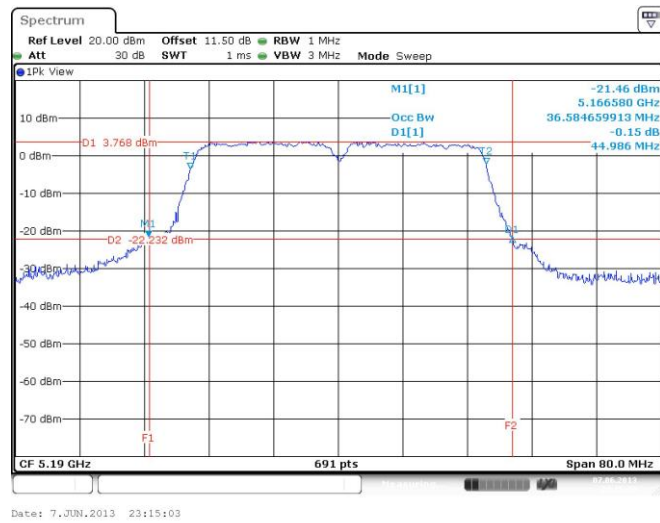



3.3 RF Output Power

3.3.1 Limit of RF Output Power


Frequency Band (GHz)	Limit
<input checked="" type="checkbox"/> 5.15~5.25	50mW or 4dBm+10 log B
<input checked="" type="checkbox"/> 5.25~5.35	250mW or 11dBm+10 log B
<input checked="" type="checkbox"/> 5.47~5.725	250mW or 11dBm+10 log B

Note: "B" is the 26dB emission bandwidth in MHz.

3.3.2 Test Procedures

- Method PM-G (Measurement using a gated RF average power meter)**
 - Measurements may is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.3.3 Test Setup





3.3.4 Test Result of Maximum Conducted Output Power

Modulation Mode	N _{TX}	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	1	5180	15.22	---	---	---	33.27	15.22	17
11a	1	5200	15.14	---	---	---	32.66	15.14	17
11a	1	5240	15.11	---	---	---	32.43	15.11	17
11a	1	5260	15.29	---	---	---	33.81	15.29	24
11a	1	5300	15.36	---	---	---	34.36	15.36	24
11a	1	5320	15.31	---	---	---	33.96	15.31	24
11a	1	5500	15.28	---	---	---	33.73	15.28	24
11a	1	5580	16.21	---	---	---	41.78	16.21	24
11a	1	5700	15.14	---	---	---	32.66	15.14	24
HT20	2	5180	9.98	10.13	---	---	20.26	13.07	17
HT20	2	5200	10.27	10.29	---	---	21.33	13.29	17
HT20	2	5240	10.34	10.51	---	---	22.06	13.44	17
HT20	2	5260	9.71	9.68	---	---	18.64	12.71	24
HT20	2	5300	10.38	10.14	---	---	21.24	13.27	24
HT20	2	5320	9.81	9.73	---	---	18.97	12.78	24
HT20	2	5500	10.06	10.22	---	---	20.66	13.15	24
HT20	2	5580	10.04	9.89	---	---	19.84	12.98	24
HT20	2	5700	9.67	9.62	---	---	18.43	12.66	24
HT40	2	5190	10.88	11.04	---	---	24.95	13.97	17
HT40	2	5230	10.35	10.29	---	---	21.53	13.33	17
HT40	2	5270	10.20	10.43	---	---	21.51	13.33	24
HT40	2	5310	10.11	10.44	---	---	21.32	13.29	24
HT40	2	5510	10.21	10.39	---	---	21.43	13.31	24
HT40	2	5550	10.62	10.73	---	---	23.36	13.69	24
HT40	2	5670	10.37	10.67	---	---	22.56	13.53	24



3.4 Peak Power Spectral Density

3.4.1 Limit of Peak Power Spectral Density

	Frequency Band (GHz)	Limit (dBm)
<input checked="" type="checkbox"/>	5.15~5.25	4
<input checked="" type="checkbox"/>	5.25~5.35	11
<input checked="" type="checkbox"/>	5.47~5.725	11

3.4.2 Test Procedures

Method SA-1

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.


Method SA-2

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average at 100 traces
3. Use the peak marker function to determine the maximum amplitude level.
4. Add $10 \log(1/x)$, where x is the duty cycle

Method SA-2 Alternative

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.

3.4.3 Test Setup






3.4.4 Test Result of Peak Power Spectral Density

Modulation Mode	N _{TX}	Freq. (MHz)	PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)
11a	1	5180	2.32	0	2.32	4
11a	1	5200	2.26	0	2.26	4
11a	1	5240	2.52	0	2.52	4
11a	1	5260	2.80	0	2.80	11
11a	1	5300	2.31	0	2.31	11
11a	1	5320	2.10	0	2.10	11
11a	1	5500	4.76	0	4.76	11
11a	1	5580	5.62	0	5.62	11
11a	1	5700	4.45	0	4.45	11
HT20	2	5180	-0.13	0	-0.13	4
HT20	2	5200	-0.23	0	-0.23	4
HT20	2	5240	0.30	0	0.30	4
HT20	2	5260	0.03	0	0.03	11
HT20	2	5300	0.13	0	0.13	11
HT20	2	5320	-0.22	0	-0.22	11
HT20	2	5500	0.18	0	0.18	11
HT20	2	5580	-0.10	0	-0.10	11
HT20	2	5700	-0.54	0	-0.54	11
HT40	2	5190	-3.34	0	-3.34	4
HT40	2	5230	-3.80	0	-3.80	4
HT40	2	5270	-3.87	0	-3.87	11
HT40	2	5310	-3.81	0	-3.81	11
HT40	2	5510	-3.36	0	-3.36	11
HT40	2	5550	-3.13	0	-3.13	11
HT40	2	5670	-3.07	0	-3.07	11

Note: Test result for HT20 / HT40 is bin-by-bin summing measured value of each TX port.



Worst Plots

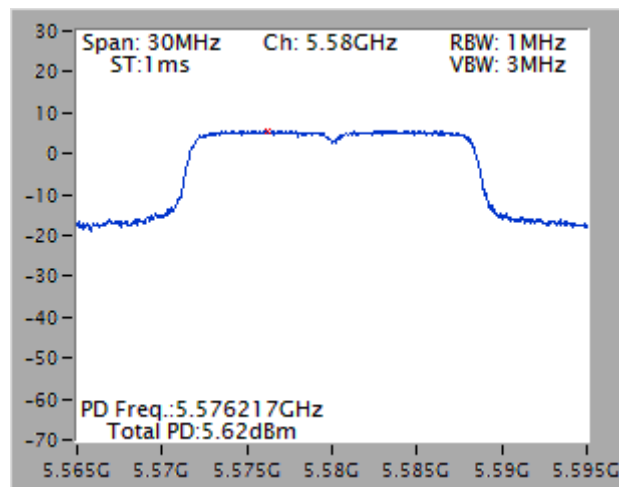



3.5 Peak Excursion


3.5.1 Peak Excursion Limit

Peak excursion of the modulation envelope shall not exceed 13 dB across any 1 MHz bandwidth.

3.5.2 Test Procedures

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = peak.
2. Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak search function to find the peak of the spectrum.
4. Use the procedure of section 3.4.2 to measure the PPSD.
5. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD

3.5.3 Test Setup






3.5.4 Test Result of Peak Excursion

Frequency band(MHz)		5150~5250			
Mode	Modulation Mode	N _{TX}	Freq. (MHz)	Peak Excursion (dB)	Limit (dB)
11a	BPSK	1	5180	6.84	13
11a	QPSK	1	5180	8.07	13
11a	16QAM	1	5180	8.42	13
11a	64QAM	1	5180	8.94	13
HT20	BPSK	2	5240	8.95	13
HT20	QPSK	2	5240	8.56	13
HT20	16QAM	2	5240	8.52	13
HT20	64QAM	2	5240	9.27	13
HT40	BPSK	2	5190	8.56	13
HT40	QPSK	2	5190	8.34	13
HT40	16QAM	2	5190	8.40	13
HT40	64QAM	2	5190	7.90	13

Frequency band(MHz)		5250~5350			
Mode	Modulation Mode	N _{TX}	Freq. (MHz)	Peak Excursion (dB)	Limit (dB)
11a	BPSK	1	5300	6.92	13
11a	QPSK	1	5300	9.26	13
11a	16QAM	1	5300	8.06	13
11a	64QAM	1	5300	8.83	13
HT20	BPSK	2	5300	8.21	13
HT20	QPSK	2	5300	8.84	13
HT20	16QAM	2	5300	9.00	13
HT20	64QAM	2	5300	8.24	13
HT40	BPSK	2	5310	8.59	13
HT40	QPSK	2	5310	8.25	13
HT40	16QAM	2	5310	8.26	13
HT40	64QAM	2	5310	8.01	13



Frequency band(MHz)		5470~5725			
Mode	Modulation Mode	N _{TX}	Freq. (MHz)	Peak Excursion (dB)	Limit (dB)
11a	BPSK	1	5580	7.08	13
11a	QPSK	1	5580	8.81	13
11a	16QAM	1	5580	7.70	13
11a	64QAM	1	5580	8.82	13
HT20	BPSK	2	5500	8.92	13
HT20	QPSK	2	5500	8.57	13
HT20	16QAM	2	5500	8.17	13
HT20	64QAM	2	5500	9.51	13
HT40	BPSK	2	5550	8.54	13
HT40	QPSK	2	5550	8.21	13
HT40	16QAM	2	5550	8.14	13
HT40	64QAM	2	5550	8.02	13

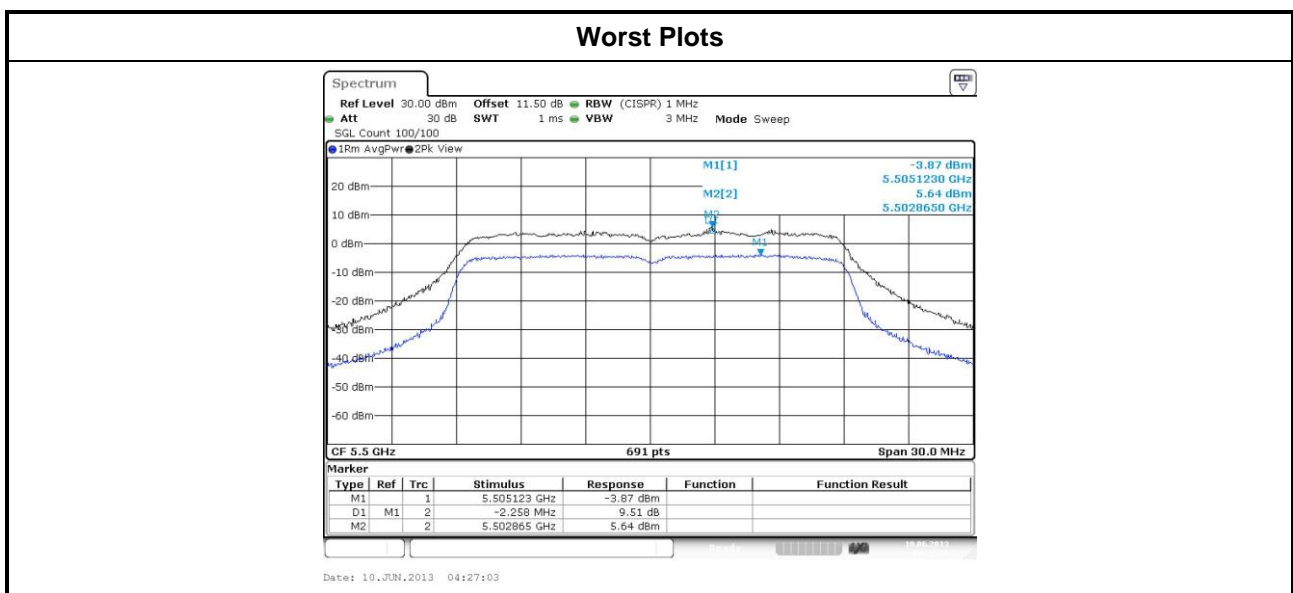

Note1: Peak excursion = Peak value –PPSD = Value of M2 – Value of M1



3.6 Transmitter Radiated and Band Edge Emissions

3.6.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
 Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
 Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.825 5.835 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).




3.6.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.6.3 Test Setup

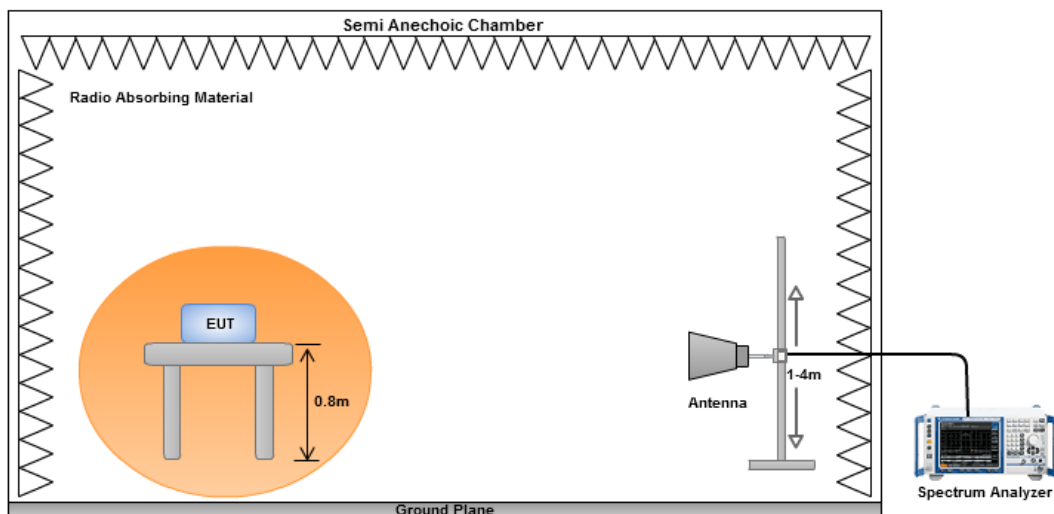



3.6.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Polarization	Horizontal		Test Freq. (MHz)	5580					
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the FCC CLASS-B limit, which is constant at 46 dBuV/m from 30 MHz to 1000 MHz. Six measurement points are marked with blue vertical lines and numbered 1 through 6. Point 1 is at 166.83 MHz, point 2 at 239.56 MHz, point 3 at 293.74 MHz, point 4 at 515.66 MHz, point 5 at 664.35 MHz, and point 6 at 718.90 MHz. All points are below the 46 dBuV/m limit.</p>									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	166.83	41.23	43.50	-2.27	57.86	-16.63	QP	-----	-----
2	239.56	38.55	46.00	-7.45	56.06	-17.51	Peak	-----	-----
3	293.74	38.76	46.00	-7.24	54.50	-15.74	Peak	-----	-----
4	515.66	36.98	46.00	-9.02	47.69	-10.71	Peak	-----	-----
5	664.35	37.43	46.00	-8.57	45.49	-8.06	Peak	-----	-----
6	718.90	38.11	46.00	-7.89	45.28	-7.17	Peak	-----	-----


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Polarization	Vertical	Test Freq. (MHz)	5580
---------------------	----------	-------------------------	------

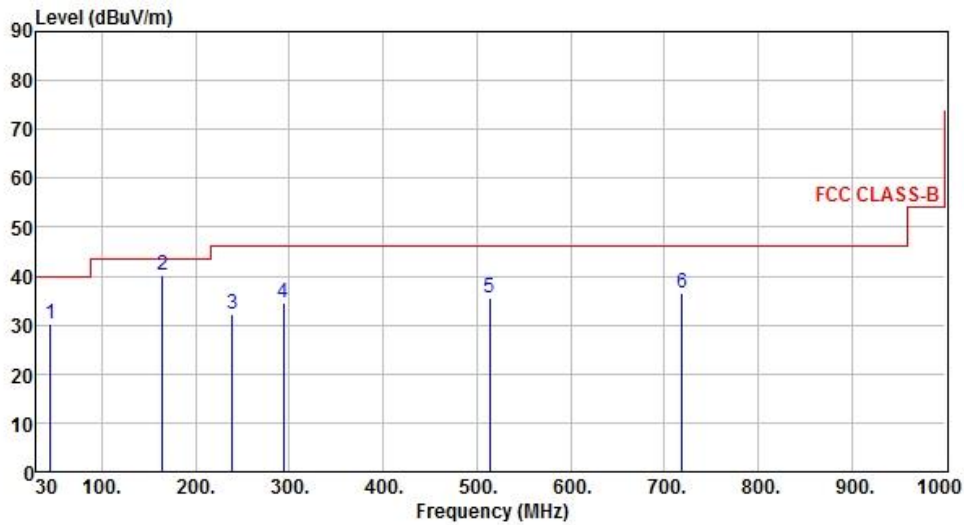

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	45.43	30.22	40.00	-9.78	46.24	-16.02	Peak	-----	-----
2	164.80	40.12	43.50	-3.38	56.68	-16.56	Peak	-----	-----
3	239.52	32.23	46.00	-13.77	49.74	-17.51	Peak	-----	-----
4	293.84	34.55	46.00	-11.45	50.27	-15.72	Peak	-----	-----
5	514.03	35.55	46.00	-10.45	46.28	-10.73	Peak	-----	-----
6	718.90	36.43	46.00	-9.57	43.60	-7.17	Peak	-----	-----


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



3.6.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

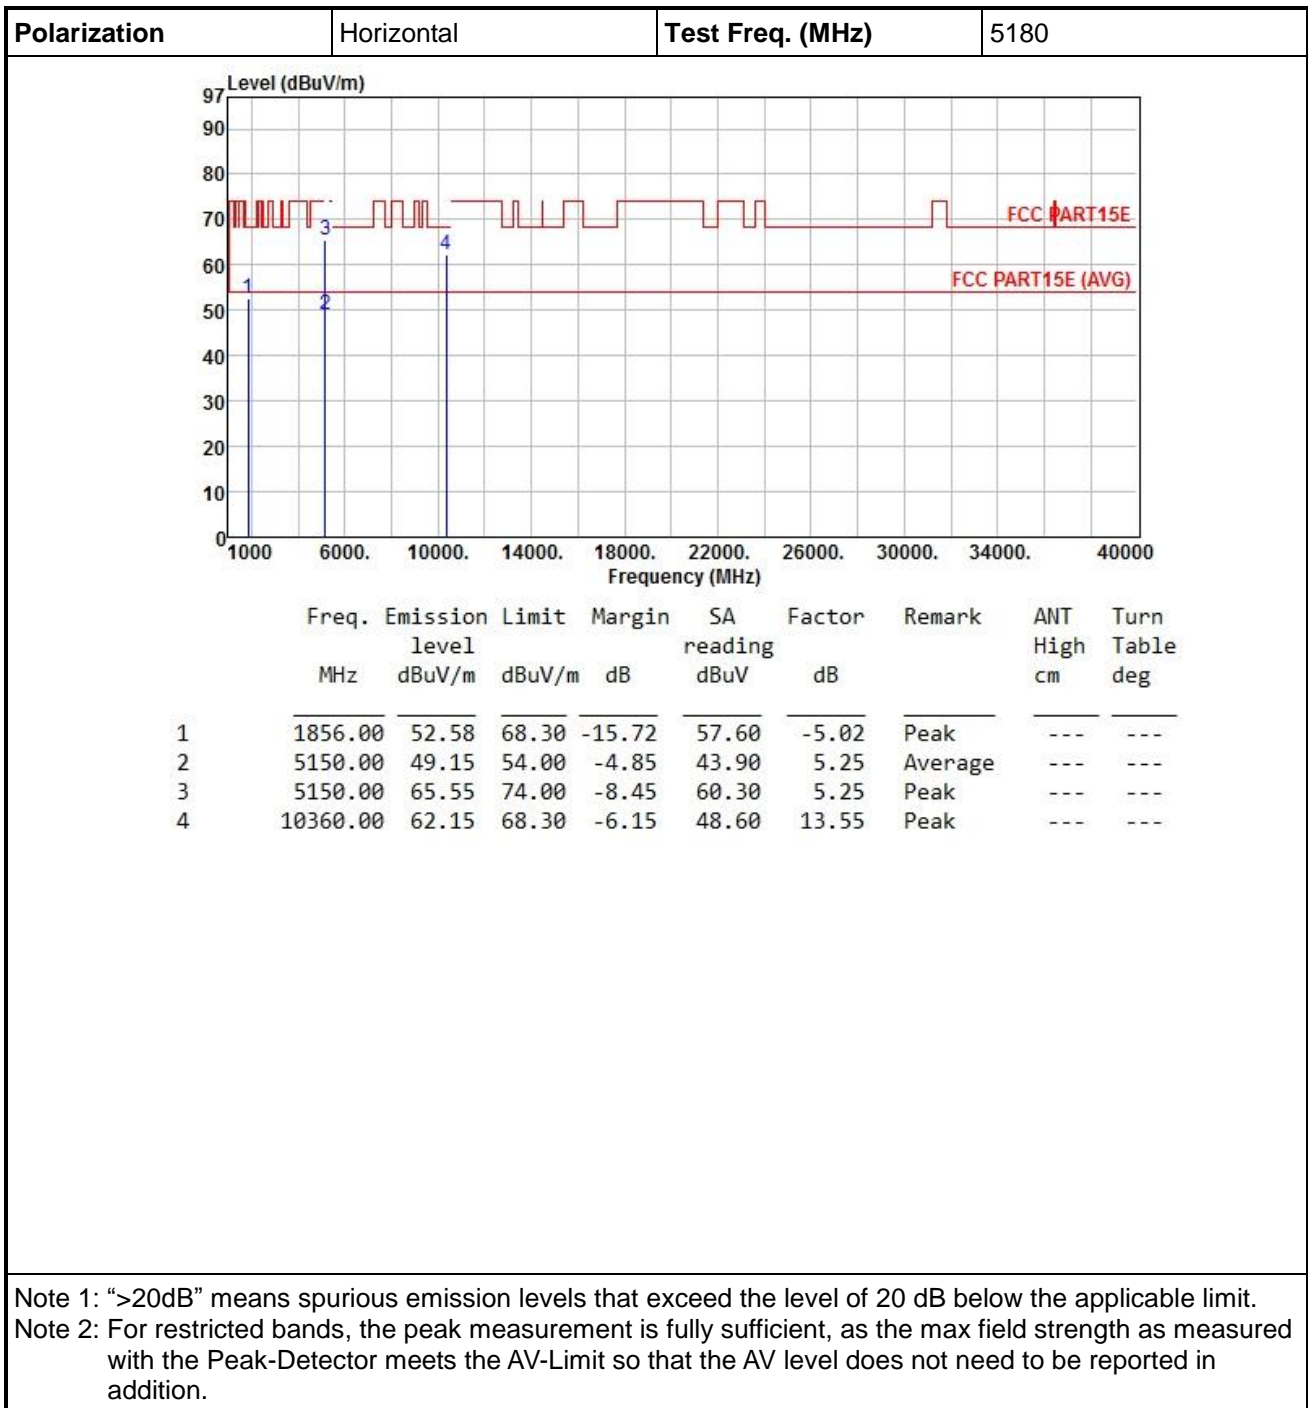



Polarization	Vertical	Test Freq. (MHz)	5180																																																						
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1856.00</td> <td>49.68</td> <td>68.30</td> <td>-18.62</td> <td>54.70</td> <td>-5.02</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>47.65</td> <td>54.00</td> <td>-6.35</td> <td>42.40</td> <td>5.25</td> <td>Average</td> <td>---</td> </tr> <tr> <td>3</td> <td>5150.00</td> <td>63.15</td> <td>74.00</td> <td>-10.85</td> <td>57.90</td> <td>5.25</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>10360.00</td> <td>62.14</td> <td>68.30</td> <td>-6.16</td> <td>48.59</td> <td>13.55</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	1856.00	49.68	68.30	-18.62	54.70	-5.02	Peak	---	2	5150.00	47.65	54.00	-6.35	42.40	5.25	Average	---	3	5150.00	63.15	74.00	-10.85	57.90	5.25	Peak	---	4	10360.00	62.14	68.30	-6.16	48.59	13.55	Peak	---		
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																	
1	1856.00	49.68	68.30	-18.62	54.70	-5.02	Peak	---																																																	
2	5150.00	47.65	54.00	-6.35	42.40	5.25	Average	---																																																	
3	5150.00	63.15	74.00	-10.85	57.90	5.25	Peak	---																																																	
4	10360.00	62.14	68.30	-6.16	48.59	13.55	Peak	---																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>																																																									



Polarization	Horizontal		Test Freq. (MHz)	5200					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1856.00	52.21	68.30	-16.09	57.23	-5.02	Peak	---	---
2	10400.00	62.03	68.30	-6.27	48.40	13.63	Peak	---	---
3	15600.00	44.00	54.00	-10.00	28.00	16.00	Average	---	---
4	15600.00	57.30	74.00	-16.70	41.30	16.00	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5200						
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1856.00	49.34	68.30	-18.96	54.36	-5.02	Peak	---	---
2	10400.00	61.23	68.30	-7.07	47.60	13.63	Peak	---	---
3	15600.00	44.20	54.00	-9.80	28.20	16.00	Average	---	---
4	15600.00	57.90	74.00	-16.10	41.90	16.00	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Horizontal		Test Freq. (MHz)	5240					
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1856.00	52.86	68.30	-15.44	57.88	-5.02	Peak	---	---
2	5150.00	43.07	54.00	-10.93	37.82	5.25	Average	---	---
3	5150.00	56.16	74.00	-17.84	50.91	5.25	Peak	---	---
4	10480.00	61.52	68.30	-6.78	47.72	13.80	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5240																																																						
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1856.00</td> <td>49.94</td> <td>68.30</td> <td>-18.36</td> <td>54.96</td> <td>-5.02</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>42.95</td> <td>54.00</td> <td>-11.05</td> <td>37.70</td> <td>5.25</td> <td>Average</td> <td>---</td> </tr> <tr> <td>3</td> <td>5150.00</td> <td>56.05</td> <td>74.00</td> <td>-17.95</td> <td>50.80</td> <td>5.25</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>10480.00</td> <td>60.09</td> <td>68.30</td> <td>-8.21</td> <td>46.29</td> <td>13.80</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	1856.00	49.94	68.30	-18.36	54.96	-5.02	Peak	---	2	5150.00	42.95	54.00	-11.05	37.70	5.25	Average	---	3	5150.00	56.05	74.00	-17.95	50.80	5.25	Peak	---	4	10480.00	60.09	68.30	-8.21	46.29	13.80	Peak	---		
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																	
1	1856.00	49.94	68.30	-18.36	54.96	-5.02	Peak	---																																																	
2	5150.00	42.95	54.00	-11.05	37.70	5.25	Average	---																																																	
3	5150.00	56.05	74.00	-17.95	50.80	5.25	Peak	---																																																	
4	10480.00	60.09	68.30	-8.21	46.29	13.80	Peak	---																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>																																																									



Polarization	Horizontal		Test Freq. (MHz)	5260					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1856.00	52.48	68.30	-15.82	57.50	-5.02	Peak	---	---
2	5350.00	44.00	54.00	-10.00	38.59	5.41	Average	---	---
3	5350.00	55.60	74.00	-18.40	50.19	5.41	Peak	---	---
4	10520.00	62.34	68.30	-5.96	48.47	13.87	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5260						
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1856.00	50.21	68.30	-18.09	55.23	-5.02	Peak	---	---
2	5350.00	43.40	54.00	-10.60	37.99	5.41	Average	---	---
3	5350.00	56.99	74.00	-17.01	51.58	5.41	Peak	---	---
4	10520.00	59.75	68.30	-8.55	45.88	13.87	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Horizontal		Test Freq. (MHz)	5300					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1856.00	52.55	68.30	-15.75	57.57	-5.02	Peak	---	---
2	10600.00	47.62	54.00	-6.38	33.62	14.00	Average	---	---
3	10600.00	62.22	74.00	-11.78	48.22	14.00	Peak	---	---
4	15900.00	44.33	54.00	-9.67	28.78	15.55	Average	---	---
5	15900.00	57.60	74.00	-16.40	42.05	15.55	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5300																																																						
	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1856.00</td> <td>49.56</td> <td>68.30</td> <td>-18.74</td> <td>54.58</td> <td>-5.02</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>45.50</td> <td>54.00</td> <td>-8.50</td> <td>31.50</td> <td>14.00</td> <td>Average</td> <td>---</td> </tr> <tr> <td>3</td> <td>10600.00</td> <td>59.40</td> <td>74.00</td> <td>-14.60</td> <td>45.40</td> <td>14.00</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>15900.00</td> <td>44.43</td> <td>54.00</td> <td>-9.57</td> <td>28.88</td> <td>15.55</td> <td>Average</td> <td>---</td> </tr> <tr> <td>5</td> <td>15900.00</td> <td>58.21</td> <td>74.00</td> <td>-15.79</td> <td>42.66</td> <td>15.55</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	1856.00	49.56	68.30	-18.74	54.58	-5.02	Peak	---	2	10600.00	45.50	54.00	-8.50	31.50	14.00	Average	---	3	10600.00	59.40	74.00	-14.60	45.40	14.00	Peak	---	4	15900.00	44.43	54.00	-9.57	28.88	15.55	Average	---	5	15900.00	58.21	74.00	-15.79	42.66	15.55	Peak	---		
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																	
1	1856.00	49.56	68.30	-18.74	54.58	-5.02	Peak	---																																																	
2	10600.00	45.50	54.00	-8.50	31.50	14.00	Average	---																																																	
3	10600.00	59.40	74.00	-14.60	45.40	14.00	Peak	---																																																	
4	15900.00	44.43	54.00	-9.57	28.88	15.55	Average	---																																																	
5	15900.00	58.21	74.00	-15.79	42.66	15.55	Peak	---																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>																																																									




Polarization	Horizontal		Test Freq. (MHz)	5320					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1856.00	52.73	68.30	-15.57	57.75	-5.02	Peak	---	---
2	5350.00	51.40	54.00	-2.60	45.99	5.41	Average	---	---
3	5350.00	68.70	74.00	-5.30	63.29	5.41	Peak	---	---
4	10640.00	48.05	54.00	-5.95	33.98	14.07	Average	---	---
5	10640.00	62.95	74.00	-11.05	48.88	14.07	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5320																																																						
	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1856.00</td> <td>49.28</td> <td>68.30</td> <td>-19.02</td> <td>54.30</td> <td>-5.02</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>5350.00</td> <td>46.60</td> <td>54.00</td> <td>-7.40</td> <td>41.19</td> <td>5.41</td> <td>Average</td> <td>---</td> </tr> <tr> <td>3</td> <td>5350.00</td> <td>62.23</td> <td>74.00</td> <td>-11.77</td> <td>56.82</td> <td>5.41</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>10640.00</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>31.79</td> <td>14.07</td> <td>Average</td> <td>---</td> </tr> <tr> <td>5</td> <td>10640.00</td> <td>59.75</td> <td>74.00</td> <td>-14.25</td> <td>45.68</td> <td>14.07</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	1856.00	49.28	68.30	-19.02	54.30	-5.02	Peak	---	2	5350.00	46.60	54.00	-7.40	41.19	5.41	Average	---	3	5350.00	62.23	74.00	-11.77	56.82	5.41	Peak	---	4	10640.00	45.86	54.00	-8.14	31.79	14.07	Average	---	5	10640.00	59.75	74.00	-14.25	45.68	14.07	Peak	---		
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																	
1	1856.00	49.28	68.30	-19.02	54.30	-5.02	Peak	---																																																	
2	5350.00	46.60	54.00	-7.40	41.19	5.41	Average	---																																																	
3	5350.00	62.23	74.00	-11.77	56.82	5.41	Peak	---																																																	
4	10640.00	45.86	54.00	-8.14	31.79	14.07	Average	---																																																	
5	10640.00	59.75	74.00	-14.25	45.68	14.07	Peak	---																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>																																																									



3.6.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

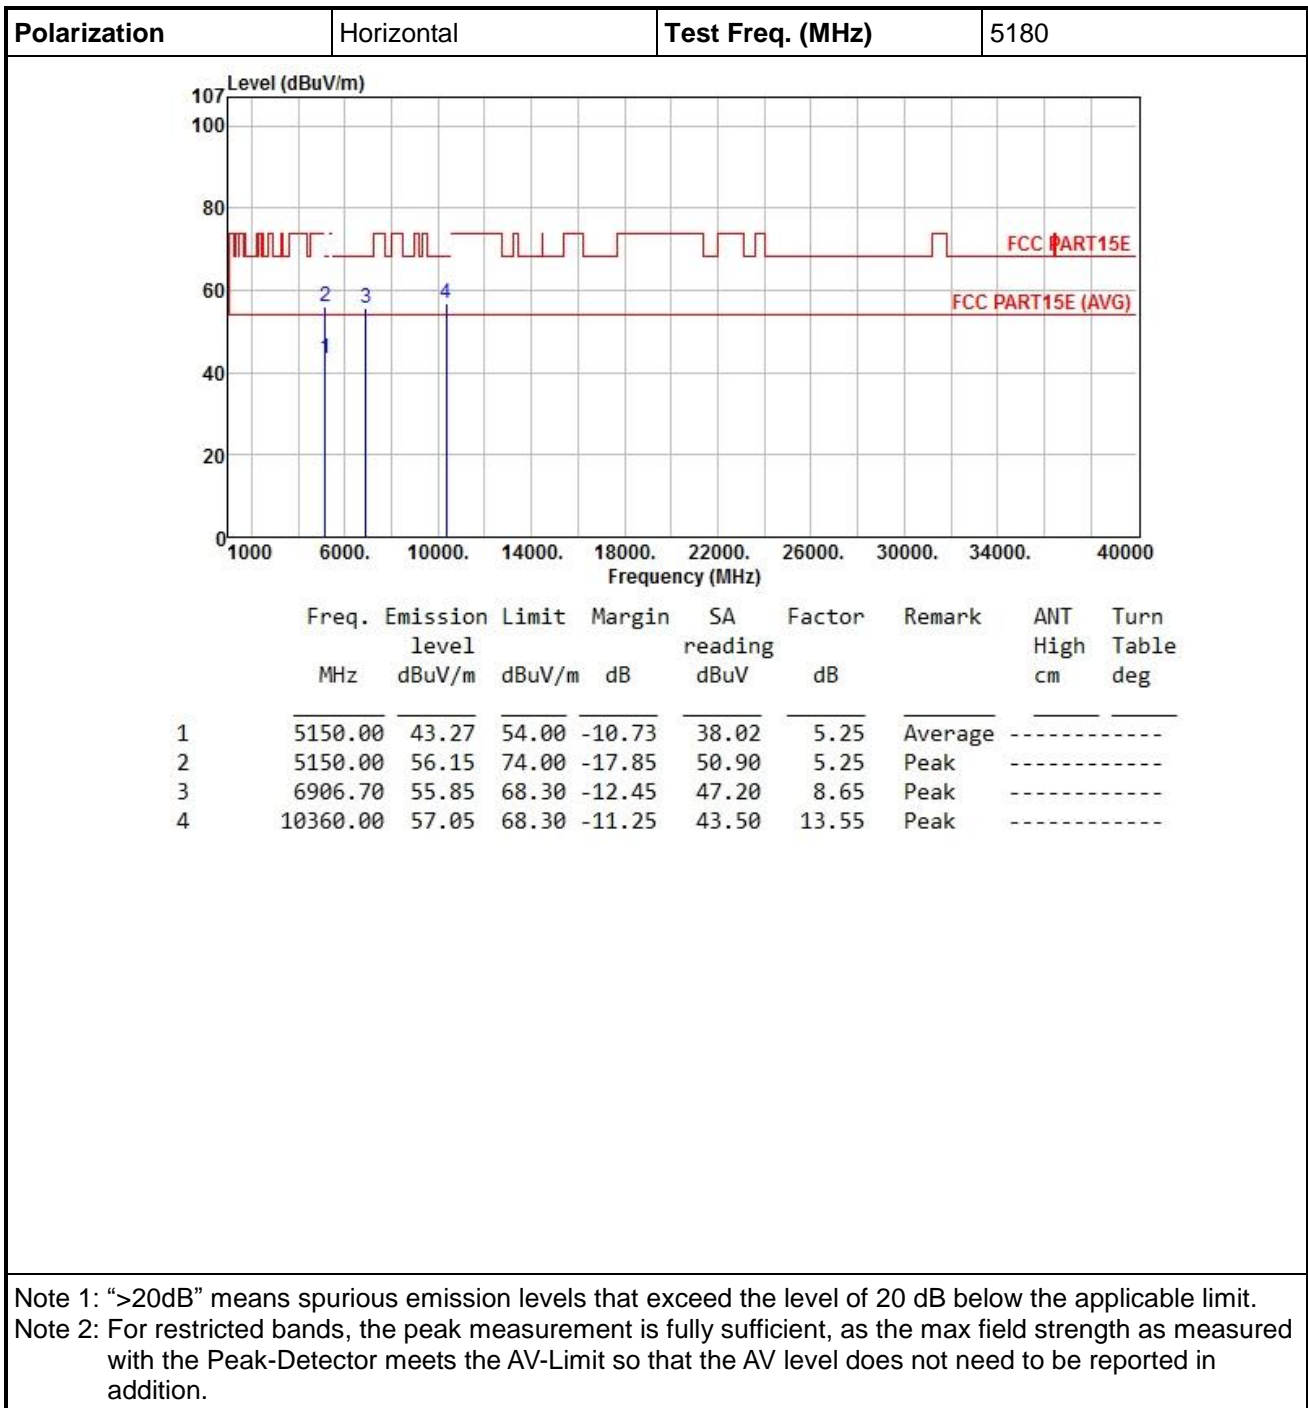




Polarization	Vertical	Test Freq. (MHz)	5180																																																						
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>43.25</td> <td>54.00</td> <td>-10.75</td> <td>38.00</td> <td>5.25</td> <td>Average</td> <td>-----</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>56.45</td> <td>74.00</td> <td>-17.55</td> <td>51.20</td> <td>5.25</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>3</td> <td>6906.70</td> <td>56.95</td> <td>68.30</td> <td>-11.35</td> <td>48.30</td> <td>8.65</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>4</td> <td>10360.00</td> <td>55.45</td> <td>68.30</td> <td>-12.85</td> <td>41.90</td> <td>13.55</td> <td>Peak</td> <td>-----</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5150.00	43.25	54.00	-10.75	38.00	5.25	Average	-----	2	5150.00	56.45	74.00	-17.55	51.20	5.25	Peak	-----	3	6906.70	56.95	68.30	-11.35	48.30	8.65	Peak	-----	4	10360.00	55.45	68.30	-12.85	41.90	13.55	Peak	-----		
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																	
1	5150.00	43.25	54.00	-10.75	38.00	5.25	Average	-----																																																	
2	5150.00	56.45	74.00	-17.55	51.20	5.25	Peak	-----																																																	
3	6906.70	56.95	68.30	-11.35	48.30	8.65	Peak	-----																																																	
4	10360.00	55.45	68.30	-12.85	41.90	13.55	Peak	-----																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>																																																									



Polarization	Horizontal	Test Freq. (MHz)	5200
---------------------	------------	-------------------------	------

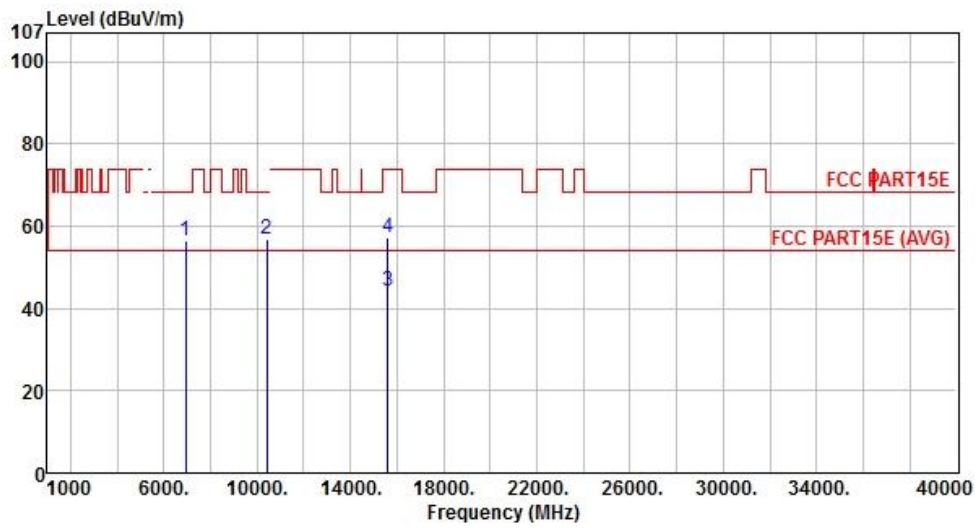

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	6933.30	56.27	68.30	-12.03	47.56	8.71	Peak	-----	-----
2	10400.00	57.03	68.30	-11.27	43.40	13.63	Peak	-----	-----
3	15600.00	44.14	54.00	-9.86	28.14	16.00	Average	-----	-----
4	15600.00	57.10	74.00	-16.90	41.10	16.00	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Polarization	Vertical	Test Freq. (MHz)	5200						
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	6933.30	57.44	68.30	-10.86	48.73	8.71	Peak	-----	-----
2	10400.00	55.13	68.30	-13.17	41.50	13.63	Peak	-----	-----
3	15600.00	44.20	54.00	-9.80	28.20	16.00	Average	-----	-----
4	15600.00	57.40	74.00	-16.60	41.40	16.00	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									




Polarization	Horizontal		Test Freq. (MHz)	5240					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5150.00	42.85	54.00	-11.15	37.60	5.25	Average	-----	-----
2	5150.00	56.25	74.00	-17.75	51.00	5.25	Peak	-----	-----
3	6986.70	56.39	68.30	-11.91	47.55	8.84	Peak	-----	-----
4	10480.00	56.87	68.30	-11.43	43.07	13.80	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5240																																																						
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>43.45</td> <td>54.00</td> <td>-10.55</td> <td>38.20</td> <td>5.25</td> <td>Average</td> <td>-----</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>57.15</td> <td>74.00</td> <td>-16.85</td> <td>51.90</td> <td>5.25</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>3</td> <td>6986.70</td> <td>57.47</td> <td>68.30</td> <td>-10.83</td> <td>48.63</td> <td>8.84</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>4</td> <td>10480.00</td> <td>54.89</td> <td>68.30</td> <td>-13.41</td> <td>41.09</td> <td>13.80</td> <td>Peak</td> <td>-----</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5150.00	43.45	54.00	-10.55	38.20	5.25	Average	-----	2	5150.00	57.15	74.00	-16.85	51.90	5.25	Peak	-----	3	6986.70	57.47	68.30	-10.83	48.63	8.84	Peak	-----	4	10480.00	54.89	68.30	-13.41	41.09	13.80	Peak	-----		
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																	
1	5150.00	43.45	54.00	-10.55	38.20	5.25	Average	-----																																																	
2	5150.00	57.15	74.00	-16.85	51.90	5.25	Peak	-----																																																	
3	6986.70	57.47	68.30	-10.83	48.63	8.84	Peak	-----																																																	
4	10480.00	54.89	68.30	-13.41	41.09	13.80	Peak	-----																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>																																																									



Polarization	Horizontal	Test Freq. (MHz)	5260
---------------------	------------	-------------------------	------

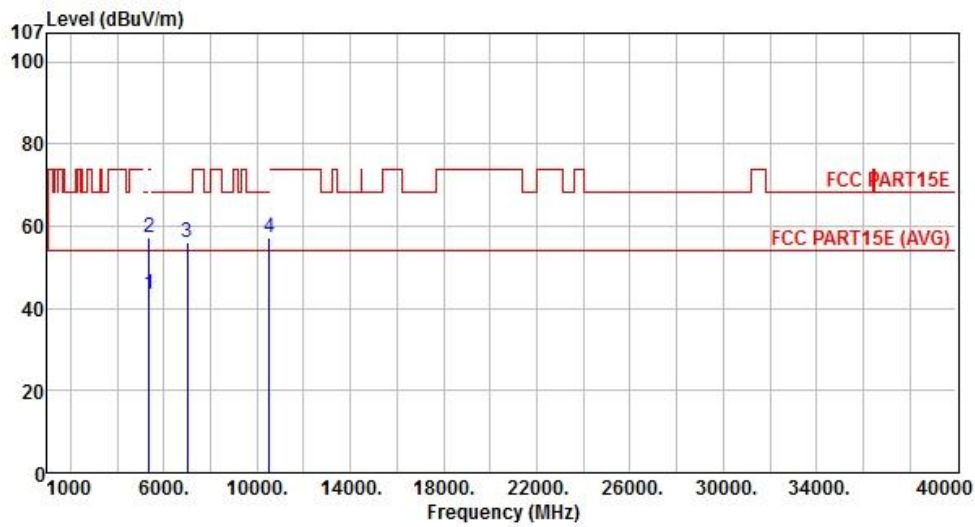

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	43.60	54.00	-10.40	38.19	5.41	Average	-----	-----
2	5350.00	57.10	74.00	-16.90	51.69	5.41	Peak	-----	-----
3	7013.30	56.04	68.30	-12.26	47.14	8.90	Peak	-----	-----
4	10520.00	57.43	68.30	-10.87	43.56	13.87	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.




Polarization	Vertical	Test Freq. (MHz)	5260																																																						
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>43.62</td> <td>54.00</td> <td>-10.38</td> <td>38.21</td> <td>5.41</td> <td>Average</td> <td>-----</td> </tr> <tr> <td>2</td> <td>5350.00</td> <td>57.20</td> <td>74.00</td> <td>-16.80</td> <td>51.79</td> <td>5.41</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>3</td> <td>7013.30</td> <td>56.96</td> <td>68.30</td> <td>-11.34</td> <td>48.06</td> <td>8.90</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>4</td> <td>10520.00</td> <td>60.84</td> <td>68.30</td> <td>-7.46</td> <td>46.97</td> <td>13.87</td> <td>Peak</td> <td>-----</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5350.00	43.62	54.00	-10.38	38.21	5.41	Average	-----	2	5350.00	57.20	74.00	-16.80	51.79	5.41	Peak	-----	3	7013.30	56.96	68.30	-11.34	48.06	8.90	Peak	-----	4	10520.00	60.84	68.30	-7.46	46.97	13.87	Peak	-----		
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																	
1	5350.00	43.62	54.00	-10.38	38.21	5.41	Average	-----																																																	
2	5350.00	57.20	74.00	-16.80	51.79	5.41	Peak	-----																																																	
3	7013.30	56.96	68.30	-11.34	48.06	8.90	Peak	-----																																																	
4	10520.00	60.84	68.30	-7.46	46.97	13.87	Peak	-----																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>																																																									



Polarization	Horizontal		Test Freq. (MHz)	5300					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	7066.70	56.49	68.30	-11.81	47.44	9.05	Peak	-----	-----
2	10600.00	42.82	54.00	-11.18	28.82	14.00	Average	-----	-----
3	10600.00	55.87	74.00	-18.13	41.87	14.00	Peak	-----	-----
4	15900.00	44.43	54.00	-9.57	28.88	15.55	Average	-----	-----
5	15900.00	57.43	74.00	-16.57	41.88	15.55	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5300
---------------------	----------	-------------------------	------

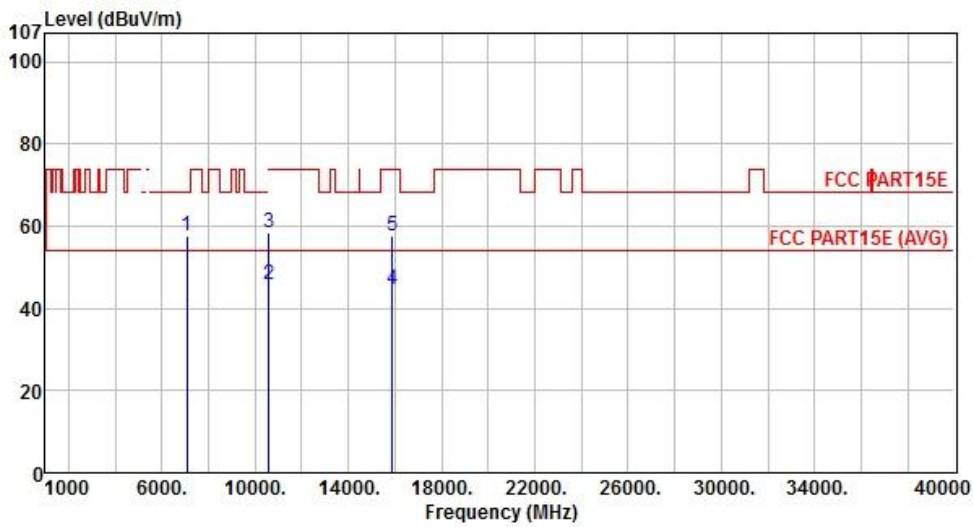

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	7066.70	57.67	68.30	-10.63	48.62	9.05	Peak	-----	-----
2	10600.00	45.80	54.00	-8.20	31.80	14.00	Average	-----	-----
3	10600.00	58.35	74.00	-15.65	44.35	14.00	Peak	-----	-----
4	15900.00	44.51	54.00	-9.49	28.96	15.55	Average	-----	-----
5	15900.00	57.81	74.00	-16.19	42.26	15.55	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Polarization	Horizontal		Test Freq. (MHz)	5320					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5350.00	44.00	54.00	-10.00	38.59	5.41	Average	-----	-----
2	5350.00	57.23	74.00	-16.77	51.82	5.41	Peak	-----	-----
3	7093.30	56.61	68.30	-11.69	47.50	9.11	Peak	-----	-----
4	10640.00	42.77	54.00	-11.23	28.70	14.07	Average	-----	-----
5	10640.00	56.37	74.00	-17.63	42.30	14.07	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5320																																																						
	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>44.10</td> <td>54.00</td> <td>-9.90</td> <td>38.69</td> <td>5.41</td> <td>Average</td> <td>-----</td> </tr> <tr> <td>2</td> <td>5350.00</td> <td>56.70</td> <td>74.00</td> <td>-17.30</td> <td>51.29</td> <td>5.41</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>3</td> <td>7093.30</td> <td>57.71</td> <td>68.30</td> <td>-10.59</td> <td>48.60</td> <td>9.11</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>4</td> <td>10640.00</td> <td>45.97</td> <td>54.00</td> <td>-8.03</td> <td>31.90</td> <td>14.07</td> <td>Average</td> <td>-----</td> </tr> <tr> <td>5</td> <td>10640.00</td> <td>58.68</td> <td>74.00</td> <td>-15.32</td> <td>44.61</td> <td>14.07</td> <td>Peak</td> <td>-----</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	5350.00	44.10	54.00	-9.90	38.69	5.41	Average	-----	2	5350.00	56.70	74.00	-17.30	51.29	5.41	Peak	-----	3	7093.30	57.71	68.30	-10.59	48.60	9.11	Peak	-----	4	10640.00	45.97	54.00	-8.03	31.90	14.07	Average	-----	5	10640.00	58.68	74.00	-15.32	44.61	14.07	Peak	-----		
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																	
1	5350.00	44.10	54.00	-9.90	38.69	5.41	Average	-----																																																	
2	5350.00	56.70	74.00	-17.30	51.29	5.41	Peak	-----																																																	
3	7093.30	57.71	68.30	-10.59	48.60	9.11	Peak	-----																																																	
4	10640.00	45.97	54.00	-8.03	31.90	14.07	Average	-----																																																	
5	10640.00	58.68	74.00	-15.32	44.61	14.07	Peak	-----																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>																																																									



Polarization	Horizontal		Test Freq. (MHz)	5500					
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	43.34	54.00	-10.66	37.80	5.54	Average	-----	-----
2	5460.00	56.08	74.00	-17.92	50.54	5.54	Peak	-----	-----
3	5470.00	56.78	68.30	-11.52	51.14	5.64	Peak	-----	-----
4	11000.00	44.52	54.00	-9.48	29.84	14.68	Average	-----	-----
5	11000.00	57.18	74.00	-16.82	42.50	14.68	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5500						
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5460.00	43.44	54.00	-10.56	37.90	5.54	Average	-----	-----
2	5460.00	56.14	74.00	-17.86	50.60	5.54	Peak	-----	-----
3	5470.00	57.59	68.30	-10.71	51.95	5.64	Peak	-----	-----
4	11000.00	52.80	54.00	-1.20	38.12	14.68	Average	-----	-----
5	11000.00	66.26	74.00	-7.74	51.58	14.68	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Horizontal		Test Freq. (MHz)	5580					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	7440.00	39.29	54.00	-14.71	29.53	9.76	Average	-----	-----
2	7440.00	50.88	74.00	-23.12	41.12	9.76	Peak	-----	-----
3	11160.00	44.32	54.00	-9.68	29.60	14.72	Average	-----	-----
4	11160.00	56.88	74.00	-17.12	42.16	14.72	Peak	-----	-----
5	16740.00	59.06	68.30	-9.24	41.31	17.75	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5580																																																																
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7440.00</td> <td>41.34</td> <td>54.00</td> <td>-12.66</td> <td>31.58</td> <td>9.76</td> <td>Average</td> <td>-----</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>51.68</td> <td>74.00</td> <td>-22.32</td> <td>41.92</td> <td>9.76</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>3</td> <td>11160.00</td> <td>52.72</td> <td>54.00</td> <td>-1.28</td> <td>38.00</td> <td>14.72</td> <td>Average</td> <td>-----</td> </tr> <tr> <td>4</td> <td>11160.00</td> <td>65.92</td> <td>74.00</td> <td>-8.08</td> <td>51.20</td> <td>14.72</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>5</td> <td>16740.00</td> <td>59.31</td> <td>68.30</td> <td>-8.99</td> <td>41.56</td> <td>17.75</td> <td>Peak</td> <td>-----</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	7440.00	41.34	54.00	-12.66	31.58	9.76	Average	-----	2	7440.00	51.68	74.00	-22.32	41.92	9.76	Peak	-----	3	11160.00	52.72	54.00	-1.28	38.00	14.72	Average	-----	4	11160.00	65.92	74.00	-8.08	51.20	14.72	Peak	-----	5	16740.00	59.31	68.30	-8.99	41.56	17.75	Peak	-----			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																											
1	7440.00	41.34	54.00	-12.66	31.58	9.76	Average	-----																																																											
2	7440.00	51.68	74.00	-22.32	41.92	9.76	Peak	-----																																																											
3	11160.00	52.72	54.00	-1.28	38.00	14.72	Average	-----																																																											
4	11160.00	65.92	74.00	-8.08	51.20	14.72	Peak	-----																																																											
5	16740.00	59.31	68.30	-8.99	41.56	17.75	Peak	-----																																																											
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>																																																																			




Polarization	Horizontal		Test Freq. (MHz)	5700					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5725.00	59.59	68.30	-8.71	53.49	6.10	Peak	-----	-----
2	7600.00	39.25	54.00	-14.75	29.30	9.95	Average	-----	-----
3	7600.00	50.65	74.00	-23.35	40.70	9.95	Peak	-----	-----
4	11400.00	44.67	54.00	-9.33	29.87	14.80	Average	-----	-----
5	11400.00	57.16	74.00	-16.84	42.36	14.80	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5700						
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5725.00	62.70	68.30	-5.60	56.60	6.10	Peak	-----	-----
2	7600.00	41.25	54.00	-12.75	31.30	9.95	Average	-----	-----
3	7600.00	51.55	74.00	-22.45	41.60	9.95	Peak	-----	-----
4	11400.00	52.90	54.00	-1.10	38.10	14.80	Average	-----	-----
5	11400.00	66.61	74.00	-7.39	51.81	14.80	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

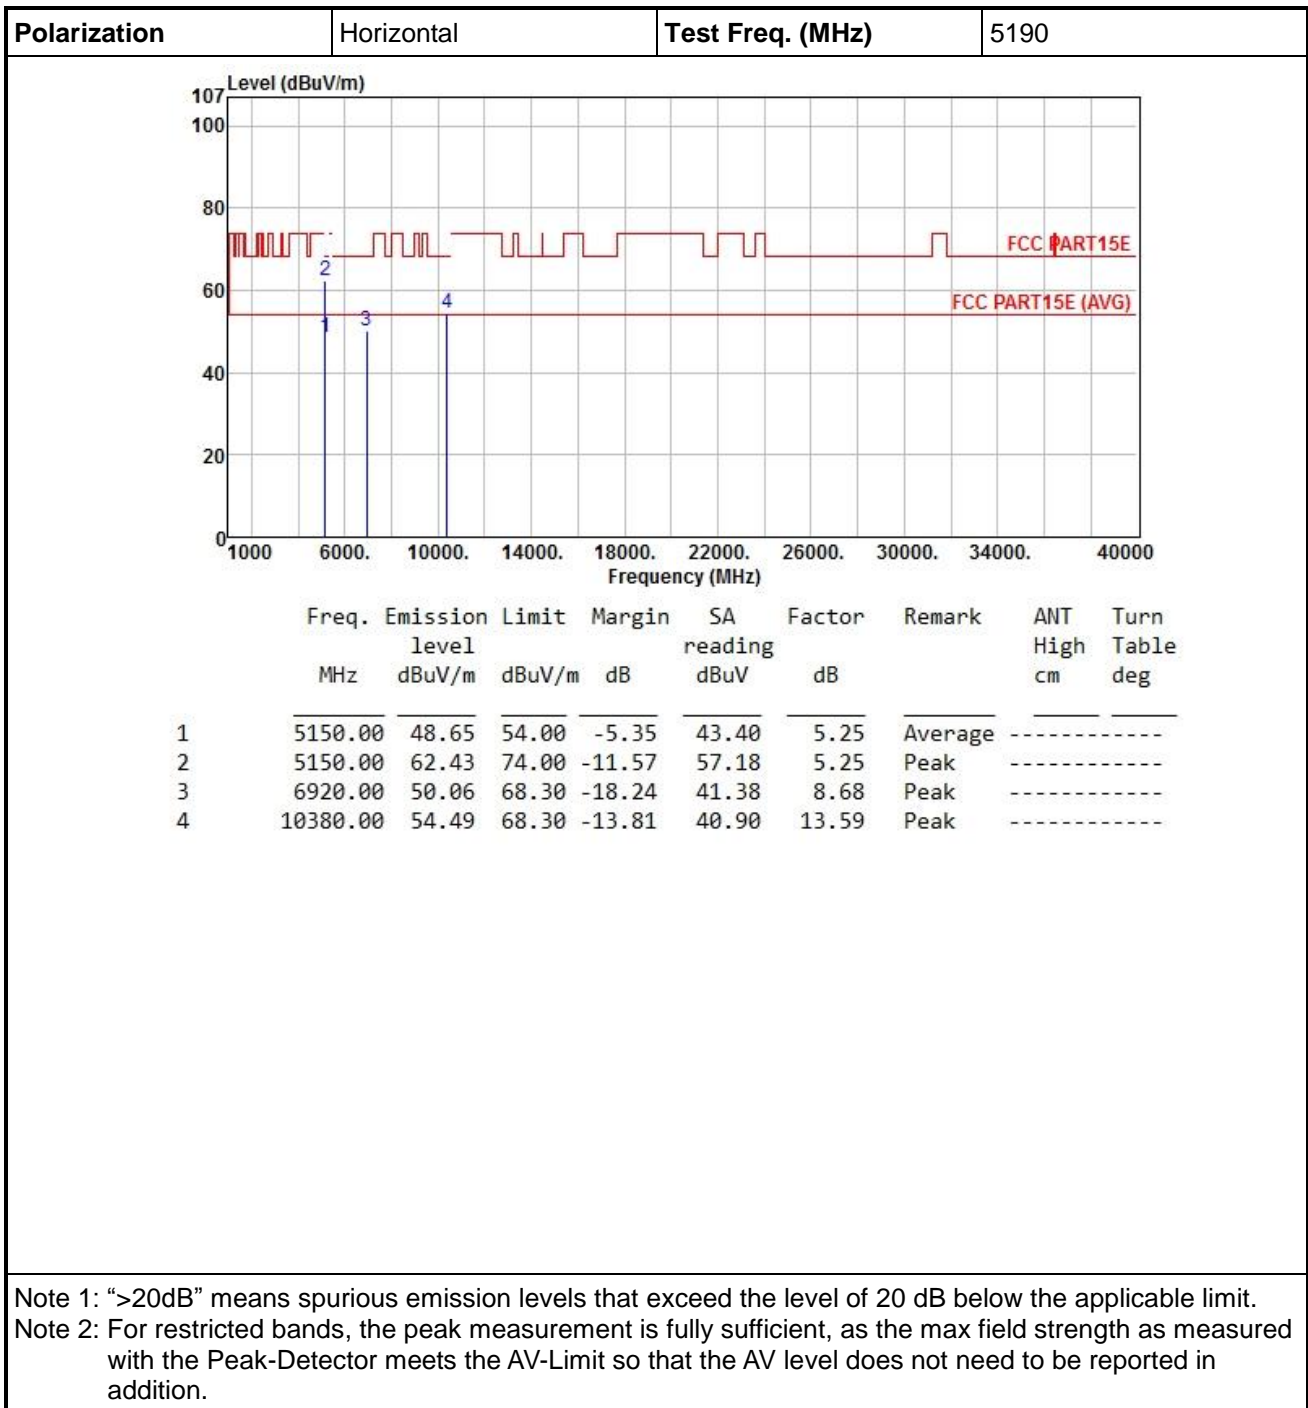




Polarization	Vertical	Test Freq. (MHz)	5190																																																						
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>47.35</td> <td>54.00</td> <td>-6.65</td> <td>42.10</td> <td>5.25</td> <td>Average</td> <td>-----</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>61.45</td> <td>74.00</td> <td>-12.55</td> <td>56.20</td> <td>5.25</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>3</td> <td>6920.00</td> <td>50.84</td> <td>68.30</td> <td>-17.46</td> <td>42.16</td> <td>8.68</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>4</td> <td>10380.00</td> <td>53.89</td> <td>68.30</td> <td>-14.41</td> <td>40.30</td> <td>13.59</td> <td>Peak</td> <td>-----</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5150.00	47.35	54.00	-6.65	42.10	5.25	Average	-----	2	5150.00	61.45	74.00	-12.55	56.20	5.25	Peak	-----	3	6920.00	50.84	68.30	-17.46	42.16	8.68	Peak	-----	4	10380.00	53.89	68.30	-14.41	40.30	13.59	Peak	-----		
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																	
1	5150.00	47.35	54.00	-6.65	42.10	5.25	Average	-----																																																	
2	5150.00	61.45	74.00	-12.55	56.20	5.25	Peak	-----																																																	
3	6920.00	50.84	68.30	-17.46	42.16	8.68	Peak	-----																																																	
4	10380.00	53.89	68.30	-14.41	40.30	13.59	Peak	-----																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>																																																									



Polarization	Horizontal	Test Freq. (MHz)	5230
---------------------	------------	-------------------------	------

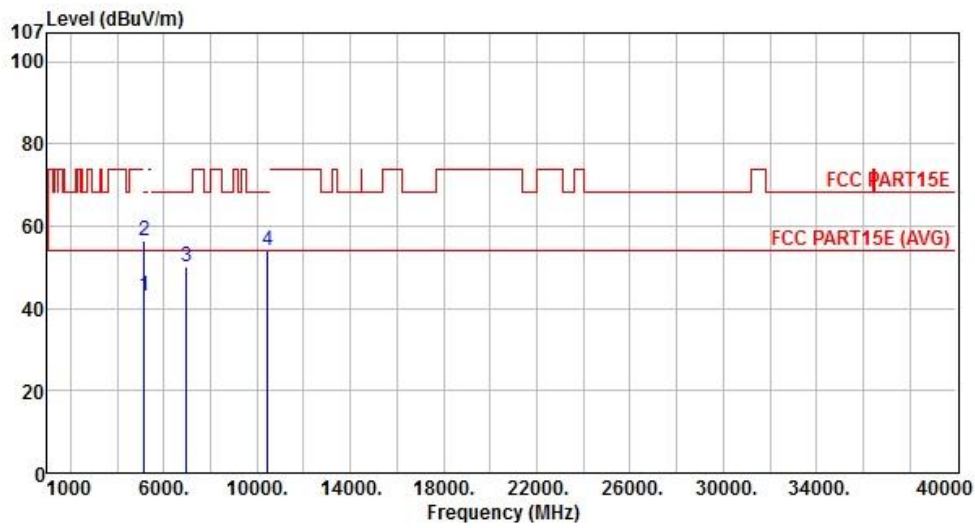


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.15	54.00	-10.85	37.90	5.25	Average	-----	-----
2	5150.00	56.55	74.00	-17.45	51.30	5.25	Peak	-----	-----
3	6973.30	49.95	68.30	-18.35	41.14	8.81	Peak	-----	-----
4	10460.00	53.95	68.30	-14.35	40.20	13.75	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Polarization	Vertical	Test Freq. (MHz)	5230
---------------------	----------	-------------------------	------

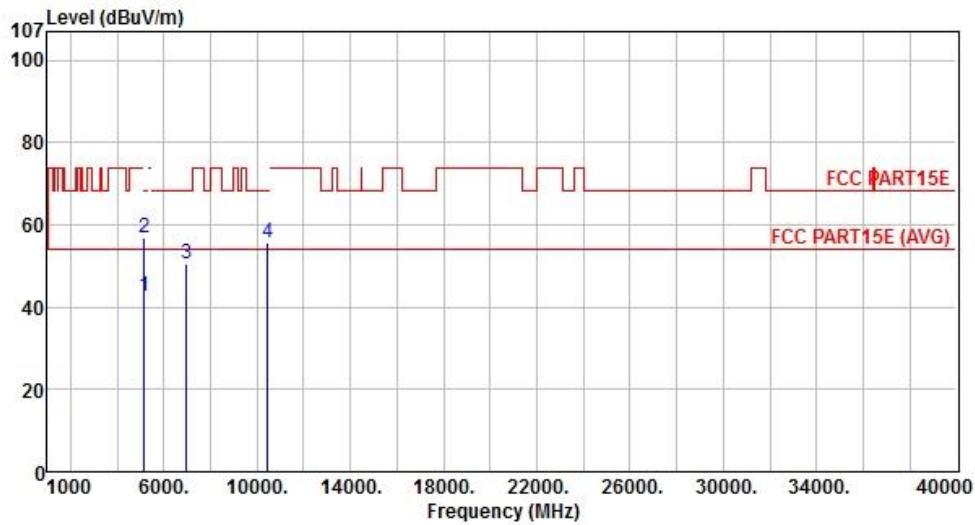

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	42.75	54.00	-11.25	37.50	5.25	Average	-----	-----
2	5150.00	56.68	74.00	-17.32	51.43	5.25	Peak	-----	-----
3	6973.30	50.70	68.30	-17.60	41.89	8.81	Peak	-----	-----
4	10460.00	55.85	68.30	-12.45	42.10	13.75	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Polarization	Horizontal		Test Freq. (MHz)	5270					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5350.00	44.10	54.00	-9.90	38.69	5.41	Average	-----	-----
2	5350.00	57.42	74.00	-16.58	52.01	5.41	Peak	-----	-----
3	7026.70	50.37	68.30	-17.93	41.44	8.93	Peak	-----	-----
4	10540.00	54.50	68.30	-13.80	40.60	13.90	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5270						
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5350.00	43.73	54.00	-10.27	38.32	5.41	Average	-----	-----
2	5350.00	57.55	74.00	-16.45	52.14	5.41	Peak	-----	-----
3	7026.70	51.12	68.30	-17.18	42.19	8.93	Peak	-----	-----
4	10540.00	54.60	68.30	-13.70	40.70	13.90	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Horizontal		Test Freq. (MHz)	5310					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5350.00	49.35	54.00	-4.65	43.94	5.41	Average	-----	-----
2	5350.00	64.58	74.00	-9.42	59.17	5.41	Peak	-----	-----
3	7080.00	50.51	68.30	-17.79	41.43	9.08	Peak	-----	-----
4	10620.00	41.23	54.00	-12.77	27.20	14.03	Average	-----	-----
5	10620.00	54.33	74.00	-19.67	40.30	14.03	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5310						
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5350.00	49.16	54.00	-4.84	43.75	5.41	Average	-----	-----
2	5350.00	64.13	74.00	-9.87	58.72	5.41	Peak	-----	-----
3	7080.00	51.07	68.30	-17.23	41.99	9.08	Peak	-----	-----
4	10620.00	42.14	54.00	-11.86	28.11	14.03	Average	-----	-----
5	10620.00	54.93	74.00	-19.07	40.90	14.03	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									




Polarization	Horizontal		Test Freq. (MHz)	5510					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5460.00	45.98	54.00	-8.02	40.40	5.58	Average	-----	-----
2	5460.00	61.58	74.00	-12.42	56.00	5.58	Peak	-----	-----
3	5470.00	51.73	54.00	-2.27	46.12	5.61	Average	-----	-----
4	5470.00	68.61	74.00	-5.39	63.00	5.61	Peak	-----	-----
5	11020.00	44.32	54.00	-9.68	29.64	14.68	Average	-----	-----
6	11020.00	57.39	74.00	-16.61	42.71	14.68	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5510						
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5460.00	46.14	54.00	-7.86	40.56	5.58	Average	-----	-----
2	5460.00	62.08	74.00	-11.92	56.50	5.58	Peak	-----	-----
3	5470.00	52.71	54.00	-1.29	47.10	5.61	Average	-----	-----
4	5470.00	69.51	74.00	-4.49	63.90	5.61	Peak	-----	-----
5	11020.00	47.13	54.00	-6.87	32.45	14.68	Average	-----	-----
6	11020.00	60.54	74.00	-13.46	45.86	14.68	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Horizontal	Test Freq. (MHz)	5550
---------------------	------------	-------------------------	------

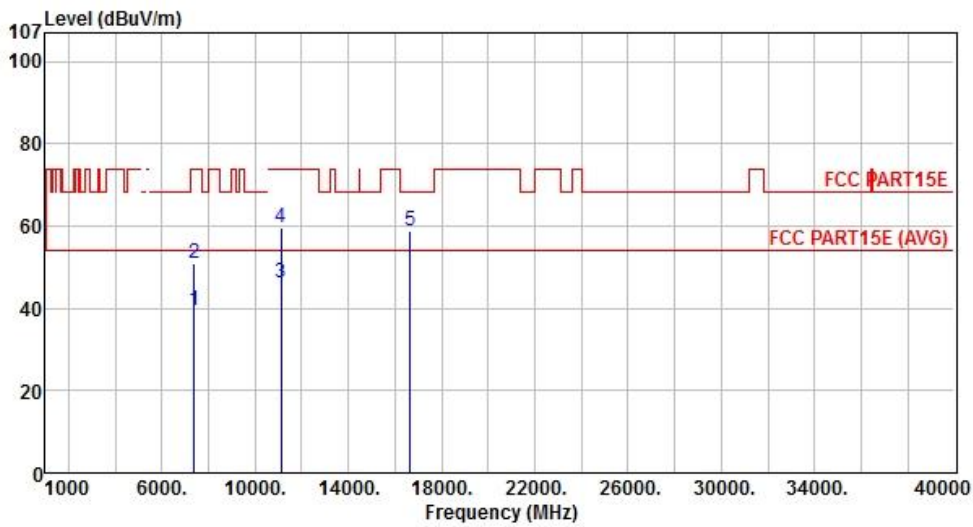

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	7400.00	39.44	54.00	-14.56	29.74	9.70	Average	-----	-----
2	7400.00	51.00	74.00	-23.00	41.30	9.70	Peak	-----	-----
3	11100.00	46.31	54.00	-7.69	31.61	14.70	Average	-----	-----
4	11100.00	59.61	74.00	-14.39	44.91	14.70	Peak	-----	-----
5	16650.00	59.00	68.30	-9.30	41.55	17.45	Peak	-----	-----

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



Polarization	Vertical	Test Freq. (MHz)	5550						
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	7400.00	40.98	54.00	-13.02	31.28	9.70	Average	-----	-----
2	7400.00	51.75	74.00	-22.25	42.05	9.70	Peak	-----	-----
3	11100.00	49.68	54.00	-4.32	34.98	14.70	Average	-----	-----
4	11100.00	61.93	74.00	-12.07	47.23	14.70	Peak	-----	-----
5	16650.00	59.35	68.30	-8.95	41.90	17.45	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Horizontal		Test Freq. (MHz)	5670					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5725.00	57.11	68.30	-11.19	51.01	6.10	Peak	-----	-----
2	7560.00	39.74	54.00	-14.26	29.82	9.92	Average	-----	-----
3	7560.00	51.41	74.00	-22.59	41.49	9.92	Peak	-----	-----
4	11340.00	46.42	54.00	-7.58	31.64	14.78	Average	-----	-----
5	11340.00	59.62	74.00	-14.38	44.84	14.78	Peak	-----	-----
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>									



Polarization	Vertical	Test Freq. (MHz)	5670																																																																
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.00</td> <td>58.22</td> <td>68.30</td> <td>-10.08</td> <td>52.12</td> <td>6.10</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>2</td> <td>7560.00</td> <td>41.55</td> <td>54.00</td> <td>-12.45</td> <td>31.63</td> <td>9.92</td> <td>Average</td> <td>-----</td> </tr> <tr> <td>3</td> <td>7560.00</td> <td>52.31</td> <td>74.00</td> <td>-21.69</td> <td>42.39</td> <td>9.92</td> <td>Peak</td> <td>-----</td> </tr> <tr> <td>4</td> <td>11340.00</td> <td>49.88</td> <td>54.00</td> <td>-4.12</td> <td>35.10</td> <td>14.78</td> <td>Average</td> <td>-----</td> </tr> <tr> <td>5</td> <td>11340.00</td> <td>62.58</td> <td>74.00</td> <td>-11.42</td> <td>47.80</td> <td>14.78</td> <td>Peak</td> <td>-----</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5725.00	58.22	68.30	-10.08	52.12	6.10	Peak	-----	2	7560.00	41.55	54.00	-12.45	31.63	9.92	Average	-----	3	7560.00	52.31	74.00	-21.69	42.39	9.92	Peak	-----	4	11340.00	49.88	54.00	-4.12	35.10	14.78	Average	-----	5	11340.00	62.58	74.00	-11.42	47.80	14.78	Peak	-----			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																											
1	5725.00	58.22	68.30	-10.08	52.12	6.10	Peak	-----																																																											
2	7560.00	41.55	54.00	-12.45	31.63	9.92	Average	-----																																																											
3	7560.00	52.31	74.00	-21.69	42.39	9.92	Peak	-----																																																											
4	11340.00	49.88	54.00	-4.12	35.10	14.78	Average	-----																																																											
5	11340.00	62.58	74.00	-11.42	47.80	14.78	Peak	-----																																																											
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p>																																																																			



3.7 Frequency Stability


3.7.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.7.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

3.7.3 Test Setup

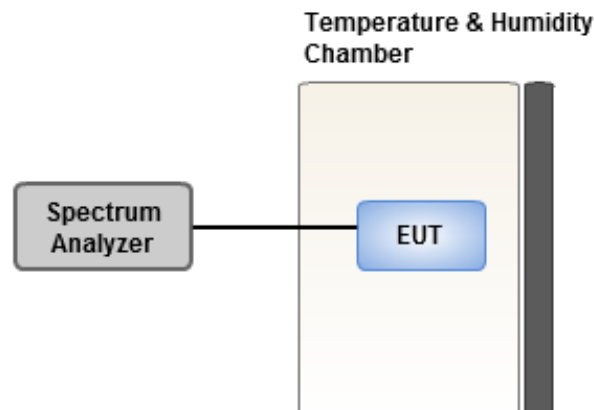



3.7.4 Test Result of Frequency Stability

Frequency: 5320 MHz	Frequency Drift (ppm)			
	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	2.67	2.82	2.87	2.96
T20°C Vmin	5.42	5.57	5.73	5.24
T50°C Vnom	4.39	4.70	4.10	4.66
T40°C Vnom	-1.19	-1.07	-0.67	-1.08
T30°C Vnom	0.66	0.74	0.48	0.62
T20°C Vnom	2.98	2.52	3.30	2.58
T10°C Vnom	3.07	2.84	3.22	3.61
T0°C Vnom	1.54	2.15	1.52	1.38
T-10°C Vnom	1.73	1.91	2.08	2.01
T-20°C Vnom	2.51	2.92	3.14	2.19
T-30°C Vnom	1.78	1.41	2.19	2.52
Vnom [V]: 110		Vmax [V]: 126.5		Vmin [V]: 93.5
Tnom [°C]: 20		Tmax [°C]: 50		Tmin [°C]: -30

==END==