

# **FCC TEST REPORT**

for

**CISPR PUB. 22 Class B**

Equipment : MODEM CARD

Model No. : PT-3029

FCC ID : H52PT-3029

Filing Type : Original Grant

Applicant : **PURETEK INDUSTRIAL CO., LTD.**  
4F, NO. 12, LANE 235, PAO-CHIAO RD., HSINTIEN  
CITY,  
TAIPEI, TAIWAN, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## Table of Contents

<b>CERTIFICATE OF COMPLIANCE .....</b>	<b>3</b>
<b>1. General Description of Equipment under Test .....</b>	<b>4</b>
1.1. Applicant .....	4
1.2. Manufacturer .....	4
1.3. Basic Description of Equipment under Test .....	4
1.4. Feature of Equipment under Test .....	4
<b>2. Test Configuration of Equipment under Test .....</b>	<b>5</b>
2.1. Test Manner .....	5
2.2. Description of Test System .....	5
2.3. Connection Diagram of Test System .....	7
<b>3. Test Software .....</b>	<b>8</b>
<b>4. General Information of Test .....</b>	<b>9</b>
4.1. Test Facility .....	9
4.2. Standard for Methods of Measurement .....	9
4.3. Test in Compliance with .....	9
4.4. Frequency Range Investigated .....	9
4.5. Test Distance .....	9
<b>5. Test of Conducted Powerline .....</b>	<b>10</b>
5.1. Major Measuring Instruments .....	10
5.2. Test Procedures .....	11
5.3. Typical Test Setup Layout of Conducted Powerline .....	12
5.4. Test Result of AC Powerline Conducted Emission .....	13
5.5. Photographs of Conducted Powerline Test Configuration .....	14
<b>6. Test of Radiated Emission .....</b>	<b>16</b>
6.1. Major Measuring Instruments .....	16
6.2. Test Procedures .....	17
6.3. Typical Test Setup Layout of Radiated Emission .....	18
6.4. Test Result of Radiated Emission .....	19
6.5. Photographs of Radiated Emission Test Configuration .....	20
<b>7. Antenna Factor &amp; Cable Loss .....</b>	<b>21</b>
<b>8. List of Measuring Equipment Used .....</b>	<b>22</b>
<b>Appendix A. Photographs of EUT .....</b>	<b>A1 ~ A2</b>

# **CERTIFICATE OF COMPLIANCE**

**for**

## **CISPR PUB. 22 Class B**

Equipment : MODEM CARD

Model No. : PT-3029

FCC ID : H52PT-3029

Applicant : **PURETEK INDUSTRIAL CO., LTD.**  
4F, NO. 12, LANE 235, PAO-CHIAO RD., HSINTIEN CITY,  
TAIPEI, TAIWAN, R.O.C.

### **I HEREBY CERTIFY THAT :**

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was ***passed* CISPR PUB. 22** both radiated and conducted emission class B limits. Testing was carried out on Jul. 25, 2000 at **SPORTON International Inc.** LAB. in Nei Hwu.

---

Lenore Chang  
President

***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## **1. General Description of Equipment under Test**

### **1.1. Applicant**

PURETEK INDUSTRIAL CO., LTD.  
4F, NO. 12, LANE 235, PAO-CHIAO RD., HSINTIEN CITY,  
TAIPEI, TAIWAN, R.O.C.

### **1.2. Manufacturer**

Same as 1.1.

### **1.3. Basic Description of Equipment under Test**

Equipment	: MODEM CARD
Model No.	: PT-3029
FCC ID	: H52PT-3029
Trade Name	: PURETEK
Telephone line	: Non-shielded, 10m
Power Supply Type	: From PC
Power Cord	: N/A

### **1.4. Feature of Equipment under Test**

- Data:
  - ITU-T V.90
  - K56flex
  - ITU-T V.34, V.32bis, V.32, V.22bis, V.22
  - Bell 103 & 212A
  - V.42bis & MNP 5 (Data compression)
  - V.42 & MNP2-4 (Error correction)
- Fax:
  - V.17 (14400bps FAX)
  - V.29 (9600bps FAX)
  - V.27ter (4800bps FAX)
- Voice:
  - Voice/Audio mode

## **2. Test Configuration of Equipment under Test**

### **2.1. Test Manner**

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The remote workstation, SONY Monitor, DELL PS/2 Keyboard, PRIMAX PS/2 Mouse, HP Printer, ACEEX Modem and EUT were connected to the FIC PC for EMI test. The TRANBON Telephone was connected to the EUT. The remote workstation included SONY Monitor, DELL PS/2 Keyboard, PRIMAX PS/2 Mouse and the FIC PC.
- c. Using the telephone line to connect the EUT and workstation.
- d. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 1000MHz.

### **2.2. Description of Test System**

Support Unit 1. -- Personal Computer (FIC)—for local and remote workstation

FCC ID	: N/A
Model No.	: P2L97
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0037
Data Cable	: Shielded
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (SONY) —for local and remote workstation

FCC ID	: AK8GDM17SE2T
Model No.	: GDM-17SE2T
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0013
Data Cable	: Shielded, 1.15m

Support Unit 3. -- PS/2 Keyboard (DELL) —for local and remote workstation

FCC ID	: GYUM90SK
Model No.	: AT101W
Serial No.	: SP0019
Data Cable	: Shielded, 1.5m

## Support Unit 4. -- PS/2 Mouse (PRIMAX) —for local and remote workstation

FCC ID : EMJMUSJQ  
Model No. : MUS9J  
Serial No. : SP0045  
Data Cable : Non-shielded, 1.75m

## Support Unit 5. -- Printer (HP)

FCC ID : DSI6XU2225  
Model No. : 2225C  
Power Supply Type : Linear  
Power Cord : Non-Shielded  
Serial No. : SP0014  
Data Cable : Shielded, 1.2m


## Support Unit 6. -- Modem (ACEEX)

FCC ID : IFAXDM1414  
Model No. : DM1414  
Power Supply Type : Linear  
Power Cord : Non-Shielded  
Serial No. : SP0015  
Data Cable : Shielded, 1.15m

## Support Unit 7. -- Telephone (TRANBON)

FCC ID : N/A  
Model No. : TE-302  
Serial No. : SP0071  
Data Cable : Non-Shielded, 1.0

### 2.3. Connection Diagram of Test System

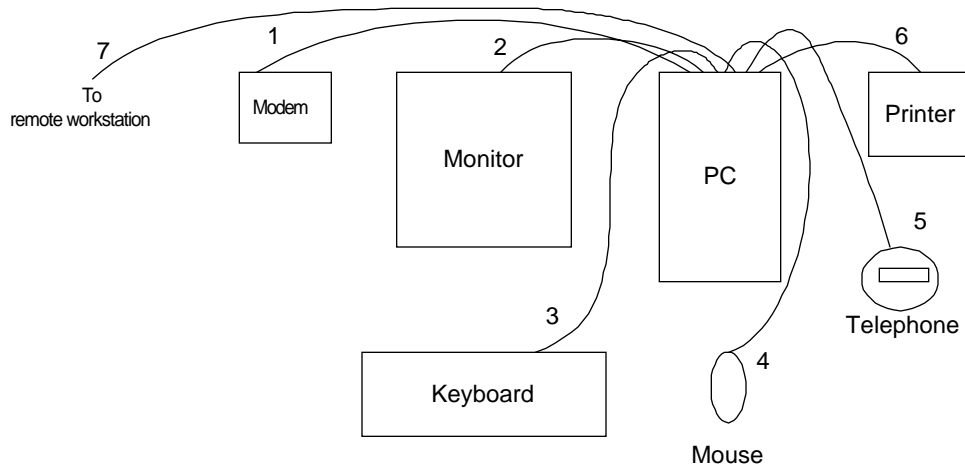

1. The I/O cable is connected from PC to the support unit 6.
2. The I/O cable is connected from PC to the support unit 2.
3. The I/O cable is connected from PC to the support unit 3.
4. The I/O cable is connected from PC to the support unit 4.
5. The I/O cable is connected from EUT to the support unit 7.
6. The I/O cable is connected from PC to the support unit 5.
7. The I/O cable is connected from EUT to the remote workstation.

### **3. Test Software**

An executive program, EMITEST.EXE under WIN 98, which generates a complete line of continuously repeating " H" pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H" messages to the monitor, and the monitor displays " H" patterns on the screen.
- d. The PC sends " H" messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H" messages to the modem.
- f. The PC sends " H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

At the same time, Hyper Terminal was executed to link with the remote workstation to receive and transmit data by telephone line.



## **4. General Information of Test**

### **4.1. Test Facility**

This test was carried out by SPORTON International Inc.

Test Site Location : No. 3, Lane 238, Kang Lo Street, Nei Hwu District,  
Taipei 11424, Taiwan, R.O.C.  
TEL : 886-2-2631-4739  
FAX : 886-2-2631-9740

### **4.2. Standard for Methods of Measurement**

ANSI C63.4-1992

### **4.3. Test in Compliance with**

CISPR PUB. 22 Class B

### **4.4. Frequency Range Investigated**

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation : from 30 MHz to 1,000 MHz

### **4.5. Test Distance**

The test distance of radiated emission from antenna to EUT is 10 M.

## **5. Test of Conducted Powerline**

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


### **5.1. Major Measuring Instruments**

Test Receiver	HP 8591EM
Attenuation	0 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 kHz

## **5.2. Test Procedures**

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

### 5.3. Typical Test Setup Layout of Conducted Powerline

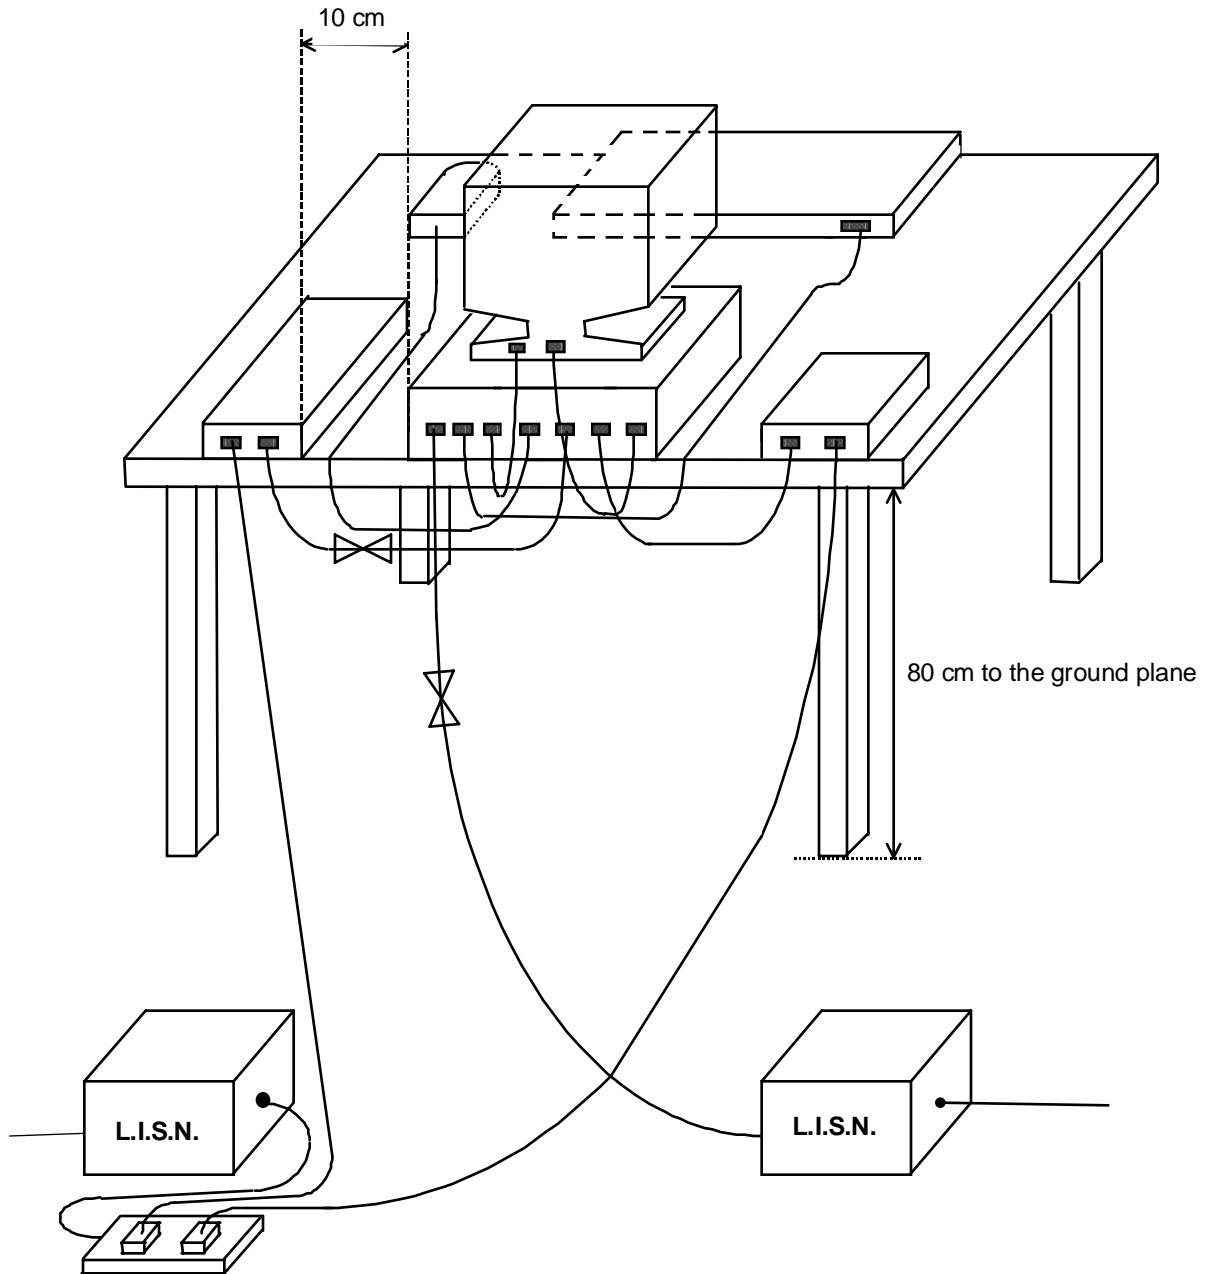


**5.4. Test Result of AC Powerline Conducted Emission**

- Frequency Range of Test : from 0.15 MHz to 30 MHz
- Temperature : 28°C
- Relative Humidity : 49 %
- Test Date : Jul. 25, 2000

**The Conducted Emission test was passed at minimum margin**

**NEUTRAL 16.713 MHz / 37.70 dBuV.**

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.278	L	37.30	36.60	73.28	67.61	60.87	50.87	1105.05	349.45	-23.6	-14.3
0.348	L	33.50	33.20	47.32	45.71	59.00	49.00	891.69	281.98	-25.5	-15.8
0.278	N	38.00	37.70	79.43	76.74	60.86	50.86	1104.58	349.30	-22.9	-13.2
0.348	N	32.20	31.20	40.74	36.31	59.01	49.01	892.38	282.20	-26.8	-17.8
2.088	N	31.80	30.50	38.90	33.50	56.00	46.00	630.96	199.53	-24.2	-15.5
16.713	N	40.90	37.70	110.92	76.74	60.00	50.00	1000.00	316.23	-19.1	-12.3

Test Engineer :   
Jackson Huang

**5.5. Photographs of Conducted Powerline Test Configuration**

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW



SIDE VIEW



## **6. Test of Radiated Emission**

Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

### **6.1. Major Measuring Instruments**


- Amplifier ( HP 8447D )
  - Attenuation 0 dB
  - RF Gain 25 dB
  - Signal Input 0.1 MHz to 1.3 GHz
  
- Spectrum Analyzer ( ADVANTEST R3261C )
  - Attenuation 0 dB
  - Start Frequency 30 MHz
  - Stop Frequency 1000 MHz
  - Resolution Bandwidth 1 MHz
  - Video Bandwidth 1 MHz
  - Signal Input 9 KHz to 2.6 GHz



## **6.2. Test Procedures**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

### 6.3. Typical Test Setup Layout of Radiated Emission

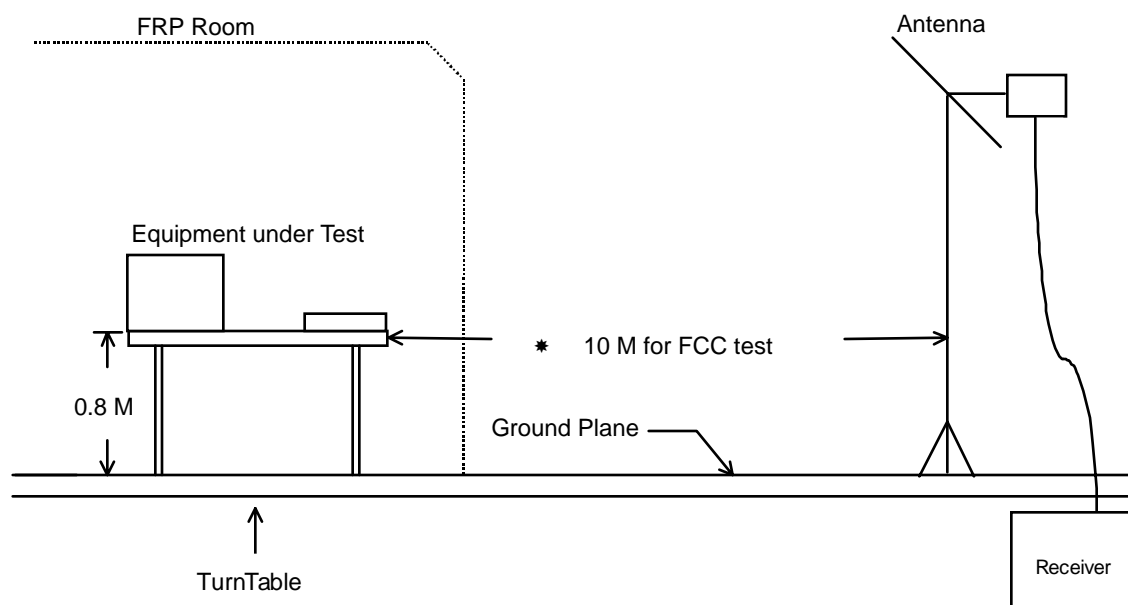

#### 6.4. Test Result of Radiated Emission

- Frequency Range of Test : from 30 MHz to 1,000 MHz
- Test Distance : 10 M
- Temperature : 30°C
- Relative Humidity : 51 %
- Test Date : Jul. 24, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

218.015 MHz / 26.11 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 300 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
218.012	H	10.31	2.78	10.77	30.00	31.62	23.86	15.60	-6.14
599.500	H	20.12	4.82	5.10	37.00	70.79	30.04	31.77	-6.96
133.421	V	11.09	2.18	10.96	30.00	31.62	24.23	16.27	-5.77
167.708	V	9.52	2.34	11.77	30.00	31.62	23.63	15.19	-6.37
218.015	V	10.31	2.78	13.02	30.00	31.62	26.11	20.21	-3.89
601.102	V	20.10	4.83	6.90	37.00	70.79	31.83	39.04	-5.17

Test Engineer :

Jackson Huang

**6.5. Photographs of Radiated Emission Test Configuration**

- The photographs show the configuration that generates the maximum emission.

**FRONT VIEW****REAR VIEW**

## 7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	19.2	0.8
35	13.4	0.9
40	13.4	0.9
45	11.5	1.1
50	9.9	1.1
55	7.9	1.2
60	6.0	1.3
65	6.4	1.4
70	6.8	1.5
75	7.1	1.5
80	7.3	1.5
85	8.2	1.6
90	9.2	1.6
95	10.1	1.6
100	11.0	1.7
110	11.4	1.9
120	11.8	2.0
130	11.3	2.2
140	10.8	2.2
150	10.7	2.2
160	9.7	2.3
170	9.4	2.4
180	9.5	2.5
190	9.4	2.5
200	9.3	2.6
220	10.4	2.8
240	11.4	3.0
260	12.2	2.9
280	12.5	3.2
300	12.9	3.2
320	13.3	3.3
340	13.7	3.6
360	14.5	3.9
380	15.5	3.9
400	16.5	3.9
450	16.5	4.2
500	18.3	4.4
550	18.9	4.8
600	20.1	4.8
650	18.1	5.1
700	17.2	5.4
750	17.9	5.8
800	18.0	6.1
850	17.7	6.6
900	21.0	6.6
950	21.0	6.9
1000	20.3	7.0

NHOP3

## 8. List of Measuring Equipment Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver (site1)	HP	8591EM	3536A00673	9 KHz – 1.8 GHz	Sep. 02, 1999	Conduction
LISN (for EUT)	EMCO	3810/2	9703-1838	50uH / 50 OHM	Aug. 30, 1999	Conduction
LISN (for support device)	Kyoritsu	KNW-407	8-1010-15	50uH / 50 OHM	Nov. 16, 1999	Conduction
EMI Filter	CORCOM	MRI-2030	N/A	480VAC / 30A	N/A	Conduction
Spectrum Analyzer (site 3)	Advantest	R3261C	71720471	9KHz - 2.6GHz	Jan. 06, 2000	Radiation
Amplifier (Site 3)	HP	8447D	2944A06292	0.1MHz -1.3GHz	Feb. 19, 2000	Radiation
Bilog Antenna (Site 3)	CHASE	CBL6112A	2218	30MHz - 2GHz	Jan. 29, 2000	Radiation
Half-wave dipole antenna (Site 3)	EMCO	3121C	8912-1285	20MHz - 1GHz	May 17, 2000	Radiation
Turn Table	EMCO	2080	9508-1805	0 ~ 360 degree	N/A	Radiation
Antenna Mast	EMCO	2075	9804-2151	1 m - 4 m	N/A	Radiation