

# **FCC TEST REPORT**

for

**CISPR PUB. 22 Class B**

Equipment : USB EXPANSION PCI CARD

Model No. : PT-6010

FCC ID : H52PT-6010

Filing Type : Original Grant

Applicant : **PURETEK INDUSTRIAL CO., LTD.**  
4F, NO. 12, LANE 235, PAO-CHIAO RD., HSINTIEN  
CITY, TAIPEI, TAIWAN, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## Table of Contents

|  |           |
|--|-----------|
| <b>CERTIFICATE OF COMPLIANCE .....</b>                           | <b>3</b>  |
| <b>1. General Description of Equipment under Test .....</b>      | <b>4</b>  |
| 1.1. Applicant .....   | 4         |
| 1.2. Manufacturer .....  | 4         |
| 1.3. Basic Description of Equipment under Test .....             | 4         |
| 1.4. Feature of Equipment under Test .....                       | 4         |
| <b>2. Test Configuration of Equipment under Test .....</b>       | <b>5</b>  |
| 2.1. Test Manner .....   | 5         |
| 2.2. Description of Test System .....                            | 5         |
| Connection Diagram of Test System .....                          | 7         |
| <b>3. Test Software .....</b>                                    | <b>8</b>  |
| <b>4. General Information of Test .....</b>                      | <b>9</b>  |
| 4.1. Test Facility .....   | 9         |
| 4.2. Standard for Methods of Measurement .....                   | 9         |
| 4.3. Test in Compliance with .....                               | 9         |
| 4.4. Frequency Range Investigated .....                          | 9         |
| 4.5. Test Distance .....   | 9         |
| <b>5. Test of Conducted Powerline .....</b>                      | <b>10</b> |
| 5.1. Major Measuring Instruments .....                           | 10        |
| 5.2. Test Procedures .....                                       | 11        |
| 5.3. Typical Test Setup Layout of Conducted Powerline .....      | 12        |
| 5.4. Test Result of AC Powerline Conducted Emission .....        | 13        |
| 5.5. Photographs of Conducted Powerline Test Configuration ..... | 14        |
| <b>6. Test of Radiated Emission .....</b>                        | <b>16</b> |
| 6.1. Major Measuring Instruments .....                           | 16        |
| 6.2. Test Procedures .....                                       | 17        |
| 6.3. Typical Test Setup Layout of Radiated Emission .....        | 18        |
| 6.4. Test Result of Radiated Emission .....                      | 19        |
| 6.5. Photographs of Radiated Emission Test Configuration .....   | 20        |
| <b>7. Antenna Factor &amp; Cable Loss .....</b>                  | <b>21</b> |
| <b>8. List of Measuring Equipment Used .....</b>                 | <b>22</b> |

# **CERTIFICATE OF COMPLIANCE**

**for**

## **CISPR PUB. 22 Class B**

Equipment : USB EXPANSION PCI CARD

Model No. : PT-6010

FCC ID : H52PT-6010

Applicant : **PURETEK INDUSTRIAL CO., LTD.**  
4F, NO. 12, LANE 235, PAO-CHIAO RD., HSINTIEN CITY,  
TAIPEI, TAIWAN, R.O.C.

### **I HEREBY CERTIFY THAT :**

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed CISPR PUB. 22** both radiated and conducted emission class B limits. Testing was carried out on Nov. 11, 1999 at **SPORTON International Inc.** LAB. in Nei Hwu.

---

W. L. Huang  
General Manager

***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## **1. General Description of Equipment under Test**

### **1.1. Applicant**

PURETEK INDUSTRIAL CO., LTD.  
4F, NO. 12, LANE 235, PAO-CHIAO RD., HSINTIEN CITY,  
TAIPEI, TAIWAN, R.O.C.

### **1.2. Manufacturer**

Same as 1.1.

### **1.3. Basic Description of Equipment under Test**

|                   |                          |
|-------------------|--------------------------|
| Equipment         | : USB EXPANSION PCI CARD |
| Model No.         | : PT-6010                |
| FCC ID            | : H52PT-6010             |
| Trade Name        | : PURETEK                |
| Power Supply Type | : From PC                |
| Power Cord        | : N/A                    |

### **1.4. Feature of Equipment under Test**

- USB solution
- additional BANDWIDTH
- EXPANDABLE WITH 2 CARDS IN ONE PC
- dual ports
- 500 mA bus-powered
- 12 Mbps bandwidth
- supports low-speed and high-speed devices
- Universal Compatibility
- USB SPECIFICATION V1.0 compatible
- PCI specification V2.1 compliant
- OHCI / UHCI standards
- PLUG & PLAY compatible with windows 95 OSR2 / 98 and higher
- CE and FCC approved

## **2. Test Configuration of Equipment under Test**

### **2.1. Test Manner**

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The SONY Monitor, DELL PS/2 Keyboard, PRIMAX PS/2 Mouse, WINIC USB Mouse x 2, HP Printer, ACEEX Modem and EUT were connected to the FIC PC for EMI test.
- c. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 1000MHz.

### **2.2. Description of Test System**

#### **Support Unit 1. -- Monitor (SONY)**

|                   |  |
|-------------------|--|
| FCC ID            | : AK8GDM17SE2T                                     |
| Model No.         | : GDM-17SE2T                                       |
| Power Supply Type | : Switching  |
| Power Cord        | : Non-Shielded                                     |
| Serial No.        | : SP0013   |
| Data Cable        | : Shielded, 360 degree via metal backshells, 1.15m |

#### **Support Unit 2. -- PS/2 Keyboard (DELL)**

|            |   |
|------------|---|
| FCC ID     | : GYUM90SK  |
| Model No.  | : AT101W  |
| Serial No. | : SP0019  |
| Data Cable | : Shielded, 360 degree via metal backshells, 2.0m |

#### **Support Unit 3. -- PS/2 Mouse (PRIMAX)**

|            |   |
|------------|---|
| FCC ID     | : EMJMUSJQ  |
| Model No.  | : MUS9J   |
| Serial No. | : SP0045  |
| Data Cable | : Shielded, 360 degree via metal backshells, 1.7m |

#### **Support Unit 4. -- USB Mouse (WINIC)**

|            |   |
|------------|---|
| FCC ID     | : F4ZFDM-A50                                      |
| Model No.  | : FDM-A50   |
| Serial No. | : SP0092  |
| Data Cable | : Shielded, 360 degree via metal backshells, 1.5m |

## Support Unit 5. -- Printer (HP)

FCC ID : DSI6XU2225  
Model No. : 2225C  
Power Supply Type : Linear  
Power Cord : Non-Shielded  
Serial No. : SP0014  
Data Cable : Shielded, 360 degree via metal backshells, 1.35m


## Support Unit 6. -- Modem (ACEEX)

FCC ID : IFAXDM1414  
Model No. : DM1414  
Power Supply Type : Linear  
Power Cord : Non-Shielded  
Serial No. : SP0015  
Data Cable : Shielded, 360 degree via metal backshells, 1.2m

## Support Unit 7. -- Personal Computer (FIC)

FCC ID : N/A  
Model No. : P2L97  
Power Supply Type : Switching  
Power Cord : Non-Shielded  
Serial No. : SP0037  
Data Cable : Shielded, 360 degree via metal backshells  
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

### 2.3. Connection Diagram of Test System

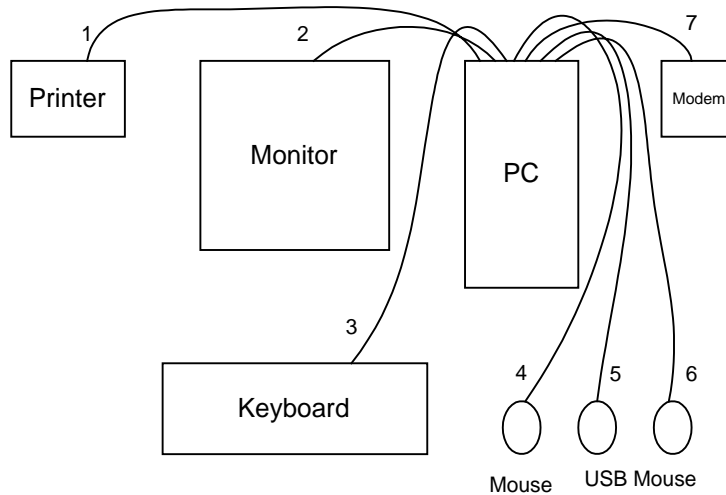

1. The I/O cable is connected to the support unit 5.
2. The I/O cable is connected to the support unit 1.
3. The I/O cable is connected to the support unit 2.
4. The I/O cable is connected to the support unit 3.
5. The I/O cable is connected from EUT to the support unit 4.
6. The I/O cable is connected from EUT to the support unit 4.
7. The I/O cable is connected to the support unit 6.

### **3. Test Software**

An executive program, EMITEST.EXE under WIN 98, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.



## **4. General Information of Test**

### **4.1. Test Facility**

This test was carried out by SPORTON International Inc.

Test Site Location : No. 3, Lane 238, Kang Lo Street, Nei Hwu District,  
Taipei 11424, Taiwan, R.O.C.

TEL : 886-2-2631-9739

FAX : 886-2-2631-9740

### **4.2. Standard for Methods of Measurement**

ANSI C63.4-1992

### **4.3. Test in Compliance with**

CISPR PUB. 22 Class B

### **4.4. Frequency Range Investigated**

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation : from 30 MHz to 1,000 MHz

### **4.5. Test Distance**

The test distance of radiated emission from antenna to EUT is 10 M.

## **5. Test of Conducted Powerline**


Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

### **5.1. Major Measuring Instruments**

|                 |              |
|-----------------|--------------|
| ● Test Receiver | ( R&S ESH3 ) |
| Attenuation     | 0 dB         |
| Start Frequency | 0.15 MHz     |
| Stop Frequency  | 30 MHz       |
| Step MHz        | 0.007 MHz    |
| IF Bandwidth    | 9 KHz        |

## **5.2. Test Procedures**

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

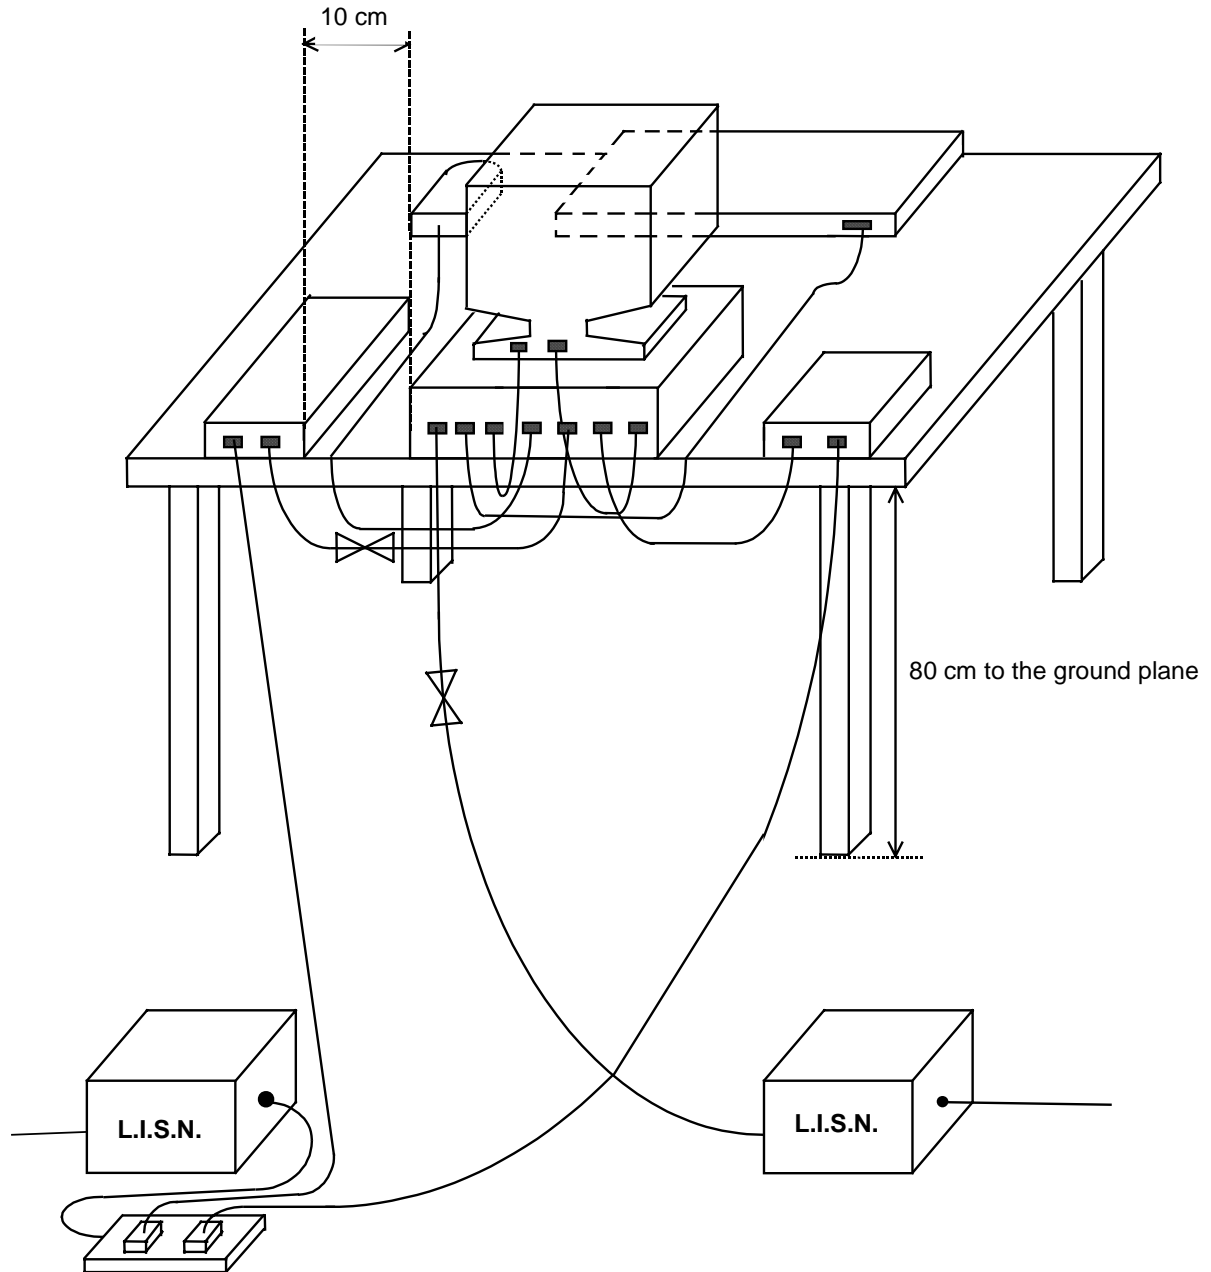**5.3. Typical Test Setup Layout of Conducted Powerline**

**5.4. Test Result of AC Powerline Conducted Emission**

- Frequency Range of Test : from 0.15 MHz to 30 MHz
- Temperature : 26°C
- Relative Humidity : 57 %
- Test Date : Nov. 11, 1999

**The Conducted Emission test was passed at minimum margin**

**NEUTRAL 0.360 MHz / 38.60 dBuV.**

| Freq.<br>(MHz) | Line<br>or<br>Neutral | Meter Reading  |                |              |              | Limits         |                |              |              | Margin       |              |
|----------------|-----------------------|----------------|----------------|--------------|--------------|----------------|----------------|--------------|--------------|--------------|--------------|
|                |                       | Q.P.<br>(dBuV) | A.V.<br>(dBuV) | Q.P.<br>(uV) | A.V.<br>(uV) | Q.P.<br>(dBuV) | A.V.<br>(dBuV) | Q.P.<br>(uV) | A.V.<br>(uV) | Q.P.<br>(dB) | A.V.<br>(dB) |
| 0.210          | L                     | 43.10          | 37.50          | 142.89       | 74.99        | 63.21          | 53.21          | 1446.32      | 457.37       | -20.1        | -15.7        |
| 0.350          | L                     | 41.30          | 36.80          | 116.14       | 69.18        | 58.96          | 48.96          | 887.41       | 280.62       | -17.7        | -12.2        |
| 5.110          | L                     | 40.60          | 34.50          | 107.15       | 53.09        | 60.00          | 50.00          | 1000.00      | 316.23       | -19.4        | -15.5        |
| 0.220          | N                     | 44.60          | 39.50          | 169.82       | 94.41        | 62.82          | 52.82          | 1383.40      | 437.47       | -18.2        | -13.3        |
| 0.360          | N                     | 43.90          | 38.60          | 156.68       | 85.11        | 58.73          | 48.73          | 863.82       | 273.16       | -14.8        | -10.1        |
| 5.120          | N                     | 41.30          | 33.40          | 116.14       | 46.77        | 60.00          | 50.00          | 1000.00      | 316.23       | -18.7        | -16.6        |

Test Engineer : \_\_\_\_\_  
LOUIS LIN

**5.5. Photographs of Counducted Powerline Test Configuration**

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW



SIDE VIEW



## 6. Test of Radiated Emission

Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

### 6.1. Major Measuring Instruments


- RF Preselector ( HP 85685A )
  - Attenuation 0 dB
  - RF Gain 25 dB
  - Signal Input 20 MHz to 1.5 GHz
  
- Spectrum Analyzer ( HP 8568B )
  - Attenuation 0 dB
  - Start Frequency 30 MHz
  - Stop Frequency 1000 MHz
  - Resolution Bandwidth 1 MHz
  - Video Bandwidth 1 MHz
  - Signal Input 100 Hz to 1.5 GHz
  
- Quasi-Peak Adapter ( HP 85650A )
  - Resolution Bandwidth 120 KHz
  - Frequency Band 30 MHz to 1 GHz
  - Quasi-Peak Detector ON for Quasi-Peak Mode  
OFF for Peak Mode



## **6.2. Test Procedures**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

### 6.3. Typical Test Setup Layout of Radiated Emission

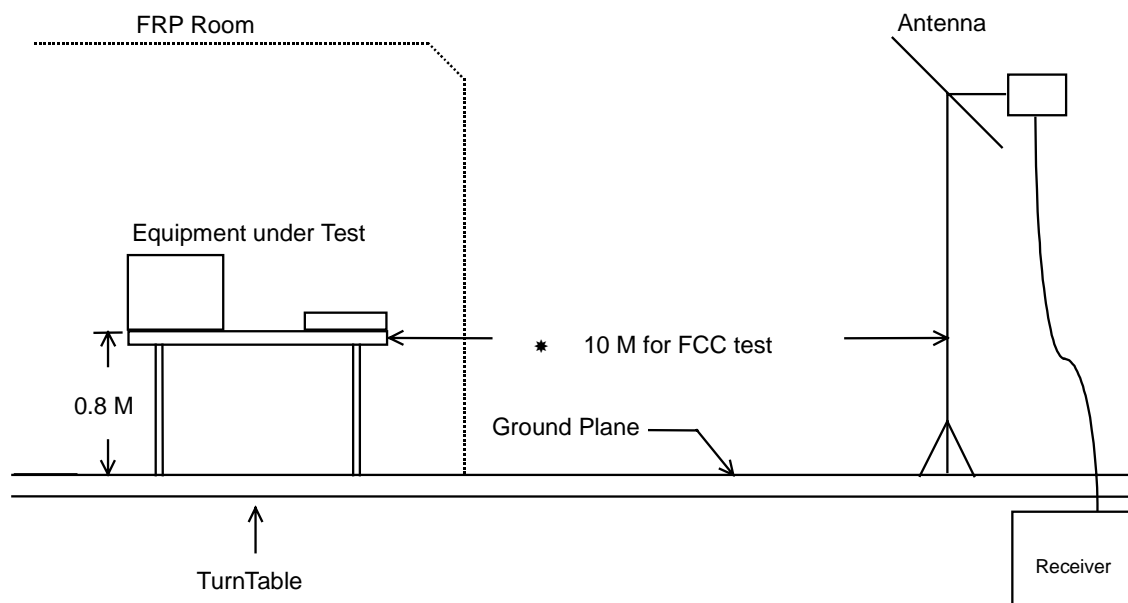

**6.4. Test Result of Radiated Emission**

- Frequency Range of Test : from 30 MHz to 1,000 MHz
- Test Distance : 10 M
- Temperature : 27°C
- Relative Humidity : 69 %
- Test Date : Nov. 10, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

**The Radiated Emission test was passed at minimum margin**

**48.000 MHz / 25.96 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 180 °.**

| Frequency<br>(MHz) | Polarity | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Limits   |        | Emission<br>(dBuV/m) | Level<br>(uV/m) | Margin<br>(dB) |
|--------------------|----------|-----------------------------|-----------------------|-------------------|----------|--------|----------------------|-----------------|----------------|
|                    |          |                             |                       |                   | (dBuV/m) | (uV/m) |                      |                 |                |
| 109.600            | H        | 11.40                       | 1.90                  | 10.30             | 30.00    | 31.62  | 23.60                | 15.14           | -6.40          |
| 214.400            | H        | 10.31                       | 2.20                  | 12.00             | 30.00    | 31.62  | 24.51                | 16.81           | -5.49          |
| 48.000             | V        | 8.39                        | 0.97                  | 16.60             | 30.00    | 31.62  | 25.96                | 19.86           | -4.04          |
| 120.100            | V        | 12.33                       | 1.80                  | 8.50              | 30.00    | 31.62  | 22.63                | 13.54           | -7.37          |
| 144.100            | V        | 10.53                       | 1.78                  | 11.20             | 30.00    | 31.62  | 23.51                | 14.98           | -6.49          |
| 214.400            | V        | 10.31                       | 2.20                  | 10.80             | 30.00    | 31.62  | 23.31                | 14.64           | -6.69          |

Test Engineer : \_\_\_\_\_  
LOUIS LIN


**6.5. Photographs of Radiated Emission Test Configuration**

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW

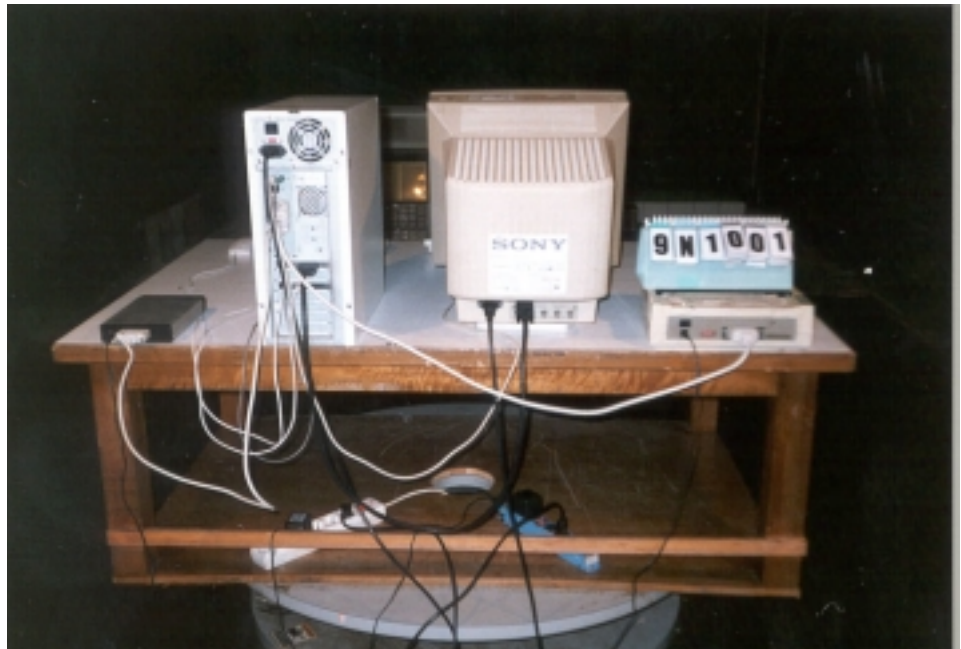

## 7. Antenna Factor & Cable Loss

| Frequency (MHz) | Antenna Factor (dB) | Cable Loss (dB) |
|-----------------|---------------------|-----------------|
| 30              | 17.2                | 0.7             |
| 35              | 16.2                | 0.8             |
| 40              | 13.0                | 0.8             |
| 45              | 10.5                | 0.9             |
| 50              | 7.0                 | 1.0             |
| 55              | 6.2                 | 1.0             |
| 60              | 5.3                 | 1.2             |
| 65              | 5.2                 | 1.1             |
| 70              | 5.2                 | 1.2             |
| 75              | 5.9                 | 1.2             |
| 80              | 6.8                 | 1.3             |
| 85              | 7.9                 | 1.4             |
| 90              | 9.0                 | 1.4             |
| 95              | 9.8                 | 1.5             |
| 100             | 10.6                | 1.9             |
| 110             | 11.5                | 1.9             |
| 120             | 12.3                | 1.8             |
| 130             | 10.9                | 1.9             |
| 140             | 10.5                | 1.6             |
| 150             | 10.5                | 2.0             |
| 160             | 9.6                 | 2.1             |
| 170             | 9.6                 | 1.6             |
| 180             | 9.7                 | 2.0             |
| 190             | 9.5                 | 1.8             |
| 200             | 9.4                 | 1.7             |
| 220             | 10.7                | 2.4             |
| 240             | 12.0                | 2.4             |
| 260             | 12.8                | 2.6             |
| 280             | 13.0                | 2.7             |
| 300             | 13.3                | 2.8             |
| 320             | 13.8                | 3.1             |
| 340             | 14.3                | 3.2             |
| 360             | 14.7                | 3.2             |
| 380             | 15.1                | 3.1             |
| 400             | 15.5                | 3.2             |
| 450             | 16.7                | 3.3             |
| 500             | 17.8                | 3.3             |
| 550             | 19.2                | 3.8             |
| 600             | 19.0                | 4.1             |
| 650             | 18.7                | 4.0             |
| 700             | 18.5                | 4.2             |
| 750             | 18.5                | 4.4             |
| 800             | 16.8                | 3.8             |
| 850             | 17.0                | 4.8             |
| 900             | 19.0                | 4.3             |
| 950             | 19.9                | 5.5             |
| 1000            | 20.4                | 5.0             |

NHOP1

## 8. List of Measuring Equipment Used

| Instrument                           | Manufacturer | Model No.  | Serial No. | Characteristics     | Calibration Date | Remark     |
|--------------------------------------|--------------|------------|------------|---------------------|------------------|------------|
| Test Receiver                        | R&S          | ESH3       | 893495/013 | 9 KHz - 30 MHz      | Apr. 19, 1999    | Conduction |
| Spectrum Monitor                     | R&S          | EZM        | 894987/011 | N/A                 | Apr. 21, 1999    | Conduction |
| LISN (for EUT)                       | KYORITSU     | KNW-407    | 8-1010-15  | 50 ohm / 50 $\mu$ H | Nov. 17, 1998    | Conduction |
| LISN<br>(for support device)         | EMCO         | 3810/2     | 9703-1838  | 50 ohm / 50 $\mu$ H | Aug. 30, 1999    | Conduction |
| EMI Filter                           | CORCOM       | MRI-2030   | N/A        | 480VAC / 30A        | N/A              | Conduction |
| RF Preselector                       | HP           | 85685A     | 2926A00951 | 20Hz -1.5GHz        | Apr. 19, 1999    | Radiation  |
| Spectrum Analyzer<br>(site 1)        | HP           | 8568B      | 2928A04713 | 100Hz – 1.5GHz      | Apr. 19, 1999    | Radiation  |
| Quasi-peak Adapter<br>(site 1)       | HP           | 85650A     | 2811A01285 | 9KHz – 1GHz         | Apr. 19, 1999    | Radiation  |
| Bilog Antenna (site 1)               | CHASE        | CBL6112A   | 2302       | 30MHz - 2GHz        | Jan. 29, 1999    | Radiation  |
| Half-wave dipole<br>antenna (site 1) | EMCO         | 3121C      | 8912-1285  | 20MHz - 1GHz        | May. 18, 1999    | Radiation  |
| Turn Table                           | EMCO         | 1060-1.211 | 9507-1805  | 0 ~ 360 degree      | N/A              | Radiation  |
| Antenna Mast                         | EMCO         | 2075       | 9806-2160  | 1 m - 4 m           | N/A              | Radiation  |