


Data#: 24 File#: 8222d.EMI

Date: 2000-03-18 Time: 20:20:30

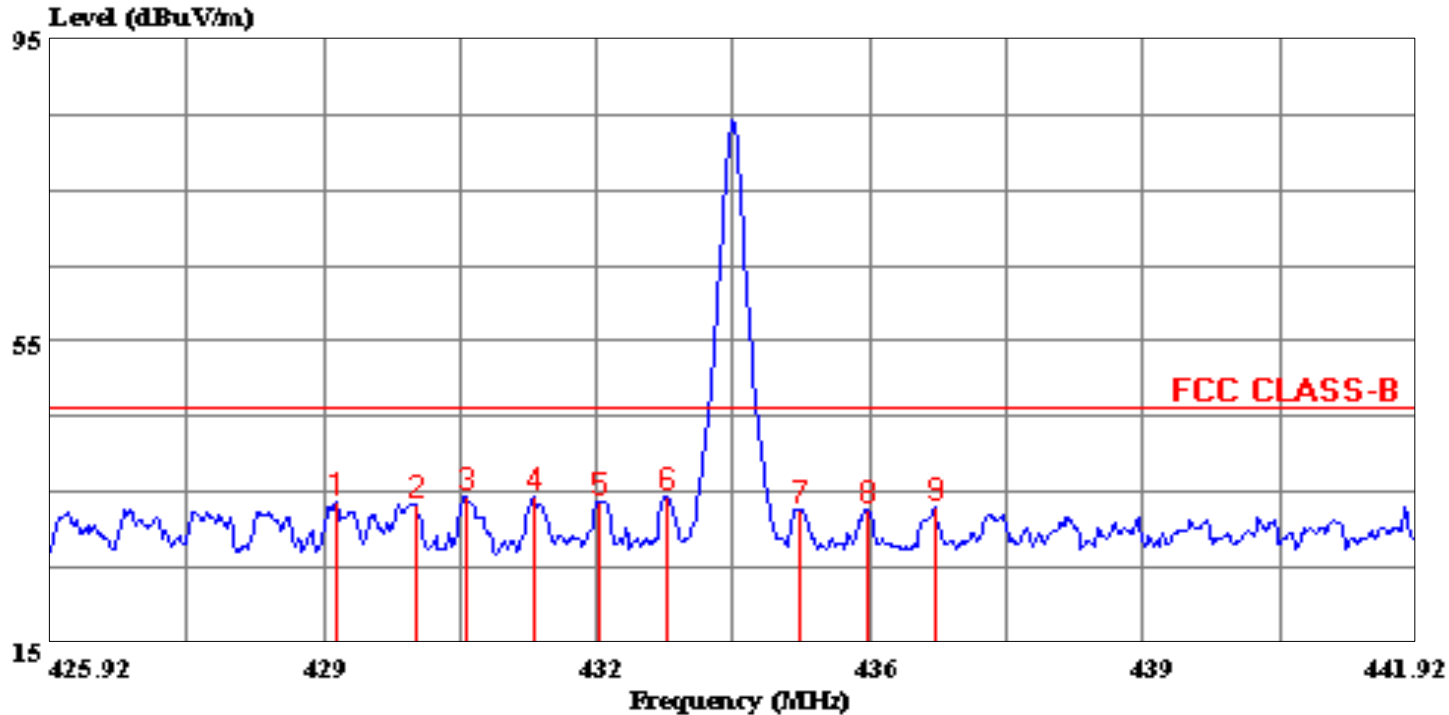

(Compliance)

Trace: 23

Ref Trace:

Condition: HORIZONTAL
Report NO. : 00E8222
Test Engr : Rick Yeo
Company : ADVANCE SECURITY INC.
EUT : RX: 6974
Test Config : EUT/SIGNAL GENERATOR/POWER SUPPLY
Type of Test: FCC CLASS B
Mode of Op. : NORMAL

Page: 1

	Read Freq	Probe Level	Probe Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	429.264	30.34	17.73	2.51	16.77	33.82	46.00	-12.18	Peak
2	430.192	29.88	17.76	2.53	16.77	33.40	46.00	-12.60	Peak
3	430.784	30.91	17.78	2.54	16.77	34.45	46.00	-11.55	Peak
4	431.584	30.67	17.80	2.55	16.78	34.24	46.00	-11.76	Peak
5	432.352	30.23	17.82	2.57	16.78	33.83	46.00	-12.17	Peak
6	433.152	30.85	17.84	2.58	16.79	34.49	46.00	-11.51	Peak
7	434.704	29.08	17.88	2.61	16.79	32.78	46.00	-13.22	Peak
8	435.504	28.92	17.90	2.62	16.80	32.65	46.00	-13.35	Peak
9	436.272	29.24	17.92	2.64	16.80	33.00	46.00	-13.00	Peak



No. 199, Chung Sheng Road,
 Hsin Tien City, Taipei,
 Taiwan, R.O.C.
 Tel:02-2217-0894 Fax:02-2217-1254

Data#: 16 File#: 8222d.EMI
 Compliance

Date: 2000-03-18 Time: 19:34:49


Condition: HORIZONTAL
 Report NO. : 00E8222
 Test Engr : Rick Yeo
 Company : ADVANCE SECURITY INC.
 EUT : RX: 6974
 Test Config : EUT/SIGNAL GENERATOR/POWER SUPPLY
 Type of Test: FCC CLASS B
 Mode of Op. : All Data Reading Up To 2000 MHz

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	42.200	28.60	12.41	0.62	15.47	26.16	40.00	-13.84	Peak
2	45.213	29.68	10.73	0.67	15.41	25.67	40.00	-14.33	Peak
3	51.263	27.88	8.36	0.76	15.37	21.63	40.00	-18.37	Peak
4	54.263	34.47	7.88	0.76	15.41	27.70	40.00	-12.30	Peak
5	57.300	30.87	7.62	0.79	15.41	23.87	40.00	-16.13	Peak
6	63.300	37.61	7.26	0.81	15.38	30.31	40.00	-9.69	Peak
7	66.300	42.49	7.20	0.82	15.35	35.16	40.00	-4.84	Peak
8	72.350	38.20	7.12	0.85	15.56	30.61	40.00	-9.39	Peak
9	75.388	34.28	7.13	0.83	15.66	26.58	40.00	-13.42	Peak
10	84.400	32.46	7.56	0.91	15.53	25.40	40.00	-14.60	Peak
11	120.570	34.05	7.59	1.14	16.08	26.70	43.50	-16.80	Peak
12	126.585	34.07	7.82	1.11	16.06	26.94	43.50	-16.56	Peak
13	158.188	31.99	10.07	1.32	16.39	26.98	43.50	-16.52	Peak
14	168.625	32.29	10.41	1.35	16.38	27.66	43.50	-15.84	Peak
15	190.005	34.04	10.94	1.50	16.36	30.11	43.50	-13.39	Peak
16	220.305	30.84	12.26	1.59	15.98	28.70	46.00	-17.30	Peak
17	233.200	34.30	12.85	1.66	16.05	32.75	46.00	-13.25	Peak
18	304.025	28.76	13.99	1.98	16.40	28.34	46.00	-17.66	Peak

Data#: 22 File#: 8222d.EMI

Date: 2000-03-18 Time: 20:14:45

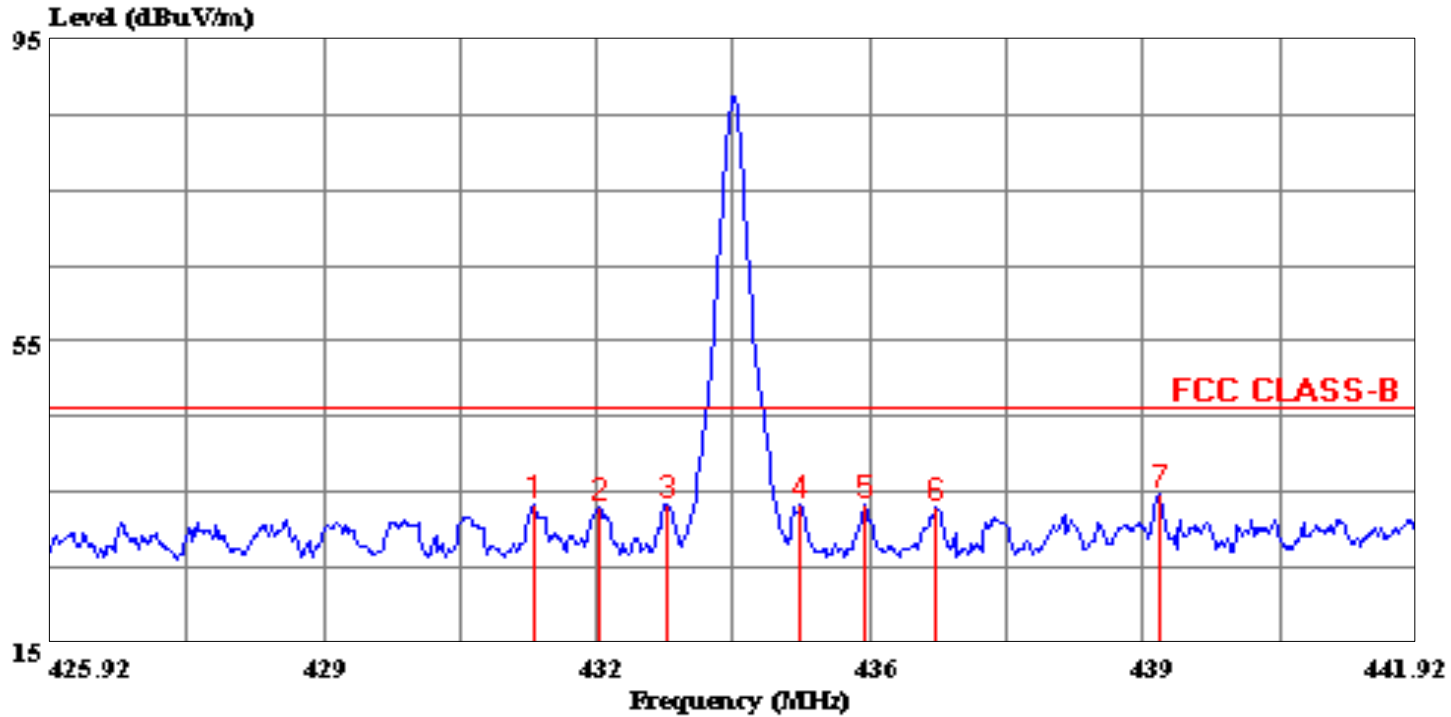

(Compliance)

Trace: 21

Ref Trace:

Condition: VERTICAL
Report NO. : 00E8222
Test Engr : Rick Yeo
Company : ADVANCE SECURITY INC.
EUT : RX: 6974
Test Config : EUT/SIGNAL GENERATOR/POWER SUPPLY
Type of Test: FCC CLASS B
Mode of Op. : NORMAL

Page: 1

	Read Freq	Probe Level	Probe Factor	Cable Loss	Preamp Factor	Limit Level	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dB	
1	431.584	30.32	17.13	2.55	16.78	33.23	-12.77	Peak
2	432.352	29.94	17.14	2.57	16.78	32.87	-13.13	Peak
3	433.152	30.53	17.16	2.58	16.79	33.49	-12.51	Peak
4	434.704	30.45	17.19	2.61	16.79	33.45	-12.55	Peak
5	435.472	30.19	17.20	2.62	16.80	33.22	-12.78	Peak
6	436.304	29.81	17.22	2.64	16.80	32.86	-13.14	Peak
7	438.912	31.52	17.27	2.68	16.81	34.65	-11.35	Peak



No. 199, Chung Sheng Road,
 Hsin Tien City, Taipei,
 Taiwan, R.O.C.
 Tel:02-2217-0894 Fax:02-2217-1254

Data#: 10 File#: 8222d.EMI
 Compliance

Date: 2000-03-18 Time: 16:39:07

Condition: VERTICAL
 Report NO. : 00E8222
 Test Engr : Rick Yeo
 Company : ADVANCE SECURITY INC.
 EUT : RX: 6974
 Test Config : EUT/SIGNAL GENERATOR/POWER SUPPLY
 Type of Test: FCC CLASS B
 Mode of Op. : All Data Reading Up To 2000 MHz

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	32.420	30.17	17.95	0.59	15.39	33.32	40.00	-6.68	Peak
2	42.230	35.92	11.44	0.62	15.47	32.51	40.00	-7.49	Peak
3	45.230	34.61	10.27	0.67	15.41	30.14	40.00	-9.86	Peak
4	50.630	33.34	8.33	0.76	15.37	27.06	40.00	-12.94	Peak
5	54.310	38.82	7.94	0.76	15.41	32.11	40.00	-7.89	Peak
6	56.820	35.44	7.81	0.77	15.42	28.61	40.00	-11.39	Peak
7	63.320	34.94	7.31	0.81	15.38	27.68	40.00	-12.32	Peak
8	66.300	34.75	7.07	0.82	15.35	27.29	40.00	-12.71	Peak
9	72.440	37.80	6.70	0.85	15.56	29.79	40.00	-10.21	Peak
10	75.350	36.42	6.69	0.83	15.66	28.28	40.00	-11.72	Peak
11	84.390	30.22	7.49	0.91	15.53	23.09	40.00	-16.91	Peak
12	108.510	32.15	9.38	1.04	15.90	26.67	43.50	-16.83	Peak
13	114.555	29.73	8.81	1.14	15.99	23.69	43.50	-19.81	Peak
14	129.610	29.35	8.60	1.15	16.09	23.01	43.50	-20.49	Peak
15	153.460	29.02	9.95	1.30	16.31	23.97	43.50	-19.53	Peak
16	178.840	35.22	10.84	1.38	16.76	30.68	43.50	-12.82	Peak
17	223.055	28.53	12.21	1.59	15.98	26.35	46.00	-19.65	Peak
18	229.100	28.78	12.48	1.63	16.02	26.87	46.00	-19.13	Peak
19	244.465	29.24	13.17	1.74	16.16	27.99	46.00	-18.01	Peak
20	298.770	29.23	14.19	1.98	16.36	29.04	46.00	-16.96	Peak