

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
CERTIFICATION TO FCC PART 15 REQUIREMENTS**

*for*

**UNINTENTIONAL RADIATOR**

**433.92 CAR ALARM RECEIVER**

**MODEL: ALA210**

**FCC ID NO: H5OR36**

**BRAND NAME: ADVANCE**

**REPORT NO: 02T1176-1**

**ISSUE DATE: FEBRUARY 20, 2002**

*Prepared for*

**ADVANCE SECURITY INC.**

**3F, 48 TA AN STREET**

**HSI-CHIH, TAIPEI HSIEN**

**TAIWAN, R. O. C.**

*Prepared by*

**COMPLIANCE ENGINEERING SERVICES, INC.**

*d.b.a.*

**COMPLIANCE CERTIFICATION SERVICES**

**1366 BORDEAUX DRIVE**

**SUNNYVALE, CA 94089, USA**

**TEL: (408) 752-8166**

**FAX: (408) 752-8168**

## TABLE OF CONTENTS

1.	VERIFICATION OF COMPLIANCE.....	1
2.	PRODUCT DESCRIPTION .....	2
3.	TEST FACILITY .....	2
4.	MEASUREMENT EQUIPMENT USED.....	2
5.	TEST CONFIGURATION.....	3
6.	TESTS CONDUCTED.....	3
7.	RADIATED EMISSION TEST PROCEDURE.....	4
8.	COHERENT TESTS.....	4
9.	EQUIPMENT MODIFICATIONS.....	4
10.	TEST CONFIGURATION PHOTOS (RADIATED EMISSION TEST) .....	5

**1. VERIFICATION OF COMPLIANCE**

COMPANY NAME : ADVANCE SECURITY  
 3F, 48 TA AN STREET  
 HSI-CHIH, TAIPEI HSIEN, TAIWAN. R. O. C.

CONTACT PERSON : MICHAEL CHEN/PRESIDENT

TELEPHONE NO. : 02-8648-1688

EUT DESCRIPTION : 433.92 MHz CAR ALARM RECEIVER

MODEL NAME/NUMBER : ALA210

DATE TESTED : 02/15/2002

REPORT NUMBER : 02T1176-1

TYPE OF EQUIPMENT	SECURITY EQUIPMENT (UNINTENTIONAL RADIATOR)
EQUIPMENT TYPE	433.92 MHz SUPERREGENERATE RECEIVER
MEASUREMENT PROCEDURE	ANSI 63.4 / 1992
LIMIT TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15.109

The above equipment was tested by Compliance Engineering Services, Inc. for compliance with the requirements set forth in CFR 47, PART 15. This said equipment in the configuration described in this report shows that maximum emission levels emanating from equipment are within the compliance requirements.

Tested By:



CHIN PANG  
 EMC TECHNICIAN  
 COMPLIANCE CERTIFICATION SERVICES

Approved & Released By:



THU CHAN  
 SENIOR EMC ENGINEER  
 COMPLIANCE CERTIFICATION SERVICES

PAGE NO: 1

## 2. PRODUCT DESCRIPTION

CLIFFORD ELECTRONICS, INC., Model H5OR36 is the receiving portion of a multi-purpose security device. The associated Transmitter is manufactured by Advance Security Inc., FCC ID: H5OT17.

## 3. TEST FACILITY

The 3 meter open area test site and conducted measurement facility used to collect the radiated data is located at 561F Monterey Road, Morgan Hill, California, U.S.A. A detailed description of the test facilities was submitted to the Commission on May 27, 1994.

The measuring instrument which was utilized in performing the tests documented herein has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment which is traceable to recognized national standards.

## 4. MEASUREMENT EQUIPMENT USED

TEST EQUIPMENTS LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
Spectrum Analyzer	HP 0.1K - 1.5GHz	8568B	2732A03661	5/10/02
Spectrum Display	HP	85662A	2816A16696	5/4/02
Quasi Peak Adapter	HP 9K - 1GHz	85650A	2811A01155	5/4/02
Pre-Amplifier,25 dB	HP0.1 - 1300MHz	8447D (P5)	2944A06550	9/19/01
Antenna, LP	EMCO200 - 2000MHz	3146	9107-3163	8/10/01
Signal Generator	HP	8640B	2322A22402	4/10/02

## 5. TEST CONFIGURATION

Set frequency generator to 433.65 MHz, EUT receiving transmission continuously. All the wires are placed on the turn table to their maximum length to simulate the worse emission conditions.

## 6. TESTS CONDUCTED

CFR 47, 15.109 RADIATED EMISSION TESTS	CONDUCTED AT 3 METERS
---	-----------------------

## 7. RADIATED EMISSION TEST PROCEDURE

The EUT and all other support equipment are placed on a wooden table 80 cm above the ground screen. Antenna to EUT distance is 3 meters. During the test, the table is rotated 360 degrees to maximize emissions and the antenna is positioned from 1 to 4 meters above the ground screen to further maximize emissions. The antenna is polarized in both vertical and horizontal positions.

Monitor the frequency range of interest at a fixed antenna height and EUT azimuth. Frequency span should be small enough to easily differentiate between broadcast stations and intermittent ambients. Rotate EUT 360 degrees to maximize emissions received from EUT. If emission increases by more than 1 dB, or if another emission appears that is greater by 1 dB, return to azimuth where maximum occurred and perform additional cable manipulation to further maximize received emission.

Move antenna up and down to further maximize suspected highest amplitude signal. If emission increased by 1 dB or more, or if another emission appears that is greater by 1dB or more, return to antenna height where maximum signal was observed and manipulate cables to produce highest emissions, noting frequency and amplitude.

## 8. COHERENT TESTS


During Radiated Emission Tests, H.P. signal generator model no: 8640B (0.5-1024MHz ) was used to radiate unmodulated CW signal to EUT at 433.65 MHz. Please refer to radiated emission data no: 020215C1 for six highest readings.

## 9. EQUIPMENT MODIFICATIONS

To achieve compliance to FCC section 15.109, the following change(s) were made during compliance testing:

NOT APPLICABLE

## 10. TEST CONFIGURATION PHOTOS (Radiated Emission Test)

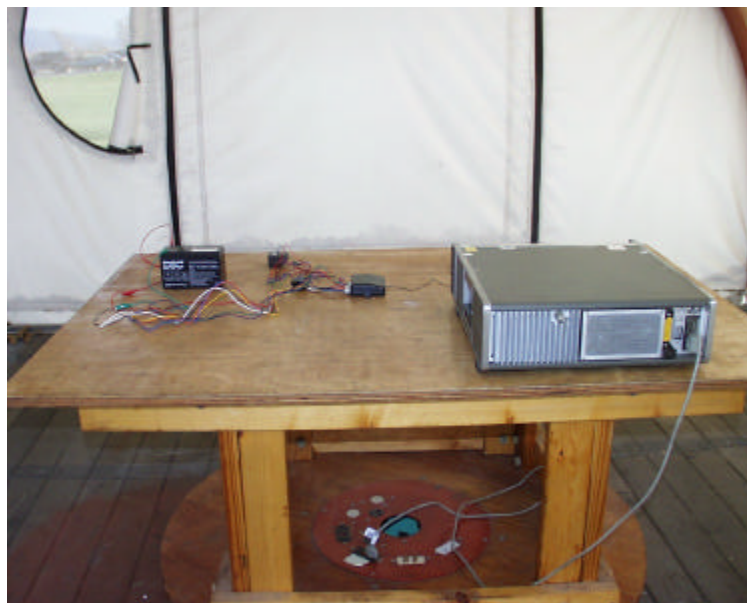



FCC, VCCI, CISPR, CE, AUSTEL, NZ  
UL, CSA, TUV, BSMI, DHHS, NVLAP

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001  
PHONE: (408) 463-0885 FAX: (408) 463-0888

**Project #:** 02T1175-1  
**Report #:** 020215C1  
**Date & Time:** 02/15/02 2:25 PM  
**Test Engr:** Chin Pang

**Company:** Advance Security Inc  
**EUT Description:** 433.92Mhz Car Alarm Receiver  
**Test Configuration :** EUT only  
**Type of Test:** FCC 15.109  
**Mode of Operation:** Receiving

A-Site   
  B-Site   
  C-Site   
  F-Site   
 6 Worst Data   
 Descending

Freq.	Reading	AF	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height	Mark
(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(H/V)	(Deg)	(Meter)	(P/Q/A)
433.05	49.40	16.51	3.15	27.55	41.50	46.00	-4.50	3mH	0.00	1.00	P
432.42	48.30	16.50	3.14	27.55	40.39	46.00	-5.61	3mH	0.00	1.00	P
431.79	48.00	16.48	3.14	27.54	40.08	46.00	-5.92	3mH	0.00	1.00	P
431.18	47.50	16.47	3.14	27.54	39.57	46.00	-6.43	3mH	0.00	1.00	P
430.54	47.70	16.46	3.13	27.54	39.75	46.00	-6.25	3mH	0.00	1.00	P
429.90	46.20	16.44	3.13	27.53	38.24	46.00	-7.76	3mH	0.00	1.00	P
429.28	47.90	16.43	3.13	27.53	39.93	46.00	-6.07	3mH	0.00	1.00	P
428.62	45.50	16.41	3.12	27.52	37.51	46.00	-8.49	3mH	0.00	1.00	P
428.00	46.00	16.40	3.12	27.52	38.00	46.00	-8.00	3mH	0.00	1.00	P
427.37	45.70	16.39	3.12	27.52	37.69	46.00	-8.31	3mH	0.00	1.00	P
434.30	47.90	16.54	3.15	27.56	40.03	46.00	-5.97	3mH	0.00	1.00	P
434.93	46.90	16.55	3.15	27.56	39.04	46.00	-6.96	3mH	0.00	1.00	P
435.56	47.50	16.57	3.16	27.57	39.66	46.00	-6.34	3mH	0.00	1.00	P
436.16	47.40	16.58	3.16	27.57	39.57	46.00	-6.43	3mH	0.00	1.00	P
436.86	47.10	16.59	3.16	27.57	39.28	46.00	-6.72	3mH	0.00	1.00	P
437.42	46.90	16.61	3.17	27.58	39.09	46.00	-6.91	3mH	0.00	1.00	P
438.10	48.30	16.62	3.17	27.58	40.51	46.00	-5.49	3mH	0.00	1.00	P
438.70	47.20	16.63	3.17	27.59	39.42	46.00	-6.58	3mH	0.00	1.00	P
439.31	46.10	16.65	3.17	27.59	38.33	46.00	-7.67	3mH	0.00	1.00	P
439.93	46.10	16.66	3.18	27.59	38.34	46.00	-7.66	3mH	0.00	1.00	P
440.58	46.00	16.67	3.18	27.60	38.26	46.00	-7.74	3mH	0.00	1.00	P
Total data #: 21											
V.2c											



COHERENCE TEST  
HORIZONTAL

