



9. SYSTEM TEST CONFIGURATION

Use a block of foam and combined it with EUT wrapping cable tie around it. This way it can test X.Y, and Z axis. To activate continuous transmission, place a small plastic block between rubber band and EUT push button.

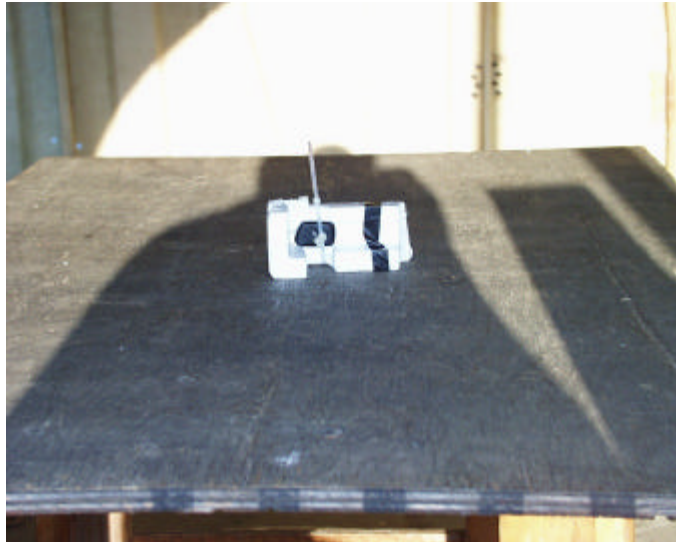

Radiated Open Site Test Set-up

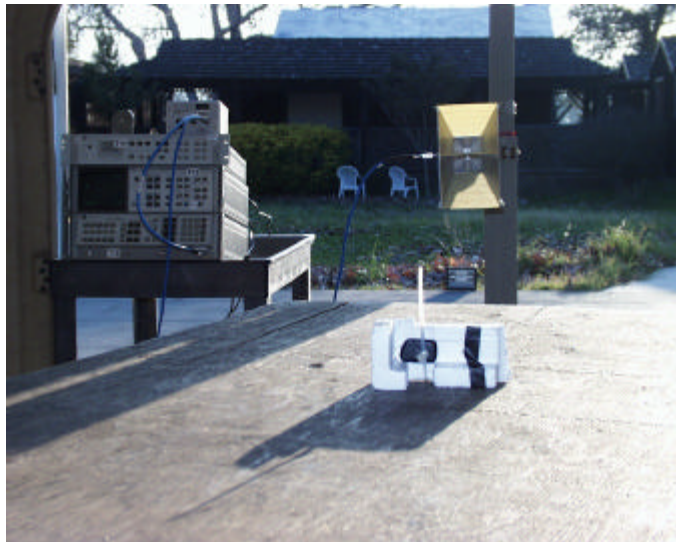

High Frequency Test Set-up